(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) **EP 1 863 008 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
28.02.2018 Bulletin 2018/09

(51) Int Cl.:
G09G 3/34 *(2006.01)*

(21) Application number: **07108548.4**

(22) Date of filing: **21.05.2007**

(54) **Method and circuit for controlling the backlighting system of a display apparatus**

Verfahren und Schaltung zur Steuerung einer Hintergrundbeleuchtungssystem einer Anzeigevorrichtung

Procédé et circuit de contrôle d'un système de rétroéclairage pour un appareil d'affichage

(84) Designated Contracting States:
DE FR GB

(30) Priority: **02.06.2006 EP 06290910**

(43) Date of publication of application:
05.12.2007 Bulletin 2007/49

(73) Proprietor: **Thomson Licensing**
92130 Issy-les-Moulineaux (FR)

(72) Inventors:
- **Ploquin, Didier**
  38500 Parthenay de Bretagne (FR)
- **Machand, Philippe**
  35500 Vitre (FR)
- **Morizot, Gérard**
  35500 Voiron (FR)

(74) Representative: **Browaeys, Jean-Philippe et al**
TECHNICOLOR
1-5, rue Jeanne d'Arc
92130 Issy-les-Moulineaux (FR)

(56) References cited:
EP-A- 1 489 590
EP-A1- 0 685 831
US-A- 5 184 117
US-A1- 2003 011 559
US-A1- 2004 160 435
US-A1- 2005 052 398
US-A1- 2005 078 081

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 863 008 B1

Printed by Jouve, 75001 PARIS (FR)

Description

[0001] The invention relates to display apparatus using transmissive light valves that modulate light emitted by a backlight to form an image. The invention also relates to display apparatus such as projection displays, in which light is modulated by reflective light valves. The light valve is controlling the amount of light that is visible on a screen. The term display will be used in the following without distinguishing between displays that use reflective or transmissive light valves. Typically, each light valve represents one pixel of the image. In the case of a colour image reproduction a triplet of light valves for the primary colours red, green and blue may be used for one pixel, thereby allowing for composing a wide variety of colours by mixing the primary colours correspondingly. In this case, the backlight typically is a uniform white light. It is also possible to produce colour images by sequentially producing monochromatic images of the primary colours. In this case, mixing of the colours is performed in the observer's eye by integration of the monochromatic images over time. Today's display apparatus often use liquid crystals as transmissive light valve, which are controlled for transmitting a desired amount of light from the backlight towards a front surface of the apparatus. The front surface of the apparatus is also referred to as a screen. Projection display apparatus may also use reflective light valves formed by micro mirrors, also known as DMD, or liquid crystals on silicon, also referred to as LCOS.

[0002] Today's liquid crystal displays, or LCD, offer a contrast ratio in the range of 1:1000. This is due to light leaking through a fully closed light valve. However, the human eye is capable of discerning contrast ratios in the range of 1:100.000. It is generally known from the prior art to control the intensity of an LCD backlight in order to improve the contrast ratio of the display. In this case the backlight of the display apparatus is adjusted to provide the highest brightness required for a pixel in the image that is to be reproduced. Common display apparatus using light valves are equipped with gas discharge lamps as a backlight, for example cold cathode fluorescent lamps, also referred to by the acronym CCFL, or gas discharge lamps in general. Further, arc lamps or halogen lamps may be used, in particular in projection devices. The brightness of those commonly used backlights is controlled, e.g., by varying the supply voltage and/or the current through the lamps.

[0003] Only recently light emitting diodes, or LEDs, have been available which provide the required amount of light to be useful as a backlight or projection light source for a display apparatus as referred to in this specification. The LEDs may either be LEDs emitting white light or may be formed by triplets of LEDs each emitting light in a primary colour, wherein white light is obtained by mixing the primary colours accordingly, either simultaneously or sequentially over time. However, conventional dimming of LEDs by accordingly controlling the current through the LEDs also results in a change in the perceived colour, which is generally undesirable.

[0004] In order to overcome the change in the perceived colour it is known to use currents having constant magnitude for driving the LEDs and to switch these currents having constant magnitude in a pulsed manner in order to achieve the desired perceived light intensity. The perceived light intensity depends on the number and/or duration of the pulses. To this end, a circuit for setting the duty cycle is generally known which includes a PLL stage that is locked to the vertical synchronisation pulse of the video signal. In the known circuit a counter/comparator is used for setting the duty cycle in accordance with the vertical synchronisation pulse.

[0005] US 2005/0078081A1 discloses a liquid crystal display device and a method for controlling it, in which the duty cycle of a backlight is variable. Operation of the backlight is timed based on a synchronization signal supplied from outside.

[0006] Figure 3 shows a prior art circuit which can be used for setting the duty cycle of a backlight. The prior art circuit is based on a PLL-controlled oscillator the frequency of which can be controlled. A PLL oscillator 101 is locked to the frame frequency by means of a synchronisation signal VB. Each output signal period of oscillator 106 represents one elementary step, similar as shown figure 1 by the line labelled ES. The output signal 106 of the oscillator is used as a clock signal to a counter 103. A count value DC is supplied to the counter 103, and the counter counts until the count value is reached. The output of the counter BLC then changes its state, similar to the line labelled BLC of figure 1, thereby controlling a backlight to be on or off. The counter 103 is reset and counting begins anew when a new period begins. It is also possible to divide a frame period into sub-periods, in which case the counter is reset and counting begins anew at the end of each sub-period. To this end, the output of the PLL oscillator 101 is divided in a divider 102 by the desired number CR of elementary steps composing each sub-period. The output of the divider 102 is supplied to the load input of counter 103 as well as to the input of a divider 104 for counting the desired number n of sub-periods composing each frame. The output of divider 104 is fed back to the PLL oscillator for synchronisation with the VB frame signal. The main feedback loop of the PLL circuit is thus provided by the two dividers 102 and 104. Divider 102 divides the elementary steps corresponding to signal 106 by a control range CR value. Divider 102 output signal represents each sub-period composing each frame as represented by the bottom-most line of figure 1. Typically CR is set to 100. Divider 104 divides the sub-period by the number n of required sub-periods to compose the total frame period.

[0007] The clock frequency of the oscillator exactly equals n*CR*f_frame, wherein n is the number of sub-periods, CR is the desired range of control of the backlight and f_frame is the repetition rate of frames in the video signal. In order to allow for a control ratio of the backlight

of 1:100 CR equals 100. The prior art circuit is not synchronised with the pixel clock and can thus not easily be integrated in a digital circuit for controlling image properties that may be provided anyway. Further, although PLL circuits may be easily integrated into digital ICs they often have properties which are not compatible with the requirement in terms of reference clock supplied and frequencies of the video signal. In fact, PLL circuits supplied in digital integrated circuits are often limited to generating multiples of fraction of clock signals within the IC, which frequency may be rather high. In order to properly operate with the rather low frame frequencies of video signals PLL circuits may have to be provided externally to the digital integrated circuit. Generally, such PLL circuits with low frequency locked loop are subject to functioning and stability problems.

[0008] It is, therefore, desirable to provide a method and a circuit for controlling a backlight that relies only on signals associated and synchronised with the video signal. It is further generally desirable to achieve a control ratio of the backlight that is independent of the video mode in which the display is currently operating.

[0009] The method as defined in claim 1 and the dependent sub-claims as well as the apparatus as defined in claim 8 and the dependent sub-claims present a solution for controlling a backlight, which relies only on signals associated and synchronised with the video signal and provides a control of the backlight substantially independent of the video mode in which the display is currently operating.

[0010] According to the invention the backlight is controlled to emit light during fractions of second time periods, which second time periods are equal to or shorter than first time periods. The first time periods may correspond to a vertical synchronisation period of a video signal or to a frame period. Several of the second time periods may be nested and distributed within the first time period, the distribution preferably being substantially even and regular and the length of the second time periods being preferably substantially equal. The backlight is controlled to emit light during fractions of or whole second time periods. In the case more than one second time periods are accommodated within the first time period, for those second time periods belonging to the same first time period, the fractions of the second time periods, during which the light source is controlled to emit light, preferably have the same relative length with regard to the respective second time period. The ratio between the fraction and the second time period then corresponds to a desired second contrast ratio. The signals for driving the backlight are preferably generated in synchronism with the vertical and/or horizontal pixel clock. A number of pixel clock periods correspond to an elementary step or third time period, and each of the second time periods is divided into a number of third time periods. The number of elementary steps is chosen according to the desired ratio of control of the backlight or contrast ratio, e.g. 100 elementary steps in a second time period for a contrast ratio range of 1:100. During each of the second time periods the backlight is controlled to be on for a number of elementary steps, or fourth time periods, corresponding to the desired contrast ratio.

[0011] Distribution of the second time intervals, or sub-periods, within the frame period, or first time period, and of the elementary steps, or third time periods, within the sub-periods, or second time periods, is accomplished by counting said third time periods, wherein a third time period is obtained by counting a number of pixel clock periods. Counters are supplied with respective values corresponding to the number of pixel clocks per elementary step, the number of sub-periods per frame period and the number of elementary steps per sub-period for different video modes. In a development of the invention an error that may still be present when the distribution of the pixel clock pulses of one frame amongst the sub-periods result in a non-integer number of pixel clock pulses per sub-period is distributed in regular intervals during a frame such that the total error during a frame is cancelled.

[0012] The invention allows for displaying contrast ratios for example in the range of 1:100.000 by combining the contrast ratios that can be achieved by the light modulator itself and the contrast ratio achievable by accordingly adapting the backlight. A possible variation in the perceived image colour that may be present in the case of a linear regulation of the backlight, which cannot always be compensated for by accordingly driving the LCD panel, is avoided.

[0013] The invention will be described in the following specification with reference to an LCD screen having an LED backlight. However, the inventive driving method may be applied to any light source that can be switched at the required frequency, also including but not limited to OLED.

[0014] In order to avoid artefacts that may occur when the light modulator is addressed and provided with new image content, it is advantageous to synchronise begin or end of the time period during which the light source emits light with a synchronisation signal indicating the beginning or the end of a new image. This is particularly important when the image content changes from one image to another as is usually the case in movie pictures or video content in general. In the case of a television signal the synchronisation signal is, e.g., the vertical synchronisation signal indicating the start of a field or a frame. The term field refers to a half image that is used in interlaced video display and the term frame refers to a full image that is used in progressive video display. According to the invention the backlight is controlled to emit light during secondary time periods shorter than the primary time period between two subsequent synchronisation signals. The ratio of the time during which the backlight emits light and the secondary time period determines the maximum brightness of the image. For maximum brightness the backlight may also be controlled to emit light during the whole secondary time period or dur-

ing the whole primary period between two subsequent synchronisation signals. The light emitted by the backlight will be integrated in the observer's eye over time and over a number of subsequent images and will give the observer the perceived impression of different levels of brightness.

[0015] If the backlight is controlled to emit light only once during the primary time period between two subsequent synchronisation signals the observer may perceive a certain amount of flicker in the image. In other words, if the secondary period equals the primary period, flicker may be perceived in case the backlight is not on all the time. To avoid this phenomenon, the required total length of the time during which the backlight emits light is distributed over sub-periods in a development of the invention. It is advantageous if the sub-periods have equal lengths. It is further advantageous when the sub-periods are distributed evenly between two subsequent synchronisation signals. It is also advantageous when the ratio of the total time during which the backlight emits light and the primary time period between two subsequent synchronisation signals equals the ratio of the duration during which the backlight emits light within one sub-period and the duration of a sub-period. That is to say the mean value of the times during which the backlight is on is substantially constant during one frame period. It is, therefore, important that the length of the last sub-period equals the length of the other sub-periods during that frame period, and that the duration during which the backlight emits light is equal over the sub-periods of one frame. In other words, n times the sub-period must equal the frame period in this embodiment of the invention. For better understanding, the term "frame period" is used as a synonym for the time period between two subsequent synchronisation signals throughout this specification.

[0016] Figure 1 shows waveforms associated with a video signal. The topmost line shows a synchronisation signal VB which indicates the start of a frame or a field. In general, the synchronisation signal indicates the start of a new image. The period of one frame extends from the rising edge of one of the synchronisation signals VB to the rising edge of the subsequent synchronisation signal VB. The next lower line labelled BLC is an exemplary output of a control circuit for controlling the backlight. The signal BLC can assume one of two binary states, either a logical "0" or a logical "1 ". A frame period is divided into n sub-periods. Each sub-period comprises a number of elementary steps. The number of elementary steps per sub-period equals 100 in the example shown in figure 1. However, the number of elementary steps per sub-period may assume any desired value, depending on which ratio of control of the backlight is desired. The elementary steps within each sub-period are exemplarily shown in the next lower line labelled ES. For the sake of clarity only few sub-periods and only few of the elementary steps within each sub-period are shown. The number of elementary steps during which the control signal BLC assumes a logical "1" or "high"-value determines the duty cycle of the backlight control. The duty cycle determines the perceived brightness of the backlight. In the ideal case shown in figure 1 a frame accommodates an integer number of sub-periods. That is to say the last sub-period of that frame ends exactly when the frame ends. In order to avoid flicker each sub-period essentially has the same duty cycle. The last line in figure 1 demonstrates how the n sub-periods are accommodated within one frame period.

[0017] In one embodiment the light modulator for a pixel or a group of pixels having the highest brightness in the image is fully opened. Then the fraction of the one or more second time period, during which the light source is controlled to emit light, is set to a length such that the ratio between the fraction of the one ore more second time periods, during which the light source is controlled to emit light, and the respective second time period corresponds to the required brightness for that pixel or group of pixels. The ratio then determines the perceived maximum brightness of the display. As a further example, a desired ratio of control of the backlight is 1:100. The frame period is split into n sub-periods. Each of the n sub-periods is divided into 100 elementary steps. The backlight is always fully lit during the on-times and is completely switched off otherwise. If a maximum brightness of 50% is desired, the backlight is switched on during 50 of the elementary steps of each sub-period. This can for example be the first 50 steps of a sub-period, but it is also possible to use the last 50 steps of a sub-period, or 50 steps located at an arbitrary position inside the sub-period. If a maximum brightness of 25% is desired, the backlight is switched on during 25 of the elementary steps of each sub-period.

[0018] The maximum switching speed of the backlight, the frame rate and the desired ratio of control of the backlight determine the number of sub-periods. As was stated before, if the number of sub-periods is set to 1 a certain amount of flicker may be perceived, which is undesirable. The maximum switching frequency of the backlight determines the smallest possible step, or elementary step. As an example a maximum switching frequency of 200 kHz is assumed. This frequency may be given by the maximum frequency of a DC-to-DC converter that is used for powering the backlight. In this case, the number of sub-periods within a frame n multiplied with the desired ratio of control of the backlight of 1:100 and multiplied with the frame rate of the display must result in a number of smaller than 200.000. The equation to solve is $n*100*75 < 200000$, the solution is $n<26{,}666$. For this exemplary case numbers of n between 1 and approximately 27 are thus of interest.

[0019] The invention will be described in greater detail with reference to the drawing, in which

Figure 1 exemplarily shows the ideal distribution of sub-periods within a frame period;

Figure 2 exemplarily shows a non-ideal distribution of sub-periods within a frame peri-

od;

Figure 3 schematically shows a known circuit for controlling a backlight;

Figure 4 schematically shows a first circuit according to the invention for controlling a backlight;

Figure 5 schematically shows a second circuit according to the invention for controlling a backlight; and

Tables 1 to 5 show numbers associated with an exemplary circuit for controlling a backlight according to the invention.

[0020] In the figures, same or similar elements are referenced with the same reference designators.

[0021] Figures 1 and 3 have already been described above and will not be referred to in detail again.

[0022] Figure 4 shows an exemplary circuit for performing one embodiment of the inventive method, which uses the pixel clock PC and the vertical or frame synchronisation signal VB for generating a control signal BLC for the backlight. A first counter 201 is supplied with the pixel clock PC at its clock input. The number of pixel clock periods per elementary step PPS is supplied to the first counter 201 at a data input. The vertical or frame synchronisation signal VB is supplied to the load input of the first counter 201. The output of the first counter 201 is applied to the clock inputs of a second and a third counter 202, 203. The number of elementary steps per sub-period SPP is supplied to the data input of the second counter 202. The vertical or frame synchronisation signal VB is also supplied to the load input of the second counter 202. The output of the second counter 202 as well as the vertical or frame synchronisation signal VB are supplied to a logical OR-gate 204. The output of the logical OR-gate 204 is applied to the load input of the third counter 203. A value DC representing the desired ratio of on-time to period-time is supplied to the data input of the third counter 203. The value DC may also be seen as representing a duty cycle of the backlight and is used to set the maximum brightness. The output BLC of the third counter 203 controls the backlight.

[0023] During operation, the number of pixel clock periods per elementary step PPS is loaded into the first counter 201 upon the occurrence of the synchronisation signal VB at its load input. At the same time the number of elementary steps per sub-period SPP is loaded into the second counter 202 and the duty cycle DC is loaded into the third counter 203. The first, the second and the third counter 201, 202 and 203 count down with every trigger impulse at their respective clock input. The VB signal is used as a global and priority synchronisation signal for the three counters. The first counter 201 and the second counter 202 reload the values present at a data input when they have finished counting and restart counting immediately. The third counter 203 stops counting when it reaches zero. The third counter 203 preferably issues a high-level signal corresponding to a logical "1" at its output unless it has counted to zero. When the third counter 203 has counted down to zero the output assumes a low-level signal corresponding to a logical "0". It is, however, also conceivable to invert the logic levels of the counters, depending on the actual choice. After it has counted to zero the third counter 203 waits until either a sub-period or a priority VB signal occurs at its load input for reloading the value at its data input and beginning counting down again.

[0024] In order to achieve identical sub-periods within a frame period in terms of duration and duty cycle the values supplied at the data inputs of the counters have to be scaled appropriately. Further, the added durations of the sub-periods have to fit as good as possible within one frame period. For obtaining the respective values the following equation has to be solved:

$$PPS * SPP * n = PPL * LPF \quad ,$$

wherein PPS denotes the number of pixel clock periods per elementary step, SPP denotes the number of elementary steps per sub-period, n is the number of sub-periods within one frame, PPL denotes the number of pixel clock periods per line and LPF denotes the number of lines in a frame, all of the afore-mentioned numbers being integer.

[0025] According to the method the values for pixel clock periods per line PPL and lines per frame LPF are decomposed into prime numbers. The prime numbers are then distributed and assigned as count values to the first and second counters 201, 202 counting pixel clock periods per elementary step PPS and elementary steps per sub-period SPP, as well as to the number of sub-periods in a frame n. It is now referred back to the exemplary values given further above, targeting a ratio of control for the backlight of 1:100 and a number of sub-periods within a frame between 1 and 27. In this case, only those combinations of prime numbers are used which allow for a value for elementary steps per sub-period SPP as close as possible to 100 and for which the number n of sub-periods within a frame lies between 1 and 27.

[0026] The following example is directed to a screen having WXGA format, in which a frame consists of a total of 795 horizontal lines, i.e. LPF = 795, each line having 1798 pixels, i.e. PPL = 1798. Hence, the total number of pixels per frame is 1429410. Further, a frame rate or repetition frequency of 75 Hz is assumed. The numbers given include the vertical and horizontal blanking interval.

[0027] The prime number decomposition of 1798 results in 2, 29 and 31. The prime number decomposition of 795 results in 3, 5 and 53. Hence, the list of prime numbers includes 2, 3, 5 29, 31, and 53.

[0028] A first step of the method includes identifying those combinations of the prime numbers in the list that allow for a value of n between 1 and 27. Table 1 shows the possible combinations.

[0029] Although the last three solutions in the table deliver a number n of sub-periods within a frame larger than the target number 27, they are not discarded. Choosing n = 31 would require a switching frequency for the backlight of 31*100*75 = 232.5 kHz, which appears to be feasible for switch mode power converters.

[0030] The next step of the method includes identifying, for each number n of sub-periods within a frame identified above, those combinations of prime numbers the product of which is as close as possible to 100. The results for all numbers n identified in the first step are shown in table 2.

[0031] 93 and 106 are the only solutions coming close to the desired value of 100. The value 100 cannot be achieved straight. The achievable ratio of control of the backlight is thus either 93 or 106. As both values can be realised using the present circuit and the present selected image resolution, the first choice would be 106, since this number is found more often than 96 in the list of possible solutions. The solutions for n having numbers 6 and 30 are discarded as the associated prime numbers result in values for SPP too far away from the desired value of 100.

[0032] The resulting count value for the number of pixel clock periods per step, PPS, can now be calculated using the remaining prime numbers, as shown in table 3.

[0033] The embodiment described above provides a simple solution for evenly distributing sub-periods within a frame period based on counting the pixel clock. However, it is not always possible to achieve a desired value for the ratio of control of the backlight. The number of possible solutions depends on the decomposition of the key figures describing the respective video mode into prime numbers. The smaller the resulting prime numbers the more solutions are possible. In the example above high prime numbers like 29, 31 and 53 are less suitable.

[0034] In a development of the inventive method and the inventive circuit, the general idea of counting the pixel clock for distributing sub-periods within a frame period and for providing a number of elementary steps within each sub-period is improved. Like before, a synchronisation signal, for example the frame or vertical synchronisation signal is used.

[0035] The development of the inventive method and the inventive circuit is based on the method described in the example above. To begin with, the desired ratio of control of the backlight is set to be fixed. For example, the ratio of control of the backlight is set to be 1:100, that is to say each sub-period is divided into 100 elementary steps or, in other words the value of SPP is set to 100. As a next step the total number of pixel clock periods per frame PPF is divided by the desired number n of sub-periods per frame multiplied by the number of elementary steps SPP. The result is the number of pixel clock periods per elementary step PPS. Written as an equation: *PPS = PPF/n/SPP.* For the exemplary numbers chosen above the equation would read as *PPS = 1429410/n/100.* The result of the division may not be an integer number. Therefore, the next smaller integer number is chosen for the number of pixel clock periods per elementary step PPS. As a result n sub-periods can be accommodated within a frame period, wherein each of the n sub-periods may accommodate the same ratio or duty cycle of control of the backlight. In the example, the duty cycles, which determine the ratio of control of the backlight, can be set to any value within a range of 1:100. The sub-periods are synchronised with the frame or vertical synchronisation signal. As was stated above, the result of the equation may not always be an integer number. Therefore, an error may remain after the n-th sub-period, which may be in a range of *1* to *n * SPP - 1* pixel clock periods. It is to be noted that no error occurs obviously, if the result of equation is an integer number. Figure 2 shows exemplary waveforms for the above-mentioned case. The waveforms shown in the figure generally correspond to the waveforms shown in figure 1. Only in the area of period n on the righthand side of the figure a difference can be seen. Period n ends with the 100th elementary step. However, the end of the frame period has not yet been reached. A time interval forming an error period EP fills the time between the end of period n and the end of the frame period, indicated by the surrounding frame EP in figure 2. This error introduces a mean error to the ratio of control of the backlight during every frame. As the error occurs after the last of the n sub-periods and prior to the vertical or frame synchronisation signal a small flicker having frame frequency may also occur. The number of pixel clock periods PEP within this error period EP calculates as *PPF - SPP*n*PPS* and may lie between 1 and n*100-1. The mean error to the ratio of control of the backlight can be calculated as *PEP/(PPF - PEP).* This error to the ratio of control of the backlight is often very small and depends on the number n of sub-periods chosen, as shown in the table 4. For calculating the table the same values for the total number of pixel clock periods per frame PPF have been chosen as for the examples above. It is to be noted that the error remains constant independent of the actual duty cycle chosen.

[0036] Generally, the inventive method presented in the example above allows for creating any number n of sub-periods within a frame period in a range from 1 to 27 while essentially achieving the desired duty cycle or ratio of control of the backlight of 1:100 for any selected number of sub-periods.

[0037] The results of the embodiment described above may be acceptable in view of the relatively small error introduced. However, in order to reduce the visibility of possible flicker having frame frequency, in a further development of the inventive method correction intervals COI are introduced. At the end of a correction interval COI the counters are disabled, or set into a hold state. In other words, at the end of a correction interval COI the counters are forced to miss a single clock pulse, i.e. a clock pulse is not applied to the respective clock inputs of the counters at the end of a correction interval COI. The number of clock pulses after which a correction in-

terval COI is inserted can be calculated as the quotient of the total number of pixel clock periods per frame and the number of pixel clock periods in the error period PEP, or COI = PPF / PEP. In doing so the end of the last of the n sub-periods within a frame period substantially coincides with the end of the frame period. The flicker having frame frequency is thus substantially eliminated.

[0038] In this embodiment of the invention, the missed clock pulses appear at regular intervals within a frame regardless of the sub-period and regardless of the state of the output of the circuit. That is to say, the missed clock pulses occur regardless of whether the output of the circuit represents a logical "1" or a logical "0", or regardless whether the light source is switched on or off. The value of the error in this embodiment of the invention depends on the value n indicating the number of sub-periods within a frame period as well as on the duty cycle. However, as a result of the introduction of the correction interval the mean error of the duty cycle is minimised when compared to the method without correction interval COI. In the method without correction interval COI the output can only assume either a logical "1" or a logical "0" during the complete error period PEP.

[0039] As the length of a correction interval can only assume integer multiples of the pixel clock period the result of the division PPF / PEP is truncated to the next smaller integer number. The final error remaining cannot be larger than one pixel clock period. This final error is truncated by the synchronisation signal and is negligible in view of the comparatively large number of pixel clock periods per frame. Table 5 shows the various values for SPP, PPS (calculated and truncated), PEP, COI (calculated and truncated), corrected number of pixel clock periods and remaining error for numbers n of sub-periods in a range of 1 to 27. For the calculation of the exemplary values in the table the same value of 1429410 pixels per frame as for the examples further above was used.

[0040] Figure 5 shows a schematic block diagram of an exemplary circuit for performing the method described above. A large part of the circuit corresponds to the circuit described in figure 4. A first counter 301 is clocked with a pixel clock signal PCK. A value for the number of pixel clock periods per elementary step PPS is supplied to a data input of the first counter 301. This value is loaded into the counter upon occurrence of a synchronisation signal VB at the load input LD of the first counter 301. The synchronisation signal VB is also supplied to the load input LD of a second counter 302 and to a logical OR-gate 304. When the first counter 301 has counted down from the value PPS supplied at its data input to 1, the logical state at the output of the first counter 301 delivers a corresponding signal, e.g. a pulse, and the counter automatically restarts counting down from the PPS value. This results in a clock signal being generated from the pixel clock PCK by division in the first counter 301, each clock period having the duration of a defined number of pixel clock periods. One period of the clock signal 306 generated in this way corresponds to an elementary step. The output signal of the first counter 301 is supplied as a clock signal to the second counter 302 and to a third counter 303. The second counter counts the number of elementary steps per sub-period. The second counter 302 is supplied with a desired number SPP of elementary steps per sub-period at its data input. When the second counter 302 has counted down from the value SPP supplied to 1, its output delivers a pulse and it automatically restarts counting down from the SPP value. The output of the second counter 302 is supplied to the logical OR-gate 304. The output of the logical OR-gate 304 is supplied to the load input LD of the third counter 303. A desired duty cycle DC corresponding to the desired brightness of the backlight is supplied to the third counter 303 at its data input and is loaded into the counter upon occurrence of a trigger signal at the load input of the counter. As has been elucidated before the trigger signal for the third counter 303 can either be an output signal of the second counter 302 or a synchronisation signal VB. The output of the third counter is a control signal BLC for switching on or off the backlight. The duration during which the backlight is switched on during a sub-period is determined by the duty cycle DC supplied to the data input of the third counter 303. The function of the circuit described until here corresponds to the function of the circuit described with reference to figure 4. A fourth counter 307 is supplied, to the data input of which a value corresponding to a correction interval COI is supplied. The fourth counter 307 is clocked by the pixel clock PCK. The value corresponding to the correction interval COI is loaded into the fourth counter 307 upon occurrence of the synchronisation signal VB at the load input LD of the fourth counter 307. The first, the second and the third counter 301, 302 and 303 have enable inputs EN, which enable or inhibit the counting down function of the respective counters. The output signal of the fourth counter 307 is connected to the respective enable inputs EN of the first, the second and the third counter 301, 302 and 303. Whenever the fourth counter 307 has counted down from the value corresponding to the correction interval COI to 1, its output delivers a pulse for one pixel clock period duration. As a result, the first, the second and the third counter 301, 302 and 303 are disabled and do not count the following incoming clock pulse. The fourth counter 307 then automatically restarts counting down from the COI value. It is to be noted that instead of supplying the output of the fourth counter 307 to enable inputs of the other counters it is also possible to interrupt the supply of clock signals to the counters. This could be done, for example by shorting the clock signals to ground using transistors or by switching and opening the clock line using transmission gates.

[0041] In another embodiment, the length number PEP of pixel clock periods in the error period is divided by the number n of sub-periods within a frame period. The integer part of the result of the division is used as a correction period COP. At the end or at the beginning of each sub-period the counters are set into a hold state for

a number of clock cycles corresponding to the correction period COP. Doing so, the error period is distributed more evenly across the frame period. Only after the end of the correction period COP the hold state is released and the counters are enabled correspondingly, continuing normal operation. By distributing the error period across the frame period the end of the last sub-period of one frame matches the end of the frame period as good as possible. This embodiment of the invention, too, substantially eliminates the flicker having frame frequency. This embodiment, however, does not reduce the mean error of the duty cycle.

[0042] It is to be noted that although the method has been described above with reference to a frame period as the basis for calculation, it is also conceivable to apply the method based on the field frequency in the case of interlaced video, or on the line frequency. That is to say, the number of pixels that is used as a starting point may also be the number of pixels per field or per line.

[0043] It is further to be noted that, although the invention has been described above with reference to a certain video format in terms of pixels per frame and frames per second, the invention may be modified for other video formats without departing from the scope of the invention.

[0044] It is to be noted that the invention is particularly suitable for hold-type light valves, in which the value for transmission or reflection is maintained once it is set until it is replaced by a new value for the next frame or field.

Claims

1. A method of driving a light source in a display apparatus comprising light modulators, wherein an image is composed by pixels that are arranged in rows and columns, wherein the apparatus reproduces images by controlling the amount of light, which is provided to individual or groups of pixels by the light source, by means of said light modulators for individual pixels or groups of pixels, thereby achieving brightness control for an image over a first contrast ratio range, wherein subsequent images have associated therewith synchronisation signals (VB) indicating the beginning or the end of a new image regularly occurring at intervals corresponding to first time periods, the beginning or end of the time period during which the light source emits light being synchronised with the beginning or end synchronisation signals associated with each image, wherein the method of driving the light source determines the maximum brightness of an image, the method including the steps of:

- accommodating one or more second time periods (period 1 - period n) within a said first time period such the one or more second time periods are nested and dispersed within a said first period; and
- controlling the light source to emit light during fractions of the one or more second time periods;

wherein the step of accommodating one or more second time periods includes the steps of:

- counting a number (PPS) of pixel clock pulses (PCK) to produce third time periods (ES, 206); and
- counting a first number (SPP) of third time periods, for generating a said second time period; and

wherein the step of controlling the light source to emit light during fractions of the one or more second time periods includes the steps, for each said second time period, of:
counting a second number (DC) of third time periods (ES, 206) for generating a fourth time period (BLC), a said counting of said second number of third periods (ES, 206) being reset and restarted (204) with either the image synchronisation signal (VB) or the completion of each counting of said first number (202) such that the fourth time period is inside each of the second time periods; and
controlling the light source to emit light during the fourth time period (BLC) of each second time period.

2. The method of claim 1, wherein, in the case more than one second time periods are accommodated within the first time period, these second time periods are of equal length and equally distributed within the first time period.

3. The method of claim 1, wherein, in the case more than one second time periods are accommodated within the first time period, for those second time periods belonging to the same first time period, the fractions of the second time periods, during which the light source is controlled to emit light, have the same relative length with regard to the respective second time period, and wherein the ratio between the fraction and the second time period corresponds to a desired second contrast ratio.

4. The method of claim 1, further including:

- fully opening the light modulator for the pixel or groups of pixels having the highest brightness in the image; and
- setting the fraction of the one or more second time periods, during which the light source is controlled to emit light, to a length such that the ratio between the fraction of the one ore more second time periods, during which the light source is controlled to emit light, and the respective second time period corresponds to the required brightness for that pixel or group of pixels, wherein the ratio determines the perceived max-

imum brightness of the display.

5. The method of claim 1, wherein, in the case more than one second time periods are accommodated within the first time period, the method further includes:

- calculating the sum of the pixel clock periods over all second time periods within a first time period;
- subtracting the sum from the total number of pixel clock periods within a first time period; and
- distributing the resulting difference in the number of pixel clock periods at equal temporal distances within a first time period, the equal temporal distances corresponding to fifth time periods (COI).

6. The method of claim 5, further including:

- disabling the counting during one pixel clock period after every fifth time period (COI).

7. The method of claim 1, wherein the synchronisation signal (VB) includes a vertical blanking signal.

8. Circuit for controlling a light source in a display apparatus comprising light modulators, in which an image is composed by pixels that are arranged in rows and columns, wherein the display apparatus reproduces images by controlling the amount of light, which is provided to individual or groups of pixels by the light source, by means of light modulators for individual pixels or groups of pixels, wherein subsequent images have assoicated therewith synchronisation signals (VB), indicating the beginning or the end of a new image, regularly occurring at intervals corresponding to first time periods, the beginning or end of the time period during which the light source emits light being adapted to be synchronised with the beginning or end synchronisation signals associated with each image, the circuit comprising:

a first counter (201; 301) adapted to count predetermined number (PPS) of pixel clock pulses (PCK), the predetermined number (PPS) of pixel clock pulses corresponding to a third time period (ES, 206);
a second counter (202; 302) adapted to count a first number (SPP) of third time periods;
wherein the first number (SPP) of third time periods counted by the second counter (202; 302) defines a second time period (period 1 - period n), one or more of said second time periods being nested and dispersed within the first time period;
wherein the circuit further includes a third counter (203; 303) adapted to count, for each second time period, a second number (DC) of third time periods, the second number (DC) of third time periods defining a fourth time period during which the light source is controlled to emit light during the second time period, said third counter being adapted to be reset and restarted with either an image synchronisation signal (VB) or the completion of each counting of said first number (202) such that the fourth period is inside each of the second time periods.

9. Circuit according to claim 8, **characterised in that** a fourth counter (307) is provided, which is adapted to inhibit the first, the second and the third counters (301, 302, 303) during one pixel clock period (PCK) after counting to a predetermined value (COI), after expiry of which pixel clock period (PCK) the first, the second and the third counters (301, 302, 303) resume counting, wherein the predetermined value corresponds to the quotient of the total number of pixel clock pulses per first time period over the difference between the total number of pixel clock pulses per first time period and the number of pixel clock periods for all second time periods in a first time period.

10. Circuit according to claim 8, **characterised in that** the first and the second counters (201, 202, 301, 302), respectively, are reset and restarted by the synchronisation signal (VB) and reload the first number and second second number at respective data inputs when they have finished counting and restart counting immediately.

11. Circuit according to claim 9, **characterised in that** the first, the second, and the fourth counters (201 202; 301, 302, 307), respectively, are reset and restarted by the synchronisation signal (VB) and reload the first number, the second number, and the predetermined value at respective data inputs when they have finished counting and restart counting immediately.

Patentansprüche

1. Verfahren zum Ansteuern einer Lichtquelle in einer Anzeigevorrichtung, die Lichtmodulatoren umfasst, in denen ein Bild durch Pixel zusammengesetzt wird, die in Zeilen und Spalten angeordnet sind, wobei die Vorrichtung durch Steuern der Lichtmenge, die für einzelne Pixel oder für Gruppen von Pixeln durch die Lichtquelle bereitgestellt wird, mittels der Lichtmodulatoren für einzelne Pixel oder für Gruppen von Pixeln Bilder wiedergibt, wodurch eine Helligkeitssteuerung für ein Bild über einen ersten Kontrastverhältnisbereich erzielt wird, wobei nachfolgenden Bildern Synchronisationssignale (VB), die den Anfang

oder das Ende eines neuen Bilds angeben, die in Intervallen, die ersten Zeitperioden entsprechen, regelmäßig auftreten, zugeordnet sind, wobei der Anfang oder das Ende der Zeitperiode, während der die Lichtquelle Licht emittiert, mit dem Anfang oder mit dem Ende von Synchronisationssignalen, die jedem Bild zugeordnet sind, synchronisiert sind, wobei das Verfahren zum Ansteuern der Lichtquelle die maximale Helligkeit eines Bilds bestimmt, wobei das Verfahren die folgenden Schritte enthält:

- Aufnehmen einer oder mehrerer zweiter Zeitperioden (Periode 1 - Periode n) in die erste Zeitperiode in der Weise, dass die eine oder die mehreren zweiten Zeitperioden innerhalb der ersten Periode verschachtelt und verteilt sind; und
- Steuern der Lichtquelle zum Emittieren von Licht während Anteilen der einen oder mehreren zweiten Zeitperioden;

wobei der Schritt des Aufnehmens einer oder mehrerer zweiter Zeitperioden die folgenden Schritte enthält:

- Zählen einer Anzahl (PPS) von Pixeltaktimpulsen (PCK), um dritte Zeitperioden (ES, 206) zu erzeugen; und
- Zählen einer ersten Anzahl (SPP) dritter Zeitperioden, um die zweite Zeitperiode zu erzeugen; und

wobei der Schritt des Steuerns der Lichtquelle zum Emittieren von Licht während Anteilen der einen oder mehreren zweiten Zeitperioden für jede der zweiten Zeitperioden die folgenden Schritte enthält:

Zählen einer zweiten Anzahl (DC) dritter Zeitperioden (ES, 206), um eine vierte Zeitperiode (BLC) zu erzeugen, wobei das Zählen der zweiten Anzahl dritter Perioden (ES, 206) entweder mit dem Bildsynchronisationssignal (VB) oder mit dem Abschluss jeder Zählung der ersten Anzahl (202) in der Weise zurückgesetzt und neu gestartet wird (204), dass die vierte Zeitperiode innerhalb jeder der zweiten Zeitperioden liegt; und

Steuern der Lichtquelle zum Emittieren von Licht während der vierten Zeitperiode (BLC) jeder zweiten Zeitperiode.

2. Verfahren nach Anspruch 1, wobei diese zweiten Zeitperioden die gleiche Länge besitzen und innerhalb der ersten Zeitperiode gleich verteilt sind, falls in der ersten Zeitperiode mehr als eine zweite Zeitperiode aufgenommen sind.

3. Verfahren nach Anspruch 1, wobei für jene zweiten Zeitperioden, die zu derselben ersten Zeitperiode gehören, die Anteile der zweiten Zeitperioden, während denen die Lichtquelle zum Emittieren von Licht gesteuert wird, hinsichtlich der jeweiligen zweiten Zeitperiode dieselbe relative Länge aufweisen, und wobei das Verhältnis zwischen dem Anteil und der zweiten Zeitperiode einem gewünschten zweiten Kontrastverhältnis entspricht, falls in der ersten Zeitperiode mehr als eine zweite Zeitperiode aufgenommen sind.

4. Verfahren nach Anspruch 1, das ferner enthält:

- vollständiges Öffnen des Lichtmodulators für das Pixel oder für die Gruppen von Pixeln mit der höchsten Helligkeit in dem Bild; und
- Einstellen des Anteils der einen oder mehreren zweiten Zeitperioden, während denen die Lichtquelle zum Emittieren von Licht gesteuert wird, auf eine solche Länge, dass das Verhältnis zwischen dem Anteil der einen oder mehreren zweiten Zeitperioden, während denen die Lichtquelle zum Emittieren von Licht gesteuert wird, und der jeweiligen zweiten Zeitperiode der geforderten Helligkeit für dieses Pixel oder für diese Gruppe von Pixeln entspricht, wobei das Verhältnis die wahrgenommene maximale Helligkeit der Anzeige bestimmt.

5. Verfahren nach Anspruch 1, wobei das Verfahren, falls in der ersten Zeitperiode mehr als eine zweite Zeitperiode aufgenommen sind, ferner enthält:

- Berechnen der Summe der Pixeltaktperioden über alle zweiten Zeitperioden innerhalb einer ersten Zeitperiode;
- Subtrahieren der Summe von der Gesamtanzahl von Pixeltaktperioden innerhalb einer ersten Zeitperiode; und
- Verteilen der resultierenden Differenz der Anzahl der Pixeltaktperioden in gleichen zeitlichen Abständen innerhalb einer ersten Zeitperiode, wobei die gleichen zeitlichen Abstände fünften Zeitperioden (COI) entsprechen.

6. Verfahren nach Anspruch 5, das ferner enthält:

- Deaktivieren des Zählens während einer Pixeltaktperiode nach jeder fünften Zeitperiode (COI).

7. Verfahren nach Anspruch 1, wobei das Synchronisationssignal (VB) ein vertikales Austastsignal enthält.

8. Schaltung zum Steuern einer Lichtquelle in einer Anzeigevorrichtung, die Lichtmodulatoren umfasst, in denen ein Bild durch Pixel zusammengesetzt wird,

die in Zeilen und Spalten angeordnet sind, wobei die Anzeigevorrichtung durch Steuern der Lichtmenge, die für einzelne Pixel oder für Gruppen von Pixeln durch die Lichtquelle bereitgestellt wird, mittels Lichtmodulatoren für einzelne Pixel oder für Gruppen von Pixeln Bilder wiedergibt, wobei nachfolgenden Bildern Synchronisationssignale (VB), die den Anfang oder das Ende eines Bilds angeben, die in Intervallen, die ersten Zeitperioden entsprechen, regelmäßig auftreten, zugeordnet sind, wobei der Anfang oder das Ende der Zeitperiode, während der die Lichtquelle Licht emittiert, dafür ausgelegt ist, mit dem Anfang oder mit dem Ende von Synchronisationssignalen, die jedem Bild zugeordnet sind, synchronisiert zu werden, wobei die Schaltung umfasst:

einen ersten Zähler (201; 301), der dafür ausgelegt ist, eine vorgegebene Anzahl (PPS) von Pixeltaktimpulsen (PCK) zu zählen, wobei die vorgegebene Anzahl (PPS) von Pixeltaktimpulsen einer dritten Zeitperiode (ES, 206) entspricht;
wobei ein zweiter Zähler (202; 302) dafür ausgelegt ist, eine erste Anzahl (SPP) dritter Zeitperioden zu zählen; wobei die erste Anzahl (SPP) dritter Zeitperioden, die durch den zweiten Zähler (202; 302) gezählt wird, eine zweite Zeitperiode (Periode 1 - Periode n) definiert, wobei eine oder mehrere der zweiten Zeitperioden innerhalb der ersten Zeitperiode verschachtelt und verteilt sind;
wobei die Schaltung ferner einen dritten Zähler (203; 303) enthält, der dafür ausgelegt ist, für jede zweite Zeitperiode eine zweite Anzahl (DC) dritter Zeitperioden zu zählen, wobei die zweite Anzahl (DC) dritter Zeitperioden eine vierte Zeitperiode definiert, während der die Lichtquelle während der zweiten Zeitperiode zum Emittieren von Licht gesteuert wird, wobei der dritte Zähler dafür ausgelegt ist, entweder mit einem Bildsynchronisationssignal (VB) oder mit dem Abschluss jedes Zählens der ersten Anzahl (202) in der Weise zurückgesetzt und neu gestartet zu werden, dass die vierte Zeitperiode innerhalb jeder der zweiten Zeitperioden liegt.

9. Schaltung nach Anspruch 8, **dadurch gekennzeichnet, dass** ein vierter Zähler (307) vorgesehen ist, der dafür ausgelegt ist, den ersten, den zweiten und den dritten Zähler (301, 302, 303) nach dem Zählen bis zu einem vorgegebenen Wert (COI) während einer Pixeltaktperiode (PCK) zu sperren, nach deren Ablauf die Pixelzeitperiode (PCK) des ersten, des zweiten und des dritten Zählers (301, 302, 303) weiter gezählt werden, wobei der vorgegebene Wert dem Quotienten der Gesamtanzahl von Pixeltaktperioden pro erster Zeitperiode und der Differenz zwischen der Gesamtanzahl von Pixeltaktimpulsen pro erster Zeitperiode und der Anzahl von Pixelzeitperioden für alle zweiten Zeitperioden in einer ersten Zeitperiode entspricht.

10. Schaltung nach Anspruch 8, **dadurch gekennzeichnet, dass** die ersten und die zweiten Zähler (201, 202, 301, 302) jeweils durch das Synchronisationssignal (VB) zurückgesetzt und neu gestartet werden und die erste Anzahl und die zweite Anzahl an jeweiligen Dateneingängen sofort neu laden, wenn sie das Zählen und das Neustarten des Zählens abgeschlossen haben.

11. Schaltung nach Anspruch 9, **dadurch gekennzeichnet, dass** der erste, der zweite und der vierte Zähler (201, 202; 301, 302, 307) jeweils durch das Synchronisationssignal (VB) zurückgesetzt und neu gestartet werden und die erste Anzahl, die zweite Anzahl und den vorgegebenen Wert an jeweiligen Dateneingängen neu laden, wenn sie das Zählen und Neustarten des Zählens sofort abgeschlossen haben.

Revendications

1. Procédé de pilotage d'une source de lumière dans un appareil d'affichage comprenant des modulateurs de lumière, dans lequel une image est composée de pixels disposés en lignes et en colonnes, où l'appareil reproduit des images en contrôlant la quantité de lumière qui est fournie aux pixels individuels ou aux groupes de pixels par la source de lumière, au moyen desdits modulateurs de lumière pour les pixels individuels ou les groupes de pixels, parvenant ainsi à un contrôle de la luminosité d'une image sur une première plage de rapports de contraste, où les images suivantes ont des signaux de synchronisation (VB) associés indiquant le début ou la fin d'une nouvelle image se produisant régulièrement à des intervalles correspondant à des premières périodes de temps, le début ou la fin de la période de temps au cours de laquelle la source de lumière émet de la lumière étant synchronisé avec les signaux de synchronisation de début ou de fin associés à chaque image, où le procédé de pilotage de la source de lumière détermine la luminosité maximale d'une image, le procédé incluant les étapes suivantes :

- prise en charge d'une ou de plusieurs deuxièmes périodes de temps (période 1 - période n) dans une dite première période de temps de manière à ce que les une ou plusieurs deuxièmes périodes de temps soient imbriquées et dispersées dans une dite première période ;
et
- contrôle de la source de lumière pour émettre

de la lumière pendant des fractions des une ou plusieurs deuxièmes périodes de temps ;

où l'étape de prise en charge d'une ou de plusieurs deuxièmes périodes de temps inclut les étapes suivantes :

- comptage d'un nombre (PPS) d'impulsions d'horloge de pixels (PCK) pour produire des troisièmes périodes de temps (ES, 206) ; et
- comptage d'un premier nombre (SPP) de troisièmes périodes de temps pour générer une dite deuxième période de temps ; et

où l'étape de contrôle de la source de lumière pour émettre de la lumière pendant des fractions des une ou plusieurs deuxièmes périodes de temps inclut les étapes suivantes pour chacune desdites deuxièmes périodes de temps :

comptage d'un deuxième nombre (DC) de troisièmes périodes de temps (ES, 206) pour générer une quatrième période de temps (BLC), un dit comptage dudit deuxième nombre de troisièmes périodes (ES, 206) étant réinitialisé et redémarré (204) avec le signal de synchronisation d'image (VB) ou au terme de chaque comptage dudit premier nombre (202) de sorte que la quatrième période de temps se trouve dans chacune des deuxièmes périodes de temps ; et contrôle de la source de lumière pour émettre de la lumière pendant la quatrième période de temps (BLC) de chaque deuxième période de temps.

2. Procédé selon la revendication 1, dans lequel lorsque plusieurs deuxièmes périodes de temps sont prises en charge dans la première période de temps, ces deuxièmes périodes de temps sont de même durée et distribuées de manière équitable dans la première période de temps.

3. Procédé selon la revendication 1, dans lequel lorsque plusieurs deuxièmes périodes de temps sont prises en charge dans la première période de temps, pour ces deuxièmes périodes de temps appartenant à la même première période de temps, les fractions des deuxièmes périodes de temps pendant lesquelles la source de lumière est contrôlée pour émettre de la lumière ont la même durée relative par rapport à la deuxième période de temps respective, et où le rapport entre la fraction et la deuxième période de temps correspond à un deuxième rapport de contraste souhaité.

4. Procédé selon la revendication 1, incluant en outre :

- l'ouverture complète du modulateur de lumière pour le pixel ou les groupes de pixels ayant la luminosité la plus forte dans l'image ; et
- le réglage de la fraction des une ou plusieurs deuxièmes périodes de temps pendant lesquelles la source de lumière est contrôlée pour émettre de la lumière sur une durée de sorte que le rapport entre la fraction des une ou plusieurs deuxièmes périodes pendant lesquelles la source de lumière est contrôlée pour émettre de la lumière et la deuxième période de temps respective correspond à la luminosité requise pour ce pixel ou groupe de pixels, où le rapport détermine la luminosité maximale perçue de l'affichage.

5. Procédé selon la revendication 1, dans lequel lorsque plusieurs deuxièmes périodes de temps sont prises en charge dans la première période de temps, le procédé inclut en outre :

- le calcul de la somme des périodes d'horloge de pixels sur toutes les deuxièmes périodes de temps d'une première période de temps ;
- la soustraction de la somme du nombre total de périodes d'horloge de pixels dans une première période de temps ; et
- la distribution de la différence obtenue du nombre de périodes d'horloge de pixels à des distances temporelles égales dans une première période de temps, les distances temporelles égales correspondant à des cinquièmes périodes (COI).

6. Procédé selon la revendication 5, incluant en outre :

- la désactivation du comptage pendant une période d'horloge de pixels après chaque cinquième période de temps (COI).

7. Procédé selon la revendication 1, dans lequel le signal de synchronisation (VB) inclut un signal de suppression verticale.

8. Circuit de contrôle d'une source de lumière dans un appareil d'affichage comprenant des modulateurs de lumière, dans lequel une image est composée de pixels disposés en lignes et en colonnes, où l'appareil d'affichage reproduit des images en contrôlant la quantité de lumière qui est fournie aux pixels individuels ou aux groupes de pixels par la source de lumière, au moyen de modulateurs de lumière pour les pixels individuels ou les groupes de pixels, où les images suivantes ont des signaux de synchronisation (VB) associés indiquant le début ou la fin d'une nouvelle image se produisant régulièrement à des intervalles correspondant à des premières périodes de temps, le début ou la fin de la période de temps au cours de laquelle la source de lumière émet de

la lumière étant adaptée pour être synchronisée avec les signaux de synchronisation de début ou de fin associés à chaque image, le circuit comprenant :

un premier compteur (201 ; 301) adapté pour compter le nombre prédéterminé (PPS) d'impulsions d'horloge de pixels (PCK), le nombre prédéterminé (PPS) d'impulsions d'horloge de pixels correspondant à une troisième période de temps (ES, 206) ;
un deuxième compteur (202 ; 302) adapté pour compter un premier nombre (SPP) de troisièmes périodes de temps ;
où le premier nombre (SPP) de troisièmes périodes compté par le deuxième compteur (202 ; 302) définit une deuxième période de temps (période 1 - période n), une ou plusieurs desdites deuxièmes périodes de temps étant imbriquées et dispersées dans la première période de temps ;
où le circuit inclut en outre un troisième compteur (203 ; 303) adapté pour compter, pour chaque deuxième période de temps, un deuxième nombre (DC) de troisièmes périodes de temps, le deuxième nombre (DC) de troisièmes périodes de temps définissant une quatrième période de temps au cours de laquelle la source de lumière est contrôlée pour émettre de la lumière pendant la deuxième période de temps, ledit troisième compteur étant adapté pour être réinitialisé et redémarré avec un signal de synchronisation d'image (VB) ou à l'issue de chaque comptage dudit premier nombre (202) de sorte que la quatrième période de temps se trouve dans chacune des deuxièmes périodes de temps.

9. Circuit selon la revendication 8, **caractérisé en ce qu'**un quatrième compteur (307) est fourni, lequel est adapté pour inhiber le premier, le deuxième et le troisième compteurs (301, 302, 303) pendant une période d'horloge de pixels (PCK) après le comptage jusqu'à une valeur prédéterminée (COI), après l'expiration de laquelle période d'horloge de pixels (PCK), le premier, le deuxième et le troisième compteurs (301, 302, 303) reprennent le comptage, où la valeur prédéterminée correspond au quotient du nombre total d'impulsions d'horloge de pixels par première période de temps sur la différence entre le nombre total d'impulsions d'horloge de pixels par première période de temps et le nombre de périodes d'horloge de pixels pour toutes les deuxièmes périodes de temps d'une première période de temps.

10. Circuit selon la revendication 8, **caractérisé en ce que** le premier et le deuxième compteurs (201, 202, 301, 302) respectivement sont réinitialisés et redémarrés par le signal de synchronisation (VB) et rechargent le premier nombre et le deuxième nombre à des entrées de données respectives lorsqu'ils ont terminé le comptage et redémarrent immédiatement le comptage

11. Circuit selon la revendication 9, **caractérisé en ce que** le premier, le deuxième et le quatrième compteurs (201 ; 202 ; 301, 302, 307) respectivement sont réinitialisés et redémarrés par le signal de synchronisation (VB) et rechargent le premier nombre, le deuxième nombre et la valeur prédéterminée aux entrées de données respectives lorsqu'ils ont terminé le comptage et redémarrent immédiatement le comptage.

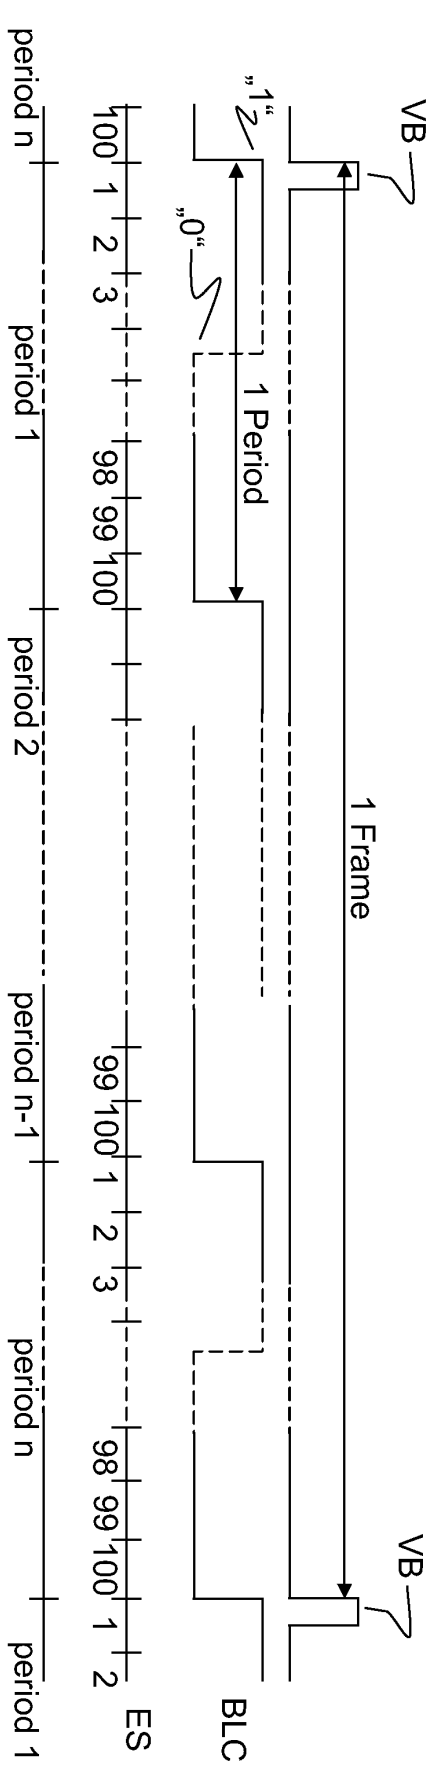

VB
1 Frame
„1“
„0“
1 Period
BLC
100 1 2 3
98 99 100
99 100 1 2 3
98 99 100 1 2
ES
period n
period 1
period 2
period n-1
period n
period 1

Fig. 1

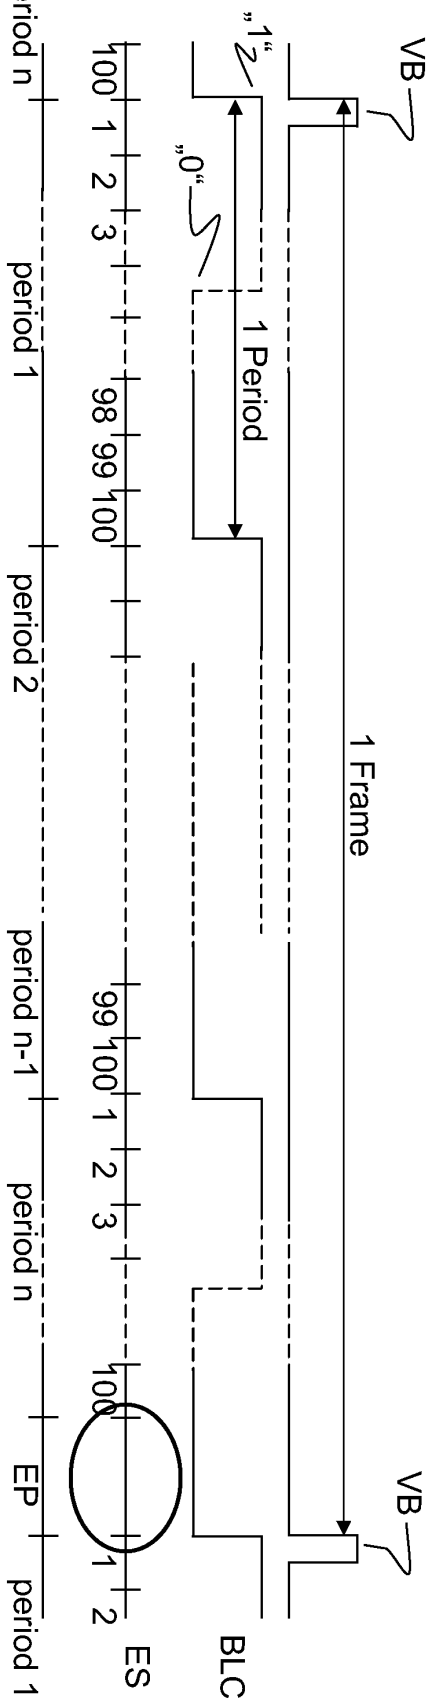

VB
1 Frame
„1“
„0“
1 Period
BLC
100 1 2 3
98 99 100
99 100 1 2 3
100 1 2
ES
EP
period n
period 1
period 2
period n-1
period n
period 1

Fig. 2

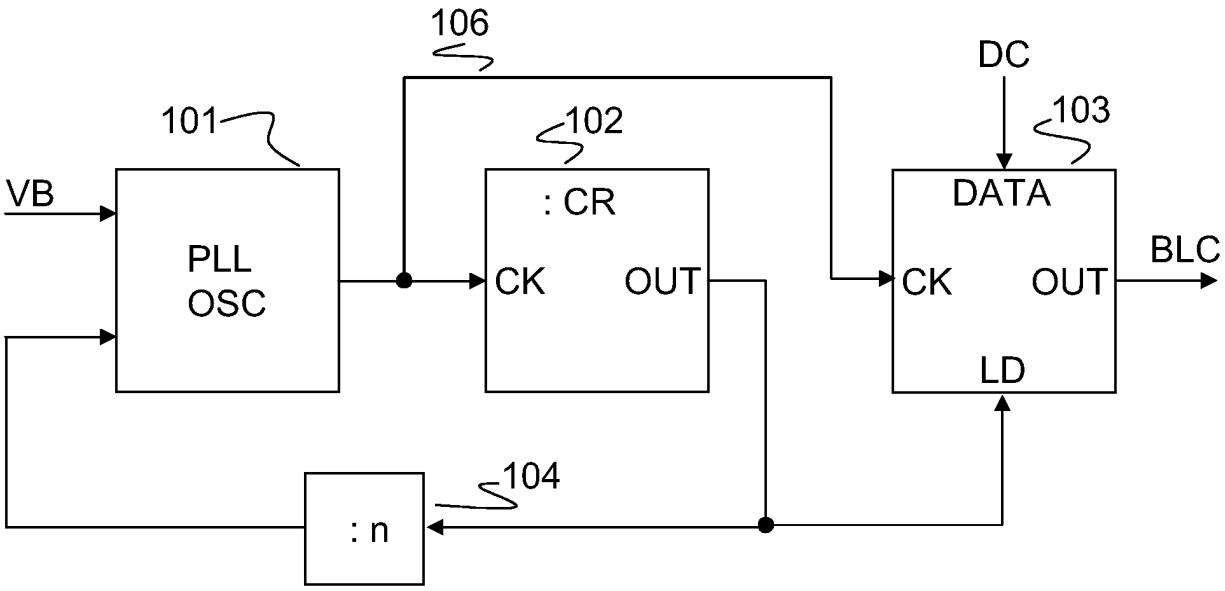


Fig. 3 prior art

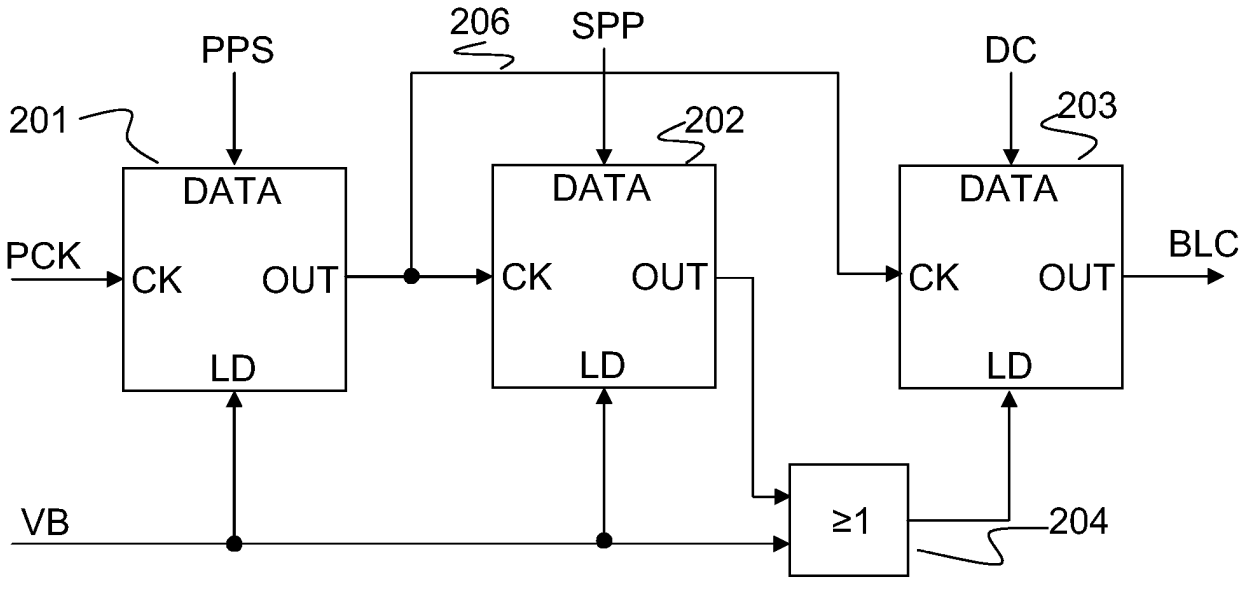


Fig. 4

n	prime numbers used
1	1
2	2
3	3
5	5
6	2; 3
10	2; 5
15	3; 5
29	29
30	2; 3; 5
31	31

Table 1

n	prime numbers used for n	SPP	prime numbers used for SPP
1	1	106	2; 53
2	2	93	3; 31
3	3	106	2; 53
5	5	106	2; 53
6	2; 3	(145)	n/a
10	2; 5	93	3; 31
15	3; 5	106	2; 53
29	29	106	2; 53
30	2; 3; 5	(53)	n/a
31	31	106	2; 53

Table 2

n	prime numbers used for n	SPP	prime numbers used for SPP	PPS	prime numbers used for PPS
1	1	106	2; 53	13485	3; 5; 29; 31
2	2	93	3; 31	7685	5; 29; 53
3	3	106	2; 53	4495	5; 29; 31
5	5	106	2; 53	2697	3; 29; 31
6	2; 3	(145)	n/a	n/a	n/a
10	2; 5	93	3; 31	1537	29; 53
15	3; 5	106	2; 53	899	29; 31
29	29	106	2; 53	465	3; 5; 31
30	2; 3; 5	(53)	n/a	n/a	n/a
31	31	106	2; 53	435	3; 5; 29

Table 3

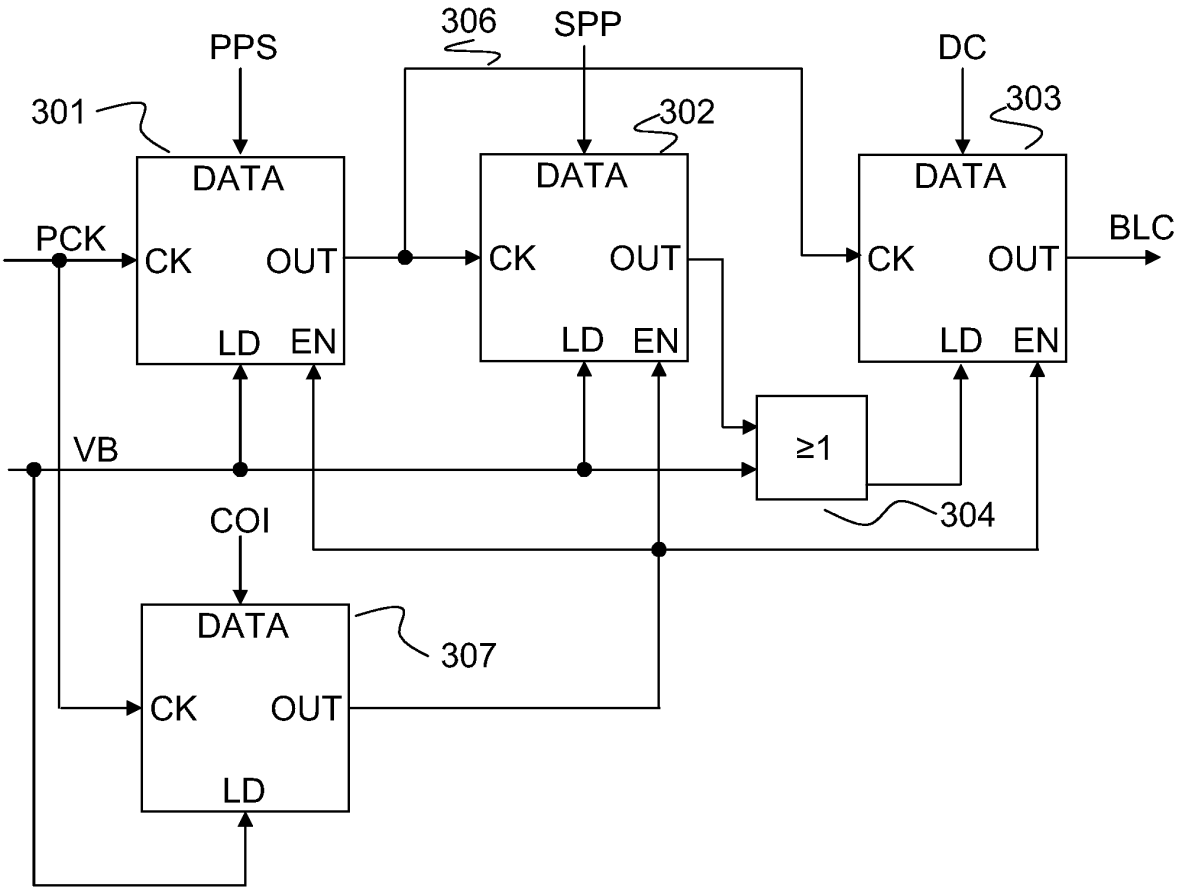


Fig. 5

n	Total steps per frame	PPS (calculated)	PPS (truncated)	PEP	duty cycle mean error
1	100	14294,1	14294	10	0,0007 %
2	200	7147,05	7147	10	0,0007 %
3	300	4764,7	4764	210	0,0147 %
4	400	3573,525	3573	210	0,0147 %
5	500	2858,82	2858	410	0,0287 %
6	600	2382,35	2382	210	0,0147 %
7	700	2042,014286	2042	10	0,0007 %
8	800	1786,7625	1786	610	0,0427 %
9	900	1588,233333	1588	210	0,0147 %
10	1000	1429,41	1429	410	0,0287 %
11	1100	1299,463636	1299	510	0,0357 %
12	1200	1191,175	1191	210	0,0147 %
13	1300	1099,546154	1099	710	0,0497 %
14	1400	1021,007143	1021	10	0,0007 %
15	1500	952,94	952	1410	0,0987 %
16	1600	893,38125	893	610	0,0427 %
17	1700	840,8294118	840	1410	0,0987 %
18	1800	794,1166667	794	210	0,0147 %
19	1900	752,3210526	752	610	0,0427 %
20	2000	714,705	714	1410	0,0987 %
21	2100	680,6714286	680	1410	0,0987 %
22	2200	649,7318182	649	1610	0,113 %
23	2300	621,4826087	621	1110	0,0777 %
24	2400	595,5875	595	1410	0,0987 %
25	2500	571,764	571	1910	0,134 %
26	2600	549,7730769	549	2010	0,141 %
27	2700	529,4111111	529	1110	0,0777%

Table 4

n	Total steps per frame	PPS (calculated)	PPS (trunc.)	PEP	COI	COI (trunc.)	corrected pixel clock periods	rem. error
1	100	14294,1	14294	10	142941	142941	10	0
2	200	7147,05	7147	10	142941	142941	10	0
3	300	4764,7	4764	210	6806,714286	6806	210	0
4	400	3573,525	3573	210	6806,714286	6806	210	0
5	500	2858,82	2858	410	3486,365854	3486	410	0
6	600	2382,35	2382	210	6806,714286	6806	210	0
7	700	2042,014286	2042	10	142941	142941	10	0
8	800	1786,7625	1786	610	2343,295082	2343	610	0
9	900	1588,233333	1588	210	6806,714286	6806	210	0
10	1000	1429,41	1429	410	3486,365854	3486	410	0
11	1100	1299,463636	1299	510	2802,764706	2802	510	0
12	1200	1191,175	1191	210	6806,714286	6806	210	0
13	1300	1099,546154	1099	710	2013,253521	2013	710	0
14	1400	1021,007143	1021	10	142941	142941	10	0
15	1500	952,94	952	1410	1013,765957	1013	1411	1
16	1600	893,38125	893	610	2343,295082	2343	610	0
17	1700	840,8294118	840	1410	1013,765957	1013	1411	1
18	1800	794,1166667	794	210	6806,714286	6806	210	0
19	1900	752,3210526	752	610	2343,295082	2343	610	0
20	2000	714,705	714	1410	1013,765957	1013	1411	1
21	2100	680,6714286	680	1410	1013,765957	1013	1411	1
22	2200	649,7318182	649	1610	887,8322981	887	1611	1
23	2300	621,4826087	621	1110	1287,756757	1287	1110	0
24	2400	595,5875	595	1410	1013,765957	1013	1411	1
25	2500	571,764	571	1910	748,382199	748	1910	0
26	2600	549,7730769	549	2010	711,1492537	711	2010	0
27	2700	529,4111111	529	1110	1287,756757	1287	1110	0

Table 5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20050078081 A1 **[0005]**