



(12) **CORRECTED EUROPEAN PATENT APPLICATION**

Note: Bibliography reflects the latest situation

(15) Correction information:

Corrected version no 1 (W1 A2)

Bibliography INID code(s) 74

(51) Int Cl.:

B66D 1/36 (2006.01)

E02F 9/20 (2006.01)

B66C 13/14 (2006.01)

(48) Corrigendum issued on:

09.04.2008 Bulletin 2008/15

(43) Date of publication:

26.12.2007 Bulletin 2007/52

(21) Application number: **07110465.7**

(22) Date of filing: **18.06.2007**

(84) Designated Contracting States:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE SI SK TR

Designated Extension States:

AL BA HR MK RS

(71) Applicant: **CASAGRANDE SpA**
I-33074 Fontanafredda (PN) (IT)

(72) Inventor: **Ros, Roberto**
33077, Sacile (PN) (IT)

(74) Representative: **Petraz, Gilberto Luigi et al**
GLP S.r.l.
Piazzale Cavedalis 6/2
33100 Udine (IT)

(30) Priority: **21.06.2006 IT UD20060160**

(54) **Control apparatus for excavator machines**

(57) A control apparatus (10) for an excavator machine (19), having one or more flexible pipes (13) to collect debris and/or deliver water, and/or to contain hoses for fluid-dynamic and/or electric commands, comprises means (11) to wind/unwind the flexible pipe (13), rotating around an axis (Y) of rotation in order to effect operations

to wind/unwind the pipes (13) along an axis or direction (X) of winding/unwinding, variable during said winding/unwinding operations. The winding means (11) is selectively inclined according to the number of revolutions made by the winding means (11) during the operations to wind/unwind the flexible pipes (13).

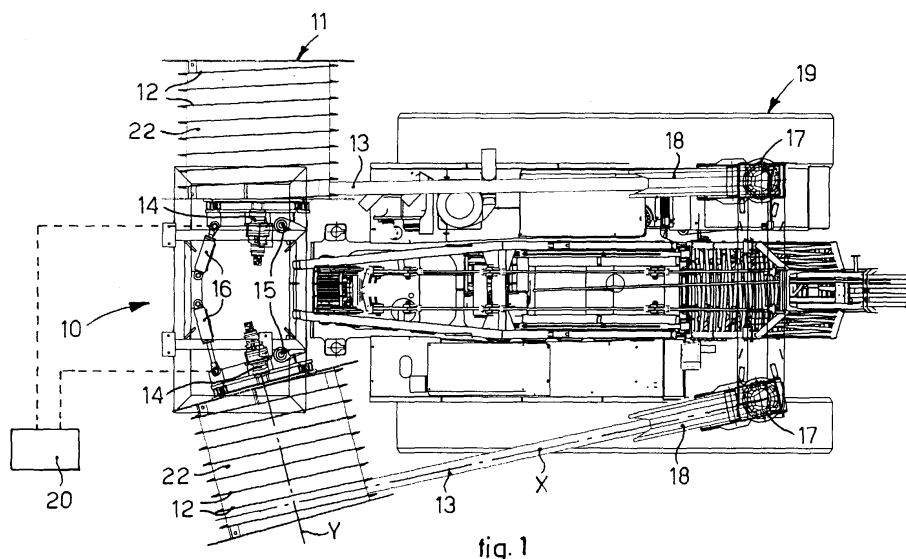


fig. 1