

(19)



(11)

EP 1 874 254 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

25.05.2016 Bulletin 2016/21

(51) Int Cl.:

A61G 13/12 (2006.01)

A61G 13/10 (2006.01)

(86) International application number:

PCT/US2006/013441

(21) Application number: **06740847.6**

(22) Date of filing: **11.04.2006**

(87) International publication number:

WO 2006/110721 (19.10.2006 Gazette 2006/42)

(54) **ACCESSORY RAIL CLAMP WITH LATCH AND LOCK MECHANISMS**

AKZESSORISCHE KONTAKTKLEMME MIT RIEGELMECHANISMEN

PINCE DE RAIL POUR ACCESSOIRE AVEC MECANISMES DE VERROUILLAGE ET DE BLOCAGE

(84) Designated Contracting States:
DE FR GB

(30) Priority: **19.09.2005 US 229759**
11.04.2005 US 670027 P
11.04.2005 US 670040 P
11.04.2005 US 670041 P
26.09.2005 US 720598 P

(43) Date of publication of application:
09.01.2008 Bulletin 2008/02

(73) Proprietor: **Allen Medical Systems, Inc.**
Batesville, IN 47006 (US)

(72) Inventor: **SKRIPPS, Thomas, K.**
Acton, MA 01720 (US)

(74) Representative: **Findlay, Alice Rosemary**
Reddie & Grose LLP
16 Theobalds Road
London WC1X 8PL (GB)

(56) References cited:
US-A- 4 018 412 US-A- 4 484 911
US-A- 4 852 840 US-A- 4 852 841
US-A- 4 854 016 US-A- 5 741 210
US-A1- 2002 061 225 US-B1- 6 598 275

EP 1 874 254 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

[0001] The present disclosure relates to clamps that attach to rails, and particularly to clamps that attach to accessory rails of surgical tables to support accessories used during surgical procedures. More particularly, the present disclosure relates to rail clamps having movable jaws that permit the clamps to couple to accessory rails without having to slide the clamp onto the rail from an end of the rail.

[0002] Accessory rail clamps to attach accessories, such as leg stirrups and arm boards, to accessory rails of surgical tables are known. See, for example, U.S. Pat. No. 6,622,980. While many surgical tables have accessory rails of a common size, some specialized surgical tables have been developed which do not include these standard-size accessory rails, but instead have frame members (also considered to be rails according to this disclosure) of different sizes to which patient support devices or other surgical equipment may attach. For example, specialized orthopedic surgical tables have been developed for orthopedic surgery and a subset of these specialized orthopedic surgical tables, referred to in the art as "Jackson" tables, have been designed specifically for spinal surgery. Examples of the "Jackson" table may be found in U.S. Pat. Nos. 5,088,706; 5,131,106; 5,613,254; and 6,260,220. Because accessory rails of surgical tables are typically made of metal, such as stainless steel, and because it is desirable for tables used in orthopedic procedures to be substantially radiolucent so that x-ray images and fluoroscopic images of patients may be taken during surgical procedures, most Jackson tables do not have standard-size accessory rails.

[0003] Many of the devices and accessories which attach to accessory rails of surgical tables, including frame members of Jackson tables, rely on one or more threaded screws to clamp against the rail or to act upon some other member that clamps against the rail. It is not uncommon for multiple accessories to be attached to accessory rails during surgery. It can become cumbersome and time consuming to screw and unscrew the multitude of threaded screws associated with such a multitude of accessories. If, for example, one or more of the accessories need to be repositioned along the rail before or during a surgical procedure. Furthermore, some caregivers may tighten a screw of an accessory to such an extent that other caregivers with less strength may have difficulty in loosening, or are completely unable to loosen, the threaded screw. Accordingly, there is a need for a accessory rail clamp that clamps onto, and unclamps from, an accessory rail quickly and easily and that, when clamped, has a fairly repeatable and consistent amount of clamping force.

[0004] US 4854016 discloses a device for clamping the edge of a diagnostic table top comprising a clamping block mechanism having an inside face for abutting the

side edge of the table top; a first jaw mechanism connected to the clamping block mechanism having an inner face for abutting one of the top or the bottom surfaces of the table top; a second Jaw mechanism pivotably connected to the clamping block mechanism having an inner face for abutting the other of the top or bottom surfaces of the table top; the second jaw mechanism being connected to the clamping block mechanism by a link mechanism and a shaft mechanism, wherein the link mechanism is pivotably connected to the clamping block mechanism and pivotably connected to the second jaw mechanism and wherein the shaft mechanism is movably mounted in the clamping block mechanism such that when the shaft mechanism is moved, the second jaw mechanism articulates between a clamping position and an open position.

[0005] US 6598275 discloses a radiolucent surgical table with a patient support member and a low shadow accessory Interface profile formed by a plurality of interconnected curved surfaces disposed along the outer edge of the patient support member for selective attachment of a range of medical accessory devices. A clamping apparatus secures associated accessories to the outer edge, which has a top recess and an essentially planar and non-vertical side surface slanting inwardly from top to bottom and terminating in a flared lower edge extending beyond the bottom of the patient support member. The clamping apparatus includes an upper Jaw member which has a downwardly projecting lip formed to conformably engage a section of the top recess. A lower jaw member is also included and has a hook region formed to surroundingly engage a section of the flared lower edge. A means is provided for joining the upper and lower jaw members.

[0006] US 4852841 discloses a device for clamping the edge of a diagnostic table top which includes a C-shaped clamping block which engages the side, top and bottom surfaces at the edge of a table. A fixed jaw engages one of the top and bottom surfaces and an articulatable jaw engages the opposite table surface. The articulatable jaw includes an outer fixed plate and an inner movable plate connected by a pair of dual pivot links at opposite ends of the plates and an activating mechanism including an axially-rotatable vertical shaft with an offset pin. Rotation of the shaft by a lever arm attached thereto causes the pin to push horizontally on the inner plate. The dual pivot links transform the horizontal motion from the pin to a combined horizontal and vertical motion of the inner plate with respect to the outer plate about a circular arc.

SUMMARY OF THE INVENTION

[0007] The invention is defined by the claims.

[0008] A clamp is provided for securing an accessory, such as a head support apparatus, to a rail of a patient support apparatus, such as a spinal surgery extension. In some embodiments, the first jaw is integrally formed

with an associated accessory. The first Jaw may have an aperture in which the resilient member is received. The first jaw may be configured to hook onto a first portion of the rail and the second jaw may be configured to hook onto a second portion of the rail when in the closed position. The second jaw may be coupled to the first jaw for pivoting movement about an axis that is generally parallel to the rail. The latch may be coupled to the second jaw for pivoting movement about an axis that is generally parallel to the rail. The latch may be biased toward the latched position by a spring. The spring may be received in an aperture in the second jaw. The latch may have a protruding portion and the first jaw may have a recess in which the protruding portion of the latch is received when the second jaw is in the closed position and the latch is in the latched position. The first jaw, the second jaw, the resilient member, and the latch are each made from a radiolucent material.

[0009] The clamp may further comprise a disk that is secured to the resilient member and that is made from a material that is harder than the resilient member. The second jaw may contact the disk when moving from the first position to the second position. The resilient member may be received in an aperture in the second jaw and at least a portion of the disk may be situated outside the aperture on one side of the first jaw. At least portion of the resilient member may be situated outside the aperture on an opposite side of the first jaw. The aperture and the resilient member may each have a stepped configuration to prevent the resilient member and disk from falling out of the aperture in a first direction. A portion of the second jaw may overlap the disk to prevent the resilient member and jaw from falling out of the aperture in a second direction.

[0010] The rail to which the clamp couples may be quadrilateral in cross section having a top, bottom, and opposite sides. The first jaw may be configured to overlap at least a portion of the top and opposite sides of the rail and the second jaw may be configured to overlap at least a portion of the top, the bottom, and one of the sides of the rail when in the second position. The latch may be coupled to the first jaw so as to pivot downwardly when moving from the latched position to the unlatched position and the first jaw may be coupled to the second jaw so as to pivot upwardly when pivoting between the second position and the first position.

[0011] The second jaw may have a cutout in which at least a portion of the latch is received. The second jaw may have an arm on each side of the cutout and the latch may be coupled to the second jaw by a pivot pin having end regions received in bores formed in each of the arms of the second jaw and having a middle region received in a bore formed in the latch. The first jaw may have a protrusion that substantially fills at least a portion of the cutout when the second jaw is in the second position. The second jaw may have an arm on each side of the cutout and the second jaw is coupled to the first jaw by a pivot pin having end regions received in bores formed

in each of the arms of the second jaw and having a middle region received in a bore formed in the protrusion of the first jaw.

[0012] Additional features, which alone or in combination with any other feature(s), such as those listed above and those listed in the appended claims, may comprise patentable subject matter and will become apparent to those skilled in the art upon consideration of the following detailed description of illustrative embodiments exemplifying the best mode of carrying out the embodiments as presently perceived.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] The detailed description particularly refers to the accompanying figures in which:

Fig. 1 is a perspective view of a spinal surgery extension coupled to a surgical table showing a plurality of patient support accessories having associated clamps exploded away from the spinal surgery extension,

Fig. 2 is an exploded perspective view of a clamp showing a first jaw, a second jaw, a pivot pin for pivotably coupling the second jaw to the first jaw, a pair of urethane friction buttons, a latch, a pivot pin for pivotably coupling the latch to the second jaw, and a spring for biasing the latch toward a latched position,

Fig. 3 is a cross sectional view of the clamp through a urethane friction button with the second jaw of the clamp in an open position,

Fig. 4 is a cross sectional view of the clamp through a urethane friction button with the second jaw of the clamp in a closed position,

Fig. 5 is a cross sectional view of the clamp through the latch with the second jaw of the clamp in the closed position and the latch biased toward a latched position by a spring, and

Fig. 6 is a cross sectional view of the clamp through the latch with the second jaw of the clamp in the closed position and the latch pivoted to an unlatched position.

DETAILED DESCRIPTION OF THE DRAWINGS

[0014] As shown in Fig. 1, a spinal surgery extension 20 is coupled to a surgical table 22. Illustratively, the surgical table 22 has a base 24, a pedestal 26, and a patient support deck 28. The deck 28 includes a head section 30, a seat section 32, and a foot section 34. The head and foot sections 30, 34 are pivotably coupled to the seat section 32 about respective transverse axes. Each deck section 30, 32, 34 includes two accessory rails 40 on opposite sides thereof. The deck 28 is pivotable about a transverse axis between Trendelenberg and reverse Trendelenberg positions. In addition, the deck 28 is pivotable about a longitudinal axis. In Fig. 1, the head section

30 is pivoted downwardly to an out-of-the-way position so that the spinal surgery extension 20 can be attached to a head end 46 of the surgical table 22.

[0015] The spinal surgery extension 20 includes a generally rectangular frame 50, an adjustable telescopic support 52, and a generally U-shaped base 54. An upper end 56 of the telescopic support 52 is coupled to the frame 50 by a universal joint 58 and a lower end 60 of the telescopic support 52 is coupled to the base 54 by a ball joint 62. The rectangular frame 50 includes left and right longitudinally-extending transversely-spaced side rails 70, 72 and head and foot end cross rails 74, 76 extending transversely between the rails 70, 72 near head and foot ends of the frame 50. The head end cross rail 74 is coupled to the telescopic support 52 via the universal joint 58. Two pivot shafts 78 extend outwardly from the foot end cross rail 76. The pivot shafts 78 are supported by associated rail clamps 80 secured to the accessory rails 40 of the seat section 32 of the surgical table 22. The pivot shafts 78 allow the frame 50 to pivot about a transverse axis relative to the surgical table 22.

[0016] The rails 70, 72 and the cross rails 74, 76 of the frame 50 have a generally rectangular cross section. In the illustrative embodiment, the rails 70, 72, 74, 76 are each about 1.5 inches (about 3.81 centimeters) high and about 1.25 inches (about 3.175 centimeters) wide. The inside spacing between the rails 70, 72 is about 14.5 inches (about 36.83 centimeters). The inside spacing between the cross rails 74, 76 is about 48.5 inches (about 123.2 centimeters). The rails 70, 72, 76 are made from radiolucent material, such as carbon fiber tube with a foam core, so that they do not interfere with x-ray imaging of a patient supported in a prone position on the frame 50 during spinal surgery. Frame member 74 and corner connectors 77 which interconnect member 76 with members 70, 72 and from which shafts 78 extend are made of a metal in the illustrative embodiment.

[0017] The telescopic support 52 includes a crank handle 90 which is operable to vary the height of the head end of the frame 50 between about 30 inches (about 76.2 centimeters) and about 42 inches (about 106.68 centimeters) above a floor 92. The U-shaped base 54 includes a bight portion 94 and two spaced-apart legs 96 which flare outwardly. When the frame 50 is attached to the surgical table 22, the legs 96 extend toward the surgical table as shown in Fig. 1. Two wheels 98 are coupled to the bight portion 94 such that the wheels 98 are spaced from the floor when the legs 96 are resting on the floor 92. Each leg 96 has a hook 88 at its free end. For storage, the frame 50 is detached from the surgical table 22 and folded downwardly so that the pivot shafts 78 are received in the respective hooks 88. The telescopic support 52 is extended by an amount that permits pivot shafts 78 to be received by the hooks 88. The extension 20 can be tilted so that wheels 98 engage the floor 92 and the assembly can then be rolled along the floor 92 for transport.

[0018] As shown in Fig. 1, a plurality of accessories 86 for supporting a patient on the frame 650 are adapted to

be coupled to the longitudinally-extending rails 70, 72 of the frame 50 by associated clamps 120. Illustrative examples of such accessories includes a head support apparatus 100, a panel 102 which may support a mattress pad, a body support apparatus 104, and an arm support apparatus 106. Other accessories may be coupled to the rails 70, 72 of the frame 50 by associated clamps 120.

[0019] The spinal surgery extension 20, panel 102, and arm support apparatus 106 are described in further detail in PCT International Publication No. WO2006/110703 A2. The head support apparatus 100 is described in further detail in PCT International Publication No. WO 2006/110671 A2. The body support apparatus 104, as well as other body support apparatuses which are coupleable to frame members 70, 72, are described in further detail in PCT International Publication No. WO 2006/110836 A2.

[0020] The foregoing is provided merely as an example of one of the types of structures to which clamps 120 may couple and to provide some examples of the types of devices which may include clamps 120. While the illustrative clamps 120 are sized and configured for coupling to the frame members of Jackson tables as well as to extension 20, it should be appreciated that other clamps according to this disclosure may be designed with the features of clamp 120, but yet sized and configured for coupling to frame members or rails of any desired size.

[0021] As shown in Figs. 2-6, each clamp 120 includes a first or fixed jaw 122, a second or movable jaw 124, a resilient member 126, and a finger latch 128. The first jaw 122, which is integrated into or otherwise coupled to the patient support accessories 100, 102, 104, 106, is adapted to be placed on an associated rail 70, 72 of the frame 50. In some embodiments, at least the jaws 122, 124 are made from a radiolucent material, such as an acrylonitrile butadiene styrene resin (ABS) material, an acetal resin material such as DELRIN® material, or the like. In some embodiments, the finger latch 128 may be made from polyethylene. In other embodiments, various portions of clamp 120 may be made from other radiolucent materials such as polyester, polyurethane, polyethylene, ultra-high-molecular-weight (UHMW) polyethylene, or other resin based materials. In the illustrative embodiment, the jaws 122, 124, the resilient member 126, and the latch 128 are each made from a radiolucent material. Also in the illustrative embodiment, the first jaw 122 is integrally molded with the associated accessory 100, 102, 104, 106. In other embodiments, the first jaw 122 may be separately formed, and coupled to the associated accessory 100, 102, 104, 106 by suitable fasteners, such as pins, screws, nut and bolt combinations, or the like.

[0022] As shown in Fig. 2, the first jaw 122 has a U-shaped body 150 having inner and outer downwardly-extending leg portions 152, 154 and a bight portion 156 extending transversely between the inner and outer downwardly-extending leg portions 152, 154. The body portions 152, 152, 156 define a downwardly-opening

channel 158 for receiving a portion of the rail 70, 72. In the illustrative embodiment, the outer leg portion 154 is shorter than the inner leg portion 152. The outer leg portion 154 has a step portion 160 disposed between two longitudinally-spaced outwardly-opening recessed portions 162, 164. As shown in Fig. 3, the downwardly-facing surface 166 of the outer leg portion 154 defines a downwardly-opening recess 168. The recess 168 has an outwardly-facing surface 167 and an inwardly-facing surface 169. The bight portion 156 has a step portion 170 disposed between two longitudinally-spaced upwardly-opening recessed portions 172, 174.

[0023] Still referring to Fig. 2, the second jaw 124 includes a U-shaped body 180 having upper and lower inwardly-extending arm portions 182, 184 and a bight portion 186 extending generally vertically between the upper and lower inwardly-extending arm portions 182, 184. The body portions 182, 182, 186 define an inwardly-opening channel 188 for receiving a portion of the rail 70, 72. The upper arm portion 182 has a cutout 190 disposed between two longitudinally-spaced step portions 192, 194. The bight portion 186 has a cutout 200 disposed between two longitudinally-spaced step portions 202, 204. The cutouts 190, 200 in the portions 182, 186 of the second jaw 124 are in communication with each other. The lower portions of the step portions 202, 204 of the bight portion 186 are more thick than the associated upper portions to create two inwardly-extending ledge portions 212, 214. The inwardly-extending arm portion 184 is formed to include a grip portion 216 to allow a user to pivot the second jaw 124 to the open position after releasing the finger latch 128.

[0024] The second jaw 124 is coupled to the first jaw 122 for pivoting movement about a longitudinally-extending pivot pin 220 between a first unlocked or open position spaced from the first jaw 122 as shown in Fig. 3 and a second locked or closed position adjacent the first jaw 122 as shown in Fig. 5. The pivot pin 220 extends through a bore 222 in the step portion 192 of the second jaw 124, through a bore 224 in the step portion 170 of the first jaw 122, and through a bore 226 in the step portion 194 of the second jaw 124. The bores 222, 224, 226 are coaxially aligned with the pivot pin 220. In the illustrative embodiments, set screws, similar to the set screws 288, are threaded into the bores 222, 226 in the step portions 192, 194 so that outer surfaces of the set screws are flush with outer surfaces of the respective step portions 192, 194. These set screws retain pin 220 within bores 222, 224, 226.

[0025] When the second jaw 124 is in the closed position as shown, for example, in Fig. 5, the associated rail 70, 72 of the frame 50 is captured between the bight portion 156 of the first jaw 122, the downwardly-extending leg portions 152, 154 of the first jaw 122, the step portions 202, 204 of the second jaw 124, and the inwardly-extending arm portion 184 of the second jaw 124. The jaws 122, 124 are dimensioned so that the outer surfaces of the jaws 122, 124 are flush with each other when the

second jaw 124 is in the closed position as shown in Fig. 5. Thus, when the second jaw 124 is in the closed position, (1) the step portion 160 of the first jaw 122 is received in the cutout 200 in the second jaw 124, (2) the step portion 170 of the first jaw 122 is received in the cutout 190 in the second jaw 124, (3) the step portions 192, 194 of the second jaw 124 are received in the associated recessed portions 172, 174 in the first jaw 122, (4) the step portions 202, 204 of the second jaw 124 are received in the associated recessed portions 162, 164 in the first jaw 122, and (5) the ledge portions 212, 214 of the second jaw 124 are wedged underneath the downwardly-facing surface 166 of the outer leg portion 154 as shown, for example, in Fig. 4.

[0026] In the illustrative embodiment, as shown in Fig. 2, the resilient member 126 comprises a pair of urethane friction buttons 240, 242. Discs 244, 246 made from relatively hard material are secured to the top surfaces of the associated friction buttons 240, 242. In the illustrative embodiment, the discs 244, 246 are secured to the friction buttons 240, 242 by a drop of Loctite® 416 adhesive. The friction buttons 240, 242, with the discs 244, 246 secured thereto, are received in respective openings 248, 250 in the bight portion 156 of the first jaw 122. As the second jaw 124 pivots from the open position, shown in Fig. 3, to the closed position, shown in Fig. 4, the downwardly-facing surfaces of the step portions 192, 194 of the second jaw 124 press down on the discs 244, 246 to, in turn, cause the friction buttons 240, 242 to press down on the associated rail 70, 72 with sufficient force to inhibit movement of the clamp 120 along the associated rail 70, 72.

[0027] In the illustrative embodiment, the friction buttons 240, 242 each comprise a large diameter head portion 260, a small diameter body portion 262, and an annular seat portion 264 at the juncture of the large and small diameter portions 260, 262. The openings 248, 250 each have a large diameter bore 270, a small diameter bore 272, and an annular seat portion 274 at the juncture of the large and small diameter bores 270, 272. The seat portions 264 of the friction buttons 240, 242 are configured to engage the seat portions 274 of the openings 248, 250 to prevent the friction buttons 240, 242 from falling downwardly through the openings 248, 250 when the friction buttons 240, 242 are not supported by the associated rail 70, 72 and the clamp 120 is the orientation shown in Figs. 3 and 4. On the other hand, the step portions 192, 194 of the second jaw 124 in the regions adjacent pin 220 prevent the friction buttons 240, 242 from falling out of the openings 248, 250 when the clamp 120 is turned upside down.

[0028] The friction buttons 240, 242 and the associated discs 244, 246 are dimensioned such that, when the friction buttons 240, 242 are supported by the associated rail 70, 72, the friction buttons 240, 242 protrude below the downwardly-facing surfaces of the bight portion 156 of the first jaw 122 as shown in Fig. 3, so that as the second jaw 124 pivots from the open position (Fig. 3) to

the closed position (Fig. 4), the step portions 192, 194 of the second jaw 124 press down on the discs 244, 246 to cause the friction buttons 240, 242 to press down on the associated rail 70, 72 (Fig. 4) to inhibit movement of the clamp 120 along the associated rail 70, 72. In the illustrative embodiment, the discs 244, 246 and the head portions of the friction buttons 240, 242 have the same diameter. The friction buttons 240, 242, the associated discs 244, 246, and the pivotable jaw 124 cooperate to form a lock mechanism for inhibiting movement of the clamp 120 along the associated rail 70, 72 when jaw 124 is in the closed position.

[0029] The finger latch 128 is coupled to the second jaw 124 for pivoting movement about a longitudinally-extending pivot pin 280 between a first or latched position, shown in Fig. 5, and a second or unlatched position, shown in Fig. 6. Referring to Fig. 2, the pivot pin 280 extends through a bore 282 in the ledge portion 212 of the second jaw 124, through a bore 284 in the latch 128, and through a bore 286 in the ledge portion 214 of the second jaw 124. The bores 282, 284, 286 are coaxially aligned with the pivot pin 280. In the illustrative embodiment, set screws 288 are threaded into the openings 282, 286 in the ledge portions 212, 214 so that outer surfaces of the set screws 288 are flush with outer surfaces of the respective ledge portions 212, 214 of the second jaw 124. Set screws 288 retain pin 280 in bores 282, 284, 286.

[0030] As shown in Fig. 2, the inwardly-extending lower arm portion 184 of the second jaw 124 has a step portion 290 that extends upwardly into the cutout 200 in the bight portion 186 of the second jaw 124. An outer portion 292 of the step portion 290 has a first width and an inner portion 294 of the step portion 290 has a second width that is less than the first width. The latch 128 has a body portion 300, a pair of longitudinally-spaced leg portions 302 that extend downwardly from the body portion 300, a finger grip portion 304 that extends forwardly from the body portion 300, and a protruding portion 306 that extends upwardly from the body portion 300. The protruding portion 306 has an outwardly-facing surface 308 and an inwardly-facing surface 310. When the latch 128 is positioned in the cutout 200 with the pivot pin 280 extending through the opening 282 in the ledge portion 212 of the second jaw 124, the opening 284 in the latch 128 and the opening 286 in the ledge portion 214 of the second jaw 124, the leg portions 302 of the latch 128 straddle the reduced-width inner portion 294 of the step portion 290. The latch 128 is normally biased toward the latched position, shown in Fig. 5, by a spring 320 that is received in an opening 322 in the step portion 290 and that is maintained in a state of compression between latch 128 and jaw 124.

[0031] As the second jaw 124 moves to the closed position shown in Fig. 5, the downwardly-facing surface 166 of the step portion 160 of the first jaw 122 engages the inwardly-facing surface 310 of the protruding portion 306 of the latch 128 to initially cause the latch 128 to pivot

downwardly. As the second jaw 124 arrives at the closed position, shown in Fig. 5, the spring 320 causes the latch 128 to move upwardly so that a tip 312 of the protruding portion 306 of the latch 128 is received in the recess 168 (Fig. 6) in the downwardly-facing surface 166 of the step portion 160 of the first jaw 122 with the inwardly-facing surface 169 (Fig. 6) of the recess 168 and the outwardly-facing surface 308 (Fig. 6) of the protruding portion 306 disposed in a confronting relationship. When the latch 128 is pivoted to the unlatched position as shown in Fig. 6, the second jaw 124 is free to move to the open position as shown in phantom in Fig. 6. The corner portions of various parts are rounded or chamfered, as at 324 in Fig. 2, to facilitate assembly of the parts and avoid any jamming of the parts during operation.

[0032] Based on the foregoing, it should be appreciated that clamps 120 attach to and detach from rails 70, 72 in a quick and easy manner. To attach clamps 120 to rails 70, 72, jaw 122 is placed on the one of rails 70, 72 and then jaw 124 is pivoted downwardly from the opened position to the closed position. As jaw 124 moves to the closed position, resilient members 240, 242 are automatically forced against the rail 70, 72 to prevent the clamp 120 from moving along the rail and latch 128 automatically snaps into its locked position to retain jaw 124 in the closed position. To remove clamp 120 from the rail 70, 72 to which it is coupled, latch 128 is pivoted to its unlatched position and jaw 124 is pivoted upwardly to its open position. For example, a user may move latch 128 downwardly to its unlatched position by pressing downwardly on portion 304 of latch 128 with his or her thumb and the user may move jaw 124 to its open position by pulling upwardly on portion 216 of jaw 124 with his or her fingers.

[0033] Although certain illustrative embodiments have been described in detail above, variations and modifications exist.

Claims

1. A clamp (120) for securing to a rail of a patient support apparatus, the clamp comprising a first jaw (122) adapted to be placed on the rail, a second Jaw (124) coupled to the first jaw (122) for pivoting movement relative to the first jaw (122) about a first axis that is generally parallel to the rail between a first position and a second position, a resilient member (126) that is forced against the rail when the second Jaw (124) is moved from the first position to the second position, the resilient member (126) engaging the rail with sufficient force to inhibit movement of the clamp (120) along the rail when the second jaw (124) is in the second position, and a latch (128) coupled to the second jaw and movable by pivoting relative to the second jaw (124) about a second axis between a latched position in which the second jaw (124) is latched in the second position relative to the first jaw

and an unlatched position in which the second jaw (124) is movable between the first and second positions, **characterized in that** the first axis is located above the rail and the second jaw (124) pivots downwardly about the first axis from the first position in which it does not engage the rail to the second position in which it engages the rail; **in that** the second axis is also generally parallel to the rail and is spaced from the first axis, and **in that** the first jaw (122) is configured to overlap at least a portion of a top and opposite sides of the rail and the second Jaw (124) is configured to overlap at least a portion of the top, a bottom and one of the sides of the rail when in the second position.

2. The clamp of claim 1, wherein the first jaw (122) has an aperture (248, 250) in which the resilient member (126) is received.
3. The clamp of either claim 1 or claim 2, wherein the first jaw (122) is configured to hook onto a first portion of the rail and the second jaw (124) is configured to hook onto a second portion of the rail when in the second position.
4. The clamp of any preceding claim, wherein the latch (128) is biased toward the latched position.
5. The clamp of claim 4, wherein the latch (128) is biased toward the latched position by a spring (320),
6. The clamp of any preceding claim, wherein the latch (128) has a protruding portion (306) and the first Jaw (122) has a recess (168) in which the protruding portion (306) is received when the second jaw (124) is in the second position and the latch (128) is in the latched position.
7. The clamp of any preceding claim, wherein the first jaw (122), the second jaw (124), the resilient member (126), and the latch (128) are each made from a radiolucent material.
8. The clamp of any preceding claim, further comprising a disk (244, 246) that is secured to the resilient member (126) and that is made from a material that is harder than the resilient member (126), the second jaw (124) contacting the disk (244, 246) when moving from the first position to the second position.
9. The clamp of claim 8, wherein the resilient member (126) is received in an aperture (248, 250) in the first Jaw (122), at least a portion of the disk (244, 240) is situated outside the aperture (248, 250) on one side of the first Jaw and at least portion of the resilient member (126) is situated outside the aperture (248, 250) on an opposite side of the first jaw.

10. The clamp of claim 9, wherein the aperture (248, 260) and the resilient member (126) have a stepped configuration to prevent the resilient member (126) and disk (244, 246) from falling out of the aperture (248, 250) in a first direction and a portion (192, 194) of the second Jaw (124) overlaps the disk (244, 246) to prevent the resilient member (126) and disc (244, 246) from falling out of the aperture (248, 250) in a second direction.

11. The clamp of any preceding claim, wherein the latch (128) is coupled to the second jaw (124) so as to pivot downwardly when moving from the latched position to the unlatched position and the second jaw (124) is coupled to the first jaw (122) so as to pivot upwardly when pivoting between the second position and the first position.

12. The clamp of any preceding claim, wherein the second jaw (124) has a cutout (190, 200) in which at least a portion of the latch (128) is received.

13. The clamp of claim 12, wherein the second jaw (124) has an arm (211, 214) on each side of the cutout (190, 200) and the latch (128) is coupled to the second jaw (124) by a pivot pin (280) having end regions received in bores (282, 286) formed in each of the arms of the second Jaw and having a middle region received in a bore (284) formed in the latch (128).

14. The clamp of claim 13, wherein the first jaw (122) has a protrusion (160, 170) that substantially fills at least a portion of the cutout (190, 200) when the second jaw (124) is in the second position.

15. The clamp of claim 14, wherein the second jaw (124) has an arm (212, 214) on each side of the cutout (190, 200) and the second jaw (124) is coupled to the first jaw (122) by a pivot pin (220) having end regions received in bores (222, 226) formed in each of the arms of the second jaw (126) and having a middle region received in a bore (224) formed in the protrusion of the first jaw (122).

Patentansprüche

1. Klemmvorrichtung (120) zum Befestigen an einer Schiene einer Patientenunterstützungsvorrichtung, wobei die Klemmvorrichtung eine erste Backe (122), die dazu angepasst ist, auf der Schiene untergebracht zu werden, eine zweite Backe (124), die an die erste Backe (122) zur Schwenkbewegung in Bezug auf die erste Backe (122) um eine erste Achse, die allgemein parallel zu der Schiene ist, zwischen einer ersten Stellung und einer zweiten Stellung gekoppelt ist, ein elastisches Element (126), das gegen die Schiene gezwungen wird, wenn die zweite Backe

- (124) von der ersten Stellung in die zweite Stellung bewegt wird, wobei das elastische Element (126) mit der Schiene mit einer Kraft in Eingriff ist, die ausreicht, um die Bewegung der Klemmvorrichtung (120) entlang der Schiene zu verhindern, wenn sich die zweite Backe (124) in der zweiten Stellung befindet, und eine Klinke (128) umfasst, die an die zweite Backe gekoppelt ist und durch Schwenken in Bezug auf die zweite Backe (124) um eine zweite Achse zwischen einer eingeklinkten Stellung, in der die zweite Backe (124) in der zweiten Stellung in Bezug auf die erste Backe eingeklinkt ist, und einer ausgeklinkten Stellung bewegt werden kann, in der die zweite Backe (124) zwischen der ersten und der zweiten Stellung beweglich ist, **dadurch gekennzeichnet, dass** die erste Achse sich über der Schiene befindet und die zweite Backe (124) nach unten um die erste Achse von der ersten Stellung, in der sie nicht mit der Schiene in Eingriff ist, zur zweiten Stellung schwenkt, in der sie mit der Schiene in Eingriff ist; dadurch, dass die zweite Achse auch allgemein parallel zur Schiene ist und von der ersten Achse beabstandet ist, und dadurch, dass die erste Backe (122) ausgebildet ist, um zumindest einen Abschnitt von einer oberen und einer entgegengesetzten Seite der Schiene zu überlappen, und die zweite Backe (124) ausgebildet ist, um zumindest einen Abschnitt des Oberteils, eines Unterteils und einer der Seiten der Schiene zu überlappen, wenn sie sich in der zweiten Stellung befindet.
2. Klemmvorrichtung nach Anspruch 1, wobei die erste Backe (122) eine Öffnung (248, 250) aufweist, in der das elastische Element (126) aufgenommen wird.
 3. Klemmvorrichtung nach entweder Anspruch 1 oder Anspruch 2, wobei die erste Backe (122) ausgebildet ist, um auf einem ersten Abschnitt der Schiene einzuheften, und die zweite Backe (124) ausgebildet ist, um auf einem zweiten Abschnitt der Schiene einzuheften, wenn sie sich in der zweiten Stellung befindet.
 4. Klemmvorrichtung nach irgendeinem der vorhergehenden Ansprüche, wobei die Klinke (128) in Richtung der eingeklinkten Stellung vorgespannt ist.
 5. Klemmvorrichtung nach Anspruch 4, wobei die Klinke (128) durch eine Feder (320) in Richtung der eingeklinkten Stellung vorgespannt ist.
 6. Klemmvorrichtung nach irgendeinem der vorhergehenden Ansprüche, wobei die Klinke (128) einen hervorstehenden Abschnitt (306) aufweist und die erste Backe (122) eine Aussparung (168) aufweist, in der der hervorstehende Abschnitt (306) aufgenommen wird, wenn die zweite Backe (124) sich in der zweiten Stellung befindet und die Klinke (128) sich in der eingeklinkten Stellung befindet.
 7. Klemmvorrichtung nach irgendeinem der vorhergehenden Ansprüche, wobei die erste Backe (122), die zweite Backe (124), das elastische Element (126) und die Klinke (128) jeweils aus einem strahlendurchlässigen Material hergestellt sind.
 8. Klemmvorrichtung nach irgendeinem der vorhergehenden Ansprüche, die ferner eine Scheibe (244, 246) umfasst, die an dem elastischen Element (126) befestigt ist und die aus einem Material hergestellt ist, das härter ist als das elastische Element (126), wobei die zweite Backe (124) die Scheibe (244, 246) berührt, wenn sie sich von der ersten Stellung in die zweite Stellung bewegt.
 9. Klemmvorrichtung nach Anspruch 8, wobei das elastische Element (128) in einer Öffnung (248, 250) in der ersten Backe (122) aufgenommen wird, wobei zumindest ein Abschnitt der Scheibe (244, 246) sich außerhalb der Öffnung (248, 250) auf einer Seite der ersten Backe befindet und zumindest ein Abschnitt des elastischen Elements (126) sich außerhalb der Öffnung (248, 250) auf einer entgegengesetzten Seite der ersten Backe befindet.
 10. Klemmvorrichtung nach Anspruch 9, wobei die Öffnung (248, 250) und das elastische Element (126) eine abgestufte Ausgestaltung aufweisen, um zu verhindern, dass das elastische Element (126) und die Scheibe (244, 246) in einer ersten Richtung aus der Öffnung (248, 250) fallen, und ein Abschnitt (192, 194) der zweiten Backe (124) die Scheibe (244, 246) überlappt, um zu verhindern, dass das elastische Element (126) und die Scheibe (244, 246) in einer zweiten Richtung aus der Öffnung (248, 250) fallen.
 11. Klemmvorrichtung nach irgendeinem der vorhergehenden Ansprüche, wobei die Klinke (128) an die zweite Backe (124) gekoppelt ist, um nach unten zu schwenken, wenn sie sich von der eingeklinkten Stellung in die ausgeklinkte Stellung bewegt, und die zweite Backe (124) an die erste Backe (122) gekoppelt ist, um nach oben zu schwenken, wenn sie zwischen der zweiten Stellung und der ersten Stellung schwenkt.
 12. Klemmvorrichtung nach irgendeinem der vorhergehenden Ansprüche, wobei die zweite Backe (124) einen Ausschnitt (190, 200) aufweist, in dem zumindest ein Abschnitt der Klinke (128) aufgenommen wird.
 13. Klemmvorrichtung nach Anspruch 12, wobei die zweite Backe (124) auf jeder Seite des Ausschnitts (190, 200) einen Arm (211, 214) aufweist und die Klinke (128) durch einen Zapfen (280) an die zweite

Backe (124) gekoppelt ist, der Endbereiche aufweist, die in Bohrungen (282, 286) aufgenommen werden, die in jedem der Arme der zweiten Backe gebildet sind, und einen mittleren Abschnitt aufweist, der in einer Bohrung (284) aufgenommen wird, die in der Klinke (128) ausgebildet ist.

14. Klemmvorrichtung nach Anspruch 13, wobei die erste Backe (122) einen Vorsprung (160, 170) aufweist, der im Wesentlichen zumindest einen Abschnitt des Ausschnitts (190, 200) füllt, wenn sich die zweite Backe (124) in der zweiten Stellung befindet.
15. Klemmvorrichtung nach Anspruch 14, wobei die zweite Backe (124) auf jeder Seite des Ausschnitts (190, 200) einen Arm (212, 214) aufweist und die zweite Backe (124) an die erste Backe (122) durch einen Zapfen (220) gekoppelt ist, der Endbereiche aufweist, die in Bohrungen (222, 226) aufgenommen werden, die in jedem der Arme der zweiten Backe (126) gebildet sind, und einen mittleren Bereich aufweist, der in einer Bohrung (224) aufgenommen wird, die in dem Vorsprung der ersten Backe (122) ausgebildet ist.

Revendications

1. Pince (120) pour fixation sur un rail d'un dispositif de support de patient, la pince comprenant une première mâchoire (122) adaptée pour être placée sur le rail, une seconde mâchoire (124) couplée à la première mâchoire (122) pour un mouvement de pivotement relativement à la première mâchoire (122) autour d'un premier axe qui est globalement parallèle au rail entre une première position et une seconde position, un élément élastique (126) qui est forcé contre le rail quand la seconde mâchoire (124) est déplacée de la première position vers la seconde position, l'élément élastique (126) venant en prise avec le rail avec une force suffisante pour empêcher le déplacement de la pince (120) le long du rail quand la seconde mâchoire (124) est dans la seconde position, et un verrou (128) couplé à la seconde mâchoire et mobile par pivotement relativement à la seconde mâchoire (124) autour d'un second axe entre une position verrouillée dans laquelle la seconde mâchoire (124) est verrouillée dans la seconde position relativement à la première mâchoire et une position déverrouillée dans laquelle la seconde mâchoire (124) est mobile entre les première et seconde positions, **caractérisée en ce que** le premier axe est situé au-dessus du rail et la seconde mâchoire (124) pivote vers le bas autour du premier axe depuis la première position dans laquelle il ne vient pas en prise avec le rail vers la seconde position dans laquelle il vient en prise avec le rail ; **en ce que** le second axe est aussi globalement parallèle au rail


et est espacé du premier axe, et **en ce que** la première mâchoire (122) est configurée pour recouvrir au moins une partie de côtés haut et opposé du rail et la seconde mâchoire (124) est configurée pour recouvrir au moins une partie du haut, d'un fond et d'un des côtés du rail quand elle est dans la seconde position.


2. Pince selon la revendication 1, dans laquelle la première mâchoire (122) comporte une ouverture (248, 250) dans laquelle l'élément élastique (126) est reçu.
3. Pince selon la revendication 1 ou la revendication 2, dans laquelle la première mâchoire (122) est configurée pour s'accrocher sur une première partie du rail et la seconde mâchoire (124) est configurée pour s'accrocher sur une seconde partie du rail quand elle est dans la seconde position.
4. Pince selon l'une quelconque des revendications précédentes, dans laquelle le verrou (128) est sollicité vers la position verrouillée.
5. Pince selon la revendication 4, dans laquelle le verrou (128) est sollicité vers la position verrouillée par un ressort (320).
6. Pince selon l'une quelconque des revendications précédentes, dans laquelle le verrou (128) comporte une partie saillante (306) et la première mâchoire (122) comporte un évidement (168) dans lequel la partie saillante (306) est reçue quand la seconde mâchoire (124) est dans la seconde position et le verrou (128) est dans la position verrouillée.
7. Pince selon l'une quelconque des revendications précédentes, dans laquelle la première mâchoire (122), la seconde mâchoire (124), l'élément élastique (126), et le verrou (128) sont chacun fait d'un matériau radio-transparent.
8. Pince selon l'une quelconque des revendications précédentes, comprenant en outre un disque (244, 246) qui est fixé sur l'élément élastique (126) et qui est fait d'un matériau qui est plus dur que l'élément élastique (126), la seconde mâchoire (124) entrant en contact avec le disque (244, 246) quand elle se déplace de la première position vers la seconde position.
9. Pince selon la revendication 8, dans laquelle l'élément élastique (126) est reçu dans une ouverture (248, 250) dans la première mâchoire (122), au moins une partie du disque (244, 246) est située à l'extérieur de l'ouverture (248, 250) sur un côté de la première mâchoire et au moins une partie de l'élément élastique (126) est située à l'extérieur de l'ouverture (248, 250) sur un côté opposé de la pre-

mière mâchoire.

10. Pince selon la revendication 9, dans laquelle l'ouverture (248, 250) et l'élément élastique (126) ont une configuration étagée pour empêcher l'élément élastique (126) et le disque (244, 246) de tomber hors de l'ouverture (248, 250) dans une première direction et une partie (192, 194) de la seconde mâchoire (124) recouvre le disque (244, 246) pour empêcher l'élément élastique (126) et le disque (244, 246) de tomber hors de l'ouverture (248, 250) dans une seconde direction. 5 10
11. Pince selon l'une quelconque des revendications précédentes, dans laquelle le verrou (128) est couplé à la seconde mâchoire (124) de façon à pivoter vers le bas quand il se déplace de la position verrouillée vers la position déverrouillée et la seconde mâchoire (124) est couplée à la première mâchoire (122) de façon à pivoter vers le haut quand elle pivote entre la seconde position et la première position. 15 20
12. Pince selon l'une quelconque des revendications précédentes, dans laquelle la seconde mâchoire (124) comporte une découpe (190, 200) dans laquelle au moins une partie du verrou (128) est reçue. 25
13. Pince selon la revendication 12, dans laquelle la seconde mâchoire (124) comporte un bras (211, 214) sur chaque côté de la découpe (190, 200) et le verrou (128) est couplé à la seconde mâchoire (124) par un axe de pivot (280) ayant des régions d'extrémité reçues dans des alésages (282, 286) formés dans chacun des bras de la seconde mâchoire et ayant une région médiane reçue dans un alésage (284) formé dans le verrou (128). 30 35
14. Pince selon la revendication 13, dans laquelle la première mâchoire (122) comporte une saillie (160, 170) qui remplit sensiblement au moins une partie de la découpe (190, 200) quand la seconde mâchoire (124) est dans la seconde position. 40
15. Pince selon la revendication 14, dans laquelle la seconde mâchoire (124) comporte un bras (212, 214) sur chaque côté de la découpe (190, 200) et la seconde mâchoire (124) est couplée à la première mâchoire (122) par un axe de pivot (220) ayant des régions d'extrémité reçues dans des alésages (222, 226) formés dans chacun des bras de la seconde mâchoire (126) et ayant une région médiane reçue dans un alésage (224) formé dans la saillie de la première mâchoire (122). 45 50

55

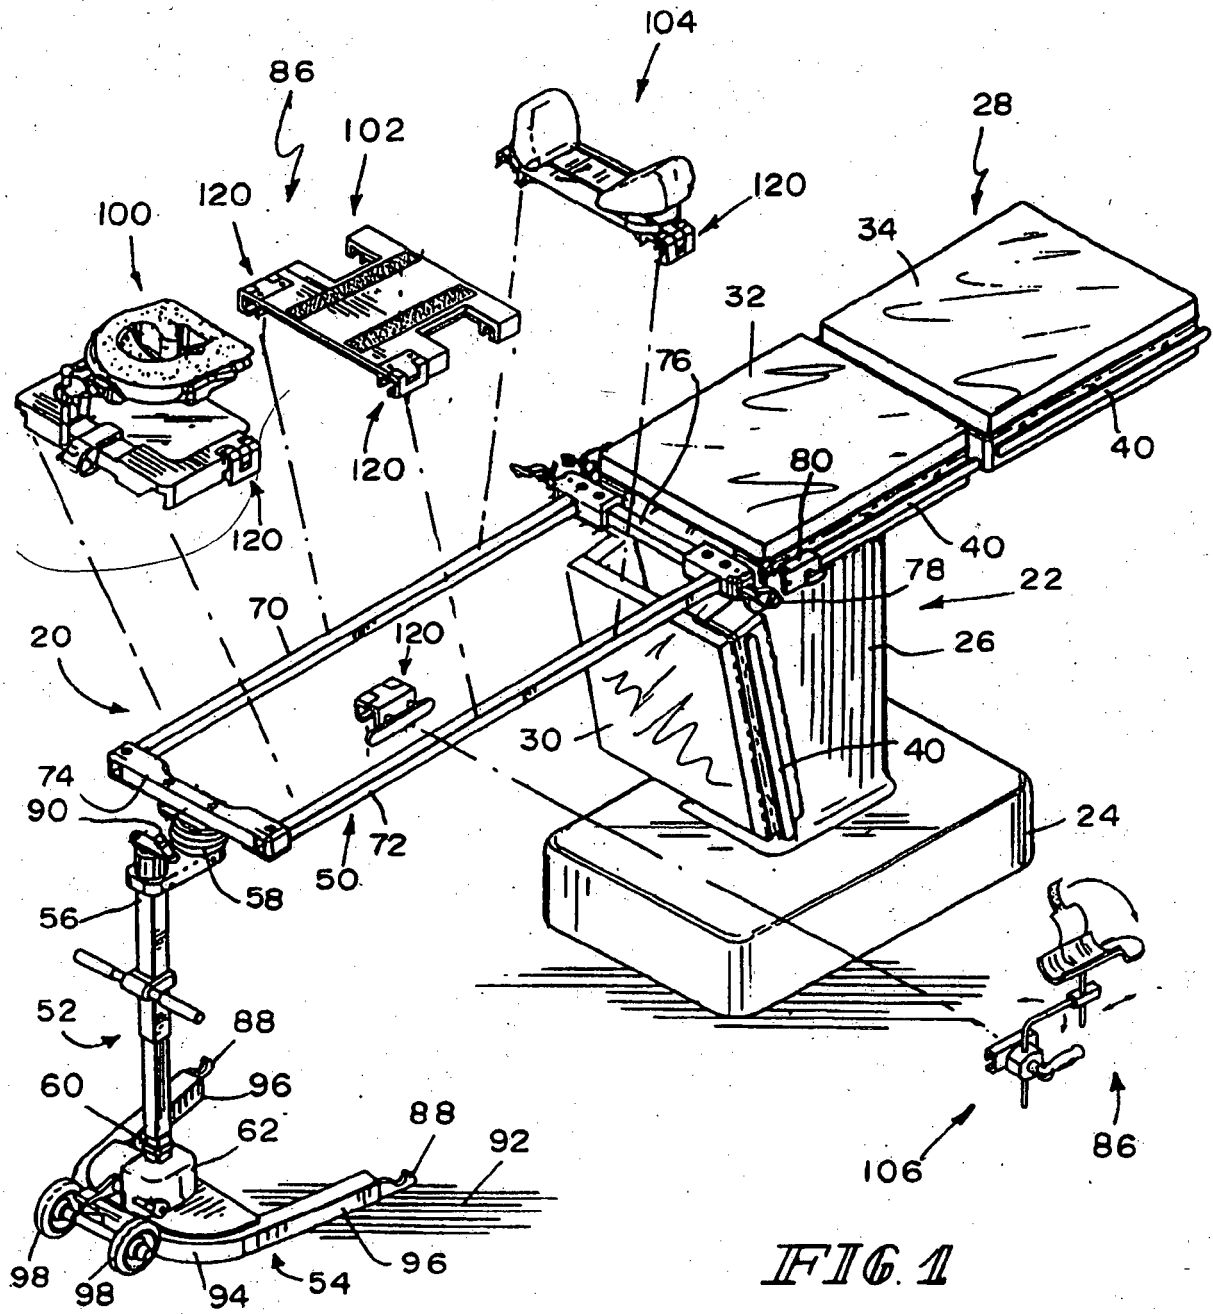

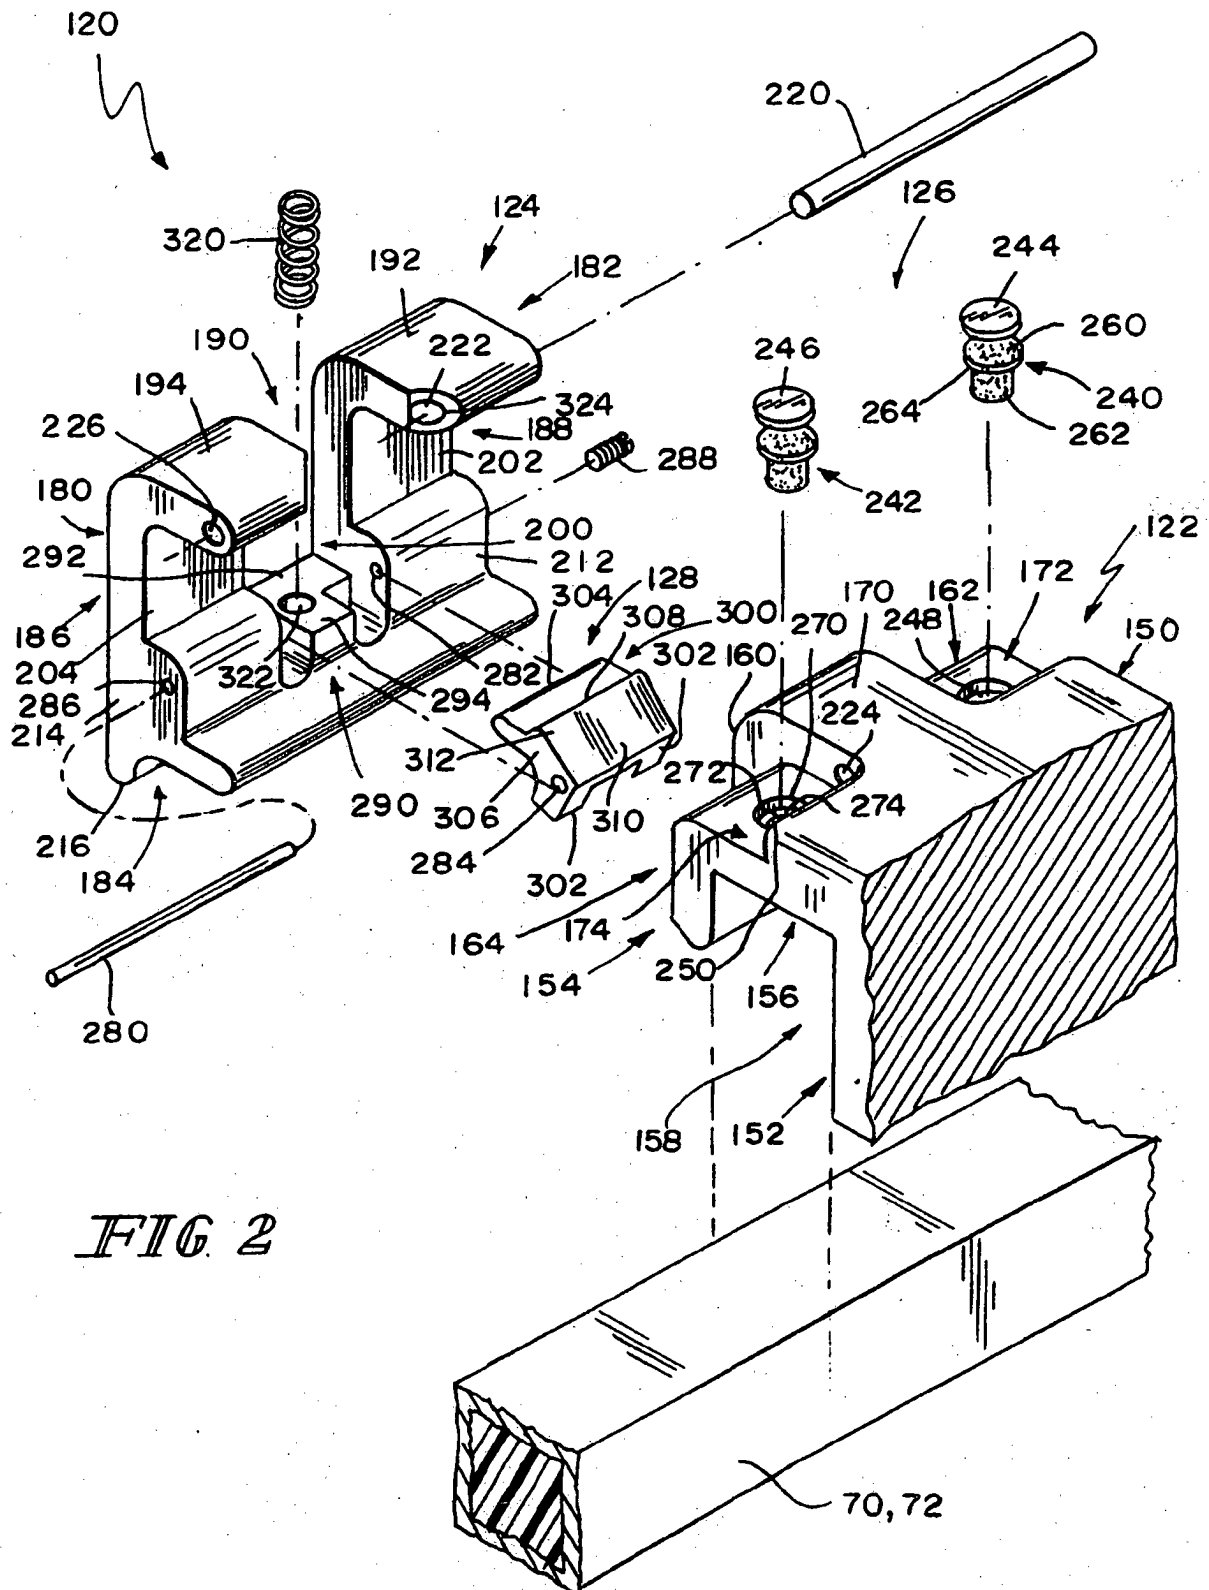

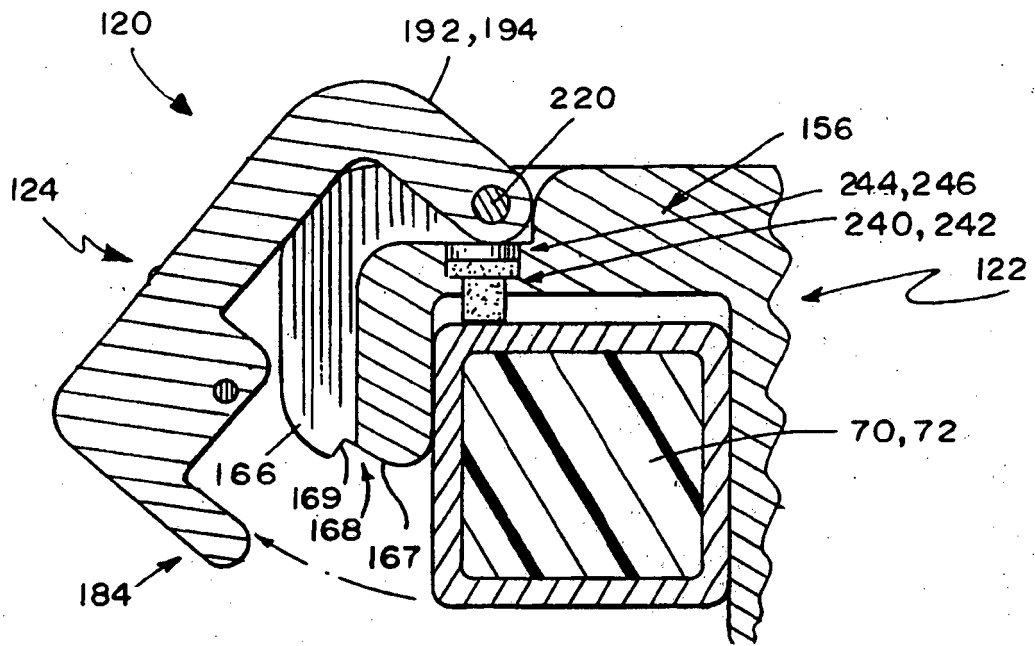


FIG 3



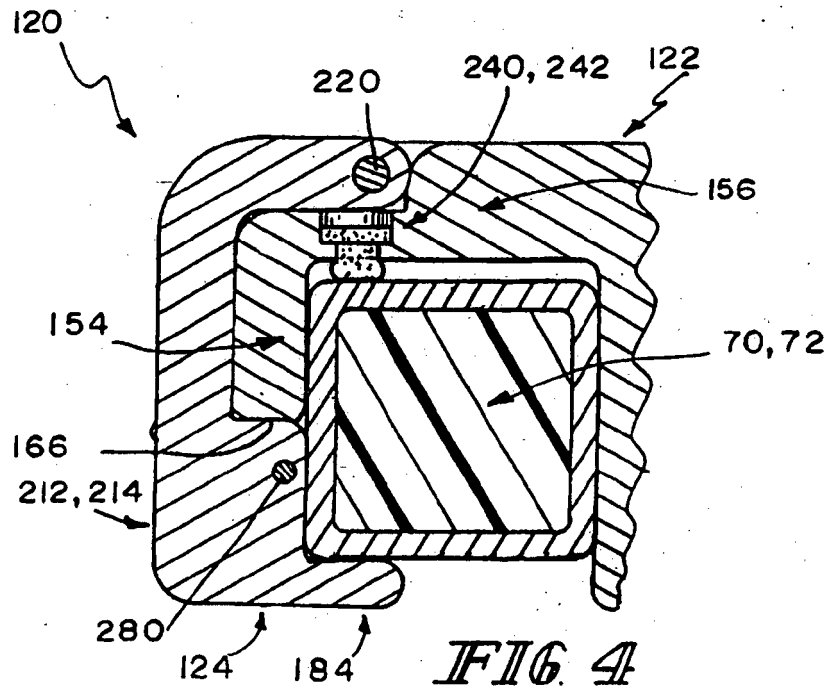


FIG 4

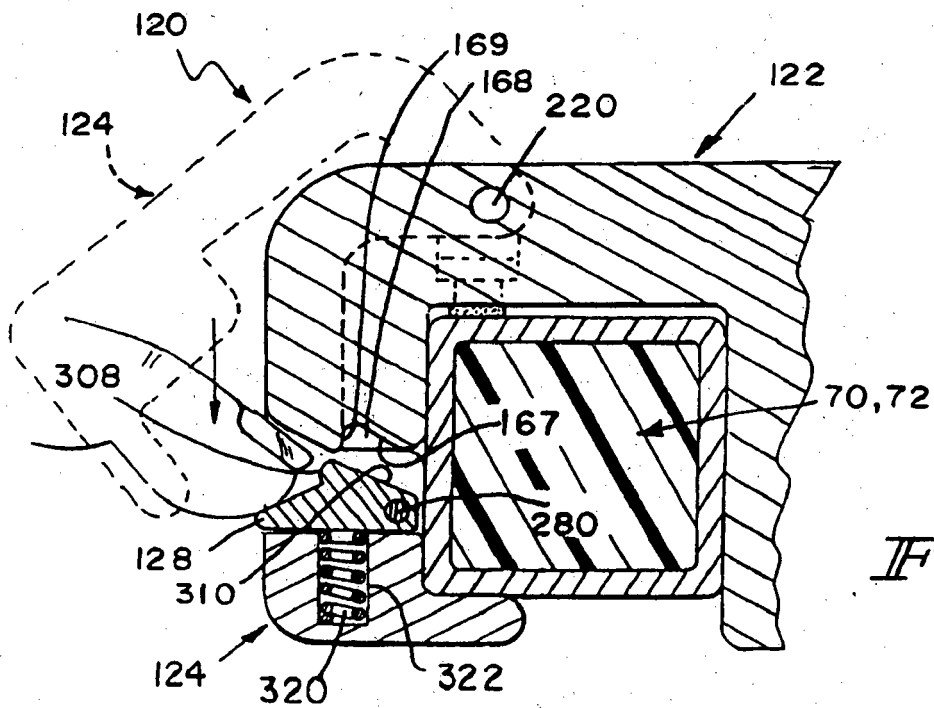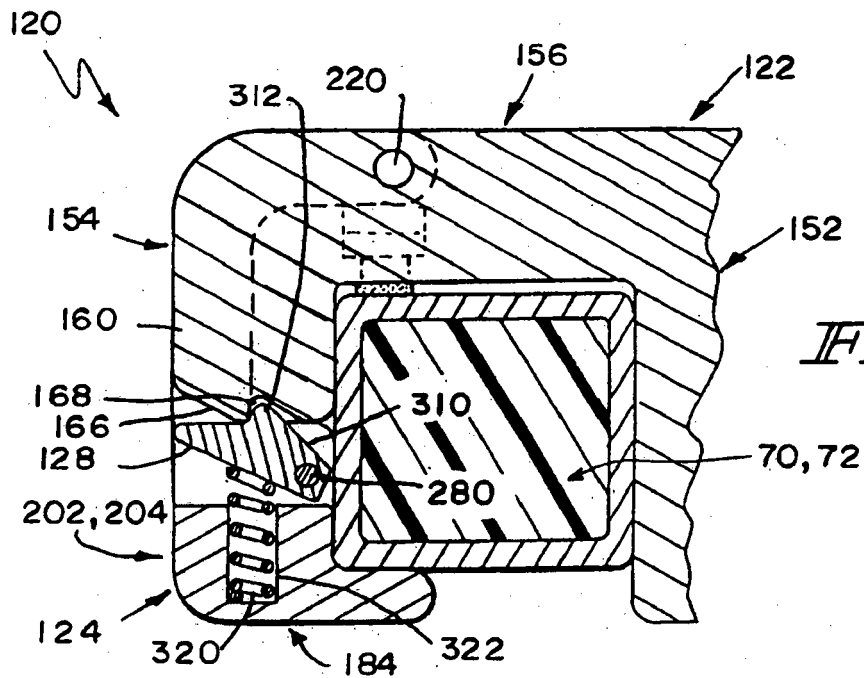

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6622980 B [0002]
- US 5088706 A [0002]
- US 5131106 A [0002]
- US 5613254 A [0002]
- US 6260220 B [0002]
- US 4854016 A [0004]
- US 6598275 B [0005]
- US 4852841 A [0006]
- WO 2006110703A2 A [0019]
- WO 2006110671A2 A [0019]
- WO 2006110836A2 A [0019]