



(11) **EP 1 876 003 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

published in accordance with Art. 153(4) EPC

Note: Bibliography reflects the latest situation

(15) Correction information:

Corrected version no 1 (W1 A1)

Bibliography INID code(s) 84

(51) Int Cl.:

B29C 45/14 (2006.01) **B29C 45/37** (2006.01)

B29K 19/00 (2006.01) **B29K 21/00** (2006.01)

B29K 105/20 (2006.01)

(48) Corrigendum issued on:

30.04.2008 Bulletin 2008/18

(86) International application number:

PCT/JP2006/308383

(43) Date of publication:

09.01.2008 Bulletin 2008/02

(87) International publication number:

WO 2006/118046 (09.11.2006 Gazette 2006/45)

(21) Application number: **06732191.9**

(22) Date of filing: **21.04.2006**

(84) Designated Contracting States:

DE FR GB

(30) Priority: **28.04.2005 JP 2005131773**

12.01.2006 JP 2006004368

(71) Applicant: **MITSUBISHI PENCIL Co., Ltd.**

Tokyo 140-8537 (JP)

(72) Inventors:

- **SUZUKI, Hitoshi**
c/o Yokohama Office
MITSUBISHI PENCIL CO., LTD.
Yokohama-shi, Kanagawa 2210014 (JP)
- **NAKAYAMA, Kyo**
c/o Yokohama Office
MITSUBISHI PENCIL CO., LTD.
Yokohama-shi, Kanagawa 2210014 (JP)

- **FUKUMOTO, Takeo**
c/o Yokohama Office
MITSUBISHI PENCIL CO., LTD.
Yokohama-shi, Kanagawa 2210014 (JP)
- **SUMITOMO, Hajime**
c/o Yokohama Office
MITSUBISHI PENCIL CO., LTD.
Yokohama-shi, Kanagawa 2210014 (JP)
- **OHSAWA, Norio**
c/o Yokohama Office
MITSUBISHI PENCIL CO., LTD.
Yokohama-shi, Kanagawa 2210014 (JP)


(74) Representative: **HOFFMANN EITLE**

Patent- und Rechtsanwälte
Arabellastrasse 4
81925 München (DE)

(54) **METHOD OF MOLDING COMPOSITE MEMBER AND COMPOSITE MEMBER**

(57) A method of moulding a composite member and a composite member are provided in which a convex part can be formed at one member by moulding the other member integrally to the one member. A concave part 10a is provided at least at a part inside a metal mould 10 located on the side opposite the second member fusion bonding surface side of the above-mentioned first member 6b, the above-mentioned second thermoplastic material is melted and ejected to the second member fusion bonding surface side of the first member 6b, the first member 6b is changed in shape by injection pressure of the melted second thermoplastic material, and a convex part 6a is formed at the first member.

Fig. 3

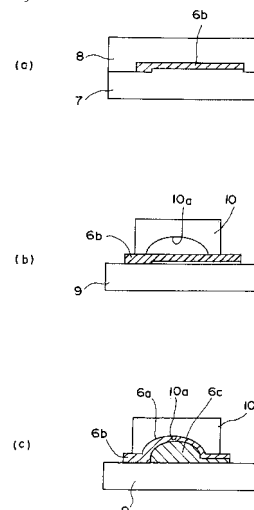

EP 1 876 003 A8