



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
06.02.2008 Bulletin 2008/06

(51) Int Cl.:
F02M 61/14 (2006.01)

(21) Application number: **06016348.2**

(22) Date of filing: **04.08.2006**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI SK TR
Designated Extension States:
AL BA HR MK YU


(71) Applicant: **SIEMENS AKTIENGESELLSCHAFT**
80333 München (DE)

(72) Inventor: **Fischetti, Gianbattista**
56000 Pisa (IT)

(54) **Fixing device for fixing a fuel injector in a cylinder head of a combustion engine**

(57) Fixing device (30) for fixing a fuel injector (18) in a cylinder head (14) of a combustion engine (22), comprising a tubular portion (32) including a central longitudinal axis (L), the tubular portion (32) being designed to engage the fuel injector (18) and to be rigidly coupled to the fuel injector (18), and projections (36) being formed in one piece with the tubular portion (32) and being bent away to extend from the tubular portion (32) outwards in radial direction. The projections (36) are comprising at least two force receiving areas (38) and are arranged and designed to receive a retaining force (F) in the force receiving areas (38), the retaining force (F) acting in the direction of the central longitudinal axis (L) to retain the fuel injector (18) in the cylinder head (14), two of the force receiving areas (38) substantially opposing each other radially relative to the central longitudinal axis (L), and the projections (36) are formed to directly follow the tubular portion (32) in the direction of the retaining force (F).

FIG 3

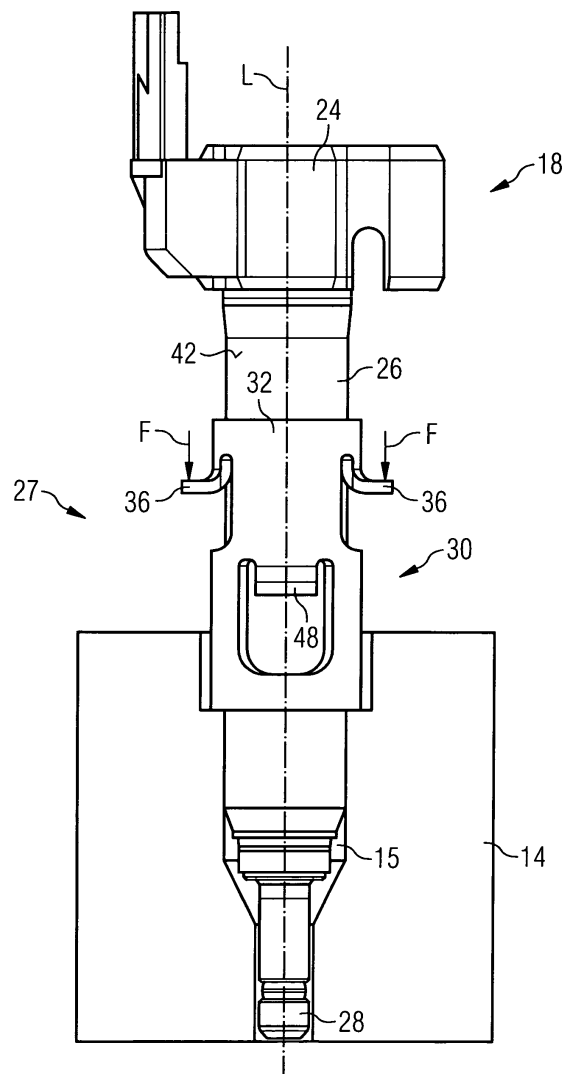

Description

[0001] The invention relates to a fixing device for fixing a fuel injector in a cylinder head of a combustion engine.

[0002] Fuel injectors are in wide spread use, in particular for internal combustion engines where they may be arranged in order to dose fuel into an intake manifold of the internal combustion engine or directly into the combustion chamber of a cylinder of the internal combustion engine. Fuel can be supplied to the internal combustion engine by the fuel injector that comprises the fixing device. The fuel injectors can be coupled to the cylinder head of the internal combustion engine in different manners.

[0003] The coupling of the fuel injectors to the cylinder heads needs to be very precise to get a correct injection angle.

[0004] The object of the invention is to create a fixing device for fixing a fuel injector in a cylinder head of a combustion engine which is simply to be manufactured and which facilitates a reliable and precise coupling between the fuel injector and the cylinder head of the combustion engine.

[0005] It is furthermore the object of the invention to create a fuel injector that ensures a precise dosing of fuel.

[0006] Additionally, the object of the invention is to create a force introduction arrangement to ensure the precise fixing of the fuel injector in the cylinder head of the combustion engine.

[0007] The objects are achieved by the features of the independent claims. Advantageous embodiments of the invention are given in the sub-claims.

[0008] According to a first aspect the invention is distinguished by a fixing device for fixing a fuel injector in a cylinder head of a combustion engine, comprising a tubular portion including a central longitudinal axis, the tubular portion being designed to engage the fuel injector and to be rigidly coupled to the fuel injector, and projections being formed in one piece with the tubular portion and being bent away to extend from tubular portion outwards in radial direction. The projections comprise at least two force receiving areas and are arranged and designed to receive a retaining force in the force receiving areas. The retaining force is acting in the direction of the central longitudinal axis to retain the fuel injector in the cylinder head, two of the force receiving areas are substantially opposing each other radially relative to the central longitudinal axis, and the projections are formed to follow directly the tubular portion in the direction of the retaining force.

[0009] This has the advantage that the fixing device has a high robustness against mechanical stress, in particular the projections have a high robustness against permanent retaining forces. Furthermore, the fixing device is highly flexible in particular in radial direction due to a recess in the tubular portion caused by bending the projections away from the tubular portion. As the projections are formed to follow directly the tubular portion in

the direction of the retaining force the force introduction via the force receiving areas into the projections causes only a small mechanical stress to the projections.

[0010] In an advantageous embodiment of the invention the tubular portion comprises a first axial end and a second axial end which are designed to be completely attachable to the fuel injector. This has the advantage that it is possible to use the complete first axial end and the complete second axial end for coupling the fixing device with the injector. In particular it is possible to weld the fixing device at the axial ends to the injector. By this it is possible to obtain a firm coupling of the fixing device to the fuel injector.

[0011] In a further advantageous embodiment of the invention at least one of the first axial end and the second axial end is circumferentially closed. By this it is possible to obtain a very good coupling of the fixing device to the fuel injector over the whole circumference of the fuel injector via the axial ends of the fixing device. In particular it is possible to couple the fixing device to the fuel injector welding the axial ends of the fixing device to the fuel injector.

[0012] According to a second aspect the invention is distinguished by a fuel injector comprising a fixing device.

[0013] According to a further aspect the invention is distinguished by a force introduction arrangement comprising a fuel injector and a force exerting device which is arranged and designed to exert the retaining force to the force receiving areas.

[0014] In this respect it is advantageous if the force exerting device is a spring. By this it is possible to exert the retaining force to the force receiving areas by a simple structured element.

[0015] Exemplary embodiments of the invention are explained in the following with the aid of schematic drawings. These are as follows:

Figure 1 an internal combustion engine in a schematic view,

Figure 2 a fuel injector with a fixing arrangement in a perspective view,

Figure 3 the fuel injector with the fixing arrangement and a cylinder head in a side view,

Figure 4 the fixing arrangement in a first embodiment in a perspective view,

Figure 5 the fixing arrangement in a second embodiment in a perspective view, and

Figure 6 a part of the fuel injector and the fixing arrangement with a force exerting device in a perspective view.

[0016] Elements of the same design and function that occur in different illustrations are identified by the same

reference character.

[0017] Figure 1 shows an internal combustion engine 22, with an intake air tract 10, a motor block 12, a cylinder head 14 and an exhaust gas tract 16. In the motor block 12 a combustion chamber 20 is arranged.

[0018] The cylinder head 14 comprises a fuel injector 18 and a sparking plug 19. A fixing device 30 enables the fixing of the fuel injector 18 to the cylinder head 14 of the combustion engine 22.

[0019] The fuel injector 18 (figures 2 and 3) comprises an injector coupling portion 24 and a valve assembly 27. The injector coupling portion 24 is designed to be coupled to a highpressure fuel chamber of the internal combustion engine 22, the fuel is stored under high pressure, for example, under the pressure of about 200 bar in the case of a gasoline engine or of about 2,000 bar in the case of a diesel engine.

[0020] Furthermore, the injector coupling portion 24 is designed to be coupled to an electrical supply to actuate a not shown actuator unit of the fuel injector 18.

[0021] The valve assembly 27 comprises a valve body 26 with a central longitudinal axis L and a not shown cavity which is axially led through the valve body 26. The valve assembly 27 further comprises a not shown valve needle taken in the cavity of the valve body 26. On a free end of the valve assembly 27 an injection nozzle 28 is formed which is closed or opened by an axial movement of the valve needle. In a closing position a fuel flow through the injection nozzle 28 is prevented. In an opening position fuel can flow through the injection nozzle 28 into the combustion chamber 20 of the internal combustion engine 22.

[0022] As can be best seen in the figures 4 and 5 the fixing device 30 comprises a tubular portion 32 extending in the direction of the central longitudinal axis L. The tubular portion 32 of the fixing device 30 has an inner surface 40 in which the fuel injector 18 with an outer surface 42 is arranged. The tubular portion 32 of the fixing device 30 engages the fuel injector 18 and is rigidly coupled to the fuel injector 18.

[0023] The coupling between the fuel injector 18 and the fixing device 30 can be realized by welding, but it may also be carried out by another adequate coupling method.

[0024] The fixing device 30 further comprises projections 36 which are in one piece with the tubular portion 32. The projections 36 are bent away from the tubular portion 32 and extend outwards in radial direction from the tubular portion 32. The projections 36 have force receiving areas 38. A retaining force F can be applied to the force receiving areas 38 of the projections 36 to fix the fuel injector 18 in a recess 15 of the cylinder head 14 (figure 3). The projections 36 follow the tubular portion 32 directly in the direction of the retaining force F.

[0025] Additionally, the fixing device 30 comprises a protrusion 48 being in one piece with the tubular portion 32. The protrusion 36 extends outwards in radial direction from the tubular portion 32. It is designed to serve as an

orientation element to define the relative angular position of the fuel injector 18 relative to the cylinder head 14 during the assembly of the fuel injector 18 and the fixing device 30 with the cylinder head 14.

[0026] Figure 4 shows a first embodiment of the fixing device 30 with a first axial end 44 and a second axial end 46. Furthermore, the fixing device 30 has two circumferential ends 56 extending between the first axial end 44 and the second axial end 46. As the fixing device 30 has a gap 60 between the two circumferential ends 56 the axial ends 44, 46 of the fixing device 30 are open in circumferential direction. As they are formed continuously over a large extension in circumferential direction it is possible to attach the first axial end 44 as well as the second axial end 46 in one piece to the fuel injector 18. Therefore, a good coupling of the tubular portion 32 to the fuel injector 18 may be obtained, for preferably by applying a single weld seam between the outer surface 42 of the fuel injector 18 and each of the axial ends 44, 46 of the fixing device 30.

[0027] The tubular portion 32 further comprises recesses 50 by bending the projections 36 relative to the tubular portion 32. The recesses 50 enable a high flexibility of the fixing device 30 in particular in the radial direction. This high flexibility is preferred in order to obtain a good coupling of the fixing device 30 to the fuel injector 18.

[0028] In the second embodiment of the fixing device 30 shown in figure 5 the first axial end 44 and the second axial end 46 of the fixing device 30 are circumferentially closed. With this it is possible to rigidly fix the fixing device 32 to the fuel injector 18 over the whole circumference of the fuel injector 18 via the axial ends 44, 46. This enables a very strong coupling between the fuel injector 18 and the fixing device 30. The tubular portion 42 of figure 5 comprises joint elements 58 so that the first axial end 44 and the second axial end 46 are circumferentially closed. By this it is possible to obtain a good rigid coupling between the circumferential ends 56 of the tubular portion 32 by simple means.

[0029] Figure 6 shows a force introduction arrangement 52 with a section of the fuel injector 18 and a force exerting device 54. For a permanent fixing of the fuel injector 18 in the cylinder head 14 the force exerting device 54 is arranged to exert the retaining force F to the force receiving areas 38 of the fixing device 30. Preferably the force exerting device 54 is a fork spring with two arms 70. The force exerting device 54 is firmly coupled to the cylinder head 14 by a screw 72 thereby enabling an exertion of the retaining force F from the two arms 70 of the force exerting device 54 to the force receiving areas 38 of the fixing device 30.

[0030] In the following, the assembly of the fuel injector 18 and the fixing device 30 and the fixing of the fuel injector 18 in the cylinder head 14 of the combustion engine 22 will be described:

[0031] For assembling the fuel injector 18 the fuel injector 18 is inserted into the fixing device 30. The fixing

device 30 is clamped together. By this the first axial end 44 and the second axial end 46 of the tubular portion 32 are in contact with the outer surface 42 of the fuel injector 18 thereby enabling a fixed coupling of the fixing device 30 to the fuel injector 18 preferably by welding.

[0032] The fuel injector 18 with the fixing device 30 is inserted into the recess 15 of the cylinder head 14 with the support of the protrusion 48 which allows orienting the fuel injector 18 relative to the cylinder head 14. Additionally, the force exerting device 54 is arranged in a way that the two arms 70 of the force exerting device 54 are in contact with the projections 36. Consequently, the retaining force F from the two arms 70 of the force exerting device 54 is transmitted to the force receiving areas 38 of the fixing device 30. By this the fuel injector 18 can be fixed in a secure manner in the recess 15 of the cylinder head 14 even if large forces exert on the fuel injector 18 in opposite direction to the retaining force F.

[0033] As the projections 36 directly follow the tubular portion 32 in the direction of the retaining force F the fixing device 30 is very robust against mechanical stress in particular in the area between the bent projections 36 and the tubular portion 32. By this a high lifetime of the fixing device 30 can be obtained.

3. Fixing device (30) in accordance with claim 2, with at least one of the first axial end (44) and the second axial end (46) being circumferentially closed.

5 4. Fuel injector (18) comprising a fixing device (30) according to one of the preceding claims.

10 5. Force introduction arrangement (52) comprising a fuel injector (18) according to claim 4 and a force exerting device (54) being arranged and designed to exert the retaining force (F) to the force receiving areas (38).

15 6. Force introduction arrangement (52) according to claim 5, with the force exerting device (54) being a spring.

Claims

1. Fixing device (30) for fixing a fuel injector (18) in a cylinder head (14) of a combustion engine (22), comprising
 - a tubular portion (32) including a central longitudinal axis (L), the tubular portion (32) being designed to engage the fuel injector (18) and to be rigidly coupled to the fuel injector (18), and
 - projections (36) being formed in one piece with the tubular portion (32) and being bent away to extend from the tubular portion (32) outwards in radial direction,
 - the projections (36) comprising at least two force receiving areas (38) and being arranged and designed to receive a retaining force (F) in the force receiving areas (38), the retaining force (F) acting in the direction of the central longitudinal axis (L) to retain the fuel injector (18) in the cylinder head (14), two of the force receiving areas (38) substantially opposing each other radially relative to the central longitudinal axis (L), and
 - the projections (36) being formed to directly follow the tubular portion (32) in the direction of the retaining force (F).
2. Fixing device (30) in accordance with claim 1, with the tubular portion (32) comprising a first axial end (44) and a second axial end (46) being designed to be completely attachable to the fuel injector (18).

25

30

35

40

45

50

55

FIG 1

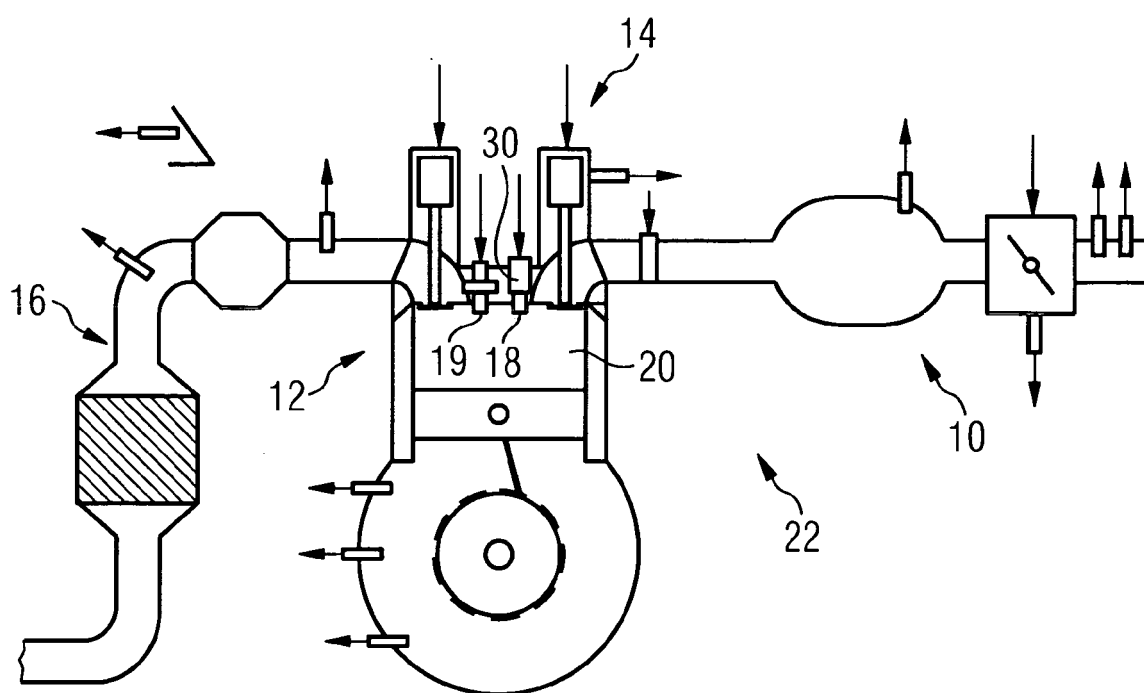


FIG 2

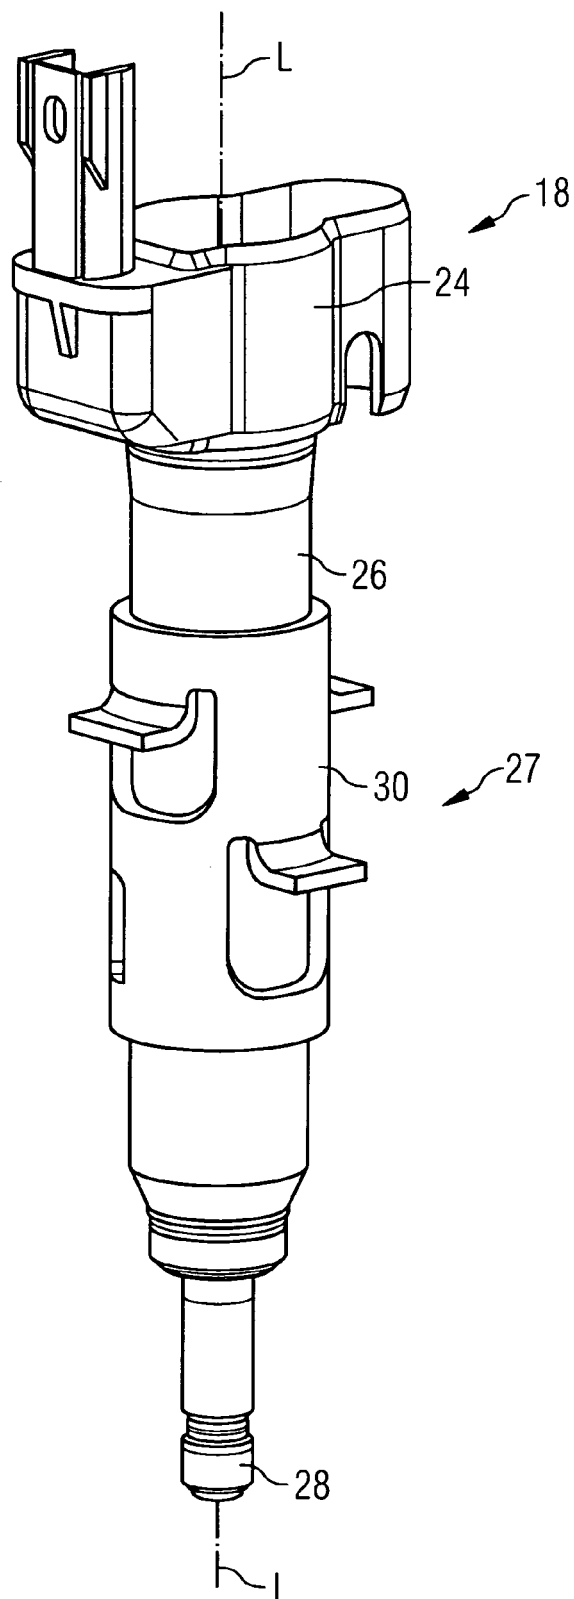


FIG 3

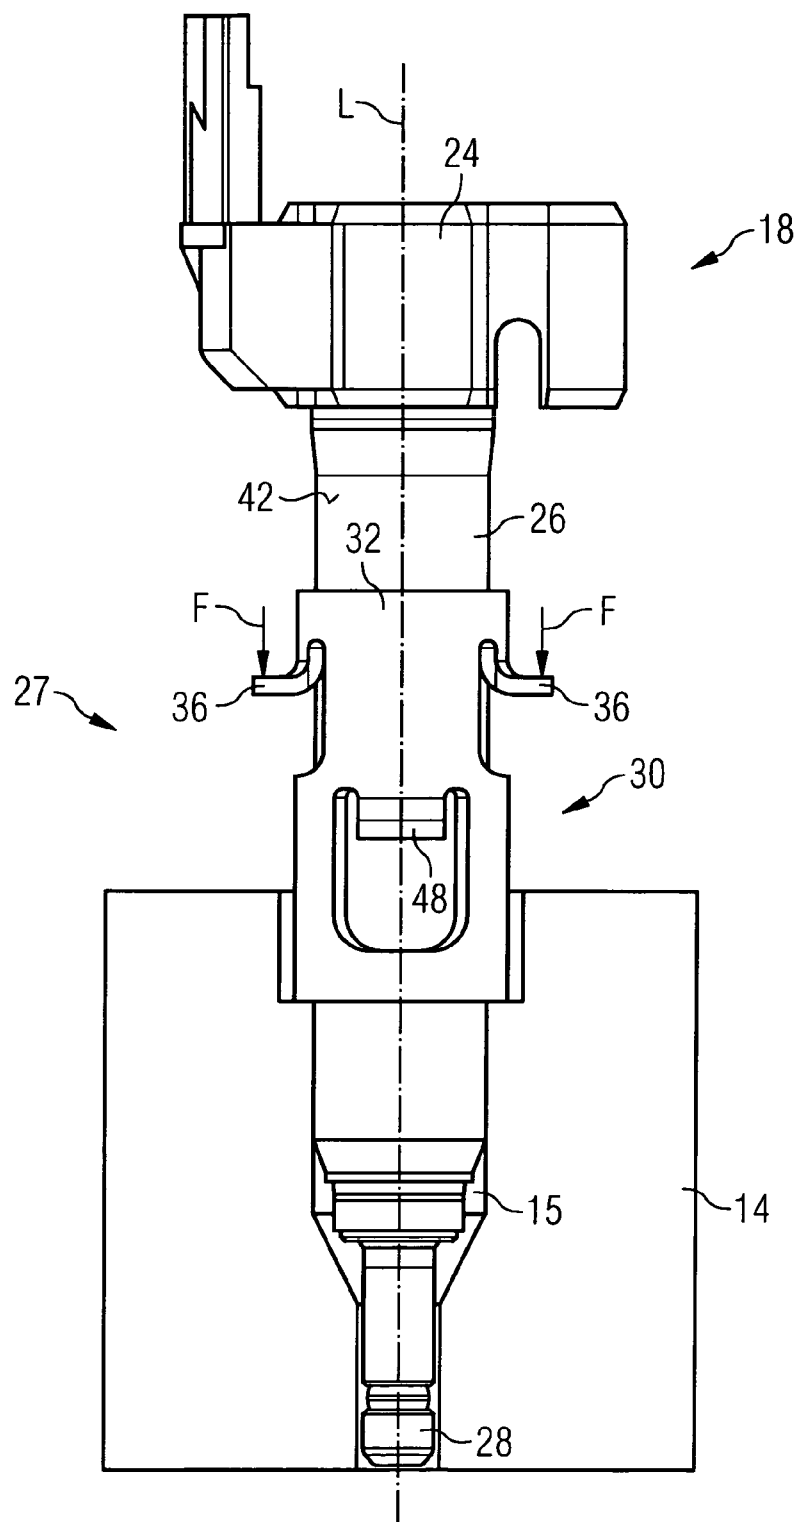


FIG 4

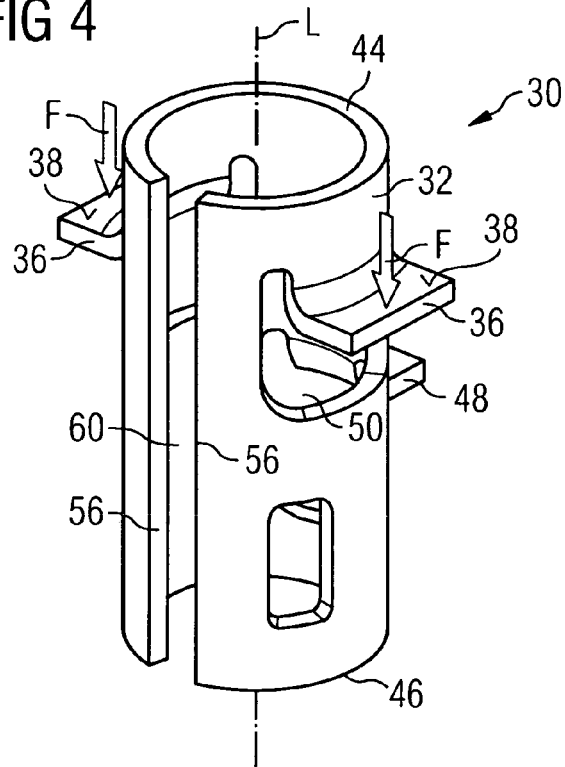


FIG 5


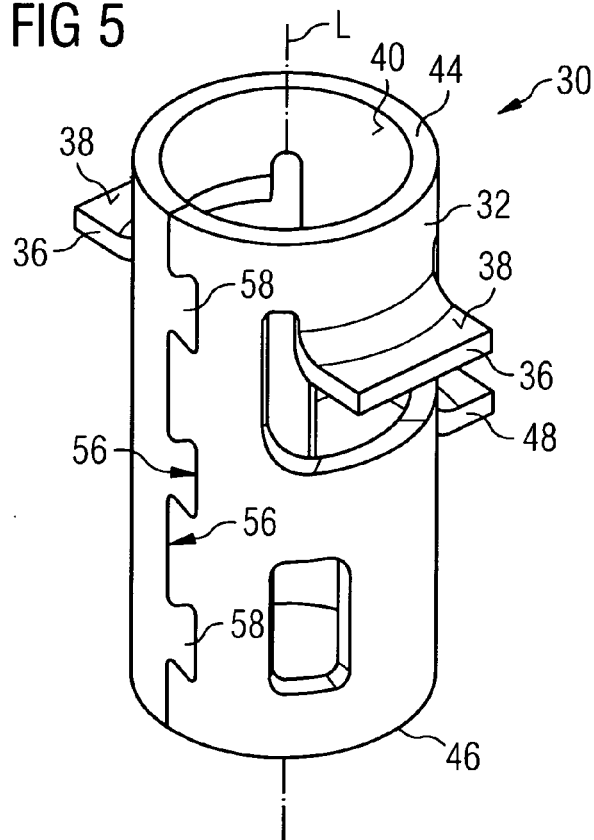


FIG 6



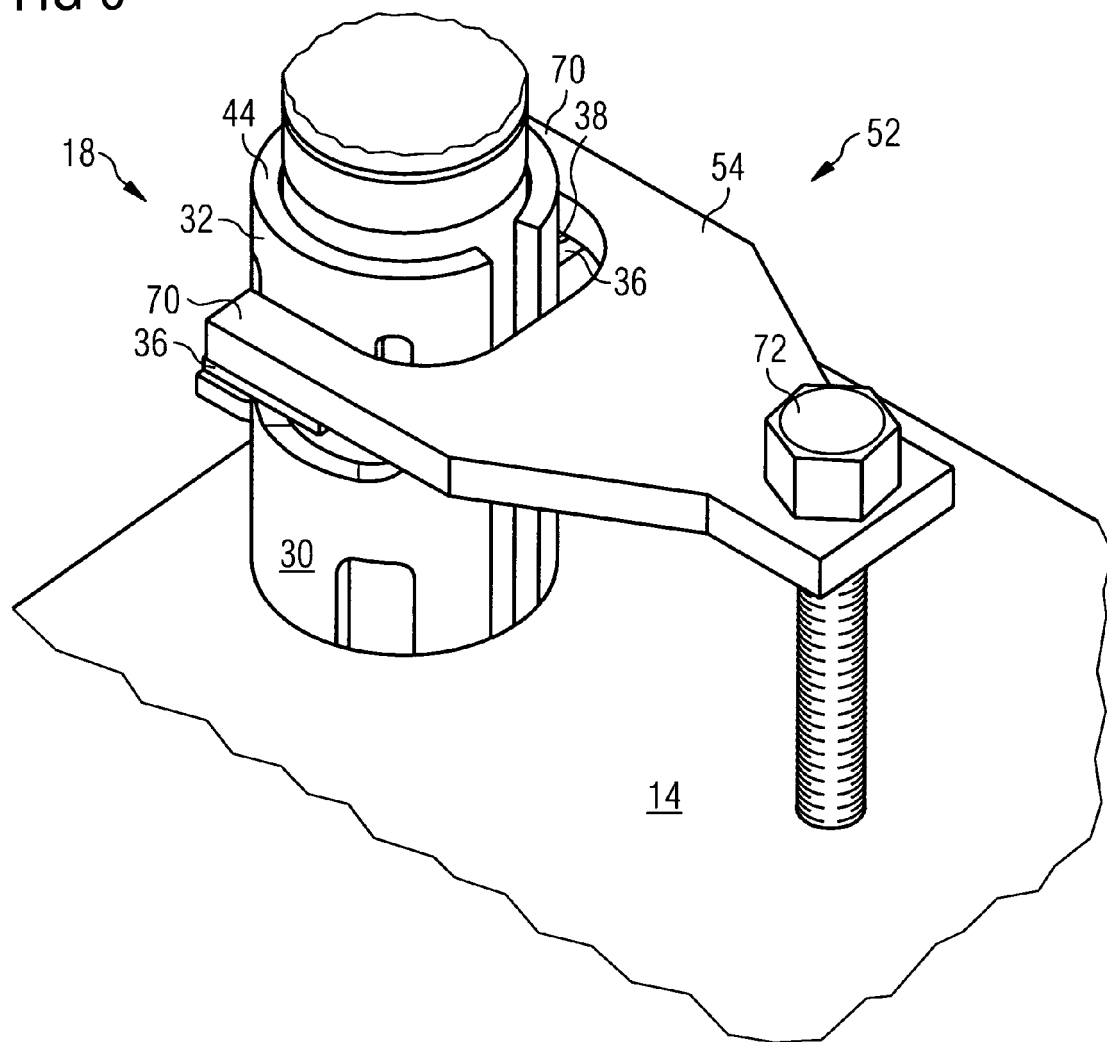

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 06 01 6348

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	DE 103 56 856 A1 (SIEMENS AG [DE]) 7 July 2005 (2005-07-07) * paragraphs [0005], [0006], [0025], [0026], [0036]; figures 2,5 *	1-6	INV. F02M61/14
A	US 6 170 467 B1 (GIRARD DIDIER [FR]) 9 January 2001 (2001-01-09) * column 2, line 48 - column 3, line 19; figures 1,2,5 *	1-6	
A	GB 448 173 A (BOSCH ROBERT) 3 June 1936 (1936-06-03) * the whole document * * sentence 69 - sentence 97; figures 1,3 *	1-6	
A	US 6 116 219 A (GIRARD DIDIER [FR]) 12 September 2000 (2000-09-12) * column 2, line 34 - line 44; figures 1-4 *	1-6	
A	JP 11 082241 A (NISSAN MOTOR) 26 March 1999 (1999-03-26) * abstract; figures 1,2 *	1-6	TECHNICAL FIELDS SEARCHED (IPC) F02M
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 25 January 2007	Examiner Jucker, Chava
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

3
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 06 01 6348

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-01-2007

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 10356856	A1	07-07-2005	EP 1706633 A1	04-10-2006
			WO 2005054661 A1	16-06-2005

US 6170467	B1	09-01-2001	BR 9804900 A	31-08-1999
			CN 1226951 A	25-08-1999
			DE 69815084 D1	03-07-2003
			DE 69815084 T2	19-02-2004
			EP 0970307 A1	12-01-2000
			ES 2199442 T3	16-02-2004
			FR 2763649 A1	27-11-1998
			WO 9853197 A1	26-11-1998
			JP 2000515610 T	21-11-2000

GB 448173	A	03-06-1936	NONE	

US 6116219	A	12-09-2000	BR 9804824 A	25-01-2000
			CN 1222954 A	14-07-1999
			DE 69826855 D1	11-11-2004
			DE 69826855 T2	17-11-2005
			EP 0983432 A1	08-03-2000
			ES 2227909 T3	01-04-2005
			FR 2762051 A1	16-10-1998
			WO 9845595 A1	15-10-1998
			JP 2000512712 T	26-09-2000

JP 11082241	A	26-03-1999	NONE	
