



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
09.04.2008 Bulletin 2008/15

(51) Int Cl.:
B65H 33/04 (2006.01) G03G 15/00 (2006.01)

(21) Application number: **07117108.6**

(22) Date of filing: **25.09.2007**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE SI SK TR
Designated Extension States:
AL BA HR MK RS

(72) Inventors:
• **Venema, Alexander H.**
3851 Ermelo, PJ (NL)
• **Elzen, Jacob G.**
5913 Venlo, XP (NL)
• **Van den Nieuwenhof, Robby H.G.**
5911 Venlo, BN (NL)

(30) Priority: **05.10.2006 EP 06121803**

(71) Applicant: **Océ-Technologies B.V.**
5914 CA Venlo (NL)

(74) Representative: **Vanoppen, Ronny R.J.**
Océ-Technologies B.V.
Corporate Patents
Postbus 101
5900 MA Venlo (NL)

(54) **Method for inserting marking inserts**

(57) The invention relates to a method of inserting a plurality of inserts from a distinguishable set into a multi-sheet document, comprising the steps of inserting inserts into the document in accordance with a job definition, such that a stack of inserts and processed sheets is obtained, said stack having at least one aligned side deter-

mining the number of surplus inserts wherein the surplus of inserts is inserted at the end of the document offset the aligned side of said stack. The invention also relates to a sheet processing apparatus, comprising a controller arrangement configured for executing the method according to the invention.

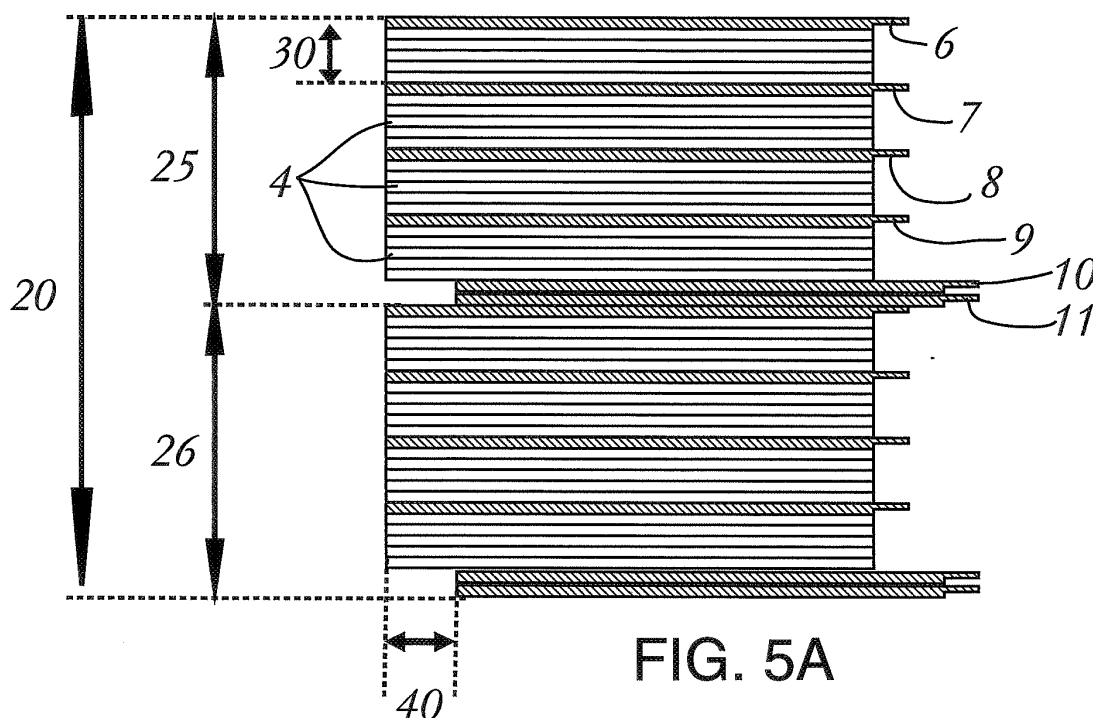


FIG. 5A

Description

[0001] The invention relates to a method of inserting a plurality of inserts from a distinguishable set into a multi-sheet document, comprising the steps of inserting inserts into the document in accordance with a job definition, such that a stack of inserts and processed sheets is obtained, said stack having at least one aligned side and determining the number of surplus inserts.

[0002] A method of this kind is described in US 5044619. The method inserts sets of covers and tab-sheets into the correct position of the documents and determines whether the number of inserts per set is larger than the required number of inserts. If so, the surplus of inserts is then purged to another tray different from the tray on which the document is outputted.

However, it is a disadvantage of this known method, that the sets of inserts are broken up, and an additional tray and associated conveying means are needed to output the surplus of inserts and in general no distinct document dividing indication is available to indicate the start and ending of the documents on the stack.

[0003] It is an object of the invention to maintain the neatness of the complete sets of marking inserts while providing an indication of the documents division. To this end a method for inserting marking inserts is provided wherein the surplus of inserts is inserted at the end of the document offset the aligned side of said stack. By inserting the surplus at the end of the document offset the aligned side of the stack the operator is provided with a document division indication and can choose to extract the surplus out of the document or to keep the document, including the surplus of inserts together.

[0004] One could also insert the surplus of inserts at the end of the document, whereby all inserts are aligned with the rest of the document, including the surplus of inserts. It is a disadvantage of that case that the extraction of the surplus out of the stack easily results in a disalignment of the stack.

[0005] The multi-sheet document may comprise processed and unprocessed sheets. The sheets may for example be paper sheets, such as A4 plain paper sheets, glossy media or the like, or transparent overhead sheets, or other synthetic sheets.

[0006] A distinguishable set of inserts is a set of inserts that is distinguishable as a set. In general such a set has a predetermined number of members. These members may for example have a certain sequence of colours, such that the set is distinguishable as a set. Another example of a distinguishable set of inserts is a set of tab-sheets. Such a set typically has a number of tab-sheets per set, all having a tabbed part which is offsetted with respect to the previous tab-sheet in the set. Such a set is distinguishable as a set of inserts. Other cyclic media may also form a distinguishable set of inserts.

Inserting marking inserts may be executed inline, i.e. in the same apparatus where sheets are printed or offline, in a different apparatus, for example an offline document

finisher. An offline document finisher may comprise an input tray for inputting processed sheets of a multi-sheet document and a separate input tray for inputting marking inserts and outputs a stack of documents.

[0007] In the case of an error in which the sheet processing apparatus can not finish an active job wherein a set of inserts is partly used at the occurrence of the error, the surplus of inserts may be processed with the method according to the invention, such that the sheet processing apparatus can restart the aborted job, or continue with the next job with a new set of inserts, while the surplus of inserts which are place offset the aligned stack functions as a identifier for the aborted job.

[0008] In another embodiment of the method according to the invention the inserts are marking inserts having an extending portion, the method being such that the extending portion extends out of the stack when aligned at the side opposite to the extending portion.

The extending portions contribute to an easier handling of the document as the marking inserts mark the set division inside the document.

[0009] In a further embodiment of the method according to the invention, the side opposite to the extending portion of the surplus of marking inserts each having a positive offset with respect to the aligned side of the stack in the direction that extends from the aligned side of the stack towards the extending portion of the marking inserts.

The resulting document division is clearly distinguishable from the set division and easily extractable by the operator. The positive offset of the surplus of marking inserts may be different for each individual marking insert of the surplus of marking inserts.

[0010] The invention will now be explained in detail with reference to the accompanying drawings, wherein:

Figure 1 is a diagram of an example of a network system with workstations and a printer;

Figure 2 is a diagram of an example of a printer for use according to the invention;

Figure 3 is a diagram of a set of a document;

Figure 4 is an illustration of a set of tab sheets;

Figure 5A is a schematic side view of a print job, processed according to an embodiment of the method according to the invention;

Figure 5B is a schematic top view of a print job, processed according to an embodiment of the method according to the invention;

[0011] Figure 1 shows a system of workstations (WS) and at least one printer (PR) connected by a network (N). Workstations, for example, are PC's and are in each case equipped with a processor unit, a monitor, a keyboard and a mouse or other indicator instrument. The term "printer" includes a digital copying machine in this context. A digital copying machine comprises a scanner, a printer, a user interface and a connection unit for connecting to the network and processing print jobs sent

from the workstations. Users who wish to have a specific data file printed from their workstation may select one specific or all printers in the system.

As an example, Figure 2 shows a digital copying machine 1 suitable for use in the system as shown in Figure 1. The various parts being shown diagrammatically separately. These parts comprise a document feeder 110 for physically handling the documents for copying, a scanner unit 112 for generating digital image data corresponding to an image appearing on a document, a printer unit 130 for making prints of images on print media in accordance with digital data, a multi-tray media supply unit 140 for supplying media to the printer unit 130 and a finishing and outputting section 150, a user-interface unit 160, a control unit 170 and a network communication unit 171.

[0012] The document feeder 110 is provided with an input tray 111 for inputting a stack of sheets of a document, a transport mechanism (not shown) for transporting the sheets one by one along the scanner unit 120 and an output tray 112 in which the sheets are placed after scanning.

[0013] The scanner unit 120 comprises a flat bed scanner provided with a glass plate on which an original document can be placed, an optical image CCD sensor array and an imaging unit comprising a movable mirror and lens system for imaging the document on the CCD sensor array. During a scanning operation the CCD sensor array generates a series of electrical signals which are converted to digital image data in manner known per se.

The printer unit 130 comprises an electro-photographic processing stage known per se, in which a photo-conductive medium 131 in the form of a band is charged by means of a corona unit 132 and then selectively discharged by exposing to a LED array 133 in accordance with digital image data. The charge image thus formed on the medium 131 is developed with toner powder in a developing unit 134, whereafter the toner image is transferred, in a combined transfer and fixing unit 135, to a heated rubber belt 136 on which the toner powder softens as a result of the heat of the belt 136 and becomes tacky. It is then transferred and fixed on a print media, usually a sheet of paper, fed from a media supply unit 140 via a conveyor 137.

A supply of print media (for example sheets of paper) in different formats and orientations is available in the media supply unit.

The print media with the toner image is transported via a conveyor 138 to the finishing and outputting section 150, which if necessary collects them into sets and then deposits them in the output tray 151. Depending on the productivity and application of the digital copying machine 1 the outputting section 150 may comprise a high capacity stacking unit (not shown) for stacking many documents at a time.

The user interface panel of the unit 160 is provided with a display screen and keys. Unit 160 is connected to the control unit 170 and the network communication unit 171. The control unit of printer 1 is shown diagrammatically

by reference 170. It comprises modules for controlling the units 110, 120, 130, 140, 150 and 160 and an image processing module for processing the digital image data so that prints of good image quality can be made by printer unit 130. The control unit 170 having a controller arrangement that is devised in order to have the system 1 to operate and to perform the method according to the present invention.

As already stated, the apparatus also includes a network communication unit 171 for communicating over a local network N, which is diagrammatically shown as cable 172. The network communication unit 171 receives print jobs from the workstations, converts them to a format that can be processed by the printer unit 130 and in co-operation with the control unit 170 prints the associated images on a print media.

[0014] A program for sending print jobs to the printer is operative in the workstations WS. A program of this kind is termed a "printer driver" and is logically coupled via the network N to one or more printers. When a user wants to send a print job, he executes the printer driver. In response, the printer driver displays a job window on the workstation monitor, in which the user can input specifications for the intended print job, such as the choice of print media, double or single sides printing and several finishing options.

[0015] Documents may come in a large variety in sizes, forms and finishing. Depending on the intended use, a document may comprise marking inserts such as, for example tab-sheets. Tab-sheets mark the position of a part of the document. The divided parts of a document are called sets. Figure 3 is a diagram of a set 3 of a document. The diagrammatically illustrated set 2 comprises five sheets of print media 4 which are covered by a tab-sheet 3. This tab-sheet 3 has an extending portion for easy marking of and browsing to the position of the set 2.

[0016] Figure 4 is an illustration of a set of tab-sheets 5. A set of this kind is commonly used for marking sets of printed media in a document. Usually such sets of marking inserts are supplied in fixed sizes. The illustrated set of tab-sheets 5 comprise six tab-sheets 6, 7, 8, 9, 10, 11. The extending portion of tab-sheet 7 is placed at an offset with respect to the extending portion of tab-sheet 6, the extending portion of tab-sheet 8 is placed at an offset with respect to the extending portion of tab-sheet 7, and so on. The offsetting of the extending portions of the tab-sheets is chosen for easy indexing of the individual tab-sheets 6, 7, 8, 9, 10, 11 and the associated sets of printed media.

The tab-sheets 6, 7, 8, 9, 10, 11 are pre-perforated with perforations 12 for easy handling. It will be clear for the skilled person that tab-sheets may be supplied in all kinds of forms and features. Usually tab-sheets have at least one side for aligning with the stacked set of printed media and one side, usually opposite to the aligning side with an extending portion, for easy identifying the tab-sheet and associated set of printed media.

[0017] Figure 5A is a schematic side view and Figure

5B is a schematic top view of a print job, processed according to an embodiment of the method according to the invention. An exemplary print job 20 comprises two documents, document 25 and document 26. This print job 20 is prepared to be executed on a printing system, comprising a controller arrangement that is devised in order to have the printing system perform a method according to the present invention. Such a controller arrangement can be a single piece of hardware, such as an ASIC, but can also be devised as an arrangement being distributed over several components or even separate hardware devices, optionally partly or substantially completely constituted in software. For the skilled man it will be clear that the actual constitution of the controller arrangement is not essential for enabling the application of the present invention.

Before sending the print job to the printing system, a user can program the requirements for the print job in the printer driver window on a workstation. In this printer driver the user can set the option for inserting marking inserts to "ON". The user may now enter the number of marking inserts in the available set. In the example on hand, the user enters that the set of marking inserts comprises six inserts. By defining the position of the marking inserts, document 25 is divided into sets 30. In this case, four sets 30 all provided with one of the set of six marking inserts available in each set of marking inserts. These options and settings may also be entered on a local user interface, such as the graphical user interface

The controller now determines the number of surplus marking inserts and starts operation. The sheets of print media 4 are printed in the print unit of the printing system. In a timed fashion the marking inserts are fed to the output tray such that the marking inserts are correctly placed at the end of each set 30 in the document 25. The marking inserts may be supplied in plural in a separate input tray of the media supply unit 140. At the output tray the document 25 comprising the printed media 4 and the marking inserts 6, 7, 8, 9, 10 and 11 are aligned. After conveying the last sheet of printed media to the output tray the controlling assembly controls the conveyance of the surplus of marking inserts to the output tray. These surplus of marking inserts are inserted offset the aligned side of the stack such that the surplus of marking inserts extend out of the stack, such that these surplus marking inserts are recognisable over the marking inserts that indicate the set dividing of the document. This procedure is repeated for document 26

[0018] The number of marking inserts in each distinguishable set may be counted automatically upon inserting the sets. In that case a user does not have to enter the number of marking inserts manually.

[0019] The amount of offset may be set in the controller or in the printer driver. If a user intends to extract the surplus of marking inserts manually he may require a larger offset than in the case of a user who uses the offset of the surplus of marking inserts merely as a document divider and keeps the complete set, including the surplus

of marking inserts together.

[0020] The set of marking inserts may be inserted into the document directly from the marking inserts storage, or the marking inserts may enter into the printing unit. The latter enables the marking inserts to be provided with a printed image, such as chapter name and number or a coloured coding to distinguish between the sets in the document.

Claims

1. A method of inserting a plurality of inserts from a distinguishable set into a multi-sheet document, comprising the steps of:

- inserting inserts into the document in accordance with a job definition, such that a stack of inserts and processed sheets is obtained, said stack having at least one aligned side; and
- determining the number of surplus inserts;

characterised in that the surplus of inserts is inserted at the end of the document offset the aligned side of said stack.

2. A method according to claim 1, wherein the inserts are marking inserts having an extending portion, the method being such that the extending portion extends out of the stack when aligned at the side opposite to the extending portion.

3. A method according to claim 2, wherein the side opposite to the extending portion of the surplus of marking inserts each having a positive offset with respect to the aligned side of the stack in the direction that extends from the aligned side of the stack towards the extending portion of the marking inserts.

4. A method according to any one of preceding claims, wherein the inserts are tab-sheets.

5. A sheet processing apparatus, comprising a controller arrangement configured for executing the method according to any one of claims 1 to 4.

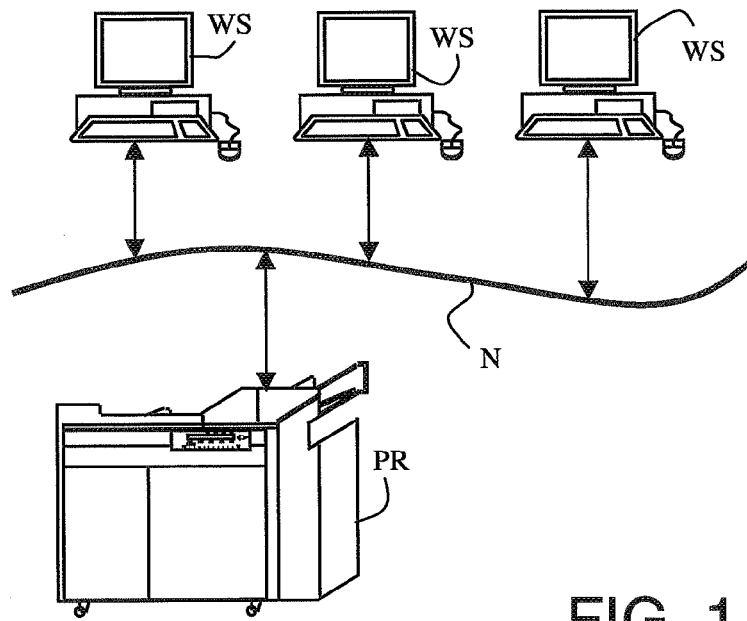


FIG. 1

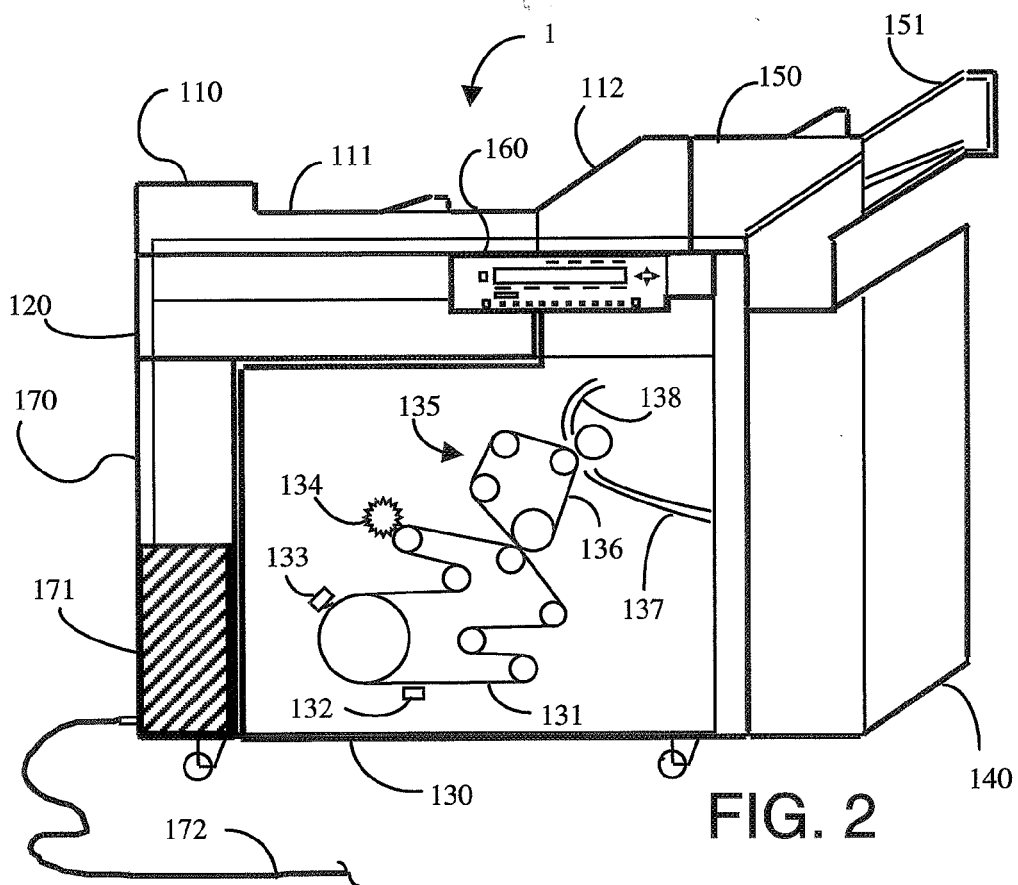


FIG. 2

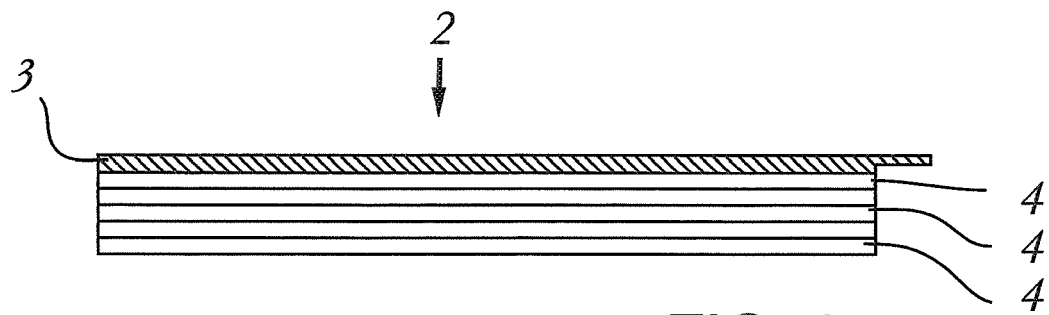


FIG. 3



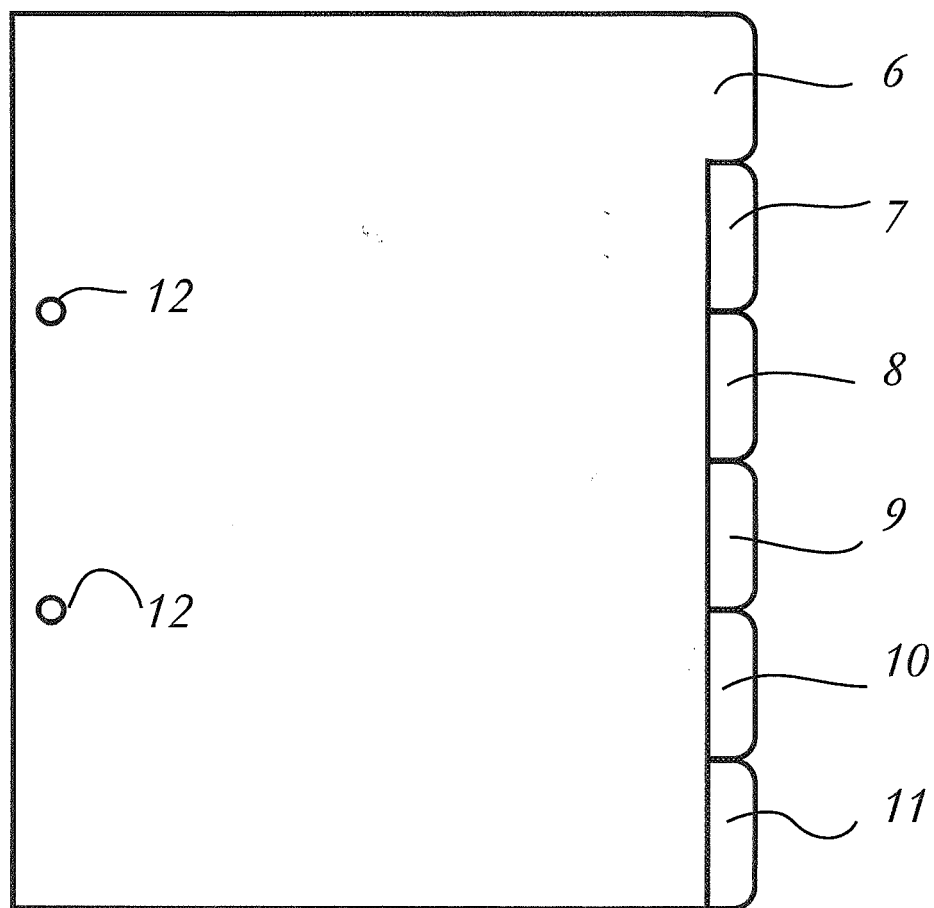


FIG. 4

↑
5

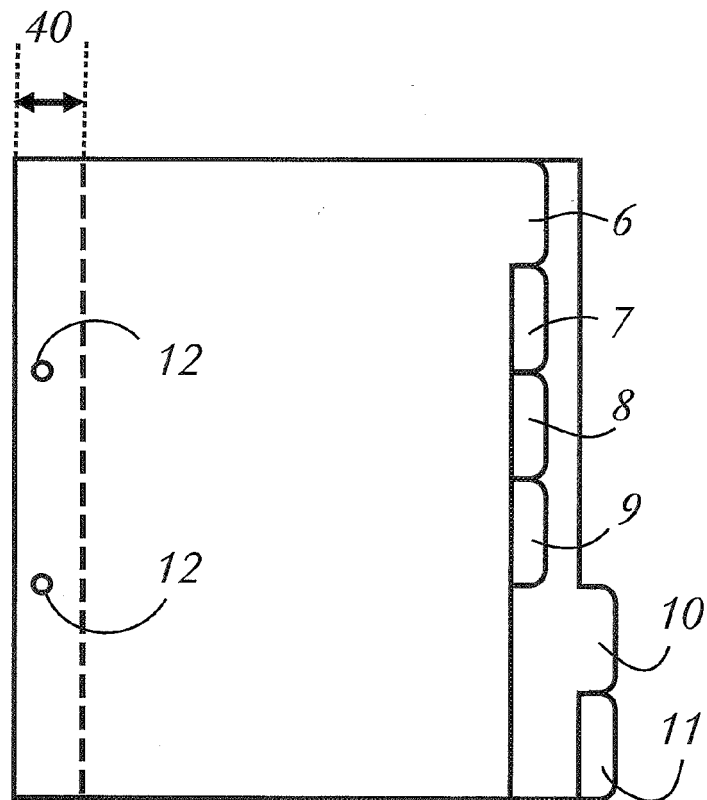

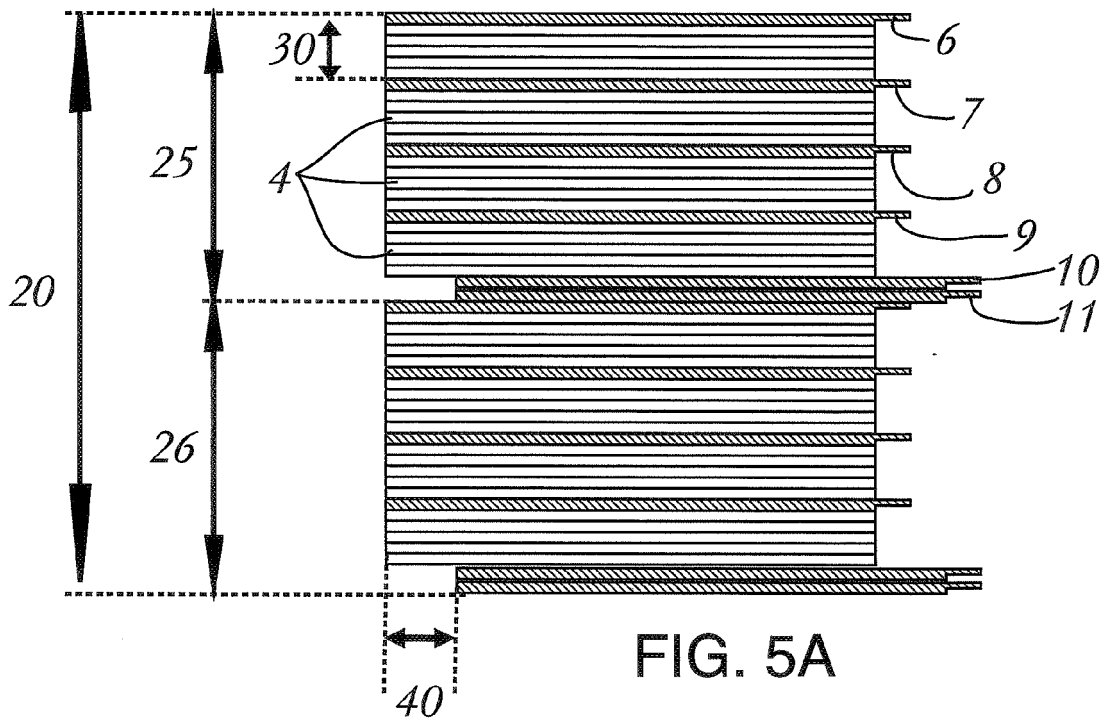

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 07 11 7108

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
D,A	US 5 044 619 A (SUNDQUIST DOUGLAS F [US] ET AL) 3 September 1991 (1991-09-03) * the whole document *	1-5	INV. B65H33/04 G03G15/00
A	US 6 227 531 B1 (GUERRERO MARCO A [MX] ET AL) 8 May 2001 (2001-05-08) * the whole document *	1-5	
			TECHNICAL FIELDS SEARCHED (IPC)
			B65H G03G
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 8 November 2007	Examiner Stroppa, Giovanni
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

7
EPO FORM 1503 03/82 (P04/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 07 11 7108

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-11-2007

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5044619	A	03-09-1991	DE 69118435 D1 09-05-1996
			DE 69118435 T2 31-10-1996
			EP 0457552 A2 21-11-1991
			JP 4229879 A 19-08-1992

US 6227531	B1	08-05-2001	NONE

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5044619 A [0002]