



(11) **EP 1 914 192 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
23.04.2008 Bulletin 2008/17

(51) Int Cl.:
B66D 1/54 (2006.01)

(21) Application number: **07254086.7**

(22) Date of filing: **16.10.2007**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE
SI SK TR**
Designated Extension States:
AL BA HR MK RS

(30) Priority: **17.10.2006 US 581783**

(71) Applicant: **JLG Industries, Inc.**
McConnellsburg, PA 17233-9533 (US)

(72) Inventors:
• **Campbell, Geoffrey George**
Kensington
New South Wales 2033 (AU)
• **McNeil, Alexander McKechran Hardie**
Gladesville
New South Wales 2111 (AU)

(74) Representative: **Gray, James et al**
Withers & Rogers LLP
Goldings House,
2 Hays Lane
London SE1 2HW (GB)

(54) **Load equalizing rope termination and method**

(57) A load equalizing rope termination serves to prevent a load imbalance between a pair of rope leads of a rope termination. The rope termination includes an end section such as an end loop and the pair of rope leads attached to a pair of rope ends. A rope termination fitting includes a base support member over which the end section is supported, and a pair of load equalizing support members disposed upstream of the base support member and over which the rope ends are supported. The engagement between the rope ends and the equalizing support members prevents a load imbalance of the rope leads.

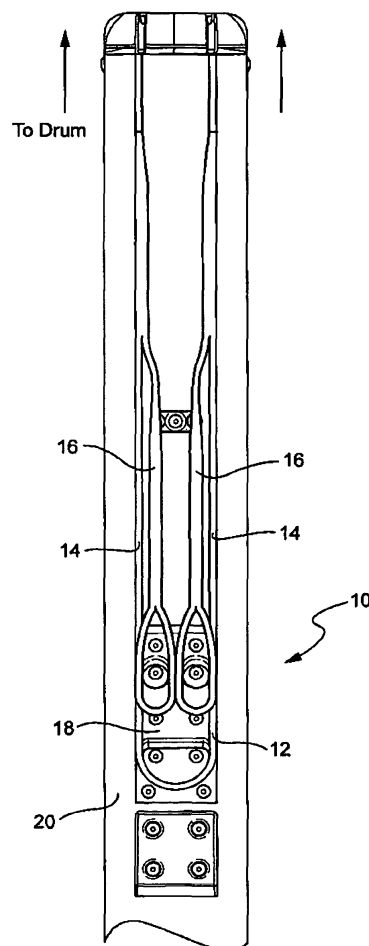


Fig. 1

Description

BACKGROUND OF THE INVENTION

[0001] The present invention relates to force distribution and load balancing and, more particularly, to a load equalizing rope termination and method that prevent a load imbalance on a pair of rope leads.

[0002] A lifting or winch system is known where a driving pulley, cable, chain, tape, rope or the like (hereinafter "rope") is attached to a rotating drum or other motive power source. At its end, the rope is secured to the object to be lifted or pulled. The drum is fixed relative to the object to be moved. As the drum is rotated, the rope is taken up around the drum, and the object to be moved is pulled.

[0003] In order to provide a level of redundancy, a pair of ropes with respective rope ends may be secured between the drum and the object to be lifted. A problem arises with this arrangement, however, if a load imbalance occurs on the rope ends. In the event of such a load imbalance, the object to be moved may be skewed or otherwise unevenly displaced, which thereby may prevent proper operation of the device.

BRIEF SUMMARY OF THE INVENTION

[0004] It would thus be desirable to develop structure cooperable with the rope termination that would prevent a load imbalance of the rope ends. The rope termination and method described herein utilize a rope termination fitting including one or more load equalizing support members. The support members receive a portion of the rope or an attachment to the rope to prevent the rope from an imbalanced load. The structure additionally ensures independence of the ropes as each is capable of supporting the load independently in the event one of the ropes fails.

[0005] In an exemplary embodiment of the invention, a load equalizing rope termination includes a pair of rope ends; a rope termination attached to the rope ends and defining an end section such as an end loop and a pair of rope leads; and a rope termination fitting. The rope termination fitting includes a base support member over which the end section is supported, and a pair of load equalizing support members disposed upstream of the base support member and over which the rope ends are supported. The engagement between the rope ends and the load equalizing support members prevents a load imbalance of the rope leads.

[0006] The load equalizing support members are preferably spaced from the base support member and aligned across a width of the base support member. The base support member and the load equalizing support members may be angled in a direction opposite from a load direction. In a preferred arrangement, the rope termination is spliced with the rope ends.

[0007] In another exemplary embodiment of the inven-

tion, a load equalizing rope termination includes a pair of rope ends; a rope termination attached to the rope ends and defining an end section and a pair of rope leads; and a rope termination fitting having structure coupled with the rope ends for preventing a load imbalance of the rope leads.

[0008] In yet another exemplary embodiment of the invention, a method of preventing a load imbalance on a rope termination defining an end section and a pair of rope leads includes the steps of attaching the rope termination to a pair of rope ends; securing the end section over a base support member; and securing the rope ends over a corresponding pair of load equalizing support members disposed upstream of the base support member.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] These and other aspects and advantages of the present invention will be described in detail with reference to the accompanying drawings, in which:

[0010] FIGURE 1 shows the load equalizing rope termination in use including the rope and rope termination fitting;

[0011] FIGURE 2 is a perspective view of the rope termination fitting; and

[0012] FIGURE 3 is a side view of the rope termination fitting;

DETAILED DESCRIPTION OF THE INVENTION

[0013] With reference to FIG. 1, like a conventional redundant arrangement, a load equalizing rope termination includes a pair of rope ends 16. The rope ends 16 are attached at an opposite end to a rotating drum or the like. The ropes are configured such that either rope is independently capable of supporting the load, thus providing an added margin of safety in the event that one of the ropes breaks.

[0014] The rotating drum or the like may be fixed and the load movable at the distal ends of the ropes; or the drum may be attached to the movable load and move with the load with the distal ends of the rope fixed; or a combination of both. In a preferred arrangement, the drum is fixed, and the load, such as a work platform or the like, is restrained to move along a load path (e.g., with wheels on rails). If the ropes 16 are not identical in length, one of the ropes will carry a disproportionate share of the load. This is particularly so if the ropes are high in stiffness such as wire ropes or some pre-stretched polymer ropes or the like. If the ropes do not carry an equal share of the load, one rope may become slack enough to jump grooves on a grooved winch drum; the load may skew creating side loads on the wheels with increasing friction, wear and energy losses; or one rope may wear faster and thereby have a shorter useful life.

[0015] To address these concerns while maintaining redundant independent support by the rope ends 16, a

rope termination 10 defining an end section such as an end loop 12 and a pair of rope leads 14 is spliced or otherwise attached to the rope ends 16. Any suitable manner of splicing the ropes together may be used, and the specific splicing method does not form part of the invention. As such, no further description will be provided.

[0016] A rope termination fitting 18 is fixed to an object to be moved (load) 20 via suitable connectors. The rope termination fitting 18 includes a base support member 22 over which the end loop 12 is supported, and two load equalizing support members 24 disposed upstream of the base support member 22 and over which the rope ends 16 are supported. The term "upstream" in this context is intended to encompass a direction in which a force on the rope termination 10 is pulling the rope termination fitting 18. In FIG. 1, the upstream direction is upward.

[0017] As shown in FIG. 2, the load equalizing support members 24 are spaced from the base support member 22 and are generally aligned across a width of the base support member 22. Additionally, with reference to FIG. 3, the base support member 22 and the load equalizing support members 24 are angled in a direction opposite from the load direction. In this manner, when a load is applied to the rope termination 10 (upward in FIG. 3), the downward angled base support member 22 and load equalizing support members 24 prevent the rope termination 10 from slipping off. A cover (not shown) over the rope termination fitting 18 further prevents the rope termination 10 from slipping off.

[0018] In use, as a rotating drum or other motive force applies a load to the rope termination 10, the end loop 12 or other end section is pulled against the base support member 22 while the rope ends 16 remain generally slack, and the rope termination fitting 18 and the movable object 20 to which it is attached are driven in the load direction. The rope ends 16 supported on the load equalizing support members 24 prevent a load imbalance of the rope leads 14. That is, an unbalanced load on the object to be moved 20, via friction, anomalies in the drum or the like may cause one of the rope leads 14 to be pulled at a different rate or load, thereby causing a load imbalance on the rope leads 14. Upon such an occurrence, the rope ends 16 engaging the respective load equalizing support members 24 prevent the rope leads from being driven unevenly, thereby preventing a load imbalance on the rope leads 14.

[0019] As noted, the configuration also serves to maintain a redundant load support as a safety feature in the event one of the rope leads 14, the primary ropes, or rope ends 16 fails. During normal operation, the end loop 12 supports the load. As such, the rope ends 16 remain slack and are not subjected to routine wear. If one of the rope leads 14 fails, the rope ends 16 will engage the respective load equalizing support members 24 to support the load. Moreover, in the event that one of the rope ends 16 fails, the second rope end 16 will support the load.

[0020] The rope termination fitting described herein includes one or more load equalizing support members

that receive rope ends or an attachment to the rope ends to prevent the ropes from being subject to an imbalanced load.

Claims

1. A load equalizing rope termination comprising:

a pair of rope ends;
a rope termination attached to the rope ends and defining an end section and a pair of rope leads;
and
a rope termination fitting comprising:

a base support member over which the end section is supported, and
a pair of load equalizing support members disposed upstream of the base support member and over which the rope ends are supported, the engagement between the rope ends and the load equalizing support members preventing a load imbalance of the rope leads.

2. A load equalizing rope termination according to claim 1, wherein the load equalizing support members are spaced from the base support member and aligned across a width of the base support member.

3. A load equalizing rope termination according to claim 1, wherein the base support member and the load equalizing support members are angled in a direction opposite from a load direction.

4. A load equalizing rope termination according to claim 1, wherein the rope termination is spliced with the rope ends.

5. A load equalizing rope termination according to claim 1, wherein the rope ends support a load, each of the rope ends being capable of independently supporting the load, and wherein the load equalizing rope termination is assembled such that in upon breakage of either rope end or the rope termination, the other rope end will support the load.

6. A load equalizing rope termination according to claim 1, wherein the end section comprises an end loop.

7. A load equalizing rope termination comprising:

a pair of rope ends;
a rope termination attached to the rope ends and defining an end section and a pair of rope leads;
and
a rope termination fitting comprising means coupled with the rope ends for preventing a load

imbalance of the rope leads.

8. A load equalizing rope termination according to claim 7, wherein the end section comprises an end loop.

5

9. A load equalizing rope termination according to claim 8, wherein the preventing means comprises:

a base support member over which the end loop is supported; and

10

a pair of load equalizing support members disposed upstream of the base support member and over which the rope ends are supported.

10. A method of preventing a load imbalance on a rope termination defining an end section and a pair of rope leads, the method comprising:

15

attaching the rope termination to a pair of rope ends;

20

securing the end section over a base support member; and

securing the rope ends over a corresponding pair of load equalizing support members disposed upstream of the base support member.

25

11. A rope termination for at least two ropes supporting a load, the rope termination being configured to prevent a load imbalance on the ropes and being designed so that in the event of a breakage in any of the ropes, at least one other rope will independently support the load.

30

35

40

45

50

55

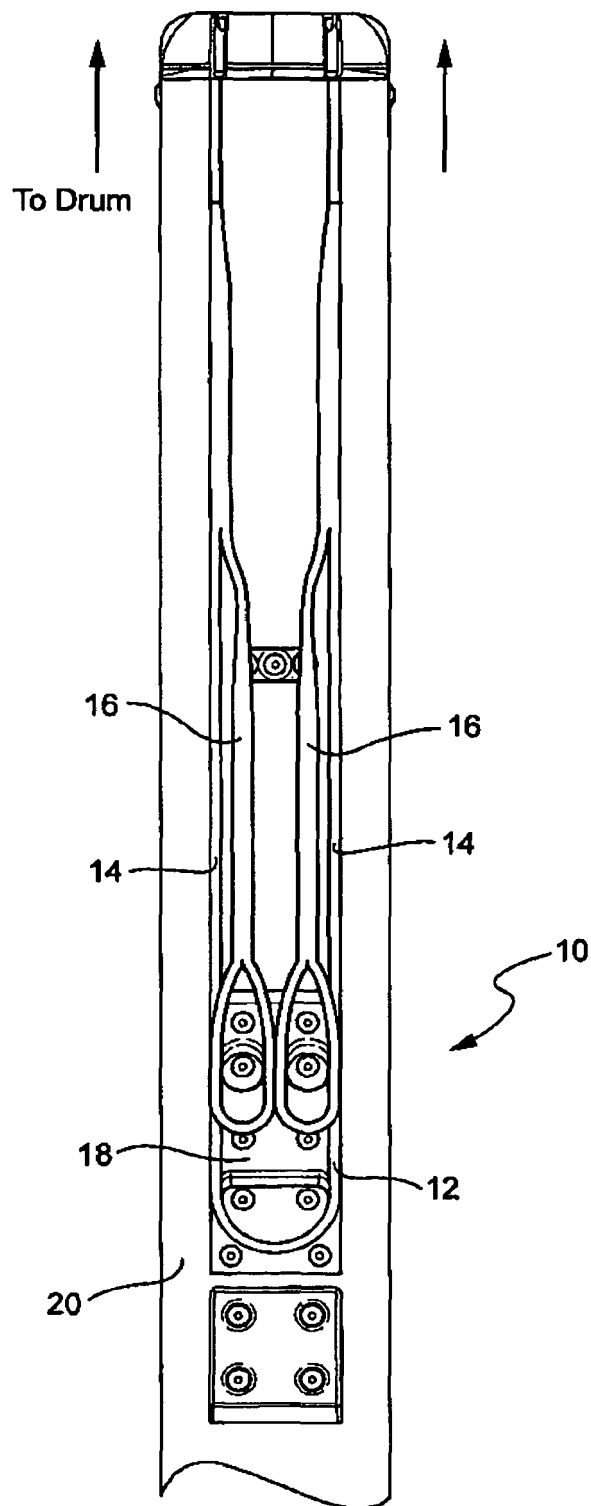


Fig. 1

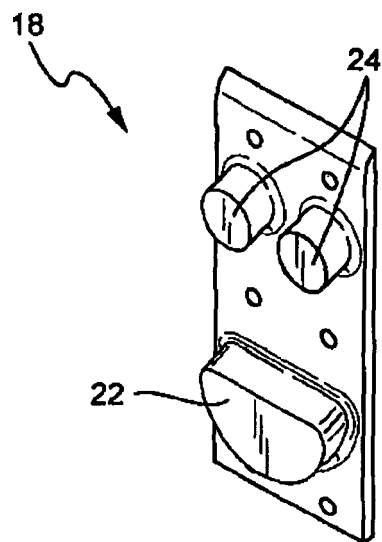


Fig. 2



Fig. 3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 07 25 4086

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	EP 0 931 757 A (SIT SOC INNOVATIONS TECH [FR]) 28 July 1999 (1999-07-28) * column 4, paragraph 25 - column 5, paragraph 29; figures 1,2 *	1-11	INV. B66D1/54
A	FR 2 081 769 A (HOESCH MASCHINENFABRIK AG HOESCH MASCHINENFABRI [DE]) 10 December 1971 (1971-12-10) * page 5, last paragraph; figure 1 *	1,7,10, 11	
A	US 2 370 834 A (BALL HARVEY W) 6 March 1945 (1945-03-06) * page 1, column 2, last paragraph; figures 3,4 *	1,7,10, 11	
			TECHNICAL FIELDS SEARCHED (IPC)
			B66D A47L
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 4 February 2008	Examiner Ferrien, Yann
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503.03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 07 25 4086

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-02-2008

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0931757	A	28-07-1999	DE 69933597 T2	23-08-2007
			FR 2773792 A1	23-07-1999
			US 6109596 A	29-08-2000

FR 2081769	A	10-12-1971	AT 307661 B	12-06-1973
			BE 762153 A1	27-07-1971
			DE 2010868 A1	23-09-1971
			PL 76312 B1	28-02-1975
			SU 483825 A3	05-09-1975

US 2370834	A	06-03-1945	NONE	
