

(43) Date of publication:
21.05.2008 Bulletin 2008/21

(51) Int Cl.: **B63H 25/02** (2006.01) **B63H 25/14** (2006.01)
B63H 20/12 (2006.01) **B63H 25/24** (2006.01)

(21) Application number: **07022326.8**

(22) Date of filing: **16.11.2007**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
 HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE
 SI SK TR**
 Designated Extension States:
AL BA HR MK RS

(71) Applicant: **Yamaha Marine Kabushiki Kaisha**
Hamamatsu-shi
Shizuoka-ken (JP)


(72) Inventor: **Mizutani, Makoto**
Hamamatsu-shi
Shizuoka-ken 432-8528 (JP)

(30) Priority: 17.11.2006 JP 2006312161
17.11.2006 JP 2006312172
17.11.2006 JP 2006312184
17.11.2006 JP 2006312228

(74) Representative: **Grünecker, Kinkeldey,
Stockmair & Schwanhäusser
Anwaltssozietät
Leopoldstrasse 4
80802 München (DE)**

(57) The present invention relates to a steering system for a watercraft, comprising: a rudder, in particular an outboard motor (12); a steering device (16) including an actuator, in particular an electric motor (20) configured to change a direction in which the watercraft travels; a steering amount input means, such as a steering wheel (17), operable by an operator, electrically connected to the actuator (20) to provide an actuation signal corresponding to the amount of a steering operation to the actuator (20); a reaction actuator, such as a reaction motor (29) for applying a reaction force to the steering amount input device (17); and control means (33) for controlling the reaction actuator (29), the control means (33) including: at least one of operation status detection means (38) for detecting an operation status corresponding to the steering operation, running status detection means (39) for detecting a running status of the watercraft, watercraft propulsion unit status recognition means (40) for recognizing a status of a watercraft propulsion unit, in particular of an outboard motor (12), such as the installation number thereof, and actuator status detection means (41) for detecting a status of the actuator (20); torque computation means (42) for computing a torque target value based on the detection value from the at least one of the detection and recognition means; and reaction actuator control means (43) for controlling the reaction actuator (29) in accordance with the torque target value.

[FIG. 3]

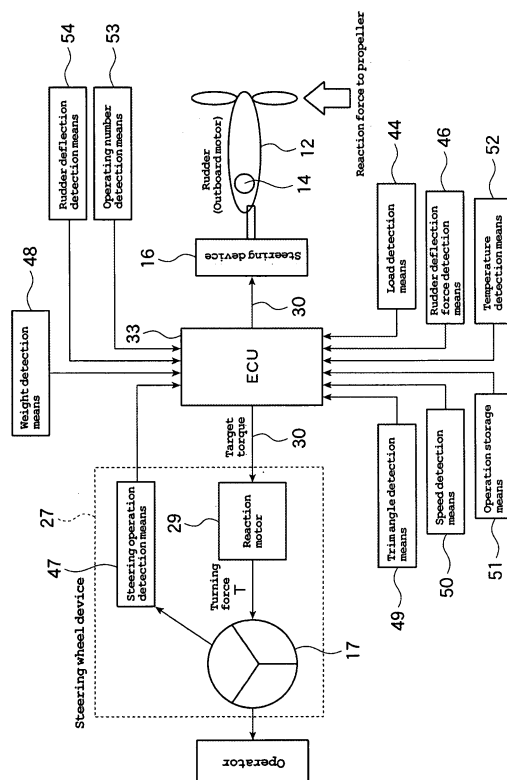

Description

[0001] The present invention relates to a steering device, and in particular to a watercraft steering device, having an electric actuator which is actuated as an operator operates a steering wheel for rudder deflection, and particularly to a watercraft steering device which can apply a reaction force to the steering wheel, and to a watercraft with the steering device.

[0002] One conventional watercraft of this type is disclosed in Patent Document 1.

[0003] More specifically, Patent Document 1 discloses that "the electric actuator of the steering device is actuated as an operator operates the steering wheel. The watercraft is steered in response to the operation amount of the steering wheel. Further, an external force to the watercraft is detected. Based on the detected external force, a reaction torque is applied to the steering wheel. Accordingly, the operator can feel the external force to the watercraft due to a water current for example, directly through the steering wheel, and thus can recognize the movement of the watercraft corresponding to such external force to thereby act without delay."

[0004] Patent Document 1: JP-A-2005-254848

[0005] In such conventional watercrafts, a reaction torque is applied to the steering wheel based on an external force to the watercraft. An operator can feel such external force due to a water current for example, directly through the steering wheel, and thus can recognize the movement of the watercraft corresponding to the external force to thereby act without delay. When the watercraft is under no external force, an operation feel of the steering wheel can be lighter. Unfortunately, in the case where larger output is required for rudder deflection (rudder deflection torque), when the steering wheel is operated faster, output from the steering motor (electric actuator) becomes less responsive, resulting in a poor operation feel.

[0006] It should be noted that rudder deflection torque characteristics required for rudder deflection (required rudder deflection force characteristics) may change from the state shown by required rudder deflection force characteristic line A1 to the state shown by required rudder deflection force characteristic line A2, depending on the characteristics of the watercraft, a rudder angle, an operation speed, or the like. In such case, a required rudder deflection force may exceed the limit of the motor ability, resulting in impaired responsiveness and a poorer operation feel.

[0007] Further, as shown in FIG. 10, motor characteristics depend on the surroundings such as temperature. When the temperature becomes high for example, the motor characteristics may change from the state shown by motor characteristic line B1 (solid line in the figure) to the state shown by motor characteristic line B2 (broken line in the figure). In such case, since the motor characteristics at high temperatures provide lower torque, a rudder deflection force required may not be obtained, resulting in impaired responsiveness and a poorer operation

feel.

[0008] In view of the foregoing problem, it is, therefore, an object of the present invention to provide a steering device which provides excellent responsiveness invariably and provide an operator with an excellent operation feel during rudder deflection, depending on a running status of the watercraft.

[0009] This objective is solved in an inventive manner by a steering system for a watercraft, comprising: a rudder; a steering device including an actuator configured to change a direction in which the watercraft travels; a steering amount input means, operable by an operator, electrically connected to the actuator to provide an actuation signal corresponding to the amount of a steering operation to the actuator; a reaction actuator for applying a reaction force to the steering amount input device; and control means for controlling the reaction actuator, the control means including: at least one of operation status detection means for detecting an operation status corresponding to the steering operation, running status detection means for detecting a running status of the watercraft, watercraft propulsion unit status recognition means for recognizing a status of a watercraft propulsion unit, such as the installation number thereof, and actuator status detection means for detecting a status of the actuator; torque computation means for computing a torque target value based on the detection value from the at least one of the detection and recognition means; and reaction actuator control means for controlling the reaction actuator in accordance with the torque target value.

[0010] Preferably, the watercraft propulsion unit, in particular arranged at a stern of the watercraft, is used as the rudder.

[0011] Further, preferably the actuator is configured to change a direction in which the watercraft travels is an electric actuator.

[0012] Still further, preferably the operation status detection means includes at least one of rudder deflection force detection means for detecting a rudder deflection force required for the rudder deflection, load detection means for detecting a load to the rudder, steering operation detection means for detecting a steering operation angle, a steering operation speed and a direction in which the steering amount input means is operated, rudder deflection detection means for detecting a rudder deflection angle, a rudder deflection speed and a direction in which the rudder is deflected, corresponding to the steering operation, and deviation detection means for detecting a deviation of a detected actual rudder deflection angle from a target rudder deflection angle corresponding to the steering operation.

[0013] Therein, it is beneficial if the running status detection means includes at least one of weight detection means for detecting at least one of a position of a waterline and a weight of the watercraft, trim angle detection means for detecting a trim angle of the watercraft, and speed detection means for detecting at least one of a speed, an acceleration and a propulsive force of the wa-

tercraft, and an output of the watercraft propulsion unit.

[0014] It is further beneficial if the watercraft propulsion unit status recognition means includes operation storage means for storing therein any one of pieces of information on the installation number of the watercraft propulsion unit, an installation position of the watercraft propulsion unit relative to the watercraft, a rotational direction of a propeller of the watercraft propulsion unit, a propeller shape, a trim tab angle and a trim tab shape.

[0015] Preferably, the actuator status detection means is an electric actuator status detection means, which is connected to temperature detection means for detecting a temperature of the electric actuator.

[0016] Further, preferably the actuator status detection means is an electric actuator status detection means, and includes operating number detection means for detecting the number of the electric actuator in operation.

[0017] Still further, preferably the steering amount input means is a steering wheel or a control lever, operable by an operator, electrically connected to the electric actuator to provide an actuation signal corresponding to the amount of a steering operation input to the electric actuator.

[0018] According to another preferred embodiment, the steering system further comprises an electronic control unit (ECU) for controlling the electric motor, wherein the ECU includes at least one of operation status detection means for detecting an operation status corresponding to the steering wheel operation, running status detection means for detecting a running status of the watercraft, outboard motor status recognition means for recognizing a status of the outboard motor, such as the installation number thereof, and electric motor status detection means for detecting a status of the electric motor, and the ECU also includes torque computation means for making a torque target value larger depending on the detection value from the at least one of the means, and reaction motor control means for controlling the reaction motor in accordance with the torque target value computed by the torque computation means.

[0019] There is further provided a watercraft with the steering system for a watercraft according to one of the above embodiments.

[0020] In the following, the present invention is explained in greater detail with respect to several embodiments thereof in conjunction with the accompanying drawings, wherein:

FIG. 1 is a plan view of a watercraft in accordance with an embodiment of the present teaching,

FIG. 2 is an enlarged plan view of a steering device of the watercraft in accordance with the embodiment of the present teaching,

FIG. 3 is a block diagram of the watercraft in accordance with the embodiment of the present teaching,

FIG. 4 is a block diagram of an ECU in accordance with the embodiment of the present teaching,

FIG. 5 is a flowchart of a reaction control process in accordance with the embodiment of the present teaching,

FIGs. 6 are graphs of a reaction control state depending on a rudder deflection status in accordance with the embodiment of the present teaching,

FIGs. 7 are graphs of the effect of the reaction control in accordance with the embodiment of the present teaching,

FIGs. 8 are graphs of a reaction control state depending on a running status in accordance with the embodiment of the present teaching,

FIG. 9 is a graph of required deflection force characteristics, illustrating the relationship between rudder deflection torques and rudder deflection speeds, and

FIG. 10 is a graph of motor characteristics, illustrating the relationship between torques generated by an electric motor and rotational speeds.

Description of Reference Numerals:

[0021]

- 10: hull
- 12: outboard motor (watercraft propulsion unit)
- 16: steering device
- 17: steering wheel
- 20: electric motor
- 28: steering wheel operation angle sensor
- 29: reaction motor
- 33: ECU (control unit)
- 38: operation status detection means
- 39: running status detection means
- 40: outboard motor status recognition means (watercraft propulsion unit status recognition means)
- 41: electric motor status detection means (electric actuator status detection means)
- 42: torque computation means
- 43: reaction motor control means
- 46: torque detection means
- 47: steering operation detection means
- 48: weight detection means
- 49: trim angle detection means
- 50: speed detection means
- 51: operation storage means
- 52: temperature detection means
- 54: rudder deflection detection means

[0022] An embodiment of the present teaching will now be described.

[0023] FIGs. 1 to 8 illustrate the embodiment of the present teaching.

[0024] The constitution of this embodiment will be first described. As shown in FIG. 1, a watercraft in accordance with this embodiment has a hull 10 including a transom 11. To the transom 11, an outboard motor 12 as a "watercraft propulsion unit" is mounted via clamp brackets 13. The outboard motor 12 is pivotable about a swivel shaft (steering pivot shaft) 14 extending in a vertical direction. The outboard motor 12 serves as a rudder as it pivots, and thus the direction in which the watercraft is driven is changed.

[0025] A steering bracket 15 is fixed at the upper end of the swivel shaft 14. The steering bracket 15 is coupled at its front end 15a to a steering device 16. The steering device 16 is driven by operating a steering wheel 17 disposed in an operator's section.

[0026] As shown in FIG. 2, the steering device 16 includes a DD (direct drive) electric motor 20 for example, as an "electric actuator." The electric motor 20 is attached to a threaded rod 21 extending in a width direction of the watercraft, and is movable in the width direction of the watercraft along the threaded rod 21.

[0027] The threaded rod 21 is supported at its both ends by a pair of left and right supports 22. The supports 22 are supported by a tilt shaft 23.

[0028] The electric motor 20 has a coupling bracket 24 extending rearward. The coupling bracket 24 and the steering bracket 15 are coupled with each other via a coupling pin 25.

[0029] As a result, as the electric motor 20 is actuated to move in the width direction of the watercraft relative to the threaded rod 21, the outboard motor 12 will pivot about the swivel shaft 14 via the coupling bracket 24 and the steering bracket 15.

[0030] On the other hand, as shown in FIG. 1, the steering wheel 17 is fixed to a steering wheel shaft 26. At the proximal end of the steering shaft 26, there is provided a steering wheel control unit 27. The steering wheel control unit 27 includes a steering wheel operation angle sensor 28 for detecting an operation angle of the steering wheel 17, and a reaction motor 29 as an "electric actuator" for applying a desired reaction force to the steering wheel 17 during an operation of the steering wheel 17 by the operator.

[0031] The steering wheel control unit 27 is connected to an electronic control unit (ECU) 33 as "control means" via a signal cable 30. The control unit 33 is connected to the electric motor 20 of the steering device 16. The control unit 33 receives a signal from the steering wheel operation angle sensor 28, controls the electric motor 20, and controls the reaction motor 29.

[0032] As shown in FIG. 4, the control unit 33 includes operation status detection means 38 for detecting an operation status corresponding to an operator's steering wheel operation, running status detection means 39 for

detecting a running status of the watercraft, outboard motor status recognition means 40 as "watercraft propulsion unit status recognition means" for recognizing a status of the outboard motor 12, such as its number, and electric motor status detection means 41 as "electric actuator status detection means" for detecting a status of the electric motor 20. The control unit 33 also includes torque computation means 42 for making a torque target value for the reaction motor 29 larger when it determines that a load to the electric motor 20 during rudder deflection will increase, based on the detection values from those means 38..., and reaction motor control means 43 for controlling the reaction motor 29 in accordance with the torque target value computed by the torque computation means 42.

[0033] As shown in FIG. 3, the operation status detection means 38 includes a torque detection means 46 for detecting a rudder deflection force required for rudder deflection, load detection means 44 for detecting a load to the rudder, such as water pressure, steering operation detection means 47 for detecting an operation angle of the steering wheel 17, an operation speed of the steering wheel 17 and a direction in which the steering wheel is operated, and rudder deflection detection means 54 for detecting a rudder deflection angle, a rudder deflection speed and a direction in which the rudder is deflected, corresponding to the operation of the steering wheel 17. The operation status detection means 38 also includes deviation detection means 45 for detecting a deviation of a detected actual rudder deflection angle from a target rudder deflection angle corresponding to the steering wheel operation, as shown in FIG. 4. The steering wheel operation angle sensor 28 provided in the steering operation detection means 47 detects a steering wheel operation angle.

[0034] To the running status detection means 39, there are connected weight detection means 48 for detecting the position of a waterline and the weight of the watercraft, trim angle detection means 49 for detecting a trim angle of the watercraft, and speed detection means 50 for detecting a speed, an acceleration and a propulsive force of the watercraft, and an output of the outboard motor 12, as shown in FIG. 3.

[0035] Further, to the outboard motor status recognition means 40, there is connected operation storage means 51 for storing therein information on the installation number of the outboard motor 12, the installation position of the outboard motor 12 relative to the watercraft, a rotational direction of a propeller of the outboard motor 12, a propeller shape, a trim tab angle, a trim tab shape, and the like. It is a matter of course that the operation storage means 51 can be included in the ECU 33.

[0036] Furthermore, the electric motor status detection means 41 includes temperature detection means 52 for detecting a temperature of the electric motor 20, and operating number detection means 53 for detecting the number of the electric motor 20 in operation, as shown in FIG. 3.

[0037] The operation of this embodiment will now be described.

[0038] As the operator first turns the steering wheel 17 by a certain amount, a signal will be transmitted from the steering wheel operation angle sensor 28 in the steering operation detection means 47 to the ECU 33. Then, in step S10 of FIG. 5, a target rudder deflection angle is detected, and in step S11, a target deviation is computed.

[0039] Further, in step S12, the operation status detection means 38 detects an operation status. As used herein, the term "operation status" refers to a rudder deflection torque required for deflecting the outboard motor 12, an operation angle and an operation speed of the steering wheel, a direction in which the steering wheel is operated, a deviation in rudder deflection angle corresponding to a steering wheel operation, and the like.

[0040] The rudder deflection torque is detected by the torque detection means 46. The operation angle and the operation speed of the steering wheel, the direction in which the steering wheel is operated, and the like are detected by the steering operation detection means 47. Detection signals from those means are transmitted to the operation status detection means 38 to thereby detect the operation status.

[0041] Further, in step S13, the running status detection means 39 detects a running status. As used herein, the term "running status" refers to the position of a waterline, the weight, a trim angle, a speed, an acceleration and a propulsive force of the watercraft, an output of the outboard motor 12, and the like.

[0042] The position of a waterline and the weight of the watercraft are detected by the weight detection means 48. The trim angle of the watercraft is detected by the trim angle detection means 49. The speed, the acceleration and the propulsive force of the watercraft, and the output of the outboard motor 12 are detected by the speed detection means 50. Detection signals from those means are transmitted to the running status detection means 39 to thereby detect the running status.

[0043] Further, in step S14, the outboard motor status recognition means 40 recognizes a status of the outboard motor 12. As used herein, the term "the status of the outboard motor 12" refers to the installation number of the outboard motor 12, the installation position of the outboard motor 12 relative to the watercraft, a rotational direction of the propeller of the outboard motor 12, a propeller shape, a trim tab angle, a trim tab shape, and the like.

[0044] Information on the installation number of the outboard motor 12, the installation position of the outboard motor 12 relative to the watercraft, the rotational direction of the propeller of the outboard motor 12, and the like are stored in the operation storage means 51. Such information is read and then transmitted to the outboard motor status recognition means 40 to thereby recognize the status of the outboard motor 12.

[0045] Thereafter, in step S15, the electric motor status detection means 41 detects a status of the electric motor

20. As used herein, the term "the status of the electric motor 20" refers to a temperature and a voltage of the electric motor 20, the number of the electric motor 20 in operation, and the like.

[0046] The temperature of the electric motor 20 is detected by the temperature detection means 52. A detection signal from the means 52 is transmitted to the electric motor status detection means 41 to thereby detect the status of the electric motor 20. The number of the electric motor 20 in operation, and the like are detected by the operating number detection means 53. A detection signal from the means 53 is transmitted to the electric motor status detection means 41.

[0047] Based on such detection values, in step S16, the torque computation means 42 in the ECU 33 computes a reaction force for the reaction motor 29. In step S17, a signal indicating the reaction force computed is transmitted from the reaction motor control means 43 in the ECU 33 to the reaction motor 29. Then, reaction control by the reaction motor 29 is performed, and the process then returns to step S10.

[0048] As a result, during the operation of the watercraft by the operator, since a certain reaction force is applied to the steering wheel 17 depending on a running status of the watercraft, and the like, the electric motor 20 is actuated with excellent responsiveness invariably, and thus the operator can obtain an excellent feel of operation when deflecting the rudder.

[0049] More specifically,

(1) Control depending on steering operation status

[0050] When a rudder deflection force required for rudder deflection is large and thereby a load to the rudder is large, or when the rudder is deflected in a direction which receives a reaction force to the propeller in response to a direction in which the steering wheel 17 has been operated, or a direction in which the rudder is expected to deflect, a reaction force from the reaction motor 29 is increased to limit an increase in the rudder deflection force.

[0051] In a watercraft in which the usual steering wheel 17 and the outboard motor 12 are coupled with each other by a mechanical cable, the steering wheel 17 becomes heavier as a rudder deflection speed increases. In this embodiment, therefore, a reaction force from the reaction motor 29 is increased correspondingly.

[0052] Also, in the watercraft in which the usual steering wheel 17 and the outboard motor 12 are coupled with each other by a cable, the steering wheel 17 becomes heavier when the rudder is deflected in the direction opposite to a direction which receives a reaction force to the propeller, as shown in FIG. 3, than when the rudder is deflected in a direction which receives a reaction force to the propeller. In this embodiment, therefore, a reaction force from the reaction motor 29 is increased correspondingly.

(2) Control depending on running status

a. Operation of position of waterline, weight and trim angle

[0053] When the position of a waterline is high, the weight of the watercraft is heavy, or a trim angle is small so that the watercraft 12 is positioned generally vertically in a certain fore-and-aft range, a rudder deflection force corresponding to a rudder angle will increase.

[0054] Accordingly, a reaction force from the reaction motor 29 is increased in a manner making an operation feel of the steering wheel 17 heavier to thereby prevent exceeding the limit of rudder deflection ability.

b. Operation of speed, propulsive force, acceleration, deceleration and output

[0055] When selectively accelerating or decelerating, the watercraft generates a propulsive force larger than that during cruising at a certain speed, which causes a reaction force to the propeller to increase.

[0056] Accordingly, a reaction force from the reaction motor 29 is increased in a manner making an operation feel of the steering wheel 17 heavier to thereby prevent exceeding the limit of rudder deflection ability.

(3) Control depending on status of outboard motor 12

[0057] A rudder deflection load increases as the installation number of the outboard motor 12 increases. A rudder deflection load increases as the propeller increases in size. A rudder deflection load increases in one direction depending on a rotational direction of the propeller. A rudder deflection load increases depending on the tab trim size. A rudder deflection load increases when a tab trim angle is deviating from a reference position corresponding to a watercraft speed, a trim angle, and a waterline.

[0058] Accordingly, a reaction force from the reaction motor 29 is increased in a manner making an operation feel of the steering wheel 17 heavier to thereby prevent exceeding the limit of rudder deflection ability.

[0059] As to the installation position of the outboard motor 12, in a watercraft with a plurality of the outboard motors 12, when it is driven with only part of the outboard motors 12 actually in operation, or when the individual outboard motors are in different trim status (when the lower part of the individual outboard motor 12 has a different underwater depth), rudder deflection load characteristics will not be the same between rudder deflection to the left and rudder deflection to the right. Accordingly, a propulsive force is adjusted, depending on whether the outboard motor 12 generating the propulsive force is on the left or the right in the width direction of the watercraft, or the outboard motor 12 having a smaller trim angle and thereby a deeper underwater depth is on the left or the right in the width direction of the watercraft (the propulsive

force is decreased when the rudder is returned from a deflected position to the side on which the outboard motor 12 of a deeper underwater depth is installed).

(4) Control depending on motor status

[0060] As the motor temperature rises, the motor characteristics described above tends to be exhibited as shown by broken line in FIG. 10, and thus less torque will be outputted from the motor. Accordingly, a reaction force from the reaction motor 29 is increased to thereby prevent exceeding the limit of the ability of the electric motor 20.

[0061] Also, the number of the electric motor 20 in operation is detected, and for the fewer motor in operation, a reaction force from the motor 29 is increased. More specifically, as the number of the motor operable is fewer, a reaction force from the motor 29 is increased to thereby prevent exceeding the limit of the ability of the electric motor 20, e.g., in the case of a plurality of the electric motors 20 in use, if any of them is not operable due to a failure or the like; or in the case where a watercraft is equipped with a plurality of the outboard motors 12 operatively coupled to each other for the same rudder deflecting movement, each outboard motor 12 having the electric motor 20, when part of the outboard motors 12 is inactivated and the associated electric motor 20 is also inactivated, so that the rudder deflection is performed using the rest of the electric motors 20.

[0062] As such, in the above watercrafts, the outboard motor 12 is deflected by the electric motor 20. Thus, it is advantageous that an operation feel of the steering wheel 17 can be lighter; however, in the case where larger torque is required for rudder deflection for example, when the operator operates the steering wheel 17 faster, output from the electric motor 20 may become less responsive, resulting in a poorer operation feel of the rudder deflecting operation. In this embodiment, however, in accordance with the motor characteristics of the electric motor 20, output from the reaction motor 29 is controlled to make an operation feel of the steering wheel 17 heavier to thereby prevent exceeding the limit of the motor characteristics of the electric motor.

[0063] Accordingly, the operation speed of the steering wheel becomes slower, and the outboard motor 12 is deflected within the limit of the output of the electric motor 20. Thus, a poorer operation feel during the rudder deflecting operation can be avoided.

[0064] More specifically, as shown in FIG. 6(b), as a running status or an electric motor status, e.g., a watercraft speed, a trim angle, the weight, an acceleration, a deceleration, or a propulsive force, increases, the relationship between rudder deflection angles and rudder deflection forces will change from the characteristics shown by solid line in FIG. 6(b) to the characteristics as shown in broken line in the figure. Accordingly, when a rudder deflection angle or a rudder deflection speed is the same as that in position a1 of the characteristics shown in solid

line, a rudder deflection force increases as that in position a2 of the characteristics shown in broken line. When a rudder deflection force is the same as that in position a1 of the characteristics shown in solid line, a rudder deflection angle or a rudder deflection speed decreases as that in position a3 of the characteristics shown in broken line. It should be understood that a rudder deflection angle depends on a reaction force to the rotation of the propeller, an inclination of the watercraft, a direction and a force of wind, a direction and a flow speed of a tidal current, and a direction in which the rudder is deflected.

[0065] As a rudder deflection force or the like increases in this way, when a reaction force from the reaction motor 29 is small, the motor characteristics may fall outside of ability characteristic line C of the electric motor 20 as position b1 shown in characteristic line B1 in FIG. 6(a), which illustrates the relationship between rudder deflection forces and rudder deflection speeds. In such case, when a reaction force from the reaction motor 29 is increased according to the present teaching, thereby changing the motor characteristics as shown by characteristic line B2, a rudder deflection force decreases as shown in position b2 while the same rudder deflection speed as in position b1 is kept. As a result, the motor characteristics falls within the range of ability characteristic line C. Accordingly, the outboard motor 12 can be deflected within the range of output of the electric motor 20, and thus no delayed response occurs in rudder deflecting movement.

[0066] That is, as shown in FIG. 7(a), as a reaction force is increased from d1 to d2, an operation speed of the steering wheel 17 will decrease from d1 to d2. Accordingly, as shown in FIG. 7(b), the operation speed will decrease from e1 to e2.

[0067] As a result, as shown in FIG. 7(c), although in the conventional, reaction uncontrolled state, an operation of the steering wheel 17 always causes a sudden change in operation angle (rudder angle) relative to time 't' as shown in broken lines in the figure, an increase in reaction force in the manner as described above provides a gradual change in the operation angle (rudder angle) relative to time 't' as shown in solid lines in the figure. This ensures prevention of such sudden change.

[0068] Further, as described above, in addition to increasing a reaction force to the steering wheel and assuring responsiveness, an upper limit is set for changes in reaction force as shown in FIG. 8(a), thereby providing moderate motor characteristics during a sudden increase in load as shown by broken line in FIG. 8(b). As a result, as shown in FIG. 8(c), even when there is a sudden change in load force (e.g., acceleration or deceleration, or landing on water after a jump), a sudden change in reaction force can be prevented as shown by broken line in FIG. 8(d).

[0069] It is a matter of course that while in the foregoing embodiment, the outboard motor 12 is used as the "watercraft propulsion unit," the present teaching is not limited to this, but it may be replaced by an inboard-outdrive

engine. Further, the foregoing embodiment includes the operation status detection means 38, the running status detection means 39, the outboard motor status recognition means 40 and the electric motor status detection means 41. However, it is only required that at least one of those means is provided.

[0070] The description above discloses, in order to achieve the foregoing problem, a preferred first aspect which provides a steering device for a watercraft, including: a watercraft propulsion unit at a stern of the watercraft; a steering device including an electric actuator for actuating the steering device, the steering device changing a direction in which the watercraft travels; a steering wheel, operable by an operator, electrically connected to the electric actuator to provide an actuation signal corresponding to the amount of a steering wheel operation to the electric actuator; a reaction actuator for applying a reaction force to the steering wheel; and control means for controlling the reaction actuator, the control means including: at least one of operation status detection means for detecting an operation status corresponding to the steering wheel operation, running status detection means for detecting a running status of the watercraft, watercraft propulsion unit status recognition means for recognizing a status of the watercraft propulsion unit, such as the installation number thereof, and electric actuator status detection means for detecting a status of the electric actuator; torque computation means for computing a torque target value based on the detection value from the at least one of the means; and reaction actuator control means for controlling the reaction actuator in accordance with the torque target value.

[0071] Further, a preferred second aspect provides the steering device for a watercraft in accordance with the first aspect, in which the operation status detection means includes at least one of rudder deflection force detection means for detecting a rudder deflection force required for the rudder deflection, load detection means for detecting a load to the rudder, steering operation detection means for detecting a steering wheel operation angle, a steering wheel operation speed and a direction in which the steering wheel is operated, rudder deflection detection means for detecting a rudder deflection angle, a rudder deflection speed and a direction in which the rudder is deflected, corresponding to the steering wheel operation, and deviation detection means for detecting a deviation of a detected actual rudder deflection angle from a target rudder deflection angle corresponding to the steering wheel operation.

[0072] Further, a preferred third aspect provides the steering device for a watercraft in accordance with the first or second aspect, in which the running status detection means includes at least one of weight detection means for detecting at least one of a position of a waterline and a weight of the watercraft, trim angle detection means for detecting a trim angle of the watercraft, and speed detection means for detecting at least one of a speed, an acceleration and a propulsive force of the wa-

tercraft, and an output of the watercraft propulsion unit.

[0073] Further, a preferred fourth aspect provides the steering device for a watercraft in accordance with any one of the first to third aspects, in which the watercraft propulsion unit status recognition means includes operation storage means for storing therein any one of pieces of information on the installation number of the watercraft propulsion unit, an installation position of the watercraft propulsion unit relative to the watercraft, a rotational direction of a propeller of the watercraft propulsion unit, a propeller shape, a trim tab angle and a trim tab shape.

[0074] Further, a preferred fifth aspect provides the steering device for a watercraft in accordance with any one of the first to fourth aspects, in which the electric actuator status detection means is connected to temperature detection means for detecting a temperature of the electric actuator.

[0075] Further, a preferred sixth aspect provides the steering device for a watercraft in accordance with any one of the first to fifth aspects, in which the electric actuator status detection means includes operating number detection means for detecting the number of the electric actuator in operation.

[0076] Further, a preferred seventh aspect provides a watercraft provided with the steering device for a watercraft in accordance with any one of the first to sixth aspects.

[0077] In accordance with the above aspects of the present teaching, the control means includes at least one of operation status detection means for detecting an operation status corresponding to the steering wheel operation, running status detection means for detecting a running status of the watercraft, watercraft propulsion unit status recognition means for recognizing a status of the watercraft propulsion unit, such as the installation number thereof, and electric actuator status detection means for detecting a status of the electric actuator. The control means also includes torque computation means for computing a torque target value based on the detection value from the at least one of the means, and reaction actuator control means for controlling the reaction actuator in accordance with the torque target value computed by the torque computation means. Accordingly, the present teaching can provide a watercraft steering device and a watercraft which provide excellent responsiveness invariably and provide an operator with an excellent operation feel during rudder deflection, depending on a running status of the watercraft.

[0078] Thus, according to a preferred first aspect, there is provided a steering device for a watercraft, comprising: a watercraft propulsion unit at a stern of the watercraft; a steering device including an electric actuator for actuating the steering device, the steering device changing a direction in which the watercraft travels; a steering wheel, operable by an operator, electrically connected to the electric actuator to provide an actuation signal corresponding to the amount of a steering wheel operation to the electric actuator; a reaction actuator for applying

a reaction force to the steering wheel; and control means for controlling the reaction actuator, the control means including: at least one of operation status detection means for detecting an operation status corresponding to the steering wheel operation, running status detection means for detecting a running status of the watercraft, watercraft propulsion unit status recognition means for recognizing a status of the watercraft propulsion unit, such as the installation number thereof, and electric actuator status detection means for detecting a status of the electric actuator; torque computation means for computing a torque target value based on the detection value from the at least one of the means; and reaction actuator control means for controlling the reaction actuator in accordance with the torque target value.

[0079] Further, according to a preferred second aspect, the operation status detection means includes at least one of rudder deflection force detection means for detecting a rudder deflection force required for the rudder deflection, load detection means for detecting a load to the rudder, steering operation detection means for detecting a steering wheel operation angle, a steering wheel operation speed and a direction in which the steering wheel is operated, rudder deflection detection means for detecting a rudder deflection angle, a rudder deflection speed and a direction in which the rudder is deflected, corresponding to the steering wheel operation, and deviation detection means for detecting a deviation of a detected actual rudder deflection angle from a target rudder deflection angle corresponding to the steering wheel operation.

[0080] Further, according to a preferred third aspect, the running status detection means includes at least one of weight detection means for detecting at least one of a position of a waterline and a weight of the watercraft, trim angle detection means for detecting a trim angle of the watercraft, and speed detection means for detecting at least one of a speed, an acceleration and a propulsive force of the watercraft, and an output of the watercraft propulsion unit.

[0081] Further, according to a preferred fourth aspect, the watercraft propulsion unit status recognition means includes operation storage means for storing therein any one of pieces of information on the installation number of the watercraft propulsion unit, an installation position of the watercraft propulsion unit relative to the watercraft, a rotational direction of a propeller of the watercraft propulsion unit, a propeller shape, a trim tab angle and a trim tab shape.

[0082] Further, according to a preferred fifth aspect, the electric actuator status detection means is connected to temperature detection means for detecting a temperature of the electric actuator.

[0083] Further, according to a preferred sixth aspect, the electric actuator status detection means includes operating number detection means for detecting the number of the electric actuator in operation.

[0084] Additionally, there is further disclosed a water-

craft provided with the steering device for a watercraft according to any one of the above aspects.

[0085] The description above still further discloses in order to provide a watercraft steering device and a watercraft which provide excellent responsiveness invariably and provide an operator with an excellent operation feel during rudder deflection, depending on a running status of the watercraft, an embodiment comprising a steering wheel 17, operable by an operator, electrically connected to an electric motor to provide an actuation signal corresponding to the amount of a steering wheel operation to the electric motor, a reaction motor 29 for applying a reaction to the steering wheel 17, and an ECU 33 for controlling the electric motor 29 are provided. Therein, the ECU 33 includes at least one of operation status detection means for detecting an operation status corresponding to the steering wheel operation, running status detection means for detecting a running status of the watercraft, outboard motor status recognition means for recognizing a status of the outboard motor 12, such as the installation number thereof, and electric motor status detection means for detecting a status of the electric motor. Further, the ECU 33 also includes torque computation means for making a torque target value larger depending on the detection value from the at least one of the means, and reaction motor control means for controlling the reaction motor 29 in accordance with the torque target value computed by the torque computation means.

Claims

1. Steering system for a watercraft, comprising:

a rudder;
a steering device including an actuator configured to change a direction in which the watercraft travels;
a steering amount input means, operable by an operator, electrically connected to the actuator to provide an actuation signal corresponding to the amount of a steering operation to the actuator;
a reaction actuator for applying a reaction force to the steering amount input device; and
control means for controlling the reaction actuator, the control means including:

at least one of operation status detection means for detecting an operation status corresponding to the steering operation, running status detection means for detecting a running status of the watercraft, watercraft propulsion unit status recognition means for recognizing a status of a watercraft propulsion unit, such as the installation number thereof, and actuator status detection means for detecting a status of the actuator;

torque computation means for computing a torque target value based on the detection value from the at least one of the detection and recognition means; and
reaction actuator control means for controlling the reaction actuator in accordance with the torque target value.

2. Steering system according to claim 1, wherein the watercraft propulsion unit, in particular arranged at a stern of the watercraft, is used as the rudder.

3. Steering system according to claim 1 or 2, wherein the actuator is configured to change a direction in which the watercraft travels is an electric actuator.

4. Steering system for a watercraft according to one of the claims 1 to 3, wherein the operation status detection means includes at least one of rudder deflection force detection means for detecting a rudder deflection force required for the rudder deflection, load detection means for detecting a load to the rudder, steering operation detection means for detecting a steering operation angle, a steering operation speed and a direction in which the steering amount input means is operated, rudder deflection detection means for detecting a rudder deflection angle, a rudder deflection speed and a direction in which the rudder is deflected, corresponding to the steering operation, and deviation detection means for detecting a deviation of a detected actual rudder deflection angle from a target rudder deflection angle corresponding to the steering operation.

5. Steering system for a watercraft according to one of the claims 1 to 4, wherein the running status detection means includes at least one of weight detection means for detecting at least one of a position of a waterline and a weight of the watercraft, trim angle detection means for detecting a trim angle of the watercraft, and speed detection means for detecting at least one of a speed, an acceleration and a propulsive force of the watercraft, and an output of the watercraft propulsion unit.

6. Steering system for a watercraft according to one of the claims 1 to 5, wherein the watercraft propulsion unit status recognition means includes operation storage means for storing therein any one of pieces of information on the installation number of the watercraft propulsion unit, an installation position of the watercraft propulsion unit relative to the watercraft, a rotational direction of a propeller of the watercraft propulsion unit, a propeller shape, a trim tab angle and a trim tab shape.


7. Steering system for a watercraft according to one of the claims 3 to 6, wherein the actuator status detec-

tion means is an electric actuator status detection means, which is connected to temperature detection means for detecting a temperature of the electric actuator.


5

8. Steering system for a watercraft according to one of the claims 1 to 7, wherein the actuator status detection means is an electric actuator status detection means, and includes operating number detection means for detecting the number of the electric actuator in operation. 10
9. Steering system according to one of the claims 1 to 8, wherein the steering amount input means is a steering wheel or a control lever, operable by an operator, electrically connected to the electric actuator to provide an actuation signal corresponding to the amount of a steering operation input to the electric actuator. 15
20
10. Steering system according to one of the claims 1 to 9, further comprising an electronic control unit (ECU) for controlling the electric motor (29), wherein the ECU (33) includes at least one of operation status detection means for detecting an operation status corresponding to the steering wheel operation, running status detection means for detecting a running status of the watercraft, outboard motor status recognition means for recognizing a status of the outboard motor (12), such as the installation number thereof, and electric motor status detection means for detecting a status of the electric motor, and the ECU (33) also includes torque computation means for making a torque target value larger depending on the detection value from the at least one of the means, and reaction motor control means for controlling the reaction motor (29) in accordance with the torque target value computed by the torque computation means. 25
30
35
40
11. Watercraft provided with the steering system for a watercraft according to one of the claims 1 to 10. 45
50
55


[FIG. 1]

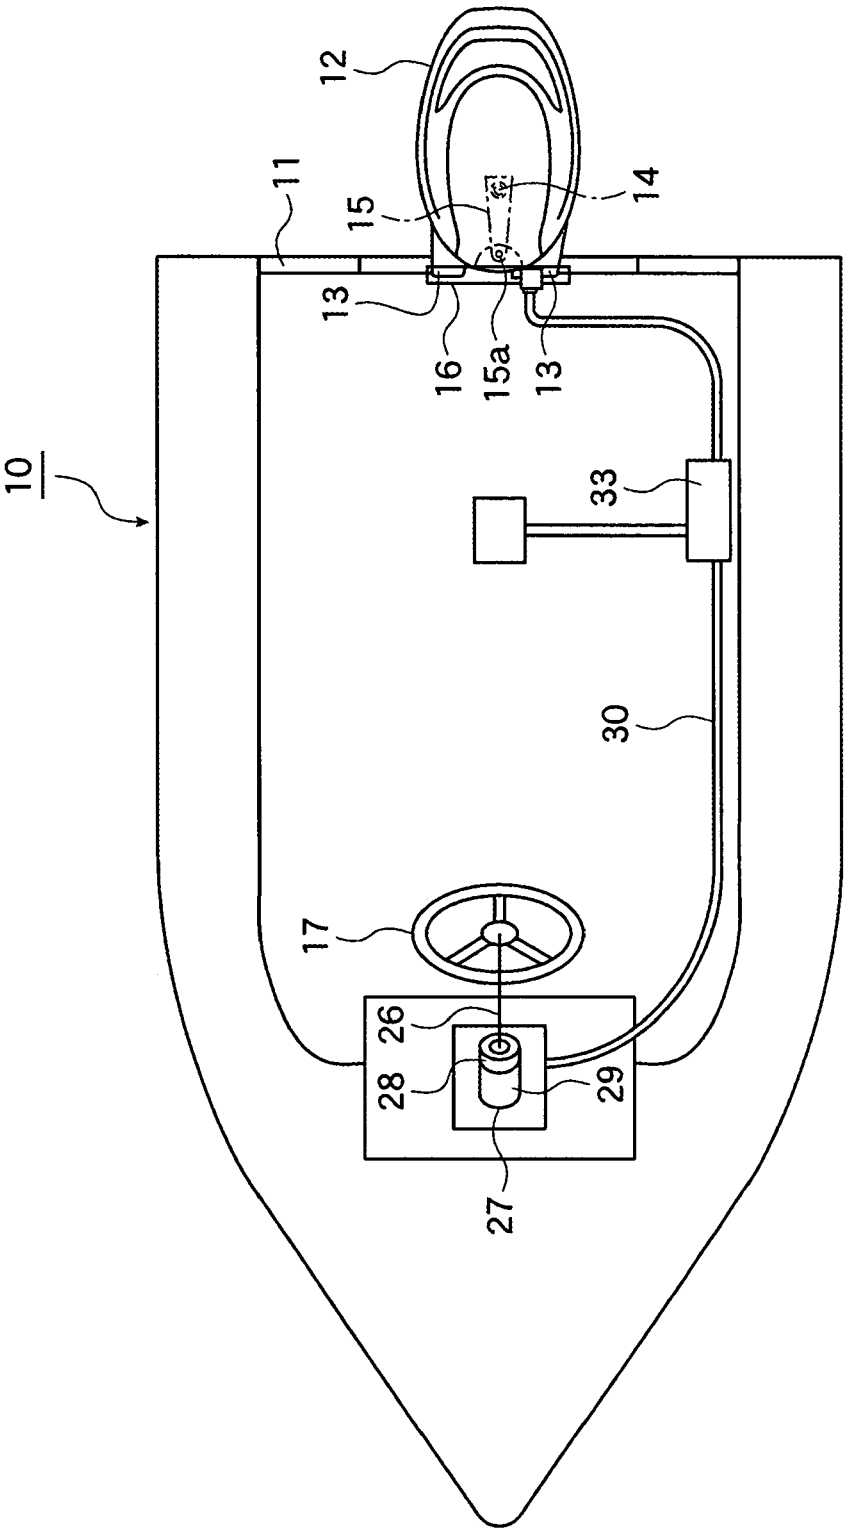


[FIG. 2]

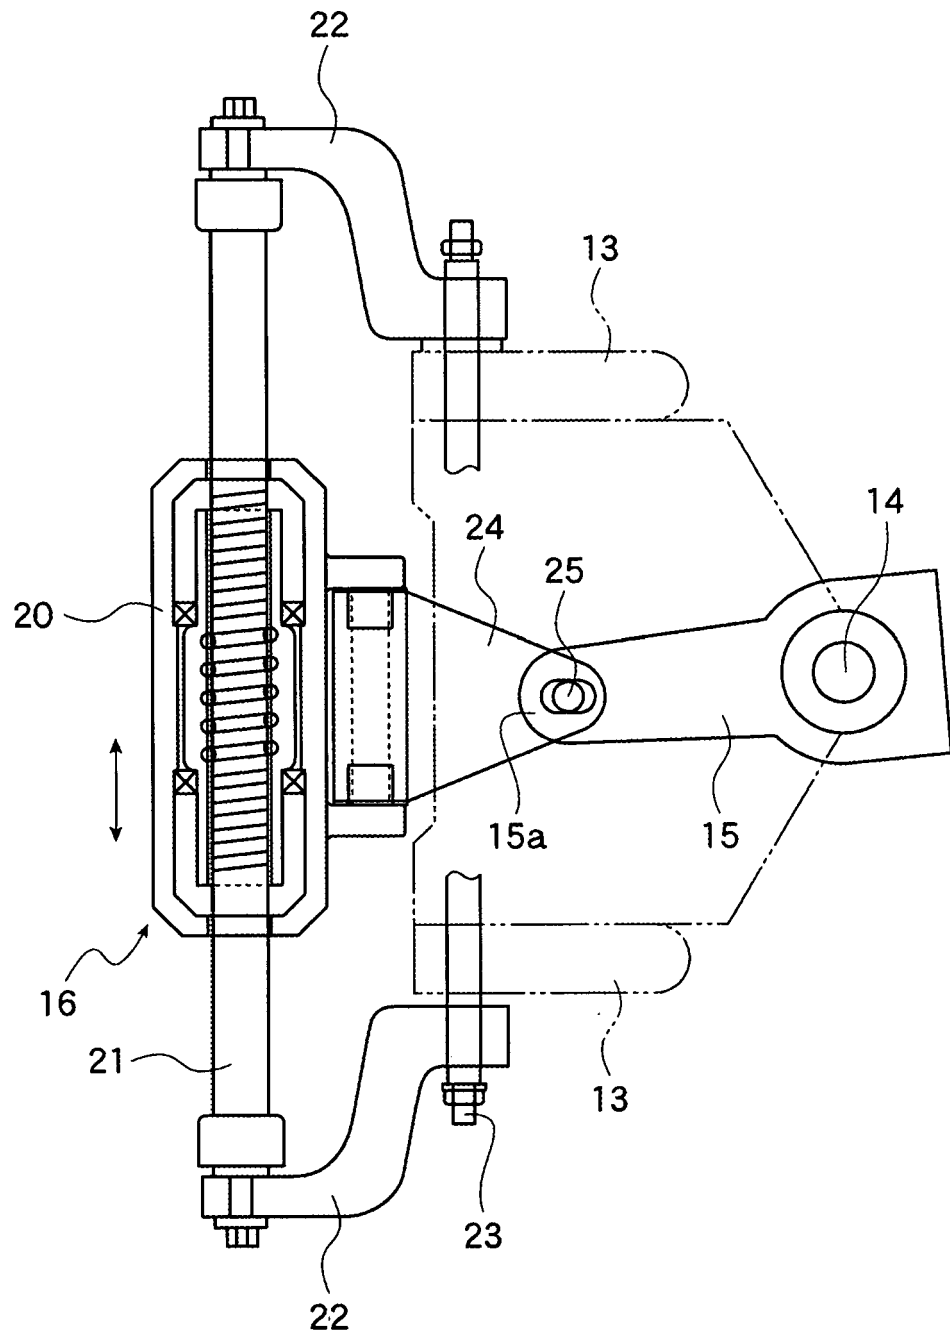


[FIG. 3]

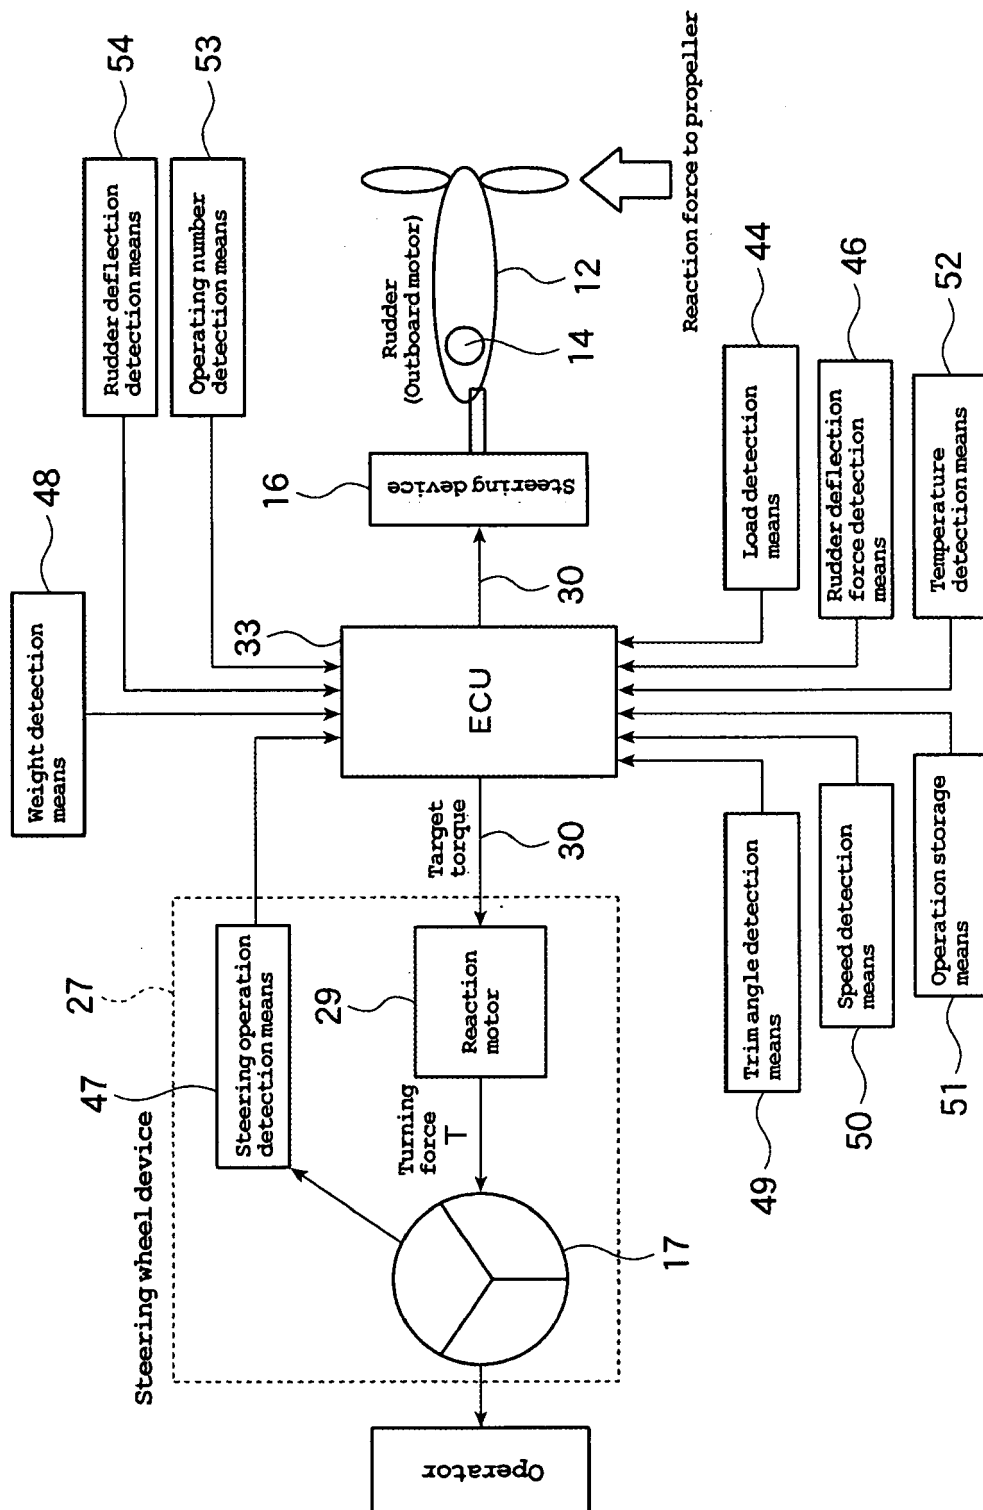



[FIG. 4]

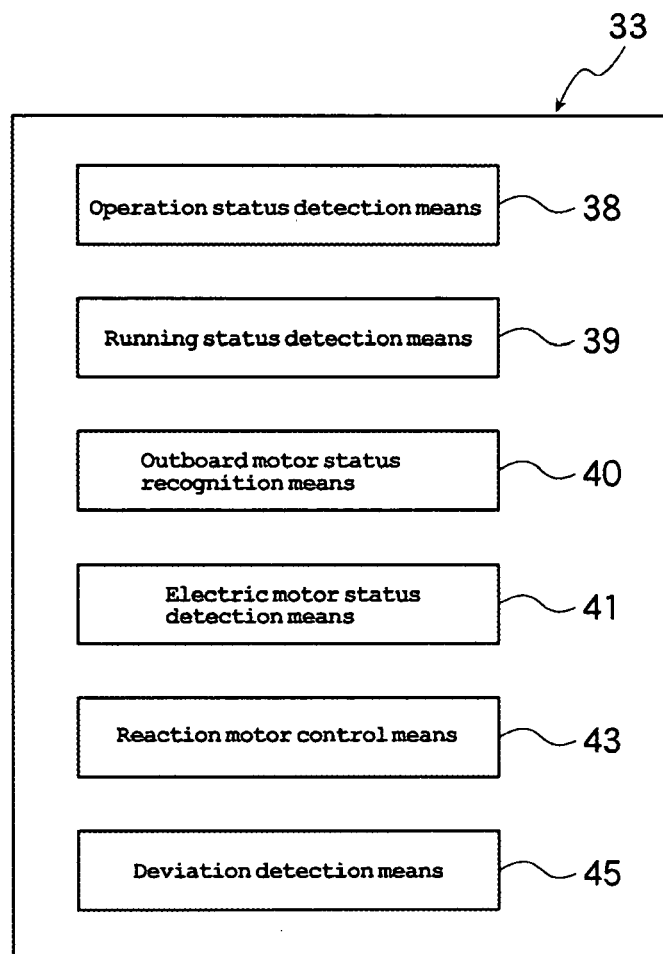

[FIG. 5]

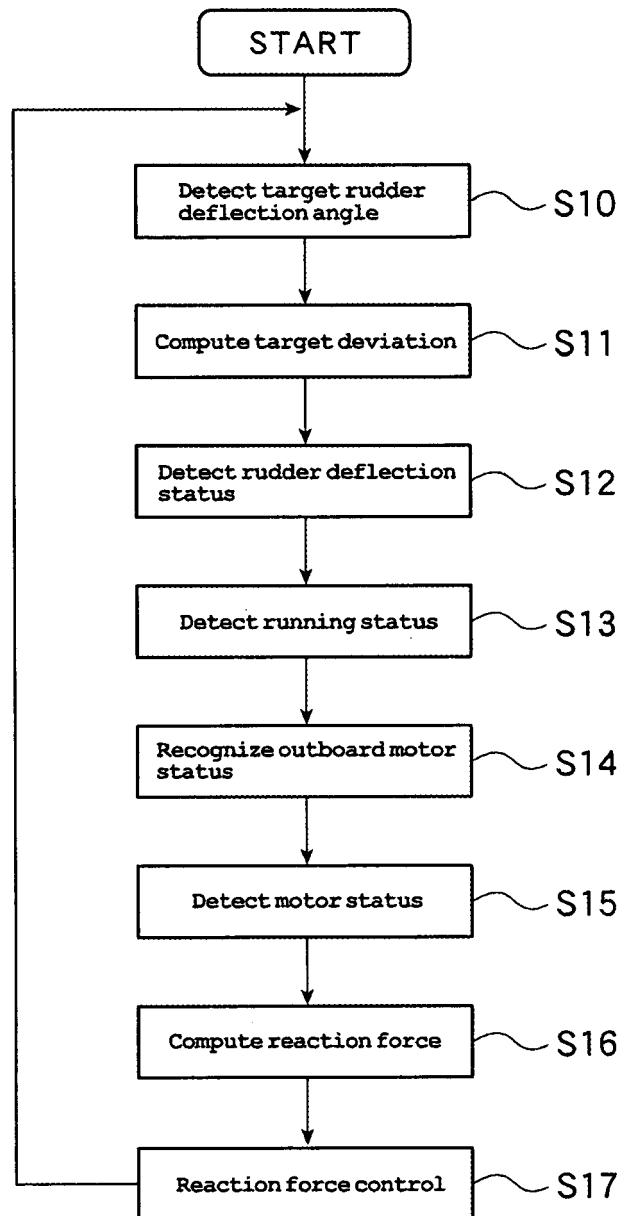


[FIG. 6]

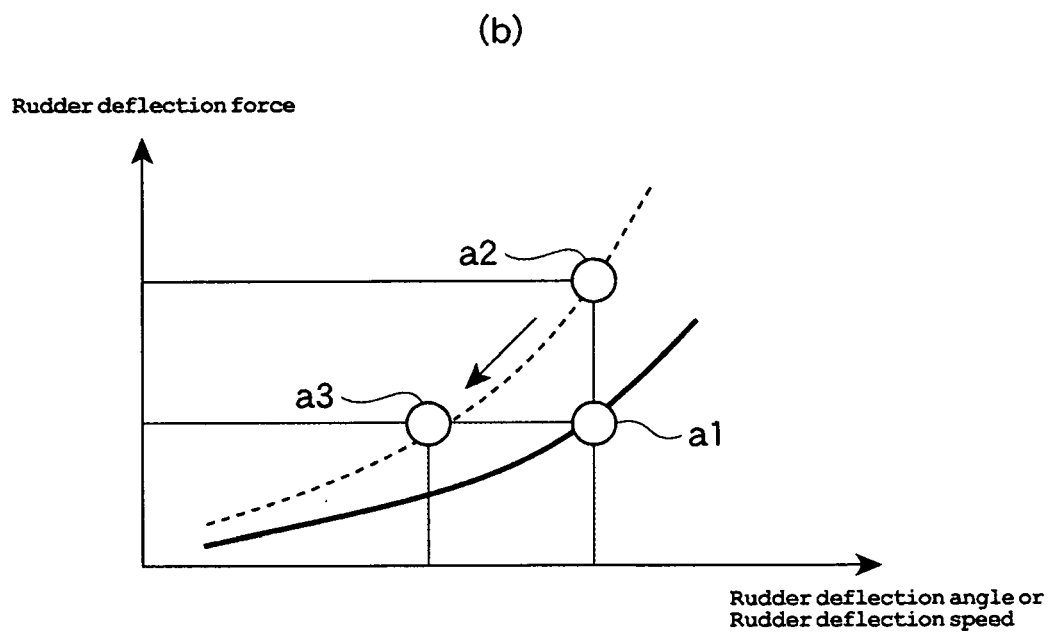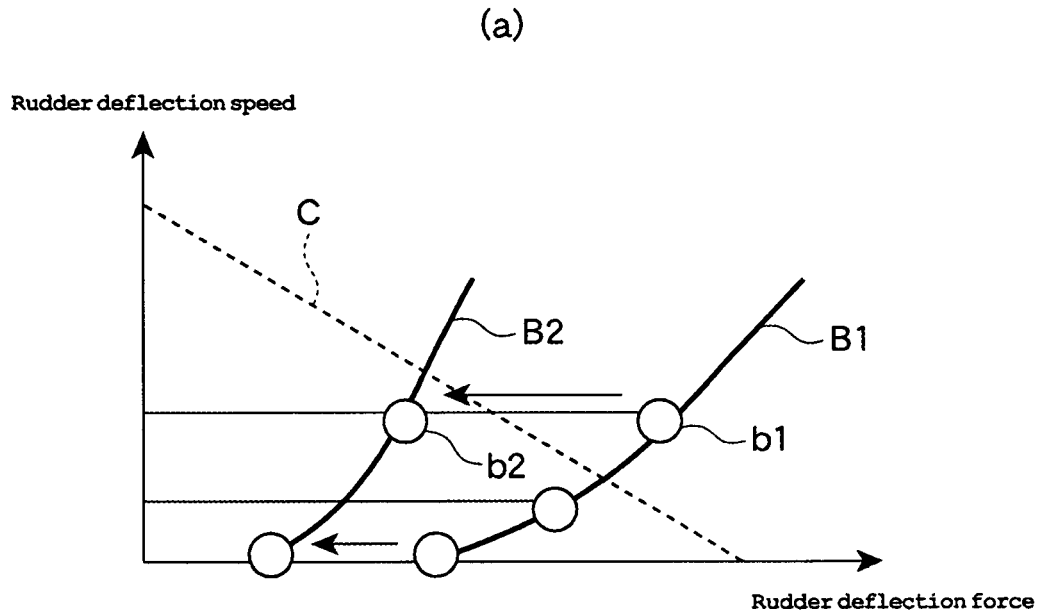


[FIG. 7]


(a)

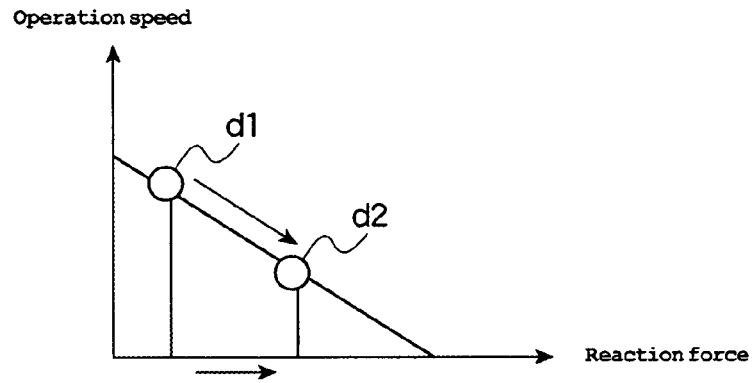


(b)

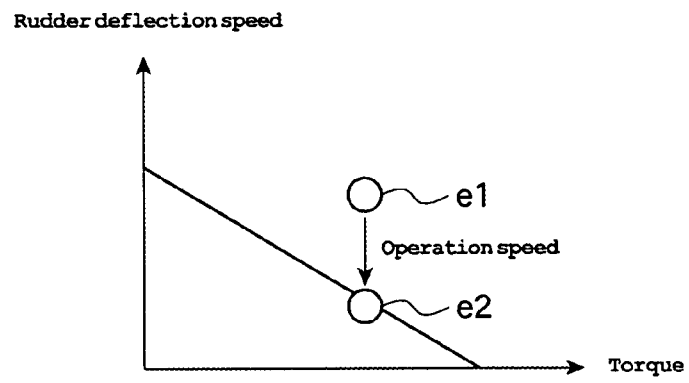


(c)

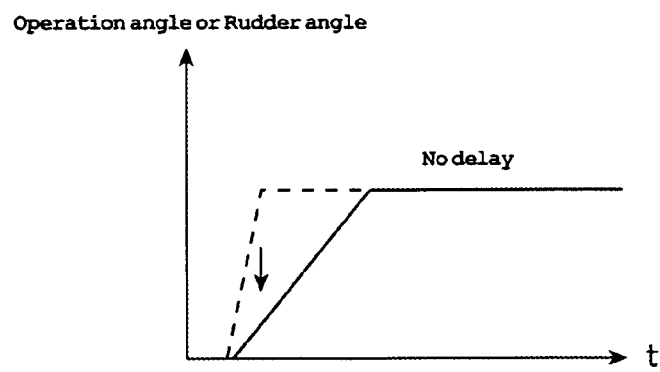


[FIG. 8]

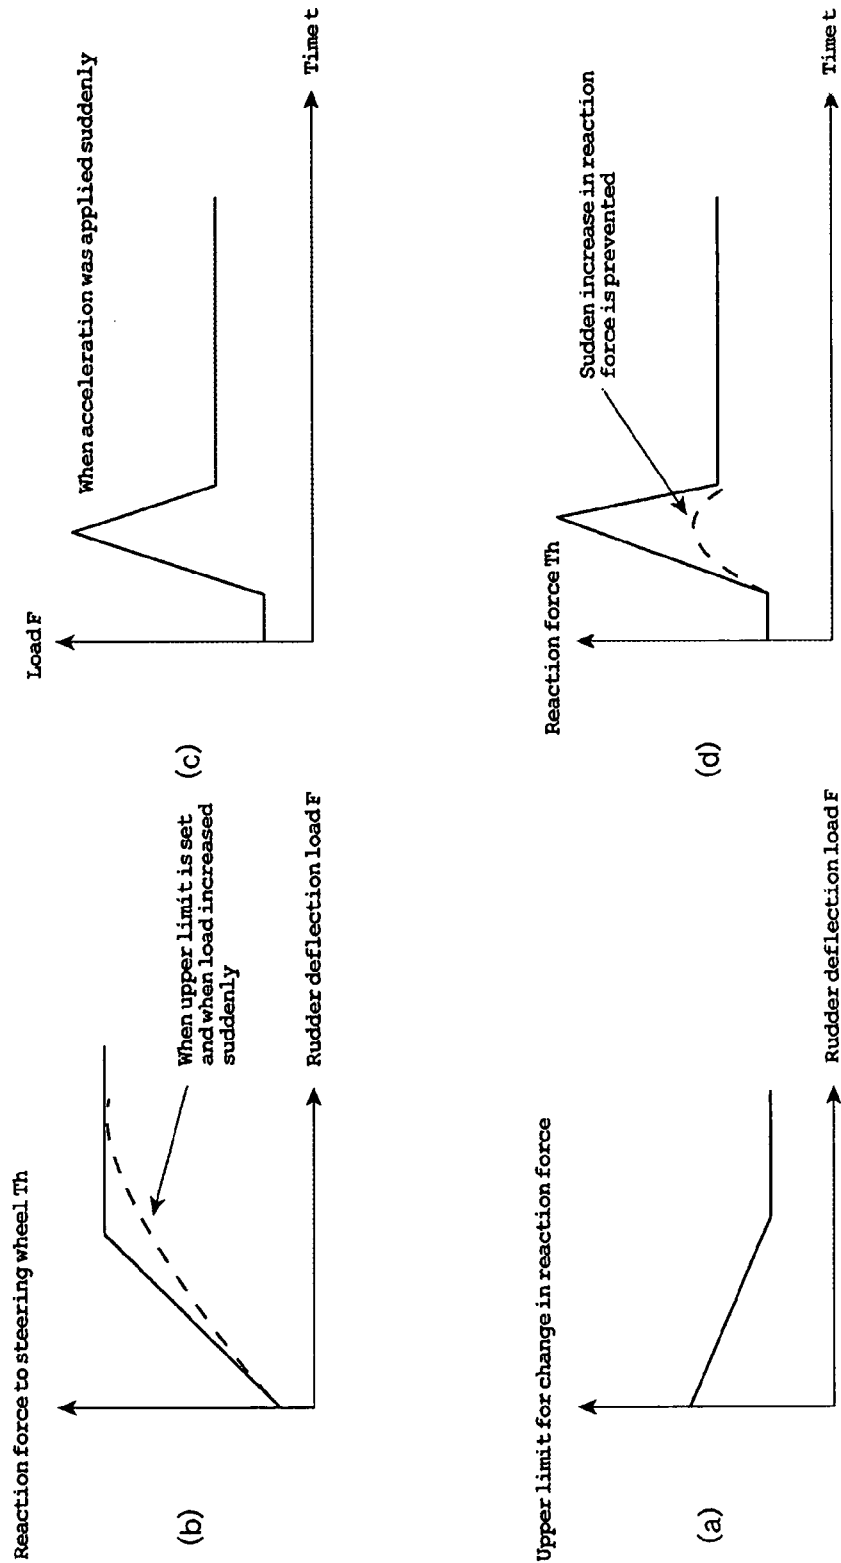

[FIG. 9]

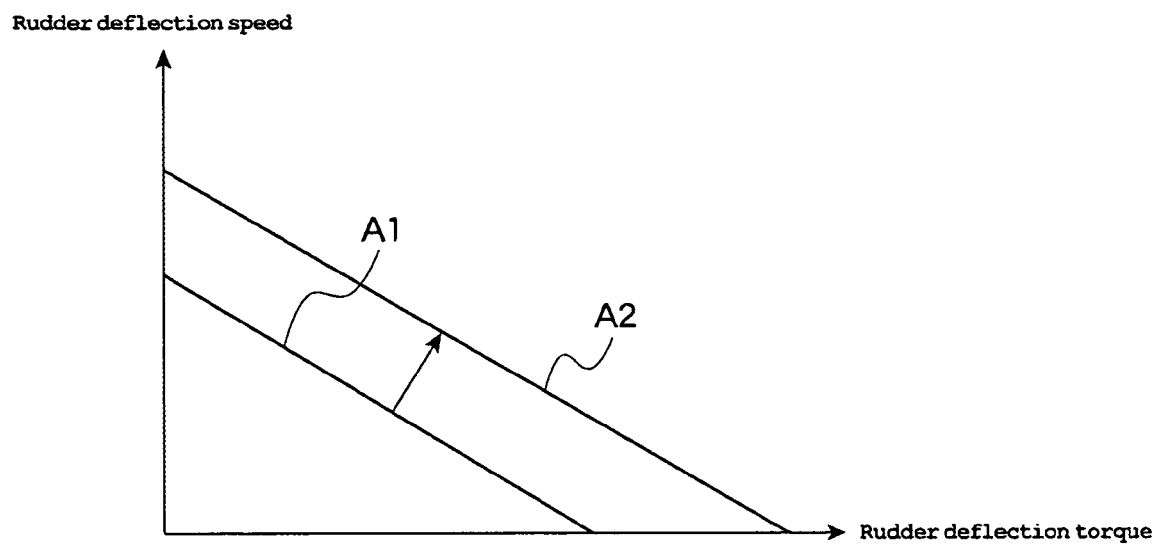

[FIG. 10]

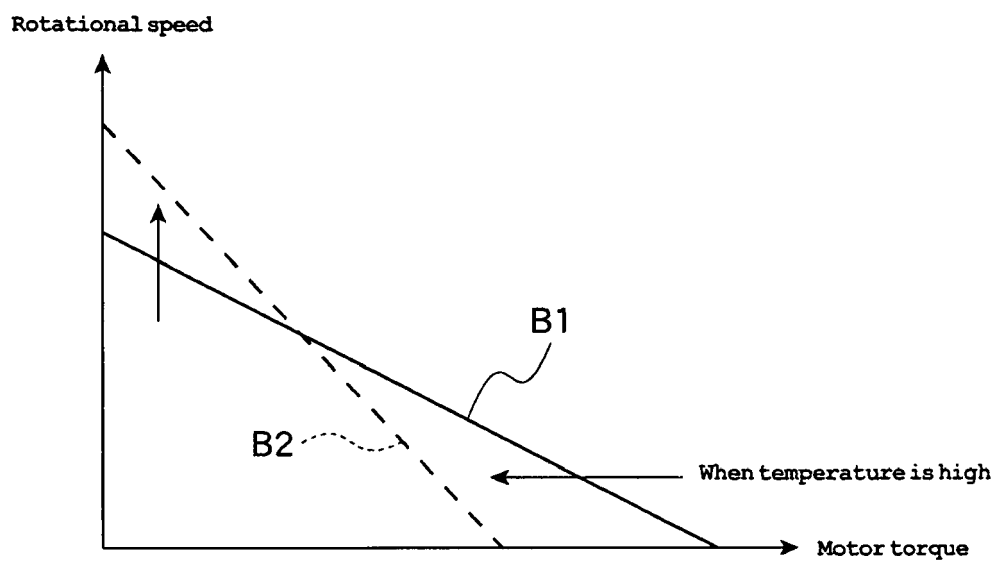

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2005254848 A [0004]