



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
21.05.2008 Bulletin 2008/21

(51) Int Cl.:
B65D 41/34 (2006.01)

(21) Application number: **07120438.2**

(22) Date of filing: **12.11.2007**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE SI SK TR
Designated Extension States:
AL BA HR MK RS

(30) Priority: **14.11.2006 IT MI20062181**

(71) Applicants:
• **Ferrari, Guglielmo**
26851 Borgo san Giovanni,
Lodi (IT)
• **Ferrari, Silvia**
26851 Borgo san Giovanni,
Lodi (IT)


(72) Inventors:
• **Ferrari, Guglielmo**
26851 Borgo san Giovanni,
Lodi (IT)
• **Ferrari, Silvia**
26851 Borgo san Giovanni,
Lodi (IT)

(74) Representative: **De Gregori, Antonella et al**
Ing. Barzano' & Zanardo Milano S.p.A.
Via Borgonuovo 10
20121 Milano (IT)

(54) **Screw cap with safety ring**

(57) Herein described is a closure cap for a container (48), of the type comprising a capsule (10) of a substantially cylindrical shape, threaded internally, provided with a side wall (14) on the lower edge (16) of which a plurality of frangible link elements (18) are provided connecting the lower edge (16) of the capsule (10) to the upper edge (20) of a safety ring (12). On the upper edge (20) of the safety ring (12) there is, made in one piece with the safety ring (12), one or more teeth (22) projecting in axial direction upwards towards the side wall (14) of the capsule (10). The upper portion of each tooth (22) is positioned in shape coupling within a corresponding cavity (24) provided on the side wall (14) of the capsule (10) at its lower edge (16). Each cavity (24) is provided with a bottom wall (26) extending in the axial direction of the cap and against which the related tooth (22) abuts preventing the capsule (10) and the safety ring (12) from being subjected to related movements in the radial direction of the cap such to cause damage to one or more of the link elements (18).

Fig.1

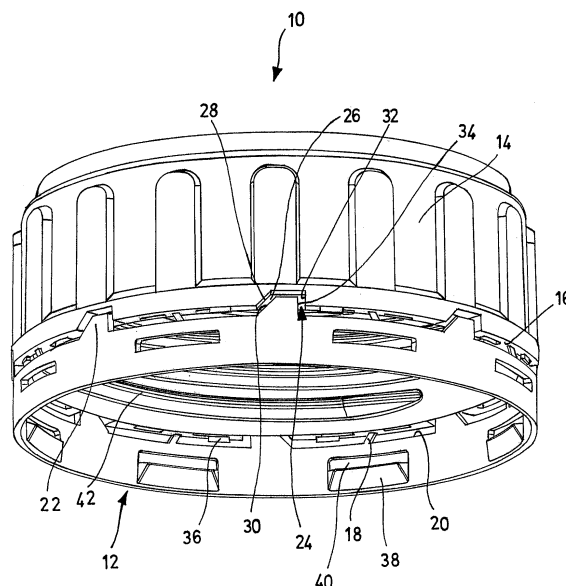

Description

[0001] The present invention refers to a screw cap with a safety ring for containers in general.

[0002] It is known that containers holding drinks or other solid food products are closed using screw closure devices composed of two elements: a threaded capsule, which performs the actual closure and possibly sealing operation of the container, and a safety ring, positioned below such capsule and connected to it by means of frangible links. The safety ring is used to avoid unwanted opening of the container, through unscrewing and removal of the capsule itself, in that such operation would lead to breaking the links and thus detachment between the capsule itself and the safety ring positioned below.

[0003] However, given the relative fragility of the connection links, necessary to allow easy opening of the containers provided with screw closure devices like the ones described above, inadvertent breaking of such links before the container reaches the end user might occur. Such inadvertent breaking may occur, for example, right from the shaping process of the cap, which is performed through moulding, or when fixing the cap onto the related container or else during transport and transfer of the container after being filled with its contents and closed for the first time.

[0004] Therefore, closure devices were made equipped with safety rings provided with solutions such to avoid, or at least limit, the related movements, both in a radial and axial direction, that might occur between the capsule and the ring, thus preserving the integrity of the links up to the time when the content of the container is to be supplied.

[0005] For example, a closure device provided with a particular type of such solutions is known from document EP 0 441 112 B1.

[0006] Therefore, the object of the present invention is to realise a screw cap with a safety ring capable of overcoming the abovementioned drawbacks, thus avoiding inadvertent breakage of the connection links between the two elements composing the cap due to any direct stress in a radial manner that the cap could be subject to.

[0007] Another object of the present invention is to realise a screw cap with a safety ring easy and economical to manufacture with respect to the known art.

[0008] These objects according to the present invention are attained by realising a screw cap with a safety ring for containers in general as described in claim 1.

[0009] Further characteristics of the invention are described in the subsequent claims.

[0010] Characteristics and advantages of a screw cap with a safety ring according to the present invention shall be more evident from the following exemplifying and non-limiting description with reference to the schematic drawings attached wherein:

Figure 1 is a perspective view of a screw cap with a safety ring according to the present invention;

Figure 2 is a side elevational view, in partial section, of the cap in figure 1;

Figure 3 is an enlarged view of the detail indicated with "C" in figure 2;

Figure 4 is a side elevational view of the upper portion of a container on which a screw cap with a safety ring according to the present invention can be applied;

Figure 5 is a side elevational view, in partial section, of the upper portion of the container of figure 4, on which a cap according to the present invention is screwed; and

Figure 6 is an enlarged view in section of the container-cap assembly shown in figure 5.

[0011] With reference to the figures, shown herein is a closure cap for containers manufactured through moulding of plastic material, essentially comprising two elements composed of a capsule 10, of substantially cylindrical shape, and a safety ring 12 positioned below, in particular in the embodiment illustrated said capsule 10 and said ring 12 being of the same diameter.

[0012] More precisely, the capsule 10 is provided with a side wall 14, on the lower edge 16 of which a plurality of frangible link elements 18 are provided connecting said lower edge 16 to the upper edge 20 of the ring 12. On the internal surface of the side wall 14 of the capsule 10 thus a thread 42 is made adapted to engage with the corresponding thread 44 made on the mouth 46 of the container 48 (figure 4) on which the closure cap according to the present invention can be screwed.

[0013] According to the invention, the upper edge 20 of the ring 12 is provided with, made in one piece with the ring 12 itself, one or more teeth 22 projecting in axial direction upwards towards the side wall 14 of the capsule 10. The upper portion of each of said one or more teeth 22 is positioned in shape coupling within a corresponding cavity 24 provided on the side wall 14 of the capsule 10, at its lower edge 16. In turn, each cavity 24 is provided with a bottom wall 26 extending in the axial direction of the cap and against which the related tooth 22 can abut, thus preventing the capsule 10 and the ring 12 from being subjected to related movements in the radial direction of the cap such to cause damage to one or more of the link elements 18.

[0014] According to the embodiment illustrated, the cavities 24 are made on the external surface of the side wall 14 of the capsule 10. In addition, each of such cavities 24 is provided with a slanted side 28 with respect to the axis of the cap, with an inclination angle approximately equivalent to the one of the corresponding slanted side 30 of the tooth 22, while the opposite side 32 of each cavity 24 is substantially parallel to the axis of the cap, just like the corresponding side 34 of the tooth 22 in shape coupling with said cavity 24.

[0015] The straight walls 32 and 34 respectively of each cavity 24 and the related tooth 22 serve as a means of resistance against the torsional moment generated

during the first screwing step of the cap on the container 48, in the assembly step, which otherwise could lead to yielding of the link elements 18. Vice versa the opposite slanted walls 28 and 30 facilitate intentional opening of the cap according to the invention, through unscrewing and simultaneous lifting of the capsule 10 by the user, thus allowing disengagement of the teeth 22 from the respective cavities 24 so as to attain the breakage of the link elements 18.

[0016] Conveniently, given the same shape, the dimensions of the cavities 24 are greater than the dimensions of the corresponding teeth 22 in such a manner that, when manufacturing the cap, that is when making the connection between the capsule 10 and the safety ring 12 through the link elements 18, there is a clearance between the teeth 22 and the cavities 24.

[0017] In addition, on the lower edge 16 of the capsule 10 there can be provided a plurality of spacing elements 36 which extend downwards in the axial direction of the cap, that is towards the safety ring 12. Such spacing elements 36 are distributed uniformly along the circumference of the ring 12 and they are used to limit the related movements in axial direction between the capsule and the ring, thus cooperating with the teeth 22 to preserve the integrity of the link elements 18 during all the steps prior to the first opening of the cap.

[0018] Lastly, on the internal surface of the safety ring 12 there can be provided one or more wedge-shaped elements 38, provided with or without related adjacent openings 40 and preferably distributed uniformly along the circumference of said ring 12, projecting radially inwards towards the neck 46 of the container 48. The wedge-shaped elements 38 are used to allow engagement of the safety ring 12 with some corresponding protrusions 50 provided on the neck 46 of the container 48 on which the cap is applied according to the invention, thus further limiting the rotational and axial movements of the ring 12 with respect to the capsule 10 screwed on the container 48 itself.

[0019] Thus it is clear that the screw cap with a safety ring according to the present invention attains the objects described previously, allowing in particular to avoid inadvertent breakage of the connection links between the safety ring and the closure capsule in a simple and economical manner, given that, as a matter of fact, the teeth and the cavities provided respectively on the ring and on the threaded capsule can be easily made during the moulding step.

[0020] However, the screw cap with a safety ring thus conceived according to the present invention is susceptible to several modifications and variants, all falling within the same inventive concept; in addition, all details can be replaced by other technically equivalent elements. In practice, the material used, alongside shapes and dimensions, may vary depending on the technical requirements.

[0021] Therefore, the protection scope of the invention is defined by the attached claims.

Claims

1. Closure cap for a container (48), of the type comprising a capsule (10) of a substantially cylindrical shape, threaded internally, provided with a side wall (14) on the lower edge (16) of which a plurality of frangible link elements (18) are provided connecting said lower edge (16) of said capsule (10) to the upper edge (20) of a safety ring (12), **characterised in that** said upper edge (20) of said safety ring (12) is provided with, made in one piece with said safety ring (12), one or more teeth (22) projecting in axial direction upwards towards said side wall (14) of said capsule (10), the upper portion of each of said one or more teeth (22) being positioned in shape coupling within a corresponding cavity (24) provided on said side wall (14) of said capsule (10) at said lower edge (16), each of said cavities (24) being provided with a bottom wall (26) extending in the axial direction of the cap and against which the related tooth (22) abuts to prevent said capsule (10) and said safety ring (12) from being subjected to related movements in radial direction of the cap such to cause damage to one or more of said link elements (18).
2. Cap according to claim 1, **characterised in that** said cavities (24) are realised on the external surface of said side wall (14) of said capsule (10).
3. Cap according to claim 1, **characterised in that** each of said one or more teeth (22) is provided with a slanted side (30) with respect to the axis of said cap, while the other side (34) is substantially parallel to the axis of said cap.
4. Cap according to claim 3, **characterised in that** each of said cavities (24) is provided with a slanted side (28) with respect to the axis of said cap, with an inclination angle approximately equivalent to the one of said slanted side (30) of each of said one or more teeth (22), while the other side (32) is substantially parallel to the axis of said cap.
5. Cap according to claim 4, **characterised in that** the dimensions of each of said cavities (24) are greater, given the same shape, than the dimensions of each of said one or more teeth (22), thus leaving clearance between said teeth (22) and the corresponding cavity (24).
6. Cap according to claim 1, **characterised in that** on said lower edge (16) of said capsule (10) there is a plurality of spacing elements (36) which extend downwards towards said safety ring (12) in the axial direction of said cap.
7. Cap according to claim 6, **characterised in that** said spacing elements (36) are distributed uniformly

along the circumference of said safety ring (12).

8. Cap according to claim 1, **characterised in that** on the inner surface of said safety ring (12) there is one or more wedge-shaped elements (38) projecting radially inwards towards the neck (46) of said container (48), said one or more wedge-shaped elements (38) being engageable with one or more corresponding protrusions (50) provided on said neck (46) of said container (48). 5 10
9. Cap according to claim 8, **characterised in that** said one or more wedge-shaped elements (38) are distributed uniformly along the circumference of said safety ring (12) . 15
10. Cap according to claim 8, **characterised in that** each of said one or more wedge-shaped elements (38) is provided with an adjacent opening (40). 20
11. Cap according to claim 1, **characterised in that** said capsule (10) and said safety ring (12) have the same diameter.
12. Cap according to claim 1, **characterised in that** it is manufactured through moulding of plastic material. 25
13. Container (48) **characterised in that** it is provided with a closure cap according to any one of the claims 1 to 12. 30

35

40

45

50

55

Fig.1

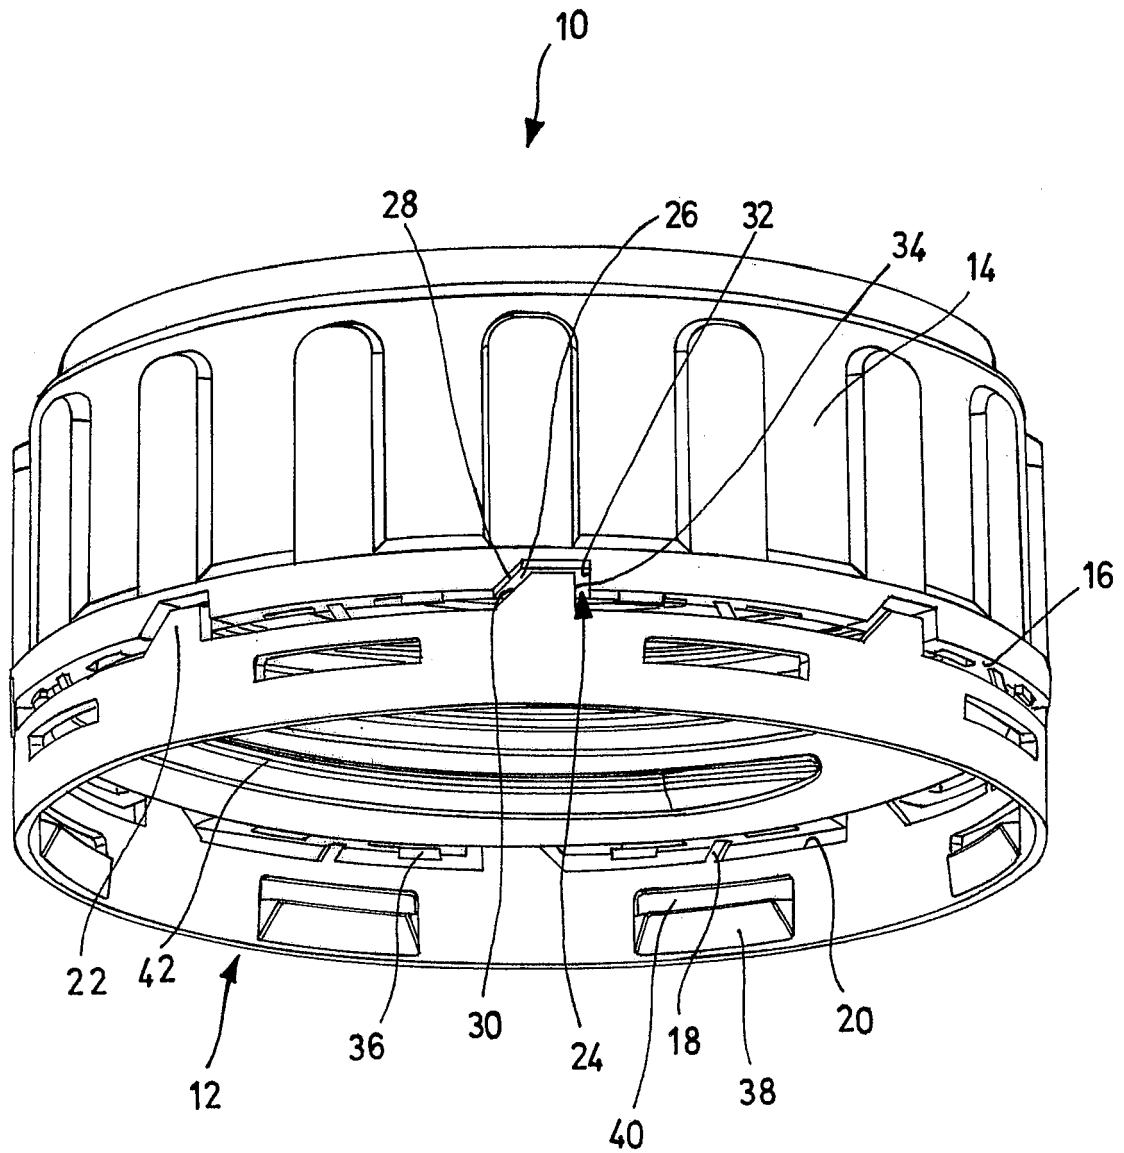


Fig.2


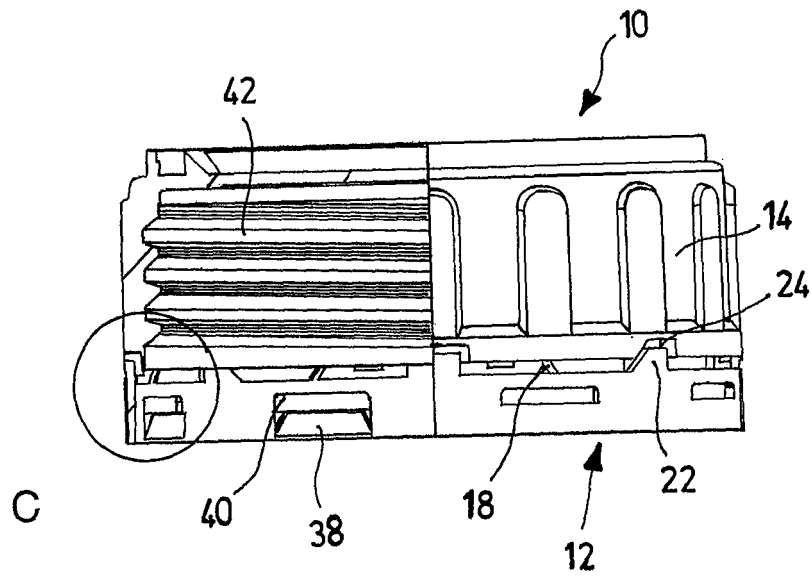


Fig.3

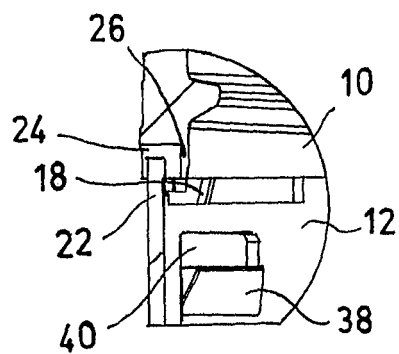

Detail C

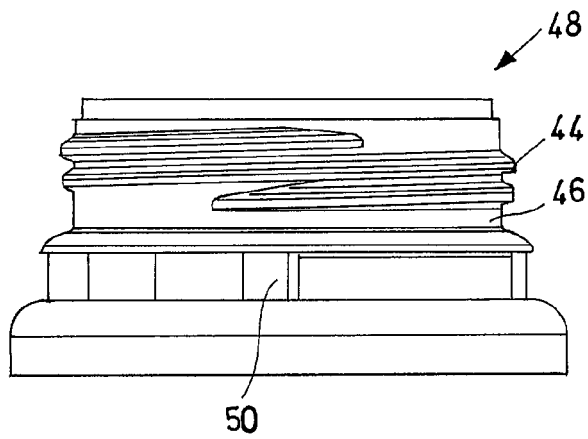


Fig.4

Fig.5


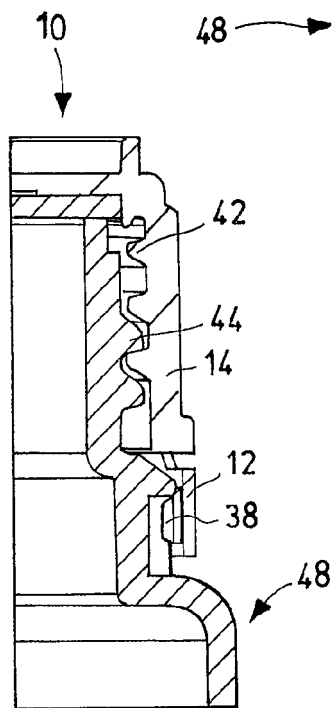


Fig.6

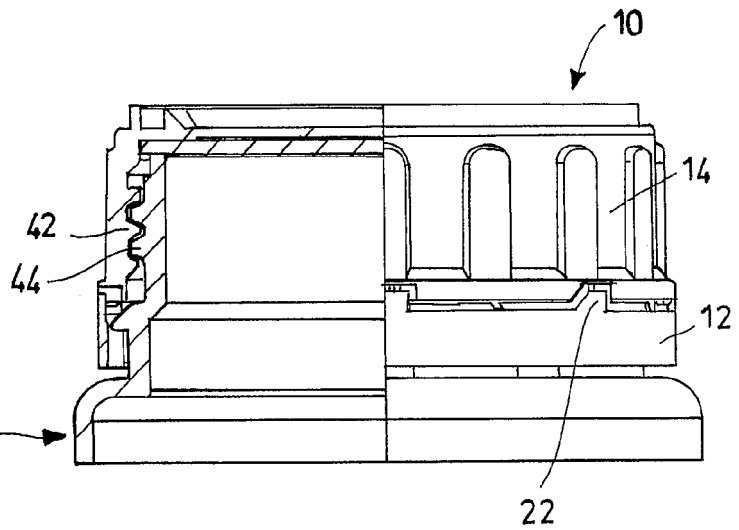

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 07 12 0438

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	DE 203 07 356 U1 (BERGI PLAST GMBH KUNSTSTOFFTEC [DE]) 9 October 2003 (2003-10-09) * page 4, line 9 - page 5, line 20; figures 1,5 *	1,3-5, 11-13	INV. B65D41/34
A	EP 1 389 587 A (YOSHINO KOGYOSHO CO LTD [JP]) 18 February 2004 (2004-02-18) * paragraphs [0062], [0066] - [0072]; figures 9,11-15 *	1,3-5, 11-13	
A	EP 1 445 207 A (FERRARI GUGLIELMO [IT]; FERRARI SILVIA [IT]) 11 August 2004 (2004-08-11) * paragraph [0017] - paragraph [0033]; figure 13- *	1,6,7, 11-13	
D,A	EP 0 441 112 A (LYNES HOLDING SA [LU]) 14 August 1991 (1991-08-14) * column 2, line 40 - column 3, line 8; figures 1,2 *	1,6,7, 11-13	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC) B65D
Place of search Munich		Date of completion of the search 18 February 2008	Examiner Galli, Monia
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 07 12 0438

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-02-2008

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 20307356	U1	09-10-2003	NONE
EP 1389587	A	18-02-2004	CA 2428077 A1 31-10-2002 CN 1461278 A 10-12-2003 WO 02085731 A1 31-10-2002 TW 274017 B 21-02-2007 US 2004011757 A1 22-01-2004
EP 1445207	A	11-08-2004	AT 306435 T 15-10-2005 DE 602004000119 D1 17-11-2005
EP 0441112	A	14-08-1991	AT 100048 T 15-01-1994 CA 2035079 A1 06-08-1991 DE 69006006 D1 24-02-1994 DE 69006006 T2 08-09-1994 DK 441112 T3 02-05-1994 ES 2049461 T3 16-04-1994

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 0441112 B1 [0005]