

(19)



(11)

EP 1 932 993 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

18.06.2008 Bulletin 2008/25

(51) Int Cl.:

E05F 15/12 ^(2006.01)**E05F 15/14** ^(2006.01)**E05F 15/16** ^(2006.01)(21) Application number: **06025173.3**(22) Date of filing: **06.12.2006**

(84) Designated Contracting States:


**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**

Designated Extension States:

AL BA HR MK RS(72) Inventor: **Tsai, Chang-Hung****Zhongzheng District****Taipei City 100 (TW)**(74) Representative: **Nix, Frank Arnold****Kröckelbergstrasse 15****65193 Wiesbaden (DE)**(71) Applicant: **Double H Technology Co.****Zhongzheng Taipei City 100 (TW)**(54) **Toothed steel cable transmission mechanism**

(57) The invention is related to a toothed steel cable transmission mechanism wherein an electric motor, especially through a reduction gear unit, drives a worm gear assembly which in turn drives a toothed steel cable in linear movement through an elbow tube on a curved path.

It provides multiple benefits when it is applied to things such as hopper windows, awning windows, casement windows, tilt-turn windows, sliding windows, window blinds, air vent system and skylights, or angle or height adjustment for hospital beds or sleep beds.

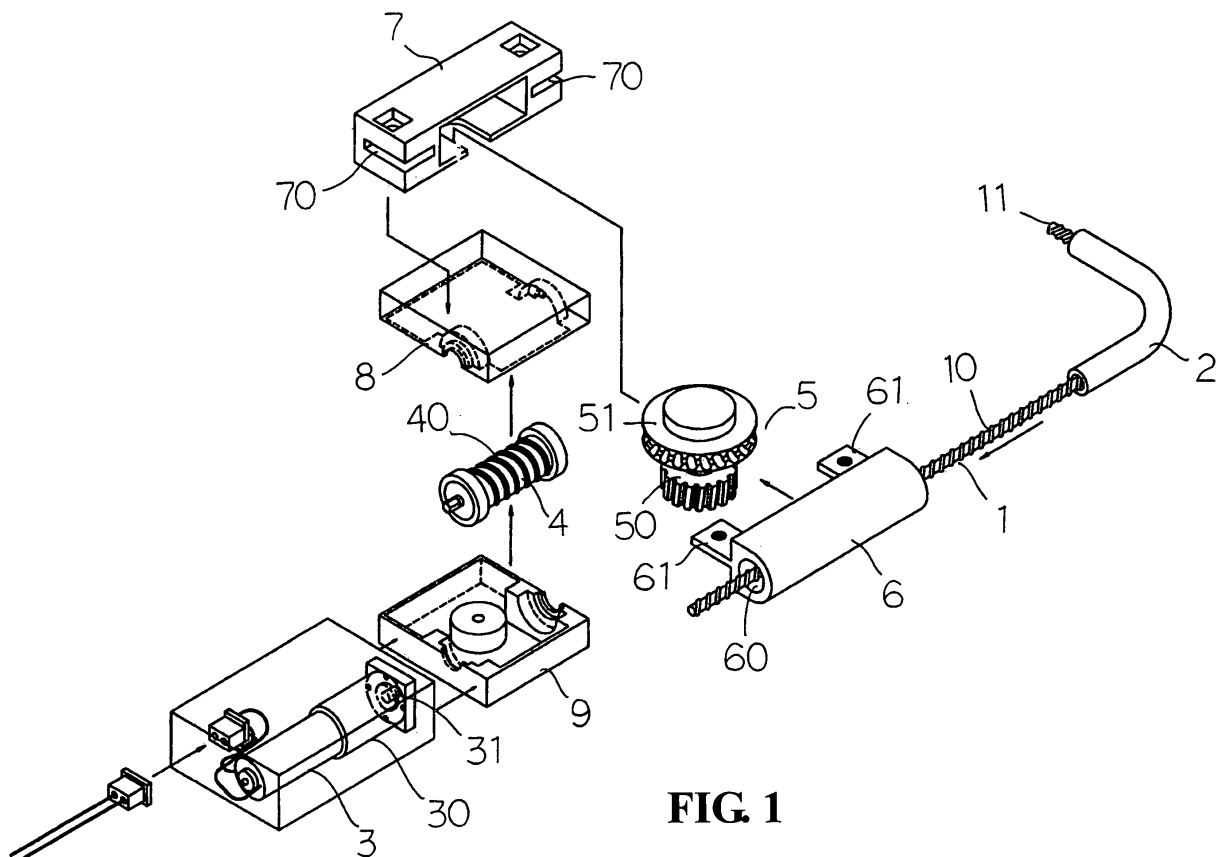**FIG. 1****EP 1 932 993 A1**

Description

Background of the Invention

1. Field of the Invention

[0001] The invention is related to a toothed steel cable transmission mechanism, especially with an electric motor which, through a reduction gear unit, drives a worm pertaining to a worm gear assembly engaging the toothed steel cable for linear movement in a curved section.

2. Description of the Prior Art

[0002] Traditional transmission mechanisms have the drawback that additional articulated lever or steering mechanism is required to change transmission direction due to the rigid characteristic of the mechanism components. Thus, the whole mechanism has increased dimensions and poor transmission efficiency. Its application is also limited.

Summary of the Invention

[0003] The main objective of the invention is to improve the traditional transmission mechanism that has the drawback in failure to transmit forces in a curved path without additional steering mechanism.

[0004] After improvement, the transmission of forces through a curved mechanism can be achieved. This is the most important feature of the invention.

[0005] To achieve the above objective and function, the technical approach and scheme includes:

A toothed steel cable transmission mechanism, which consists of
 a toothed flexible steel cable, which is a long and thin steel line with surface teeth and bendability; a steel cable elbow tube, which is a hollow tube to provide proper protection and guidance for the passing steel cable on its curved path; an electric motor, e. g. a DC motor driving a reduction gear unit to reduce output RPM; a worm provided on the output end of the reduction gear unit and engaging the worm wheel of a worm gear assembly consisting of the worm wheel as the driving gear and a coaxial gear as the driven gear engaging the teeth of the toothed steel cable and driving the same;
 a steel cable guide in form of a hollow sleeve with a pair of ears for securing the engagement between the passing toothed steel cable and the driven gear of the gear assembly.
 When the above mechanism is working, the motor with linear transmission characteristic transmits forces through the reduction gear unit to the worm and the worm gear assembly to drive the toothed steel cable to make linear movement in bendable structure.

The above toothed steel cable transmission mechanism can have a top cover to accommodate the driven gear of the gear assembly and a middle cover and a bottom cover to accommodate the worm and the driving gear of the worm gear assembly. The top cover also has a connector to fit the ears of the steel cable guide.

For the above transmission mechanism, the control of transmission direction for the toothed steel cable is through the motor steering and the worm and worm gear assembly.

For the above transmission mechanism, the end of the toothed steel cable is the power output end, which depending on applications can connect to peripherals that need switches or movement such as hopper windows, awning windows, casement windows, tilt-turn windows, sliding windows, window blinds, air vent system and skylights, or angle or height adjustment for hospital beds or sleep beds.

When the above toothed steel cable transmission mechanism is applied to window opening and closing, it is associated with a window actuator on the window frame, so the pull-push forces from the power output end of the toothed steel cable are transmitted to the window through the toothed steel cable. Regarding the technical approach and mechanism to achieve the objective of the invention, embodiments with illustrations in figures are described in details as follows:

Brief Description of the Drawings

[0006]

Figure 1: a three-dimensional exploded view of the structure of the transmission mechanism according to the invention.

Figure 2: a three-dimensional view of the assembled mechanism.

Figure 3: the two-dimensional illustration of the operation principle of the invention.

Figure 4: a partial cross-sectional view of the transmission mechanism of the invention.

Figure 5: an embodiment of the invention in application for a smoke vent window.

Figure 6: a plurality of smoke vent windows as an example for the invention.

Detailed Description of the Preferred Embodiment

[0007] To further explain the details of the invention, examples are given as follows:

Please refer to Figure 1 for the three-dimensional exploded view of the structure of the invention. The toothed steel cable 1 is a thin and long steel line that is bendable and has surface teeth 10. The elbow tube 2 is a hollow tube to properly protect and guide

the passing toothed steel cable 1 on a curved path. The motor 3 is an electric motor, preferably powered by direct current. The motor is connected with a reduction gear unit 30 that is made of a gear assembly. The worm 4 is a rod with threads 40 and mounted on the output end 31 of the reduction gear unit 30. The worm gear assembly 5 consists of two coaxial gears. The driving gear 50 of the worm gear assembly 5 is the worm wheel engaging and driven by the worm 4 to drive the coaxial driven gear 51 that engages and drives the toothed steel cable 1 in linear movement.

The toothed steel cable guide 6 is a hollow tube 60 to secure the close contact between the passing toothed steel cable 1 and the driven gear 51 of the worm gear assembly 5. The toothed steel cable guide 6 has a pair of ears 61 which connect to slots 70 for securing the toothed steel cable guide 6 with top cover 7 to prevent disengagement between the toothed steel cable 1 and the driven gear 51 of the gear assembly when in operation.

Please refer to Figure 2 for the three-dimensional exterior assembly diagram. The DC motor 3 has linear transmission characteristic and transmits torque to the worm 4 and worm gear assembly 5 and drives the toothed steel cable 1 to make curved movement. Then the toothed steel cable 1 is driven through the elbow tube 2 which forces it to follow the curved path and provides protection and a change of orientation. The close match between the toothed steel cable 1 and the worm gear assembly 5 is achieved through the toothed steel cable guide 6. The exterior of the worm 4 and the worm gear assembly 5 is protected by a top cover 7, a middle cover 8 and a bottom cover 9.

Please refer to Figure 3 for the two-dimensional illustration of the operation principle of the invention. The power output of DC motor 3 has linear characteristic. After conversion by the reduction gear unit 30, the torque is transmitted by the worm 4, which further transmits the power to the worm gear assembly 5 and drives the toothed steel cable 1 to perform a linear movement in the curved elbow tube 2.

Please refer to Figure 4 for a partial cross-sectional view of the transmission mechanism of the invention. The space inside the top cover 7 is to accommodate the driven gear 51 of the worm gear assembly 5. The space enclosed by the middle cover 8 and the bottom cover 9 is to accommodate the driving gear 50 of the worm 4 and worm gear assembly 5. The toothed steel cable 1 passes the hollow sleeve 60 of the toothed steel cable guide 6 and drives the driven gear 51 of the worm gear assembly 5.

From this figure, it is clear that the power transmission path is from the worm 4 to the driving gear 50, then through the coaxial driven gear 51 to the toothed steel cable 1.

Please refer to Figure 5 for an embodiment of the

invention for a smoke vent window. The figure shows an example of a hopper window with fire fighting significance. Depending on applications, the mechanism of the invention is used to actuate peripherals switchable or moveable, such as hopper windows, awning windows, casement windows, tilt-turn windows, sliding windows, window blinds, air vent system and skylights, or height adjustment for hospital beds or sleep beds. The opening and closing of the window panel 10d is brought about by the actuator 10a on the window frame 10c, which converts the power and transmits the power through the toothed steel cable 1 to the window panel 10d, so the window panel 10d is pushed open or pulled closed.

The linear movement of the toothed steel cable 1 inside the actuator 10a is activated by an authorizing main operator 10e or a manual switch 10g, which sends a fire alarm signal to the central control box 10f. Upon receiving the signal, the central control box 10f activates the DC motor assembly 3 and further transmits power through the actuator 10a to the toothed steel cable 1.

Please refer to Figure 6 for a smoke vent window. The figure shows an example of a multi-panel hopper window. On the window frame 10c for the individual window panel 10d there is an actuator 10a. Its independent power source (DC motor assembly 3) is used to control the opening and closing of the window panel 10d. Each switch assembly has a pipe (containing electric line and signal line) connecting to the central control box (containing microcomputer control chip) that operates on logic judgment.

In summary, the invention provides application technology for the toothed steel cable transmission mechanism. It is mainly through a DC motor to drive a worm and a worm gear assembly, and further drives a toothed steel cable for linear movement in a curved structure. This is the major improvement over the traditional transmission mechanism. The invention provides advanced breakthrough on applications of toothed steel cable transmission mechanism and is subject to patent application approval. The above description for the invention is only the preferred embodiment. It is specially noted that any modification based on the same technical approach and design concept in the invention shall fall into the scope of the invention.

Claims

1. A toothed steel cable transmission mechanism consisting of:

- a toothed steel cable (1) in form of a long and thin flexible steel element with surface teeth (10);
- a steel cable elbow tube (2) in form of a hollow

tube to provide proper protection and guidance for the passing toothed steel cable (1);
 an electric motor (3) with a reduction gear unit (30) to reduce output RPM;
 a worm (4) with threads (40) attached to the the output end (31) of the reduction gear unit (30) and
 a worm gear assembly (5) consisting of two co-axial gears (50, 51), wherein the driving gear (50) engages the worm (4) to drive the coaxial driven gear (51), which in turn drives the toothed steel cable (1) for linear power transmission;
 a toothed steel cable guide (6) in form of a hollow sleeve to house the point of engagement between the toothed steel cable (1) and the driven gear (51) of the gear assembly; in addition, the said toothed steel cable guide has a pair of ears (61) that connect to slots (70) for securing the steel cable guide (6) with top cover (7) to prevent disengagement between the toothed steel cable (1) and the driven gear (51) of the gear assembly when in operation;

wherein the electric motor (3) with linear transmission characteristic transmits forces through the reduction gear unit (30) to the worm (4) and the worm gear assembly (5) to drive the toothed steel cable (1) to perform a linear movement in curved path.

2. A toothed steel cable transmission mechanism as described in claim 1 comprising a top cover (7) the inside space of which is to accommodate the driven gear (51) of the worm gear assembly (5) and a middle cover (8) and a bottom cover (9) accommodating the worm (4) and the driving gear (50) of the worm gear assembly (5); the top cover (7) also has a connector (70) to fit the ears (61) of the toothed steel cable guide (6).
3. A toothed steel cable transmission mechanism as described in claim 1, the control of linear push-pull for the toothed steel cable is through the driving by the electric motor and the control by the worm and worm assembly gear.
4. A toothed steel cable transmission mechanism as described in claim 1 wherein the end of the toothed steel cable is the power output end, which depending on applications can connect to peripherals that need actuation or movement such as hopper windows, awning windows, casement windows, tilt-turn windows, sliding windows, window blinds, air vent system and skylights.
5. A toothed steel cable transmission mechanism as described in claim 4 for the opening and closing of a window wherein an actuator (10a) on the window frame (10c) transmits the push-pull forces through

the toothed steel cable (1) to the window panel (10d).

6. A toothed steel cable transmission mechanism as described in claim 1
 wherein the end of the toothed steel cable (1) is the power output end, which depending on applications can connect to peripherals that need height or angle adjustment such as hospital beds or sleep beds.

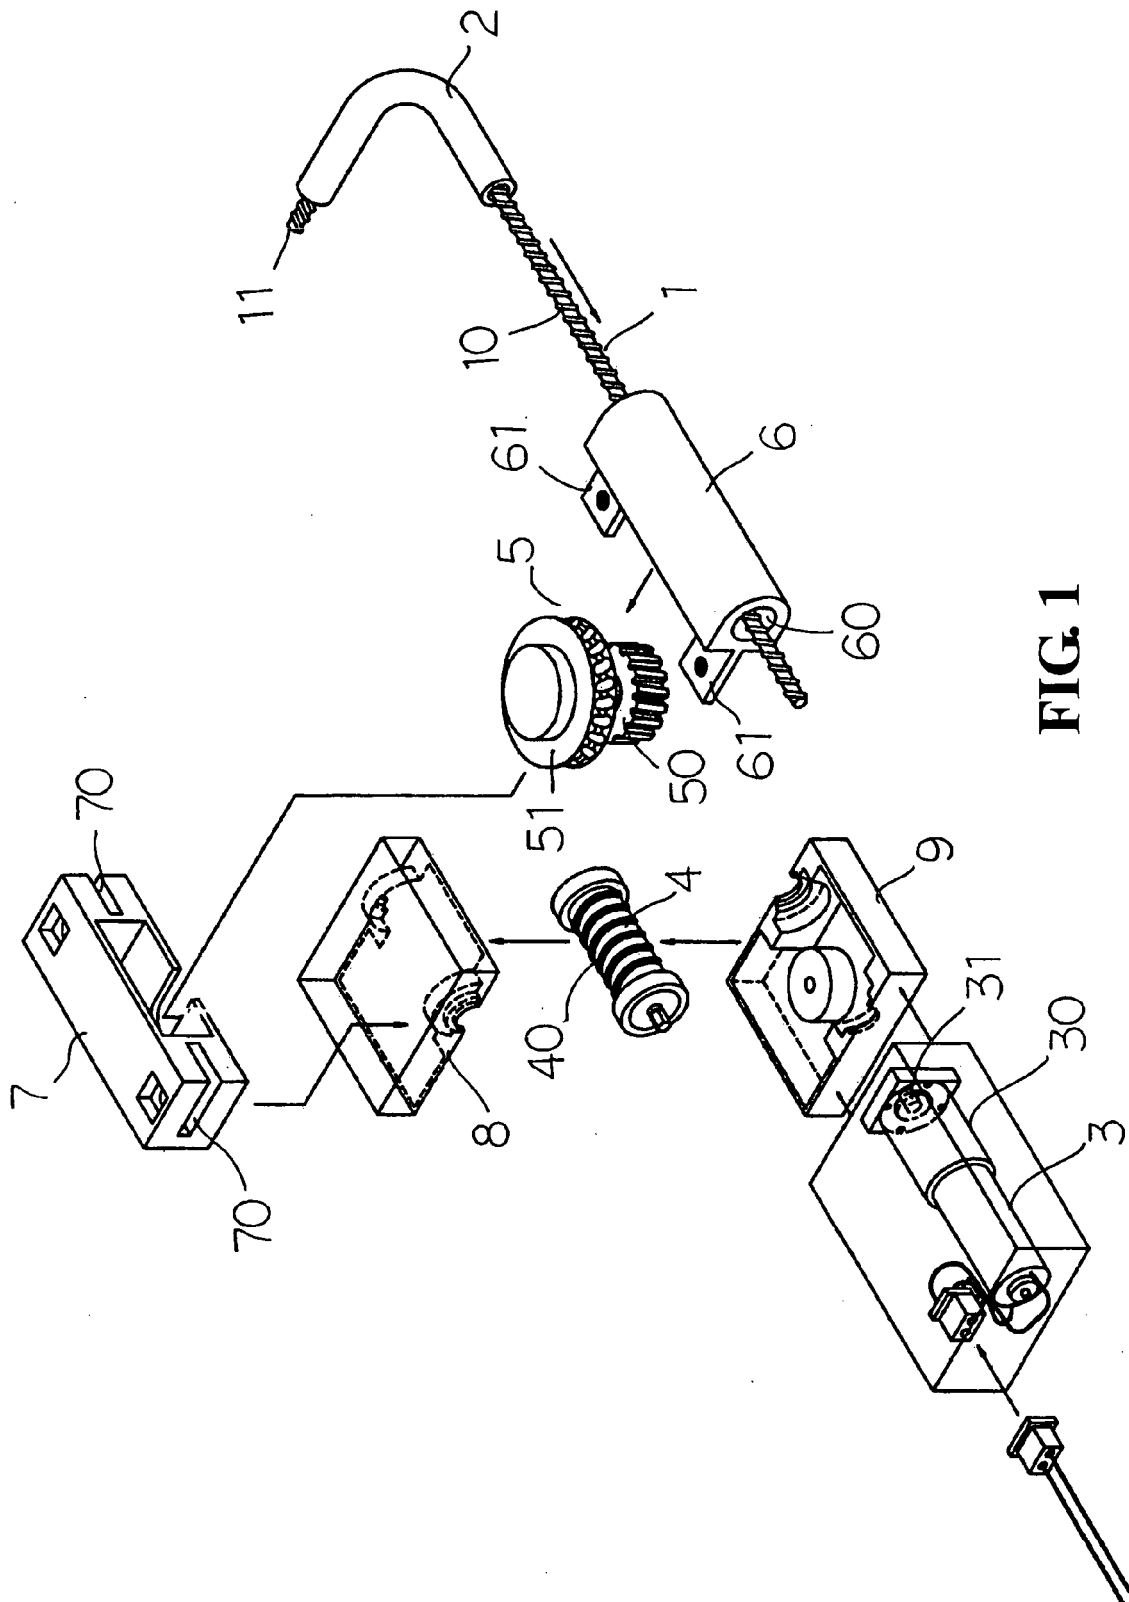


FIG. 1

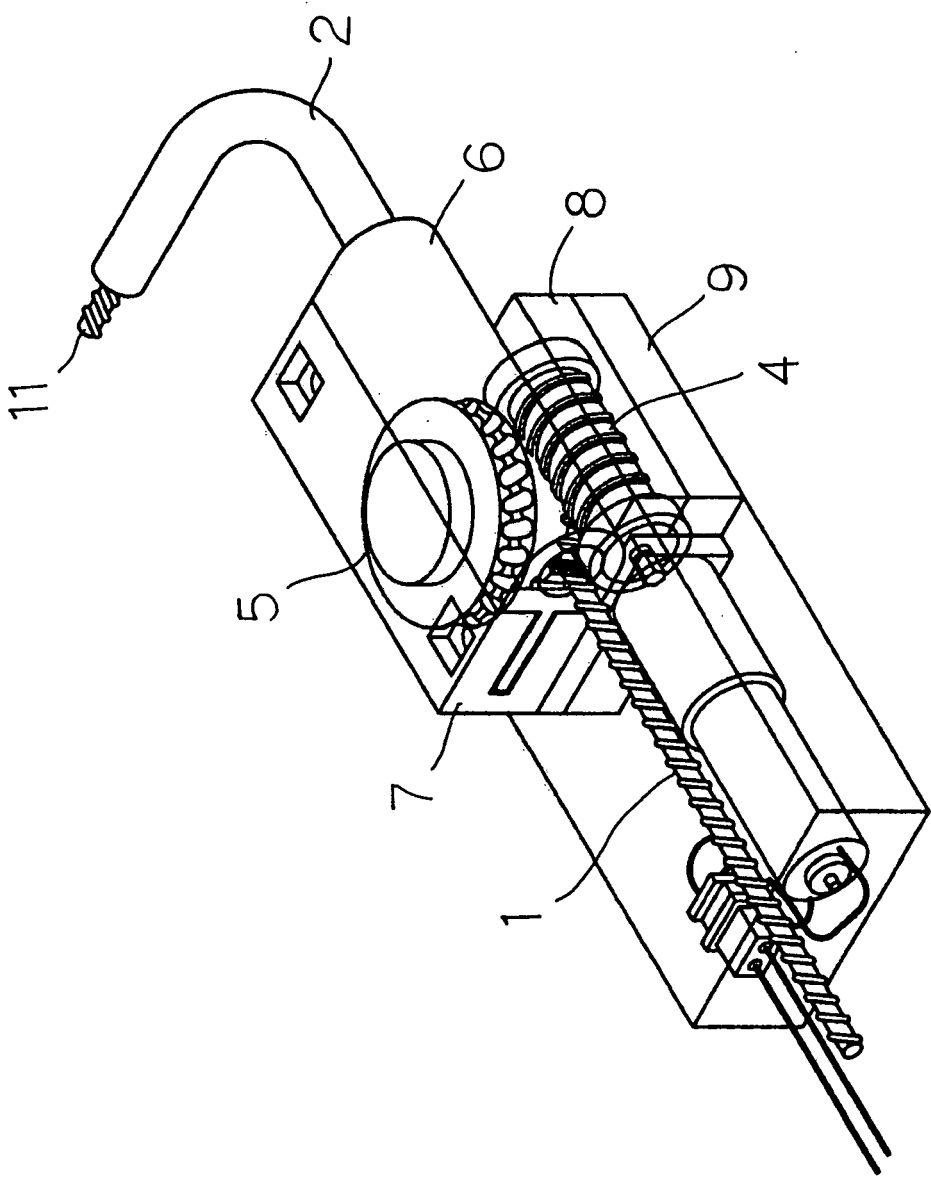


FIG. 2

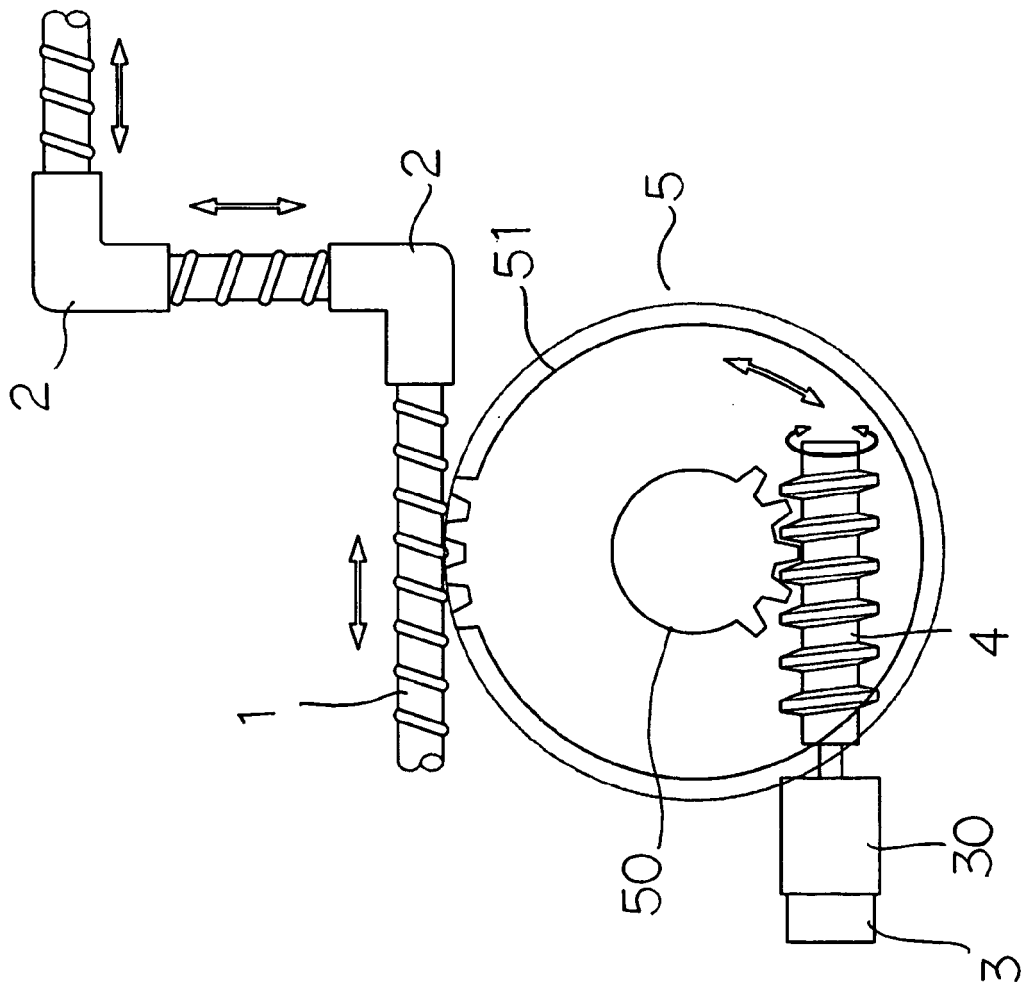


FIG. 3

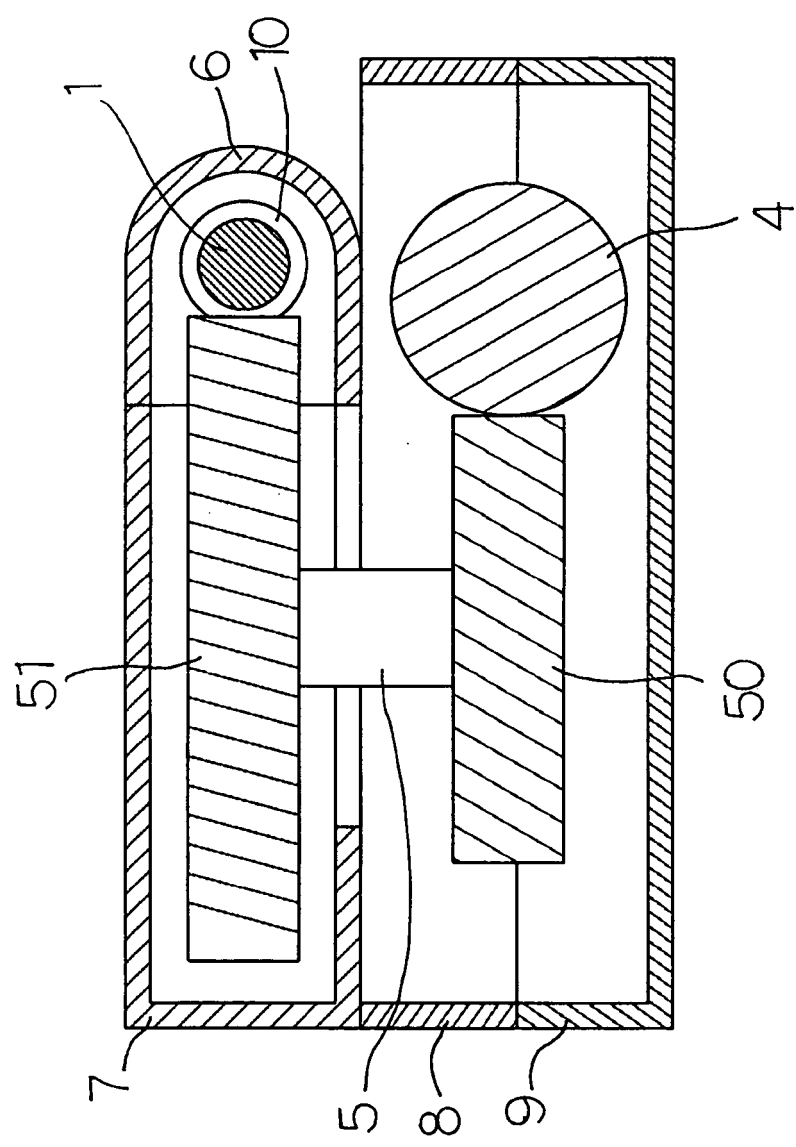


FIG. 4

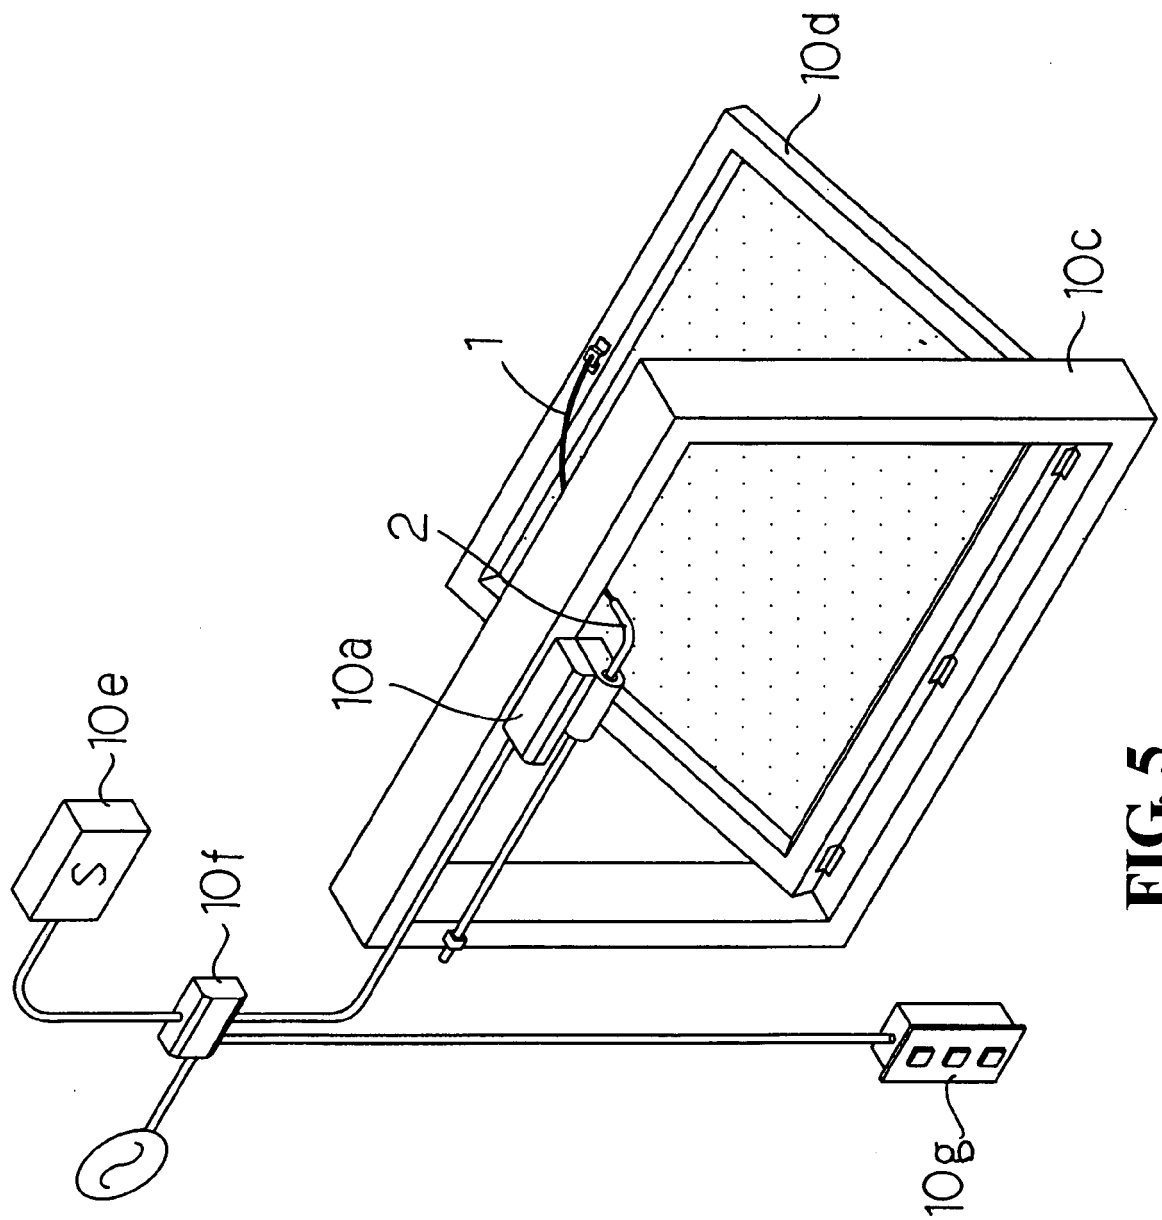


FIG. 5

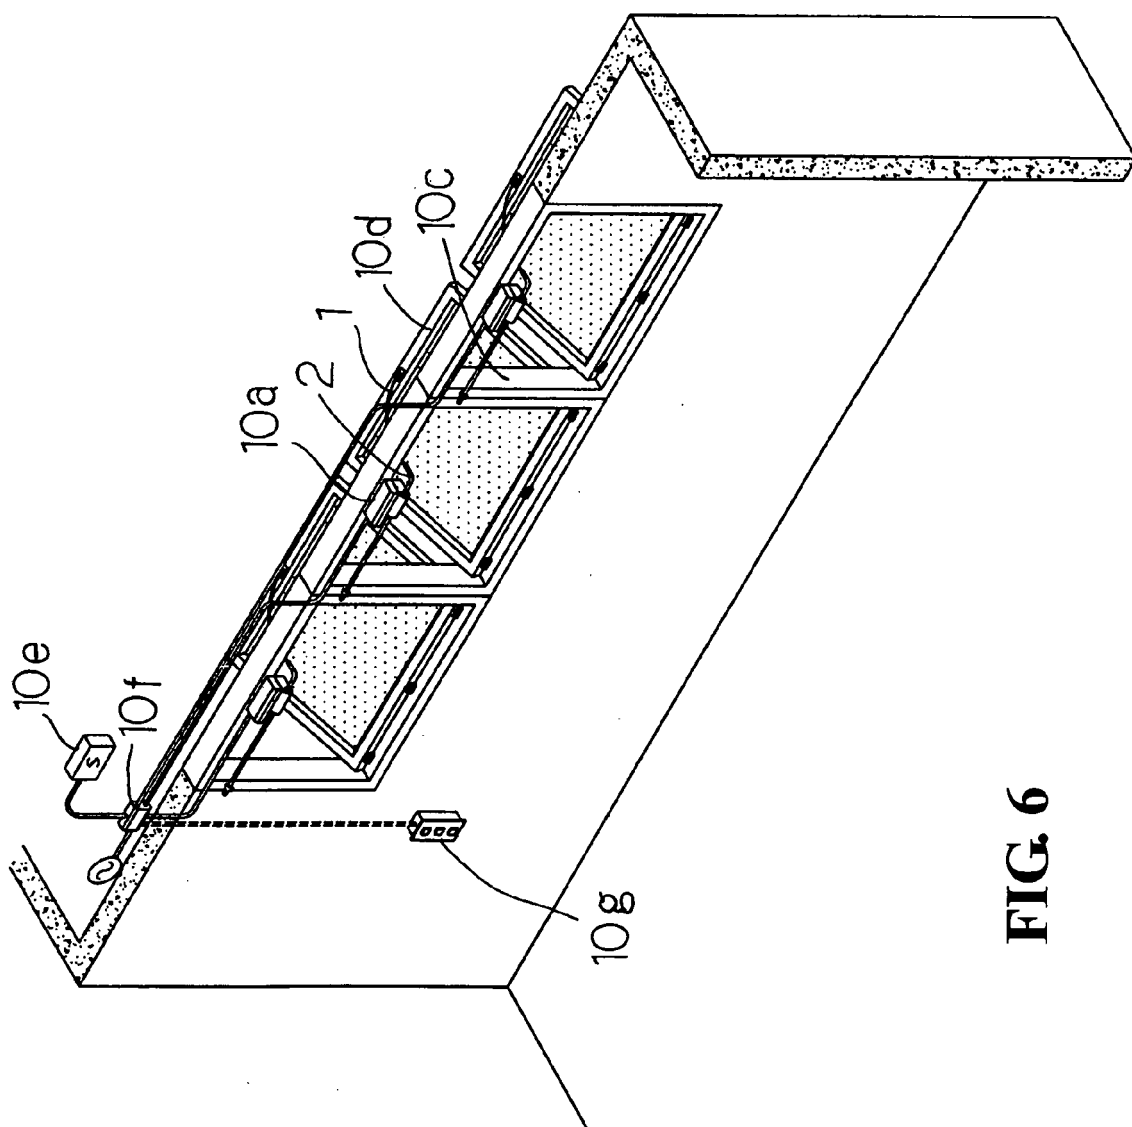


FIG. 6



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 06 02 5173

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	DE 31 49 609 A1 (WEBASTO WERK BAIER KG W [DE]) 23 June 1983 (1983-06-23) * page 8, line 23 - page 9, line 16; claims 1-13; figures 1-6 *	1-6	INV. E05F15/12 E05F15/14 E05F15/16
A	US 2005/093330 A1 (HOFFMAN LAWRENCE A [US]) 5 May 2005 (2005-05-05) * page 29 - page 33 * * page 43 - page 44; claims 1-6,20; figures 1-4 *	1-6	
A	GB 1 387 140 A (BOSCH GMBH ROBERT) 12 March 1975 (1975-03-12) * page 4, lines 15-53; claims 1-14; figures 2,3 *	1-6	
			TECHNICAL FIELDS SEARCHED (IPC)
			E05F F16C F16H
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
Munich		10 May 2007	Balice, Marco
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 06 02 5173

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-05-2007

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 3149609 A1	23-06-1983	JP 1670393 C	12-06-1992
		JP 2042686 B	25-09-1990
		JP 58105824 A	23-06-1983

US 2005093330 A1	05-05-2005	NONE	

GB 1387140 A	12-03-1975	DE 2163534 A1	28-06-1973
		FR 2159105 A5	15-06-1973
		IT 971587 B	10-05-1974
