



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
18.06.2008 Bulletin 2008/25

(51) Int Cl.:
F23L 11/00 (2006.01) F23L 13/02 (2006.01)

(21) Application number: **07122731.8**

(22) Date of filing: **10.12.2007**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE SI SK TR
Designated Extension States:
AL BA HR MK RS

(71) Applicant: **M-Design NV**
8210 Zedelgem (BE)

(72) Inventor: **Goovaerts, Bart**
8210 Zedelgem (BE)

(74) Representative: **Ostyn, Frans**
K.O.B. NV,
Kennedypark 31 c
8500 Kortrijk (BE)

(30) Priority: **13.12.2006 BE 200600613**

(54) **See-through stove provided with a damper**

(57) This invention relates to a stove (1), in particular a see-through stove, comprising a combustion chamber with at least two closable openings and a flue duct (2), a controllable damper (3) being provided between the com-

bustion chamber and the flue duct (2) in order to close off the abovementioned duct (2). The stove according to this invention is characterized in that the abovementioned damper (3) comprises at least two individually controllable damper elements (4, 5).

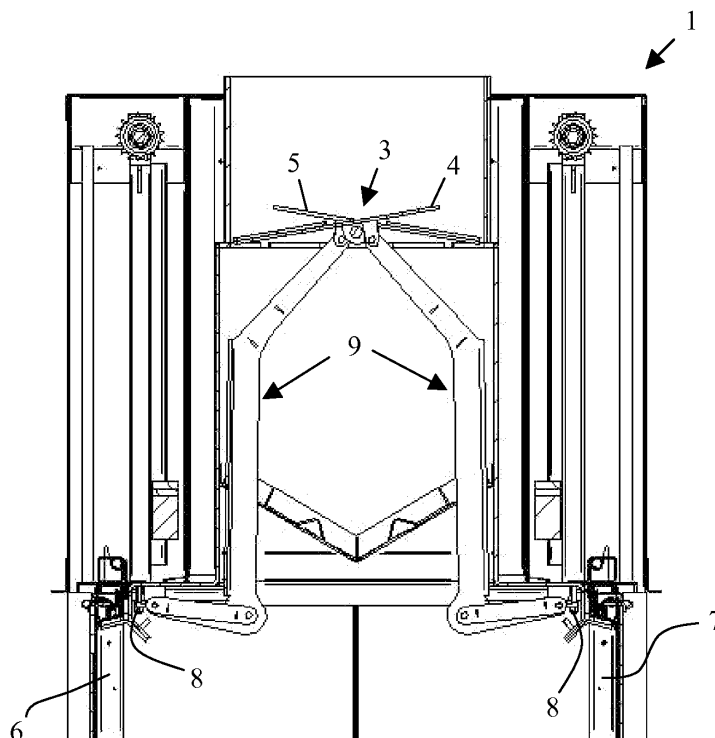


Fig. 2

Description

[0001] This invention relates to a stove, comprising a combustion chamber with at least two closable openings and a flue duct, a controllable damper being provided between the combustion chamber and the flue duct in order to close off the abovementioned duct.

[0002] This invention relates in particular to a see-through stove.

[0003] Atmospheric stoves are available in many types, styles and sizes. A particular form, which is becoming increasingly popular is the see-through stove. Such stoves have at least two closable openings lying opposite each other. This stove is placed in a wall in such a way that the hearth fire is visible on both sides, for example in two adjacent rooms.

[0004] See-through stoves with, for example, two closable openings must be connected to a chimney (flue) which draws very well, for if the user has the fire on with one or two openings not closed off, smoke must not pass through these unclosed openings into the living room. In the closed state (both openings closed off) the chimney then draws much too hard, with the result that the chimney draws the heat out of the appliance. The result is poor combustion and much lower efficiency.

[0005] Since the efficiency of see-through stoves is largely determined by the chimney draught, it is known to provide such stoves with a control damper in order to adjust the air supply and thus increase the efficiency.

[0006] This solution has the disadvantage, however, that the damper has to be opened every time a door is opened. This is often forgotten, with the result that smoke often goes into the living room. Furthermore, in the case of such see-through stoves there is still too much chimney draught when the damper is open and the fire is on with one opening closed off.

[0007] The object of this invention is to provide a stove with better combustion and greater efficiency in all circumstances, irrespective of whether the openings are open or closed.

[0008] The object of the invention is achieved by providing a stove comprising a combustion chamber with at least two closable openings and a flue, a controllable damper being provided between the combustion chamber and the flue, which damper comprises at least two individually controllable damper elements. By dividing the damper it is ensured that the damper can be opened only partially or can be opened fully depending on the number of openings not closed off. This results in better combustion and considerably greater efficiency. In particular, the damper comprises two individually controllable damper elements.

[0009] According to a preferred embodiment of the stove according to the invention, the abovementioned stove comprises a closing means for each opening, each closing means being provided for controlling at least one damper element. The abovementioned closing means is preferably a lifting door, tilting door or revolving door.

[0010] In a particular embodiment of a stove according to this invention each closing means is movable between an open and a closed position, in the closed position of a closing means the respective damper element being provided so that it partially closes off the flue duct. It should be pointed out here that the expression in a closed position of the closing means does not rule out a statutory minimal opening still remaining in order to allow the combustion gases to leave the combustion chamber.

[0011] In a more particular embodiment of the stove according to the invention, when each closing means is in its closed position, the damper elements are provided so that together they close off the abovementioned duct to the maximum permitted extent.

[0012] According to a particularly advantageous embodiment of the stove according to the invention the abovementioned stove comprises setting means for setting the angle of the two damper elements depending on the chimney draught. The setting means preferably comprise a threaded rod that can be screwed in and out.

[0013] The stove according to this invention is preferably a see-through stove.

[0014] In order to explain the features of this invention further and to indicate additional advantages and details of the invention, there now follows a more detailed description of a stove according to the invention. It should be clear that nothing in the description below can be interpreted as a limitation of the protection for this invention applied for in the claims.

[0015] In this description reference is made by means of reference numerals to the appended drawings, in which:

Figure 1 is a front view of a see-through stove;

Figure 2 is a view of the see-through stove shown in Figure 1 along line A - A; and

Figure 3 is a perspective view of a damper with two controllable damper elements provided in the flue duct of the see-through stove.

[0016] This invention relates to a stove (1), in particular a coal-fired or wood-burning stove, comprising a combustion chamber with at least two closable openings and a flue duct (2), a controllable damper (3) being provided between the combustion chamber and the flue duct (2) in order to close off the abovementioned duct (2). The stove according to this invention is characterized in that the abovementioned damper (3) comprises at least two individually controllable damper elements (4, 5).

[0017] The stove (1) shown in Figure 1 is a see-through stove with two closable openings lying opposite each other. The see-through stove illustrated is provided with two lifting doors (6, 7) for closing off the openings lying opposite each other.

[0018] The damper (3) (see Figures 2 and 3) comprises two damper elements (4 and 5) which are operated separately by the two lifting doors (6 and 7). In the figures shown the first lifting door (6) will control a first damper

element (5), and the second lifting door (7) will control the second damper element (4). The lifting doors are provided with a mechanical transmission (9) for controlling the different damper elements (4, 5).

[0019] Since the damper elements (4, 5) are operated individually by two lifting doors (6, 7) functioning independently of each other, when the fire is on with only one lifting door open the flue duct (2) will be only partially closed off by one damper element, with the result that the fire will remain burning more gently.

[0020] When the fire is burning with two lifting doors (6, 7) open, both damper elements (4, 5) will open fully automatically, so that smoke will no longer go into the living room.

[0021] When the fire is burning with two lifting doors (6, 7) closed, both damper elements (4, 5) will also close, thereby closing off the flue duct (2). This will produce a higher temperature in the stove, resulting in better combustion, considerably greater efficiency and much less pollution of the environment, and much less wood or fuel consumption, and the glass lifting doors which make the see-through stove so interesting remain cleaner for much longer.

[0022] The stove according to this invention is furthermore provided with setting means (8) for adjusting the angle of the two damper elements (4, 5) and thereby adjusting the chimney draught depending on the circumstances. The setting means preferably comprise a threaded rod (8) that can be screwed in and out, being pressed down by a small lip of the door when the door closes, thereby making the damper element close at a particular angle depending on the length of the threaded rod (8).

Claims

1. Stove (1) comprising a combustion chamber with at least two closable openings and a flue duct (2), a controllable damper (3) being provided between the combustion chamber and the flue duct (2) in order to close off the abovementioned duct (2), **characterized in that** the abovementioned damper (3) comprises at least two individually controllable damper elements (4, 5).
2. Stove (1) according to claim 1, **characterized in that** the abovementioned stove comprises a closing means (6, 7) for each opening, each closing means (6, 7) being provided for controlling at least one damper element (4, 5).
3. Stove (1) according to claim 2, **characterized in that** each closing means (6, 7) is movable between an open and a closed position, in a closed position of a closing means (6, 7) the respective damper element (4, 5) being provided so that it partially closes off the flue duct (2).

4. Stove (1) according to claim 3, **characterized in that** when each closing means (6, 7) is in its closed position, the damper elements (4, 5) are provided so that together they close off the abovementioned duct (2).
5. Stove (1) according to one of claims 2 to 4, **characterized in that** the abovementioned closing means (6, 7) is a lifting door, tilting door or revolving door.
6. Stove (1) according to one of the preceding claims, **characterized in that** the abovementioned stove comprises setting means (8) for setting the angle of the two damper elements (4, 5) depending on the chimney draught.
7. Stove (1) according to one of the preceding claims, **characterized in that** the damper (3) comprises two individually controllable damper elements (4, 5).
8. Stove (1) according to one of the preceding claims, **characterized in that** the abovementioned stove is a see-through stove.

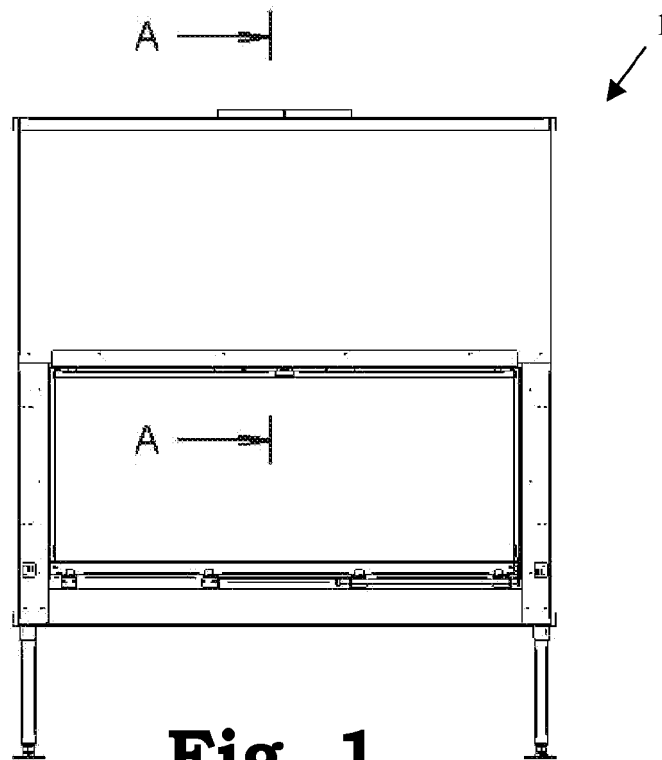


Fig. 1

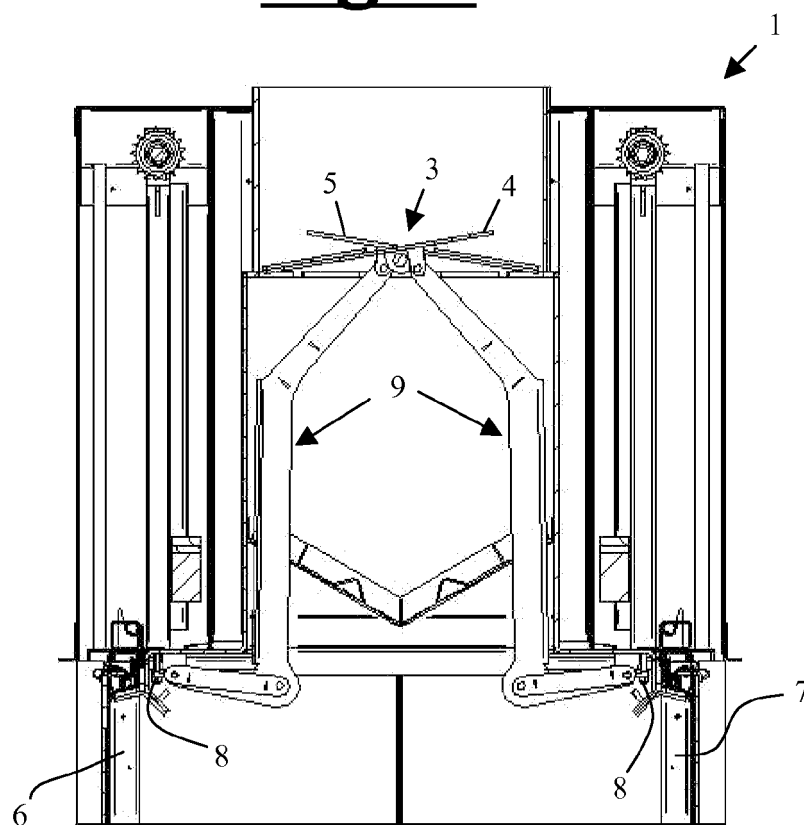


Fig. 2

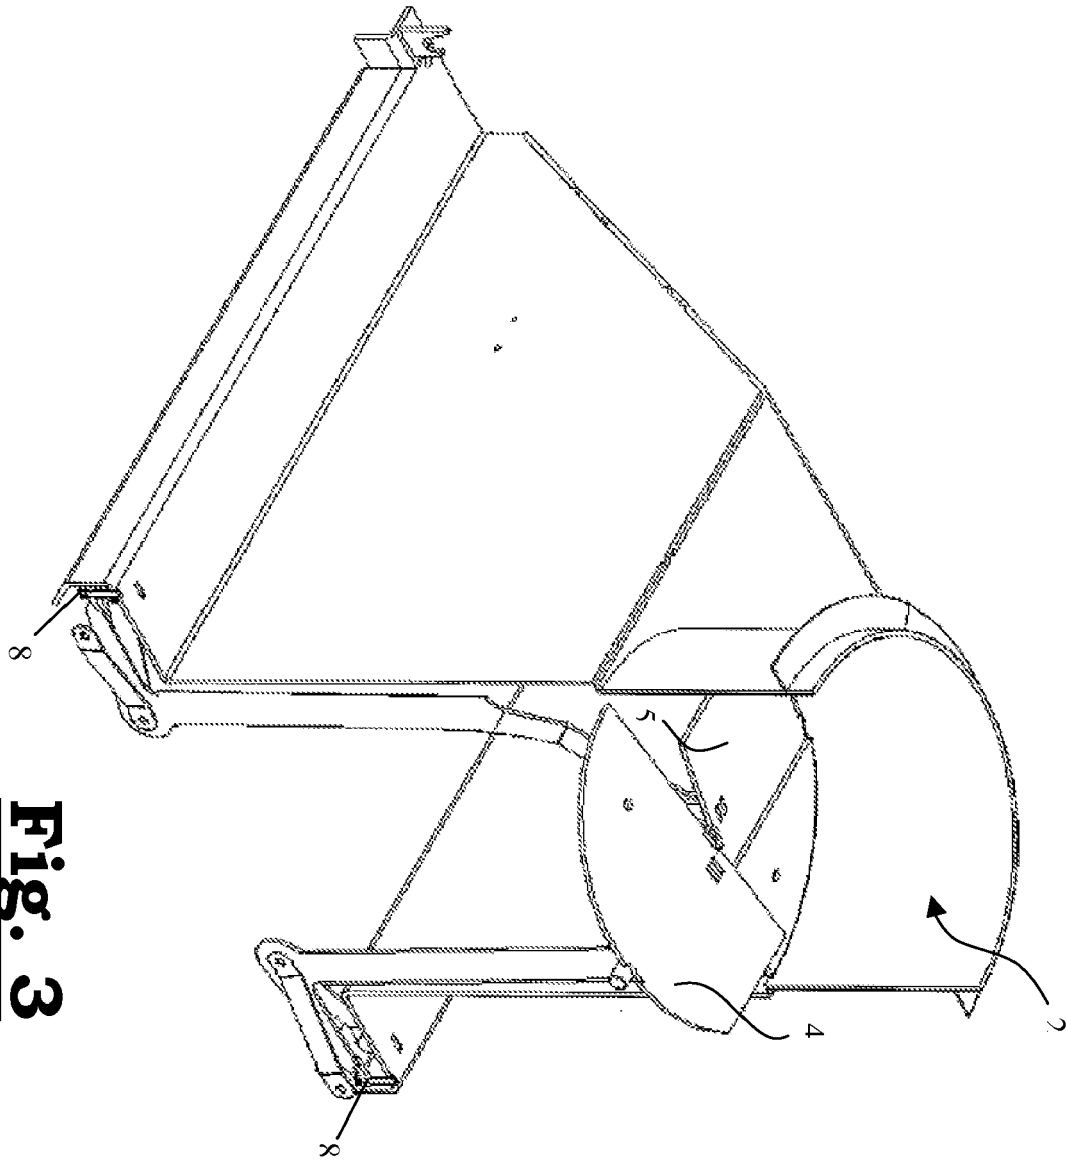


Fig. 3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 07 12 2731

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	FR 2 644 574 A1 (FREI MARTIN [CH]) 21 September 1990 (1990-09-21) * page 1, paragraph 1 * * page 1, line 21 - line 27 * * page 2, line 2 - line 3 * -----	1,8	INV. F23L11/00 F23L13/02
A	DE 195 03 229 A1 (STOBER & MORLOCK [DE]) 8 August 1996 (1996-08-08) * column 4, line 26 - line 42 * * figures 1,4 * -----	1-3	
A	DE 298 16 944 U1 (ESG EMISSIONSMESTECHNIK UND ST [DE]) 4 February 1999 (1999-02-04) * page 3, line 22 - line 25 * -----	1-3	
A	FR 2 711 773 A1 (LABATTU MICHEL [FR]) 5 May 1995 (1995-05-05) * page 1, line 25 - page 2, line 4; figure 3 * -----	1,8	
A	FR 2 846 730 A1 (IND B V [FR]) 7 May 2004 (2004-05-07) * page 3, line 15 - line 20; figures 1-3 * -----	1,6	TECHNICAL FIELDS SEARCHED (IPC)
A	EP 0 084 016 A1 (FONDIS SA [FR]) 20 July 1983 (1983-07-20) * page 2, line 17 - line 25 * -----	4	F23L F24B
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 13 March 2008	Examiner Mougey, Maurice
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

3

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 07 12 2731

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-03-2008

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR 2644574	A1	21-09-1990	CH 677697 A5 14-06-1991 DE 9000610 U1 01-03-1990
DE 19503229	A1	08-08-1996	NONE
DE 29816944	U1	04-02-1999	NONE
FR 2711773	A1	05-05-1995	NONE
FR 2846730	A1	07-05-2004	NONE
EP 0084016	A1	20-07-1983	BE 895561 A1 02-05-1983 CH 652192 A5 31-10-1985 DE 3367021 D1 20-11-1986 ES 277337 U 16-07-1984 FR 2522782 A1 09-09-1983 GR 77873 A1 25-09-1984