



(11) **EP 1 936 129 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**25.06.2008 Bulletin 2008/26**

(51) Int Cl.:  
**F01K 25/06 (2006.01)**

(21) Application number: **07110803.9**

(22) Date of filing: **23.07.1999**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE  
SI SK TR**  
Designated Extension States:  
**AL BA HR MK RS**

(62) Document number(s) of the earlier application(s) in  
accordance with Art. 76 EPC:  
**99305850.2 / 1 070 830**

(71) Applicant: **Exergy, Inc.**  
**Hayward,**  
**California 94541 (US)**

(72) Inventors:  
• **KALINA, Alexander, I.**  
**Hillsborough,, CA 94010. (US)**

• **PELLETIER, Richard, I.**  
**Livermore,, CA 94550 (US)**  
• **RHODES, Lawrence, B.**  
**Livermore,, CA 94550 (US)**

(74) Representative: **McCall, John Douglas**  
**W.P. THOMPSON & CO.**  
**Coopers Building**  
**Church Street**  
**Liverpool L1 3AB (GB)**

Remarks:

This application was filed on 21 - 06 - 2007 as a  
divisional application to the application mentioned  
under INID code 62.

(54) **Method and apparatus of converting heat to useful energy**

(57) A method and apparatus for implementing a thermodynamic cycle. A heated gaseous working stream including a low boiling point component and a higher boiling point component is separated (S), and the low boiling point component is expanded (T) to transform the energy of the stream into useable form and to provide an expanded relatively rich stream (31). This expanded rich stream (31) is then split into two streams, one (33) of which is expanded further to obtain further energy, re-

sulting in a spent stream (34), the other (32) of which is extracted. The lean unexpanded stream (7) and the spent rich stream (34) are then combined in a regenerating subsystem with the extracted stream (32) to reproduce the working stream, which is then efficiently heated in a heater (HE-5) to provide the heated gaseous working stream that is separated.

**EP 1 936 129 A2**

**Description****Background of the Invention**

5 **[0001]** The invention relates to implementing a thermodynamic cycle to convert heat to useful form.

**[0002]** Thermal energy can be usefully converted into mechanical and then electrical form. Methods of converting the thermal energy of low temperature heat sources into electric power present an important area of energy generation. There is a need for increasing the efficiency of the conversion of such low temperature heat to electric power.

10 **[0003]** Thermal energy from a heat source can be transformed into mechanical and then electrical form using a working fluid that is expanded and regenerated in a closed system operating on a thermodynamic cycle. The working fluid can include components of different boiling temperatures, and the composition of the working fluid can be modified at different places within the system to improve the efficiency of operation. Systems that convert low temperature heat into electric power are described in Alexander I. Kalina's U.S. Pat. Nos. 4,346,561; 4,489,563; 4,982,568; and 5,029,444. In addition, systems with multicomponent working fluids are described in Alexander I. Kalina's U.S. Pat. Nos. 4, 548, 043; 4,586,340, 15 4,604,867; 4,732,005; 4,763,480, 4,899,545; 5,095,708; 5,440,882; 5,572,871 and 5,649,426, which are hereby incorporated by reference .

**Summary of the Invention**

20 **[0004]** The invention features, in general a method and system for implementing a thermodynamic cycle. A working stream including a low boiling point component and a higher boiling point component is heated with a source of external heat (e.g., a low temperature source) to provide a heated gaseous working stream. The heated gaseous working stream is separated at a first separator to provide a heated gaseous rich stream having relatively more of the low boiling point component and a lean stream having relatively less of the low boiling point component. The heated gaseous rich stream 25 is expanded to transform the energy of the stream into useable form and to provide an expanded, spent rich stream. The lean stream and the expanded, spent rich stream are then combined to provide the working stream.

**[0005]** Particular embodiments of the invention may include one or more of the following features. The working stream is condensed by transferring heat to a low temperature source at a first heat exchanger and thereafter pumped to a higher pressure. The expanding takes place in a first expansion stage and a second expansion stage, and a stream of 30 partially expanded fluid is extracted between the stages and combined with the lean stream. A separator between the expander stages separates a partially expanded fluid into vapor and liquid portions, and some or all of the vapor portion is fed to the second stage, and some of the vapor portion can be combined with the liquid portion and then combined with the lean stream. A second heat exchanger recuperatively transfers heat from the reconstituted multicomponent working stream (prior to condensing) to the condensed multicomponent working stream at a higher pressure. A third 35 heat exchanger transfers heat from the lean stream to the working stream after the second heat exchanger. The working stream is split into two substreams, one of which is heated with the external heat, the other of which is heated at a fourth heat exchanger with heat from the lean stream; the two streams are then combined to provide the heated gaseous working stream that is separated at the separator.

**[0006]** Embodiments of the invention may include one or more of the following advantages. Embodiments of the invention can achieve efficiency of conversion of low temperature heat to electric power that exceeds the efficiency of 40 standard Rankine cycles.

**[0007]** Other advantages and features of the invention will be apparent from the following detailed description of particular embodiments and from the claims.

**Brief description of the drawing**

45 **[0008]** The accompanying drawings and the description thereof, illustrate the invention by way of example. In the drawings:-

- 50 Fig. 1 is a diagram of a thermodynamic system for converting heat from a low temperature source to useful form.  
 Fig. 2 is a diagram of another embodiment of the Fig. 1 system which permits an extracted stream and a completely spent stream to have compositions which are different from the high pressure charged stream.  
 Fig. 3 is a diagram of a simplified embodiment in which there is no extracted stream.  
 Fig. 4 is a diagram of a further simplified embodiment.

**Detailed Description of the Invention**

**[0009]** Referring to Fig. 1, a system for implementing a thermodynamic cycle to obtain useful energy (e.g., mechanical

and then electrical energy) from an external heat source is shown. In the described example, the external heat source is a stream of low temperature waste-heat water that flows in the path represented by points 25-26 through heat exchanger HE-5 and heats working stream 117-17 of the closed thermodynamic cycle. Table 1 presents the conditions at the numbered points indicated on Fig. 1. A typical output from the system is presented in Table 5.

**[0010]** The working stream of the Fig. 1 system is a multicomponent working stream that includes a low boiling component and a high boiling component. Such a preferred working stream may be an ammonia-water mixture, two or more hydrocarbons, two or more freons, mixtures of hydrocarbons and freons, or the like. In general, the working stream may be mixtures of any number of compounds with favorable thermodynamic characteristics and solubility. In a particularly preferred embodiment, a mixture of water and ammonia is used. In the system shown in Fig. 1, the working stream has the same composition from point 13 to point 19.

**[0011]** Beginning the discussion of the Fig. 1 system at the exit of turbine T, the stream at point 34 is referred to as the expanded, spent rich stream. This stream is considered "rich" in lower boiling point component. It is at a low pressure and will be mixed with a leaner, absorbing stream having parameters as at point 12 to produce the working stream of intermediate composition having parameters as at point 13. The stream at point 12 is considered "lean" in lower boiling point component.

**[0012]** At any given temperature, the working stream (of intermediate composition) at point 13 can be condensed at a lower pressure than the richer stream at point 34. This permits more power to be extracted from the turbine T, and increases the efficiency of the process.

**[0013]** The working stream at point 13 is partially condensed. This stream enters heat exchanger HE-2, where it is cooled and exits the heat exchanger HE-2 having parameters as at point 29. It is still partially, not completely, condensed. The stream now enters heat exchanger HE-1 where it is cooled by stream 23-24 of cooling water, and is thereby completely condensed, obtaining parameters as at point 14. The working stream having parameters as at point 14 is then pumped to a higher pressure obtaining parameters as at point 21. The working stream at point 21 then enters heat exchanger HE-2 where it is recuperatively heated by the working stream at points 13-29 (see above) to a point having parameters as at point 15. The working stream having parameters as at point 15 enters heat exchanger HE-3 where it is heated and obtains parameters as at point 16. In a typical design, point 16 may be precisely at the boiling point but it need not be. The working stream at point 16 is split into two substreams; first working substream 117 and second working substream 118. The first working substream having parameters as at point 117 is sent into heat exchanger HE-5, leaving with parameters as at point 17. It is heated by the external heat source, stream 25-26. The other substream, second working substream 118, enters heat exchanger HE-4 in which it is heated recuperatively, obtaining parameters as at point 18. The two working substreams, 17 and 18, which have exited heat exchangers HE-4 and HE-5, are combined to form a heated, gaseous working stream having parameters as at point 19. This stream is in a state of partial, or possibly complete, vaporization. In the preferred embodiment, point 19 is only partially vaporized. The working stream at point 19 has the same intermediate composition which was produced at point 13, completely condensed at point 14, pumped to a high pressure at point 21, and preheated to point 15 and to point 16. It enters the separator S. There, it is separated into a rich saturated vapor, termed the "heated gaseous rich stream" and having parameters as at point 30, and a lean saturated liquid, termed the "lean stream" and having parameters as at point 7. The lean stream (saturated liquid) at point 7 enters heat exchanger HE-4 where it is cooled while heating working stream 118-18 (see above). The lean stream at point 9 exits heat exchanger HE-4 having parameters as at point 8. It is throttled to a suitably chosen pressure, obtaining parameters as at point 9.

**[0014]** Returning now to point 30, the heated gaseous rich stream (saturated vapor) exits separator S. This stream enters turbine T where it is expanded to lower pressures, providing useful mechanical energy to turbine T used to generate electricity. A partially expanded stream having parameters as at point 32 is extracted from the turbine T at an intermediate pressure (approximately the pressure as at point 9) and this extracted stream 32 (also referred to as a "second portion" of a partially expanded rich stream, the "first portion" being expanded further) is mixed with the lean stream at point 9 to produce a combined stream having parameters as at point 10. The lean stream having parameters as at point 9 serves as an absorbing stream for the extracted stream 32. The resulting stream (lean stream and second portion) having parameters as at point 10 enters heat exchanger HE-3 where it is cooled, while heating working stream 15-16, to a point having parameters as at point 11. The stream having parameters as at point 11 is then throttled to the pressure of point 34, obtaining parameters as at point 12.

**[0015]** Returning to turbine T, not all of the turbine inflow was extracted at point 32 in a partially expanded state. The remainder, referred to as the first portion, is expanded to a suitably chosen low pressure and exits the turbine T at point 34. The cycle is closed.

**[0016]** In the embodiment shown in Fig. 1, the extraction at point 32 has the same composition as the streams at points 30 and 34. In the embodiment shown in Fig. 2, the turbine is shown as first turbine stage T-1 and second turbine stage T-2, with the partially expanded rich stream leaving the higher pressure stage T-1 of the turbine at point 31. Conditions at the numbered points shown on Fig. 2 are presented in Table 2. A typical output from the Fig. 2 system is presented in Table 6.

**[0017]** Referring to Fig. 2, the partially expanded rich stream from first turbine stage T-1 is divided into a first portion at 33 that is expanded further at lower pressure turbine stage T-2, and a second portion at 32 that is combined with the lean stream at 9. The partially expanded rich stream enters separator S-2, where it is separated into a vapor portion and a liquid portion. The composition of the second portion at 32 may be chosen in order to optimize its effectiveness when it is mixed with the stream at point 9. Separator S-2 permits stream 32 to be as lean as the saturated liquid at the pressure and temperature obtained in the separator S-2; in that case, stream 33 would be a saturated vapor at the conditions obtained in the separator S-2. By choice of the amount of mixing at stream 133, the amount of saturated liquid and the saturated vapor in stream 32 can be varied.

**[0018]** Referring to Fig. 3, this embodiment differs from the embodiment of Fig. 1, in that the heat exchanger HE-4 has been omitted, and there is no extraction of a partially expanded stream from the turbine stage. In the Fig. 3 embodiment, the hot stream exiting the separator S is admitted directly into heat exchanger HE-3. Conditions at the numbered points shown on Fig. 3 are presented in Table 3. A typical output from the system is presented in Table 7.

**[0019]** Referring to Fig. 4, this embodiment differs from the Fig. 3 embodiment in omitting heat exchanger HE-2. Conditions at the numbered points shown on Fig. 4 are presented in Table 4. A typical output from the system is presented in Table 8. While omitting heat exchanger HE-2 reduces the efficiency of the process, it may be economically advisable in circumstances where the increased power given up will not pay for the cost of the heat exchanger.

**[0020]** In general, standard equipment may be utilized in carrying out the method of this invention. Thus, equipment such as heat exchangers, tanks, pumps, turbines, valves and fittings of the type used in a typical Rankine cycles, may be employed in carrying out the method of this invention.

**[0021]** In the described embodiments of the invention, the working fluid is expanded to drive a turbine of conventional type. However, the expansion of the working fluid from a charged high pressure level to a spent low pressure level to release energy may be effected by any suitable conventional means known to those skilled in the art. The energy so released may be stored or utilized in accordance with any of a number of conventional methods known to those skilled in the art.

**[0022]** The separators of the described embodiments can be conventionally used gravity separators, such as conventional flash tanks. Any conventional apparatus used to form two or more streams having different compositions from a single stream may be used to form the lean stream and the enriched stream from the fluid working stream.

**[0023]** The condenser may be any type of known heat rejection device. For example, the condenser may take the form of a heat exchanger, such as a water cooled system, or another type of condensing device.

**[0024]** Various types of heat sources may be used to drive the cycle of this invention.

Table 1

#	P psiA	X	T °F	H BTU/lb	G/G30	Flow lb/hr	Phase
7	325.22	.5156	202.81	82.29	.5978	276,778	SatLiquid
8	305.22	.5156	169.52	44.55	.5978	276,778	Liq28°
9	214.26	.5156	169.50	44.55	.5978	276,778	Wet.9997
10	214.26	.5533	169.52	90.30	.6513	301,549	Wet.9191
11	194.26	.5533	99.83	-29.79	.6513	301,549	Liq 53°
12	85.43	.5533	99.36	-29.79	.6513	301,549	Wet.9987
13	85.43	.7000	99.83	174.41	1	463,016	Wet. 6651
14	84.43	.7000	72.40	-38.12	1	463,016	SatLiquid
15	350.22	.7000	94.83	-13.08	1	463,016	Liq 73°
16	335.22	.7000	164.52	65.13	1	463,016	SatLiquid
117	335.22	.7000	164.52	65.13	.8955	463,016	SatLiquid
17	325.22	.7000	203.40	302.92	.8955	414,621	Wet .5946
118	335.22	.7000	164.52	65.13	1045	463,016	SatLiquid
18	325.22	.7000	197.81	281.00	.1045	48,395	Wet .6254
19	325.22	.7000	202.81	300.63	1	463,016	Wet .5978
21	355.22	.7000	73.16	-36.76	1	463,016	Liq 96°
29	84.93	.7000	95.02	150.73	1	463,016	Wet .6984
30	325.22	.9740	202.81	625.10	.4022	186,238	SatVapor
32	214.26	.9740	170.19	601.53	.0535	24,771	Wet.0194
34	85.43	.9740	104.60	555.75	.3487	161,467	Wet.0467
23	•	Water	64.40	32.40	9.8669	4,568,519	

EP 1 936 129 A2

(continued)

	#	P psiA	X	T °F	H BTU/lb	G/G30	Flow lb/hr	Phase
5	24	•	Water	83.54	51.54	9.8669	4,568,519	
	25	•	Water	208.40	176.40	5.4766	2,535,750	
	26	•	Water	169.52	137.52	5.4766	2,535,750	

Table 2

	#	PpsiA	X	T °F	H BTU/lb	G/G30	Flow lb/hr	Phase
10	7	325.22	.5156	202.81	82.29	.5978	276,778	SatLiquid
	8	305.22	.5156	169.52	44.55	.5978	276,778	Liq 28°
	9	214.19	.5156	169.48	44.55	.5978	276,778	Wet.9997
15	10	214.19	.5523	169.52	89.23	.6570	304,216	Wet.921
	11	194.19	.5523	99.74	-29.96	.6570	304,216	Liq 53°
	12	85.43	.5523	99.53	-29.96	.6570	304,216	Wet.9992
20	13	85.43	.7000	99.74	173.96	1	463,016	Wet.6658
	14	84.43	.7000	72.40	-38.12	1	463,016	SatLiquid
	15	350.22	.7000	94.74	-13.18	1	463,016	Liq73°
25	16	335.22	.7000	164.52	65.13	1	463,016	SatLiquid
	117	335.22	.7000	164.52	65.13	8955	463,016	SatLiquid
	17	325.22	.7000	203.40	302.92	.8955	414,621	Wet .5946
30	118	335.22	.7000	164.52	65.13	.1045	463,016	SatLiquid
	18	325.22	.7000	197.81	281.00	.1045	48,395	Wet .6254
	19	325.22	.7000	202.81	300.63	1	463,016	Wet.5978
35	21	355.22	.7000	73.16	-36.76	1	463,016	Liq 96°
	29	84.93	.7000	94.96	150.38	1	463,016	Wet.6989
	30	325.22	.9740	202.81	625.10	.4022	186,238	SatVapor
40	31	214.59	.9740	170.63	602.12	.4022	186,238	Wet.0189
	32	214.69	.9224	170.63	539.93	.0593	27,437	Wet.1285
	33	214.69	.9829	170.63	612.87	.3430	158,800	SatVapor
45	34	85.43	.9829	102.18	564.60	.3430	158,800	Wet.0294
	35	214.69	.5119	170.63	45.44	.0076	3,527	SatLiquid
50	23	•	Water	64.40	32.40	9.8666	4,568,371	
	24	•	Water	83.50	51.50	9.8666	4,568,371	
	25	•	Water	208.40	176.40	5.4766	2,535,750	
55	26	•	Water	169.52	137.52	5.4766	2,535,750	

Table 3

	#	P psiA	X	T °F	H BTU/lb	G/G30	Flow lb/hr	Phase
45	10	291.89	.4826	203.40	80.72	.6506	294,484	SatLiquid
	11	271.89	.4826	109.02	-23.56	.6506	294,484	Liq 89°
	12	75.35	.4826	109.07	-23.56	.6506	294,484	Wet .9994
50	13	75.35	.6527	109.02	180.50	1	452,648	Wet .6669
	14	74.35	.6527	72.40	-47.40	1	452,648	SatLiquid
	15	316.89	.6527	103.99	-12.43	1	452,648	Liq 64°
55	16	301.89	.6527	164.52	55.41	1	452,648	SatLiquid
	17	291.89	.6527	203.40	273.22	1	452,648	Wet.6506
	21	321.89	.6527	73.04	-46.18	1	452,648	Liq97°
	29	74.85	.6527	100.84	146.74	1	452,648	Wet.7104,

# EP 1 936 129 A2

(continued)

#	P psiA	X	T °F	H BTU/lb	G/G30	Flow lb/hr	Phase
30	291.89	.9693	203.40	631.64	.3494	158,164	SatVapor
34	75.35	.9693	108.59	560.44	.3494	158,164	Wet.0474
23	•	Water	64.40	32.40	8.1318	3,680,852	
24	•	Water	88.27	56.27	8.1318	3,680,852	
25	•	Water	208.40	176.40	5.6020	2,535,750	
26	•	Water	169.52	137.52	5.6020	2,535,750	

Table 4

#	P psiA	X	T °F	H BTU/lb	G/G30	Flow lb/hr	Phase
10	214.30	.4059	203.40	80.05	.7420	395,533	SatLiquid
11	194.30	.4059	77.86	-55.30	.7420	395,533	Liq 118°
12	52.48	.4059	78.17	-55.30	.7420	395,533	Liq 32°
29	52.48	.5480	104.46	106.44	1	533,080	Wet .7825
14	51.98	.5480	72.40	-60.06	1	533,080	SatLiquid
21	244.30	.5480	72.83	-59.16	1	533,080	Liq 98°
16	224.30	.5480	164.52	41.26	1	533,080	SatLiquid
17	214.30	.5480	203.40	226.20	1	533,080	Wet .742
30	214.30	.9567	203.40	646.49	.2580	137,546	SatVapor
34	52.48	.9567	114.19	571.55	.2580	137,546	Wet .0473
23	•	Water	64.40	32.40	5.7346	3,057,018	
24	•	Water	93.43	61.43	5.7346	3,057,018	
25	•	Water	208.40	176.40	4.7568	2,535,750	
26	•	Water	169.52	137.52	4.7568	2,535,750	

Table 5

## Performance Summary KCS34 Case 1

Heat in	28893.87 kW	237.78 BTU/lb
Heat rejected	25638.63 kW	210.99 BTU/lb
Σ Turbine enthalpy drops	3420.86 kW	28.15 BTU/lb
Turbine Work	3184.82 kW	26.21 BTU/lb
Feed pump ΔH 1.36, power	175.97 kW	1.45 BTU/lb
Feed + Coolant pump power	364.36 kW	3.00 BTU/lb
Net Work	2820.46 kW	23.21 BTU/lb
Gross Output	3184.82 kWe	
Cycle Output	3008.85 kWe	
Net Output	2820.46 kWe	
Net thermal efficiency	9.76 %	
Second law limit	17.56 %	
Second law efficiency	55.58 %	
Specific Brine Consumption	899.05 lb/kW hr	
Specific Power Output	1.11 Watt hr/lb	

Table 6

## Performance Summary KCS34 Case 2

Turbine mass flow	58.34 kg/s 463016 lb/hr
-------------------	-------------------------

# EP 1 936 129 A2

(continued)

## Performance Summary KCS34 Case 2

Pt 30 Volume flow	4044.45 l/s 514182 ft <sup>3</sup> /hr	
Heat in	28893.87 kW	212.93 BTU/lb
Heat rejected	25578.48 kW	188.50 BTU/lb
Σ Turbine enthalpy drops	3500.33 kW	25.80 BTU/lb
Turbine Work	3258.81 kW	24.02 BTU/lb
Feed pump ΔH 1.36. power	196.51 kW	1.45 BTU/lb
Feed + Coolant pump power	408.52 kW	3.01 BTU/lb
Net Work	2850.29 kW	21.00 BTU/lb
Gross Output	3258.81 kWe	
Cycle Output	3062.30 kWe	
Net Output	2850.29 kWe	
Net thermal efficiency	9.86 %	
Second law limit	17.74 %	
Second law efficiency	55.60 %	
Specific Brine Consumption	889.65 lb/kW hr	
Specific Power Output	1.12 Watt hr/lb	

Table 7

## Performance Summary KCS34 Case 3

Turbine mass flow	57.03 kg/s 452648 lb/hr	
Pt 30 Volume flow	4474.71 l/s 568882 ft <sup>3</sup> /hr	
Heat in	28893.87 kW	217.81 BTU/lb
Heat rejected	25754.18 kW	194.14 BTU/lb
Σ Turbine enthalpy drops	3300.55 kW	24.88 BTU/lb
Turbine Work	3072.82 kW	23.16 BTU/lb
Feed pump ΔH 1.21, power	170.92 kW	1.29 BTU/lb
Feed + Coolant pump power	341.75 kW	2.58 BTU/lb
Net Work	2731.07 kW	20.59 BTU/lb
Gross Output	3072.82 kWe	
Cycle Output	2901.89 kWe	
Net Output	2731.07 kWe	
Net thermal efficiency	9.45 %	
Second law limit	17.39 %	
Second law efficiency	54.34 %	
Specific Brine Consumption	928.48 lb/kW hr	
Specific Power Output	1.08 Watt hr/lb	
Heat to Steam Boiler	15851.00 kW	577.22 BTU/lb
Heat Rejected	10736.96 kW	390.99 BTU/lb

Table 8

## Performance Summary KCS34 Case 4

Turbine mass flow	67.17 kg/s 533080 lb/hr	
Pt 30 Volume flow	7407.64 l/s 941754 ft <sup>3</sup> /hr	
Heat in	28893.87 kW	184.94 BTU/lb
Heat rejected	26012.25 kW	166.50 BTU/lb
Σ Turbine enthalpy drops	3020.89 kW	19.34 BTU/lb

(continued)

**Performance Summary KCS34 Case 4**

Turbine Work	2812.45 kW	18.00 BTU/lb
Feed pump $\Delta H$ 89. power	147.99 kW	0.95 BTU/lb
Feed + Coolant pump power	289.86 kW	1.86 BTU/lb
Net Work	2522.59 kW	16.15 BTU/lb
Gross Output	2812.45 kW	
Cycle Output	2664.46 kW	
Net Output	2522.59 kW	
Net thermal efficiency	8.73 %	
Second law limit	17.02 %	
Second law efficiency	51.29 %	
Specific Brine Consumption	1005.22 lb/kW hr	
Specific Power Output	0.99 Watt hr/lb	

**Claims****1.** A method for implementing a thermodynamic cycle comprising:

heating a working stream including a low boiling point component and a higher boiling point component with a source of external heat to provide a heated gaseous working stream,  
 separating said heated gaseous working stream at a first separator to provide a heated gaseous rich stream having relatively more of said low boiling point component and a lean stream having relatively less of said low boiling point component,  
 expanding said heated gaseous rich stream to transform the energy of the stream into useable form and to provide an expanded, spent rich stream, and  
 combining said lean stream and said expanded, spent rich stream to re-provide said working stream.

**2.** A method as claimed in claim 1, wherein, after said combining and before said heating with said external source of heat, said working stream is condensed by transferring heat to a low temperature source at a first heat exchanger, and said working stream is thereafter pumped to a higher pressure.**3.** A method as claimed in claim 2, further comprising transferring, at a second heat exchanger, heat from said working stream, prior to said working stream being condensed, to said working stream after said working stream has been pumped to said higher pressure and prior to said heating with said external source of heat.**4.** A method as claimed in claim 2 or 3, further comprising transferring, at a third heat exchanger, heat from said lean stream to said working stream after said working stream has been pumped to said higher pressure and prior to said heating with said external source of heat.**5.** A method as claimed in claim 3, further comprising transferring, at a third heat exchanger, heat from said lean stream to said working stream after said working stream has received heat at said second heat exchanger and prior to said heating with said external source of heat.**6.** A method as claimed in any one of claims 2 to 5, further comprising splitting said working stream, after said pumping and prior to said heating with said external source of heat, into a first working substream and a second working substream, and wherein said heating with said external source of heat involves heating said first working substream with said external source of heat to provide a heated first working substream and thereafter combining said heated first working substream with said second working substream to provide said heated gaseous working stream.**7.** A method as claimed in claim 6, further comprising transferring, at a fourth heat exchanger, heat from said lean stream to said second working substream.**8.** A method as claimed in any one of the preceding claims, wherein said heating with said external source of heat occurs at a fifth heat exchanger.



9. A method as claimed in any one of the preceding claims, wherein said expanding takes place in a first expansion step and a second expansion step,  
said heated gaseous rich stream being partially expanded to provide a partially expanded rich stream in said first expansion step,  
5 further comprising dividing said partially expanded rich stream into a first portion and a second portion,  
wherein said first portion is expanded to provide said expanded, spent rich stream in said second expansion step, and  
further comprising combining said second portion with said lean stream before said combining of said lean stream and said expanded, spent rich stream.
10. A method as claimed in claim 9, wherein said dividing includes separating said partially expanded rich stream into a vapor portion and a liquid portion, said first portion including at least some of said vapor portion, and said second portion including said liquid portion.
11. A method as claimed in claim 10, further comprising combining some of said vapor portion with said liquid portion to provide said second portion.
12. A method as claimed in any one of claims 9 to 11, further comprising transferring, at a heat exchanger, heat from said lean stream with said second portion to said working stream before said working stream has been heated with said external source of heat.
13. Apparatus for implementing a thermodynamic cycle comprising  
a heater that heats a working stream including a low boiling point component and a higher boiling point component with a source of external heat to provide a heated gaseous working stream,  
a first separator connected to receive said heated gaseous working stream and to output a heated gaseous rich stream having relatively more of said low boiling point component and a lean stream having relatively less of said low boiling point component,  
25 an expander that is connected to receive said heated gaseous rich stream, and transform the energy of the stream into useable form and to output an expanded, spent rich stream, and  
a first stream mixer that is connected to combine said lean stream and said expanded, spent rich stream and output said working stream, the output of said stream mixer being connected to the input to said heater.
14. An apparatus as claimed in claim 13, further comprising a first heat exchanger and a pump that are connected between said first stream mixer and said heater, said first heat exchanger condensing said working stream by transferring heat to a low temperature source, and said pump thereafter pumping said working stream to a higher pressure.
15. An apparatus as claimed in claim 14, further comprising a second heat exchanger connected to transfer heat from said working stream, prior to said working stream being condensed, to said working stream after said working stream has been pumped to said higher pressure at said pump and prior to said heating with said external source of heat at said heater.
16. An apparatus as claimed in claim 14 or 15, further comprising a third heat exchanger connected to transfer heat from said lean stream to said working stream after said working stream has been pumped to said higher pressure at said pump and prior to said heating with said external source of heat at said heater.
17. An apparatus as claimed in claim 14 or 15, further comprising a third heat exchanger connected to transfer heat from said lean stream to said working stream after said working stream has received heat at said second heat exchanger and prior to said heating with said external source of heat at said heater.
18. An apparatus as claimed in any one of claims 14 to 17, further comprising  
a stream splitter connected to split said working stream, after said pumping at said pump and prior to said heating with said external source of heat at said heater, into a first working substream and a second working substream, said heater heating said first working substream to provide a heated first working substream, and  
a third stream mixer connected to combine said heated first working substream with said second working substream to provide said heated gaseous working stream.
19. An apparatus as claimed in claim 18, further comprising a fourth heat exchanger connected to transfer heat from said lean stream to said second working substream.


20. An apparatus as claimed in any one of claims 13 to 19, wherein said heater is a fifth heat exchanger.

21. An apparatus as claimed in any one of claims 13 to 20, wherein said expander includes a first expansion stage and a second expansion stage,  
 5 said first expansion stage being connected to receive said heated gaseous rich stream and to output a partially expanded rich stream,  
 further comprising a stream divider that is connected to receive said partially expanded rich stream and divide it into a first portion and a second portion,  
 wherein said second stage is connected to receive said first portion and expands said first portion to provide said  
 10 expanded, spent rich stream, and  
 further comprising a second stream mixer that is connected to combine said second portion with said lean stream before said lean stream is combined with said expanded, spent rich stream at said first stream mixer.

22. An apparatus as claimed in claim 21, wherein said stream divider includes a second separator that is connected to  
 15 receive said partially expanded rich stream and to separate it into a vapor portion and a liquid portion, said first portion including at least some of said vapor portion, and said second portion including said liquid portion.

23. An apparatus as claimed in claim 22, wherein said stream divider includes a fourth stream mixer connected to  
 20 combine some of said vapor portion from said second separator with said liquid portion from said second separator to provide said second portion.

24. An apparatus as claimed in any one of claims 21 to 23, further comprising a heat exchanger connected to transfer  
 25 heat from said lean stream with said second portion to said working stream before said working stream has been heated with said external source of heat at said heater.

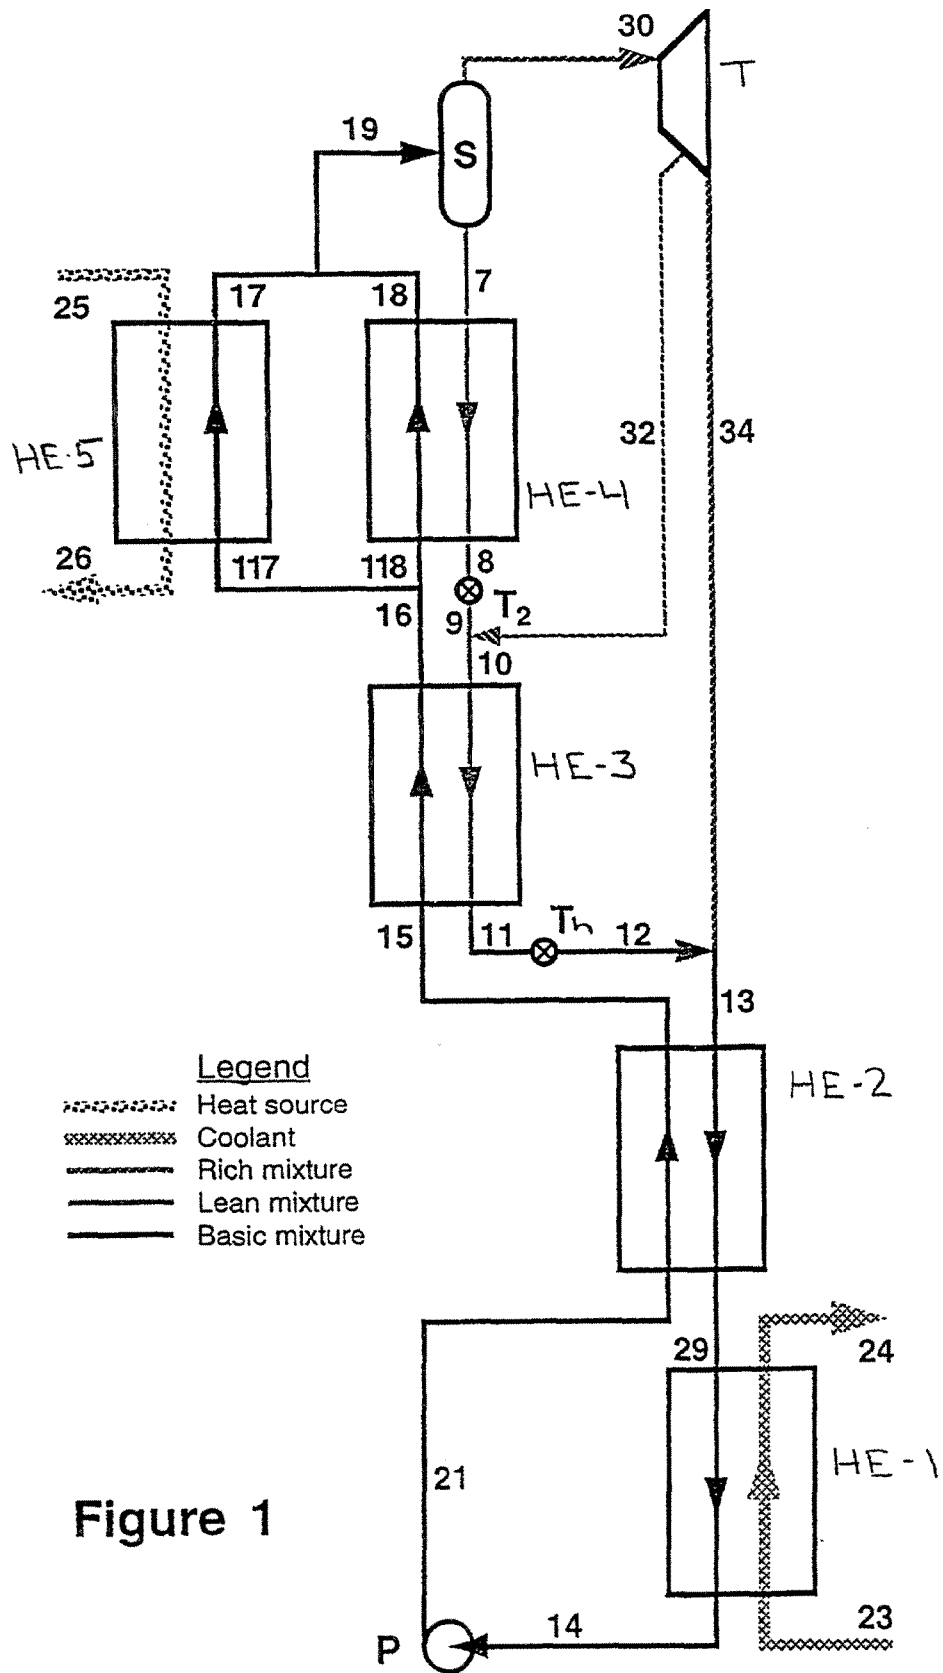

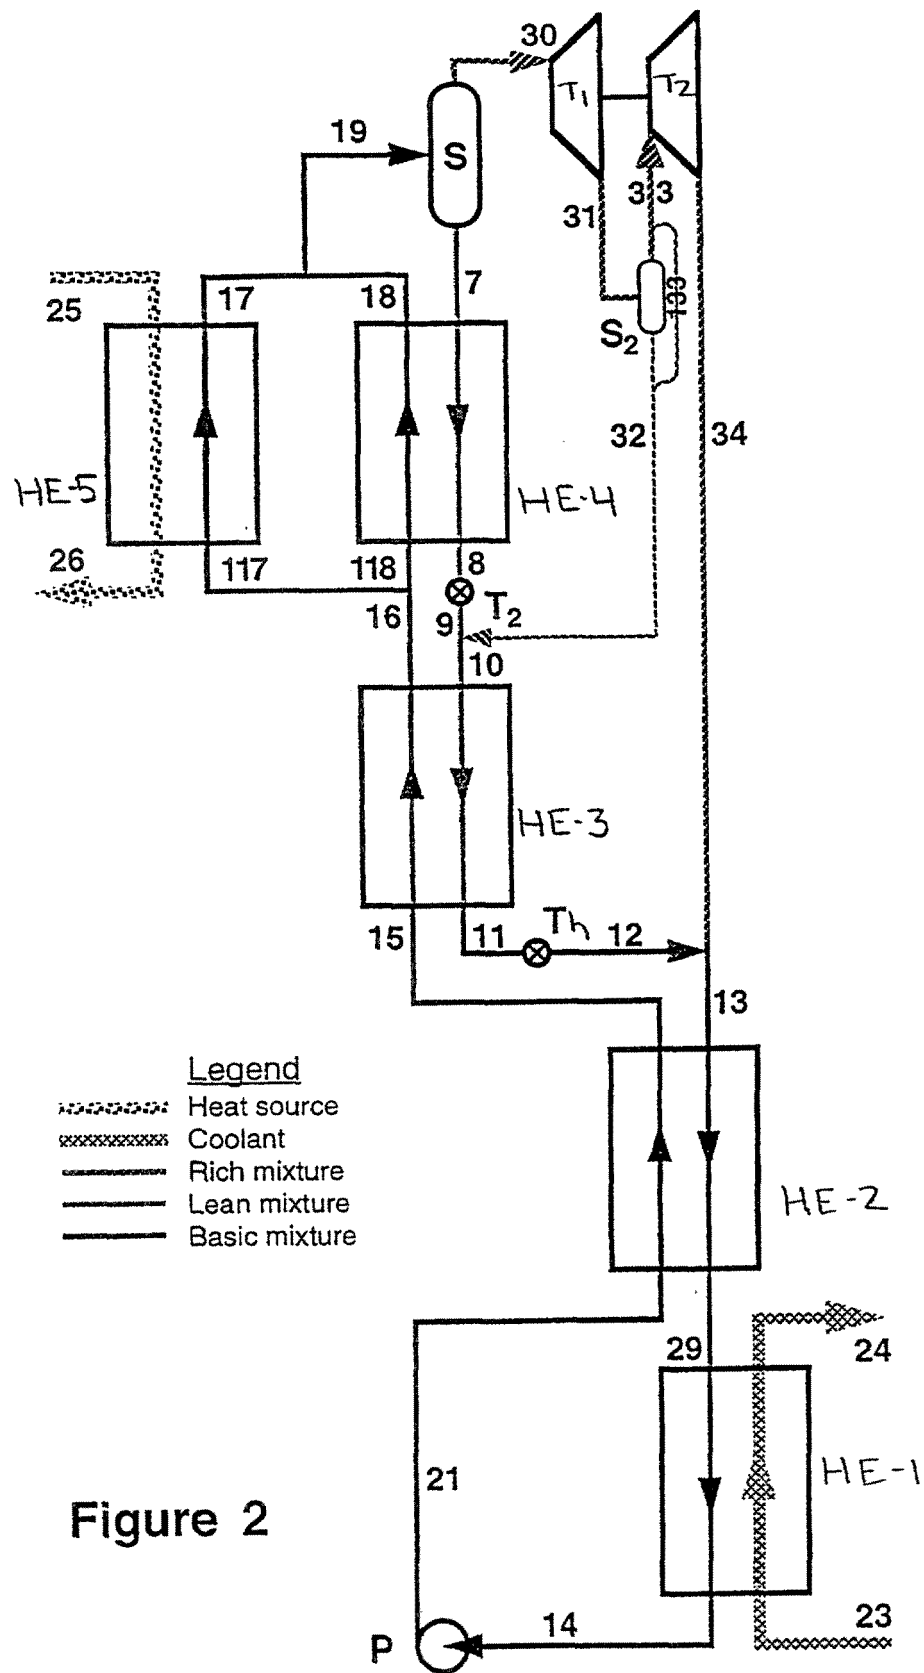


Figure 2

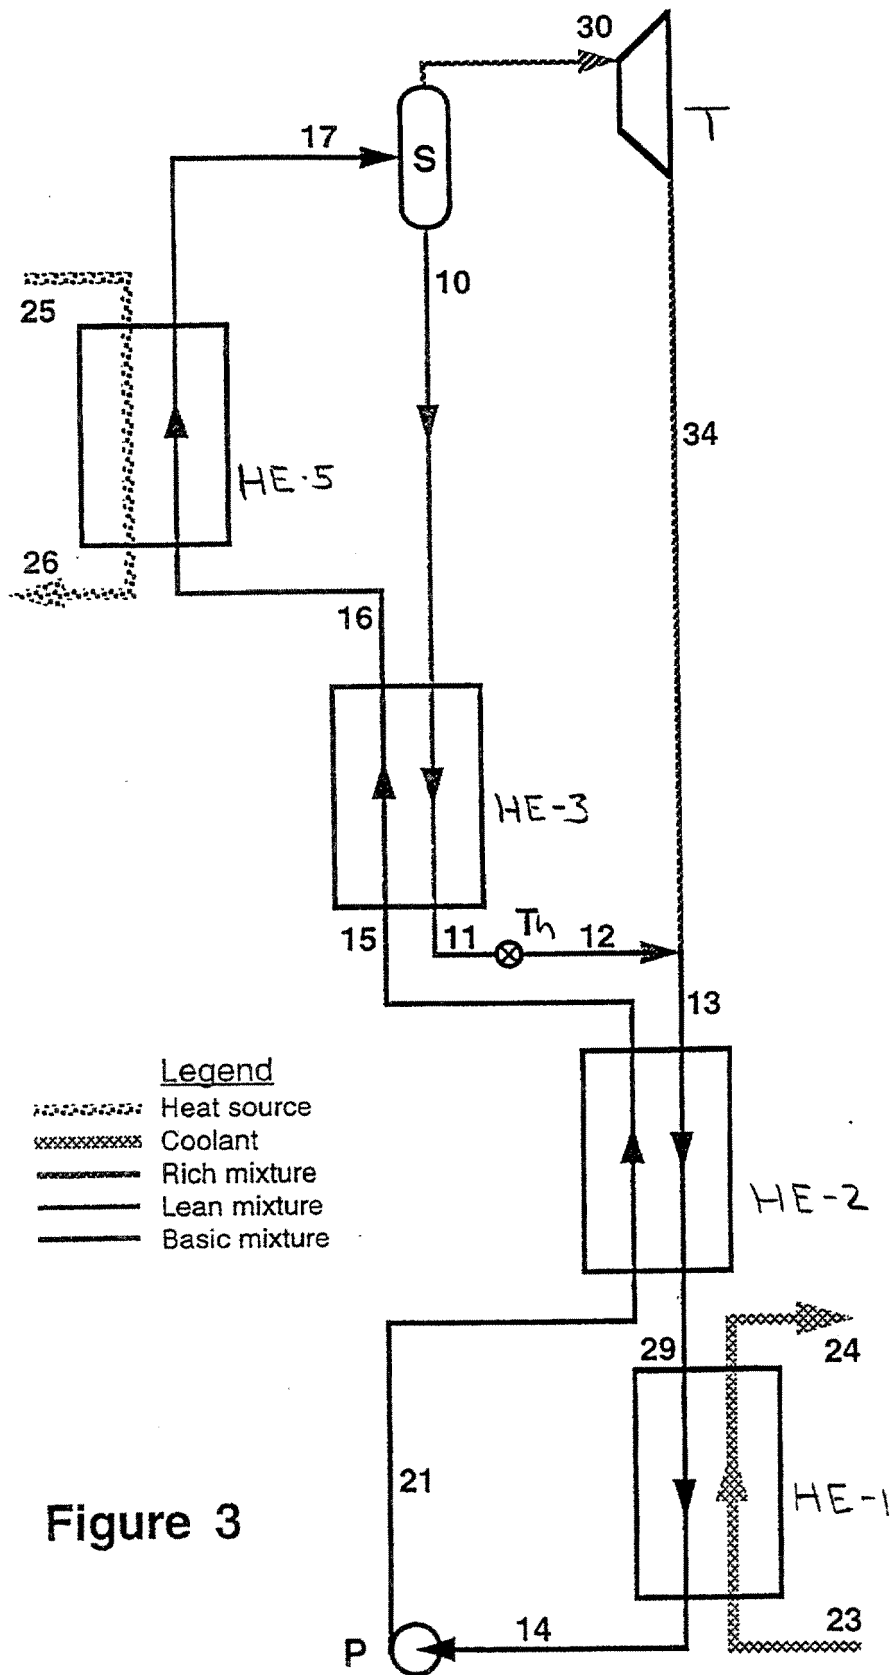


Figure 3

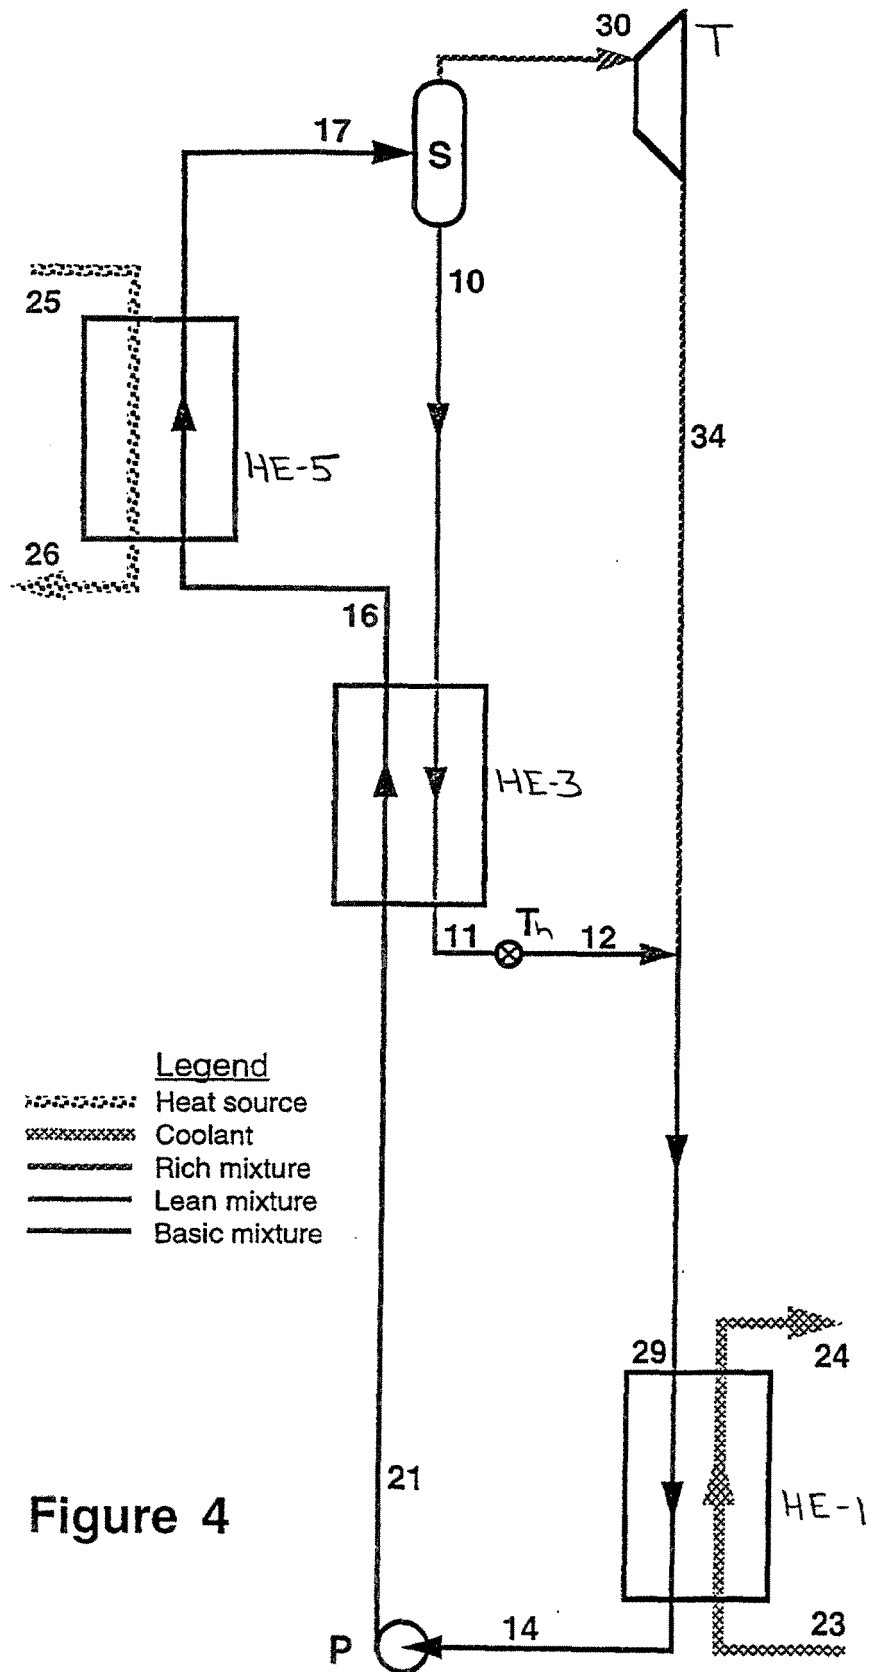


Figure 4

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 4346561 A [0003]
- US 4489563 A [0003]
- US 4982568 A [0003]
- US 5029444 A [0003]
- US 4548043 A [0003]
- US 4586340 A [0003]
- US 4604867 A [0003]
- US 4732005 A [0003]
- US 4763480 A [0003]
- US 4899545 A [0003]
- US 5095708 A [0003]
- US 5440882 A [0003]
- US 5572871 A [0003]
- US 5649426 A [0003]