



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
02.07.2008 Bulletin 2008/27

(51) Int Cl.:
F25J 1/02 (2006.01)

(21) Application number: **06127190.4**

(22) Date of filing: **26.12.2006**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI SK TR
Designated Extension States:
AL BA HR MK RS

- **Pérez Díaz, Silvia**
33204 Gijón (Asturias) (ES)
- **Soave, Giorgio**
20097 Milano (IT)

(71) Applicant: **REPSOL YPF S.A.**
28046 Madrid (ES)

(74) Representative: **Pons Arino, Angel**
Pons Patentes y Marcas Internacional, S.L.
Glorieta Ruben Dario 4
28010 Madrid (ES)

(72) Inventors:
• **Migliore, Calogero**
28034 Madrid (ES)

Remarks:
Amended claims in accordance with Rule 137(2) EPC.

(54) **Process to obtain liquefied natural gas**

(57) A process to obtain liquefied natural gas (LNG) which comprises the use of air as refrigerant in an open

or closed cycle. The invention also refers to a system to carry out said process and uses thereof.

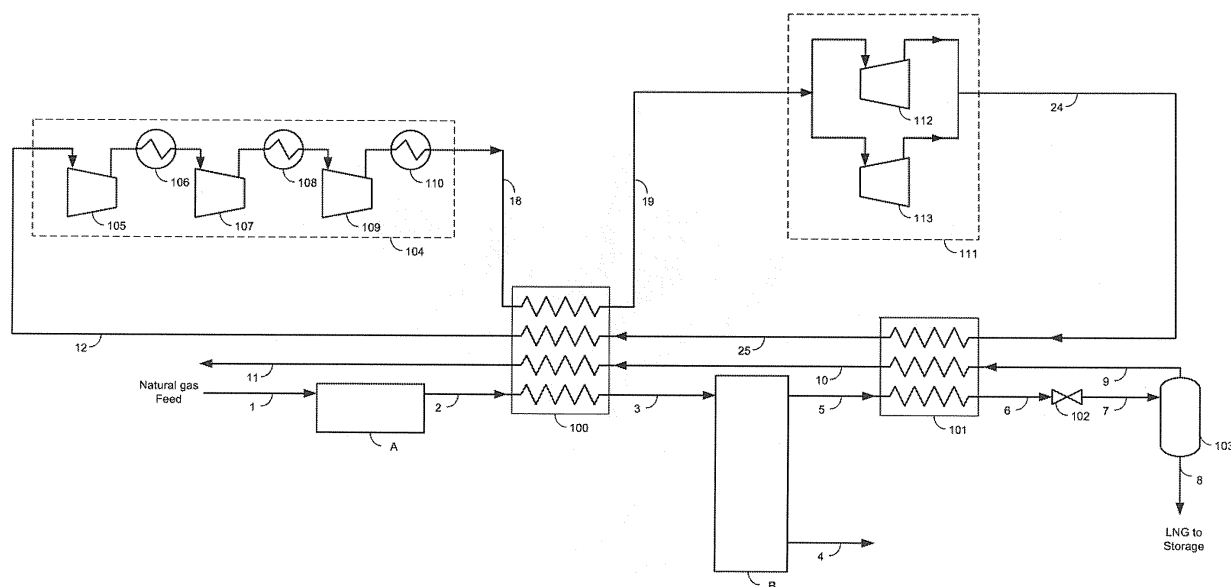


FIG. 1

Description

[0001] The invention relates to a process to obtain Liquefied Natural Gas (LNG) using air as refrigerant. This process can be performed by using an open or close air refrigerant cycle.

BACKGROUND ART

[0002] Natural gas is often available in areas remote from where it will be ultimately used. When carrying it, natural gas is cooled to a temperature of approximately -260 °F (-160 °C) at atmospheric pressure so that it condenses to a liquid called liquefied natural gas (LNG). This LNG is normally transported overseas in appropriate carrier vessels.

[0003] Numerous process cycles have been developed for LNG production to provide the large refrigeration requirements. Such cycles typically use a mixed refrigerant comprising light hydrocarbons and optionally nitrogen. e.g., US 4,274,849 patent discloses a mixture of hydrocarbons, at least two, as a refrigerating fluid in a process to liquefy a natural gas.

SUMMARY OF THE INVENTION

[0004] The present invention refers to a novel process, system or plant capable of liquefying natural gas from any kind of natural gas fields, and particularly from "off-shore" fields, and more particularly from stranded natural gas fields, wherein this process comprises air used as refrigerant.

[0005] The system of the present invention comprises a simple and easily reproducible process in all possible locations, preferably "offshore" natural gas fields. This system is particularly advantageous when located in barges for liquefying gas from small natural gas fields located in distant areas, far away from the coast.

[0006] Thus, a first aspect of this invention refers to a process to obtain liquefied natural gas which comprises the air used as refrigerant. This process can be developed as an air refrigeration cycle independent from the natural gas stream.

[0007] According to the process of the present invention, it is provided an air refrigeration cycle comprising the following steps:

- a. compressing the air
- b. cooling said compressed air of step (a)
- c. expanding said compressed air once cooled at step (b); and
- d. using said expanded air (step (c)) for cooling natural gas

[0008] In an embodiment of the present invention, the process can also comprise the further step:

- e. adding an air make-up in order to compensate the

probable air losses.

[0009] The air make-up may be treated to remove the CO₂ and water that can be carried using treating facilities known in the art.

[0010] In a more preferred embodiment, step (a) of the process is carried out in at least one stage, preferably more than one.

[0011] The air refrigerant cycle of the invention can be open or closed. When the air refrigeration cycle is open, the air is continuously taken from the environment, at atmospheric conditions, treated to remove CO₂ and water, used to cool natural gas according to the above steps, and given back to the atmosphere.

[0012] When the air refrigeration cycle is closed, the air used to cool natural gas goes back to the beginning of the process (step (a)).

[0013] According to the process of the present invention, the natural gas stream passes through the following steps:

- a. cooling the natural gas.
- b. expanding said natural gas once cooled at step (a), obtaining LNG or LNG and a vapour phase (end-flash gas).

[0014] Thus, the natural gas can be liquefied completely (LNG), without letting any vapor phase, or not obtaining two phases, liquid and vapor.

[0015] In another embodiment of the present invention, if two phases are obtained in step (b), the natural gas stream comprises the further step:

- c. separating said phases: liquid (LNG) and vapor (endflash gas).

[0016] Optionally, the natural gas stream may further comprise the stage of separating their natural gas liquids (NGL), before liquefaction.

[0017] The term "Natural gas liquids (NGL)" as used herein refers to less volatile components of the natural gas, from ethane to higher hydrocarbons (ethane, propane, butane, isobutane and natural gasoline, the latter sometimes called condensate), with minor content of methane.

[0018] In another embodiment of the present invention, the natural gas stream can be pre-treated, if required, before cooling it. Various pretreatment arrangements are known in the art. The appropriate pretreatment depends on the location, the type, the precise composition and the level and nature of undesirable contaminants or impurities present in the natural gas feed. It usually could comprise the removal, but are not limited to, Hg, H₂O, CO₂ or H₂S.

[0019] This natural gas stream is often passed to the process with a pressure of at least 1 bar, and preferably above 10 bar; it also depends on the location, and the type of the natural gas in the gas-field.

[0020] The feed of natural gas can be poor in heavier hydrocarbons and it needs no separation of the natural gas liquids; alternately, should the natural gas is partially rich in heavier hydrocarbons, the natural gas liquids can be kept in the final LNG and separated by fractionation after its transportation to the final destination. In both cases the natural gas is liquefied as such and this is realized using a single heat exchanger.

[0021] In a more preferred embodiment, a natural gas stream particularly rich in heavier hydrocarbons is cooled in two stages:

[0022] First, the natural gas is cooled with air, until a suitable temperature that allows condensing as a liquid the required quantity of natural gas liquids (NGL). This stage is carried out through a first heat exchanger. This temperature could depend on the natural gas feed composition, LNG specifications, or on particular requirements in heavier components recoveries and/or purities. This temperature will not be lower than -100°C .

[0023] The result of the previous stage is a light hydrocarbon gaseous stream called lean natural gas. The term "lean natural gas" refers to a stream which contains almost all the methane and the nitrogen of the initial feed, the desired quantity of ethane and small residual quantities of the less volatile components (propane and higher).

[0024] Secondly, the lean natural gas goes through a second heat exchanger where it is cooled with the air, until the gas is almost totally or fully liquefied. The temperature at which the NG exits this heat exchanger will not be lower than -163°C .

[0025] As an alternate embodiment, the cooling and liquefaction of a natural gas stream particularly rich in heavier hydrocarbons can be carried out in only one heat exchanger. In this case, the NGL extraction is done after the gas pretreatment and before the cooling and liquefaction.

[0026] In another embodiment of the invention, the endflash gas stream, obtained as subproduct in the liquefying of natural gas, is used to cool natural gas and air streams in the process in order to recover its cryogenic energy, and as fuel gas. This fuel could feed gas turbines and it will typically need to be pressurized by a compressor before being introduced to them. The amount of endflash gas obtained can match the quantity of required fuel gas or it can be part of it or it can be in excess and be used partly for other purposes.

[0027] A second aspect of the present invention refers to a system to carry out the previously described process which comprises a continuous stream of natural gas, gas treatment facilities and an air refrigerant cycle.

[0028] Air is used as refrigerant in the refrigerant cycle of this system in order to obtain liquefied natural gas. This cycle can preferably be closed loop or open cycle.

[0029] In other embodiment, the system comprises the following pieces of equipment:

- Heat exchangers. Any type of heat exchangers may

be used in the present invention, although plate-fin heat exchangers are preferred.

The minimum number of heat exchangers in the natural gas side is one, although any number of heat exchangers is possible.

In an embodiment of the present invention, the system can have the exchange of heat between the compressed air stream and the exhaust air after cooling and liquefaction in a separate heat exchanger.

- Expanders. Examples of suitable expanders are a JT-valve (Joule Thompson valve) and a turbine expander, although any type of expander may be employed.

In the air side, at least one expander is necessary for air expansion. Due to power limitations, the air expanders can be more than one in parallel. The air expanders can be coupled to one or more air compressors in order to recover their power. Alternately, their power can be utilized for other process purposes, such as power generation.

In the natural gas side, at least one expander is necessary for expanding the liquid obtained from the heat exchange section.

- Compressors. At least one is required for compressing the air. The number of compression stages in the air cycle depends on the process optimization; it is not a fixed number.

The compression zone preferably comprises one or more heat exchangers (intercoolers) between compressors, in case more than one compressor is used, and one or more heat exchangers (aftercoolers) after the last compressor. The intercoolers and the aftercoolers preferably use water as coolant medium, although air can also be used. Shell -and-tube heat exchangers are preferred.

Another compressor, together with its cooling system, may be required to feed the gas turbines with the endflash gas.

- Compressor drivers. They drive all of the compression stages, except for one if it is coupled to the air expander. Gas turbines or electric motors can be used.

[0030] In a more preferred embodiment, the system comprises further equipment:

- Column for NGL extraction. If an NGL fractionation is required, more than one column could be necessary. The column for NGL extraction can be bypassed if no natural gas liquids need to be extracted, so in this case, the natural gas stream can be directed to a further heat exchanger for the liquefaction of natural gas.

[0031] In a still preferred embodiment, the system comprises further equipment:

- Endflash vessel.

[0032] On a second embodiment of the present invention, this system may be located on a fixed structure such as a platform or a movable structure such as a barge or a ship. Both structures may be used in all types of natural gas fields, including onshore and offshore gas fields. This allows the exploitation in any kind of deposit, even for exploitation of stranded gas (small volume and remote area fields).

[0033] The term "onshore" as used herein refers to something that is on land.

[0034] The term "offshore" as used herein refers to something that is in the sea away from the shore; not on the shoreline but out to the sea.

[0035] As an alternate embodiment, the system can be located on two separate areas (two different fixed structures, two different movable structures or one fixed structure and one movable structure). One area may be dedicated to the gas pretreatment unit and the NGL extraction facilities, while the other area may be dedicated to the liquefaction unit.

[0036] Thus, a third aspect of this invention refers to the use of the system previously described for natural gas fields, and preferably for stranded natural gas fields.

[0037] The term "stranded natural gas field" as used herein refers to a natural gas field that has been discovered, but remains unusable for either physical or economic reasons. Economically, because the reserve is too remote from a market for natural gas; or physically, if the gas field is too deep to drill for, or is beneath an obstruction.

[0038] Another aspect of this invention relates to the use of the previously described system for producing at least 0.1 MTA (million tonnes per year) of LNG, and preferably, the production of LNG is within the range of 0.5 to 3 MTA.

[0039] Unless otherwise defined, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skilled in the art to which this invention belongs. Methods and materials similar or equivalent to those described herein can be used in the practice of the present invention. Throughout the description and claims the word "comprise" and its variations are not intended to exclude other technical features, additives, components, or steps. Additional objects, advantages and features of the invention will become apparent to those skilled in the art upon examination of the description or may be learned by practice of the invention. The following examples and drawings are provided by way of illustration and are not intended to be limiting of the present invention. Various required subsystems such as valves, control systems, sensors, clamps, and riser support structures have been deleted from the Figures for the purposes of simplicity and clarity of presentation.

BRIEF DESCRIPTION OF THE DRAWINGS

[0040]

Fig. 1 and Fig. 3.- are schematic diagrams of a closed refrigerant cycle according to the invention.

Fig. 2.- is a schematic diagram of an open refrigerant loop according to the invention.

EXAMPLES

[0041] The following examples give a description of some of the possible process schemes and operating conditions which do not cover all the possible schemes and conditions which are detailed in the claim list given below.

EXAMPLE 1

[0042] Fig.1 shows one example of the present invention as applied to liquefaction of a natural gas feed stream using air as refrigerant. The natural gas feed stream 1 is treated in a conventional pretreatment plant A to remove CO₂, H₂S, water and mercury contaminants.

[0043] The treated gas, stream 2, corresponds to a sweet, dry natural gas stream at 15°C, 30 bar. Stream 2 has a molar composition as given in Table 1 below.

Table 1

Treated gas composition example	
Component	Mole Fraction
Nitrogen	0.0020
Methane	0.8387
Ethane	0.1204
Propane	0.0274
n-Butane	0.0081
n-Pentane	0.0034

[0044] Stream 2 enters the liquefaction plant, passing through two heat exchangers 100, 101 in order to obtain a subcooled high pressure liquid, stream 6. In the first heat exchanger 100, the natural gas is precooled to an intermediate temperature of about -69°C (stream 3), in order to condense the natural gas liquids. Stream 3 enters a column B where the natural gas liquids are extracted as stream 4 at the bottom, while the lean gas, stream 5, exits the column at the top. Stream 4 will be directed to a fractionation zone, if specific products like propane and butane are required.

[0045] The lean natural gas (stream 5) enters the second heat exchanger 101, and it is cooled to a temperature of about -130°C, obtaining a subcooled high pressure liquid stream (stream 6), which is directed to a JT-valve 102, through which the stream 6 is expanded adiabati-

cally to 1.1 bar and finally directed to an endflash vessel 103, which separates liquid and vapor, producing LNG to storage (stream 8) and endflash gas (stream 9), both at about -160°C and 1.1 bar.

[0046] Stream 9 is passed back to both heat exchangers 101 and 100, respectively, where the cryogenic energy of this stream is recovered. Thus, stream 9 exits the heat exchanger 101 at -91°C, obtaining stream 10, which is further heated by heat exchanger 100 to the temperature of 15°C (stream 11). This vapor stream 11 can be used as fuel within the plant. In case this fuel feeds gas turbines, stream 11 will typically need to be pressurized by a compressor before being introduced to them.

[0047] In this example, the heat exchangers in the natural gas side are plate-fin heat exchangers.

[0048] The air refrigeration cycle which transforms gas stream 2 to liquid stream 6 will now be described, starting with air stream 12 which has been exhausted of all or most of its cooling properties by absorbing heat from the feed gas. Stream 12, at about 34°C, is at the lowest pressure of the cycle (about 2 bar) and is fed to and recompressed in a multistage compressor unit 104 provided with intercooling and aftercooling stages to produce compressed stream 18. The compressor zone comprises three compressors 105, 107 and 109, with one heat exchanger 106 between compressors 105 and 107, one heat exchanger 108 between compressors 107 and 109 and one heat exchanger 110 after the last compressor 109. The intercoolers 106 and 108, and the aftercooler 110 use water as coolant medium. Compressed stream 18 exits the compressor unit 104 at 40°C, 30 bar and is directed to heat exchanger 100, where is precooled to -24°C by the countercurrent passage of air refrigerant stream 21 and of endflash gas 10. Stream 18 emerges as stream 19 from heat exchanger 100 and is passed to an expander zone 111 to reduce the pressure and temperature of the air stream 19, resulting in the stream 24. The expander zone comprises two turboexpanders 112 and 113 in parallel and is used to provide part of the power for the compressors of the compressor unit 104. The air stream 24 (which has been expanded in the expander zone 111) is at 2.1 bar and at a temperature of about -135°C. It passes through both heat exchangers 101 and 100, respectively. In the heat exchanger 101, the stream 24 provides enough cooling to liquefy the natural gas stream 5 to form liquid natural gas (stream 6). Stream 24 emerges as stream 25 from heat exchanger 101 at a temperature of -73°C and it enters heat exchanger 100, where it pre-cools both the natural gas (stream 2) and the compressed air (stream 18). Stream 25 leaves the heat exchanger 100 as stream 12 and it starts the cycle again.

[0049] The air cycle will have a point for make up in order to compensate for air losses in the air cycle. The air make-up will have to be treated in treating facilities to eliminate the CO₂ and water that it can carry.

[0050] Table 2 shows the operating conditions of the main streams of FIG. 1.

Table 2

Stream	P (bar)	T (°C)
2	30	15
3	29.8	-68.6
5	29.8	-68.6
6	29.6	-130.4
7	1.1	-159.4
8	1.1	-159.4
9	1.1	-159.4
10	1.05	-90.8
11	1	15
12	1.95	34.5
18	30	40
19	29.9	-24.1
24	2.15	-134.6
25	2.05	-73.4

EXAMPLE 2

[0051] FIG. 2 shows another example of the present invention. The example shown in FIG. 2 has, as modification in relation to FIG. 1, that the air used as refrigerant flows in an open loop.

[0052] As in the previous example, the natural gas 1 is treated in the pretreatment plant A to remove CO₂, H₂S, water and mercury contaminants (the treated gas, stream 2, has the composition shown in Table 1) and then liquefied by exchange with cold air in two steps. First, it is precooled in the heat exchanger 100 to a temperature of about -69°C (stream 3). It passes through a column B where the liquids are extracted as the bottom stream 4; the lean natural gas exits the column B at the top (stream 5) and enters the second heat exchanger 101. The liquid stream emerging from heat exchanger 101 at about -130°C (stream 6) is directed to an expansion zone, where is expanded adiabatically in a JT-valve 102 to 1.1 bar (stream 7). Finally, stream 7 is directed to an endflash vessel 103, which separates liquid and vapor, producing LNG to storage (stream 8) and endflash gas (stream 9), both at about -160°C and 1.1 bar.

[0053] Stream 9 is passed back to both heat exchangers 101 and 100, respectively, where the cryogenic energy of this stream is recovered, in an identical way as in Example 1. In the end, endflash gas exits heat exchanger 100 as stream 11 at 15°C, 1 bar. This vapor stream 11 can be used as fuel within the plant.

[0054] The air refrigeration cycle, in FIG. 2, is an open loop. In this cycle, the air is continuously taken from the atmosphere at ambient conditions (stream 12*). Stream 12* enters the treating plant C, which is in charge of removing the CO₂ and water that can carry the air and leaves the plant as stream 12 (15°C, 1 bar). Stream 12 is compressed in a multistage compressor unit 104 provided with intercooling and aftercooling stages to pro-

duce compressed stream 18, which exits the compressor unit 104 at 40°C and 16 bar. It is directed to heat exchanger 100, where is precooled to about -27°C by the countercurrent passage of air refrigerant stream 21 and of endflash gas 10. Stream 18 emerges as stream 19 from heat exchanger 100 and is passed to an expander zone 111, where the pressure and the temperature is reduced to about 1.2 bar and -133°C, respectively (stream 24). Stream 24 passes through both heat exchangers 101 and 100, respectively. In the heat exchanger 101, the stream 24 provides enough cooling to liquefy the natural gas stream 5 to form liquid natural gas (stream 6). Stream 24 emerges as stream 25 from heat exchanger 101 at a temperature of about -74°C and it enters heat exchanger 100, where it precools both the natural gas (stream 2) and the compressed air (stream 18). Stream 25 leaves the heat exchanger 100 as stream 26 at about 33°C and 1 bar, and it is released directly to the atmosphere.

[0055] Table 3 shows the operating conditions of the main streams of FIG. 2.

Table 3

Stream	P (bar)	T (°C)
2	30	15
3	29.8	-68.6
5	29.8	-68.6
6	29.6	-130.4
7	1.1	-159.4
8	1.1	-159.4
9	1.1	-159.4
10	1.05	-90.8
11	1	15
12	1	15
18	16	40
19	15.9	-26.7
24	1.2	-133.1
25	1.1	-74.1
26	1	33.3

EXAMPLE 3

[0056] FIG. 3 shows another example of the present invention.

[0057] As in the previous examples, the natural gas 1 is treated in the pretreatment plant A (the treated gas, stream 2, has the composition shown in Table 1) and then liquefied by exchanging heat with cold air in two steps. First, it is precooled in the heat exchanger 100 to a temperature of about -69°C (stream 3). It passes through a column B where the liquids are extracted as the bottom stream 4; the lean natural gas exits the column B at the top (stream 5) and enters the second heat exchanger 101. The liquid stream emerging from heat exchanger 101 at about -131°C (stream 6) is directed to an

expansion zone, where is expanded adiabatically in a JT-valve 102 to 1.1 bar (stream 7). Finally, stream 7 is directed to an endflash vessel 103, which separates liquid and vapor, producing LNG to storage (stream 8) and endflash gas (stream 9), both at about -160°C and 1.1 bar.

[0058] Stream 9 is passed back to both heat exchangers 101 and 100, respectively, where the cryogenic energy of this stream is recovered, in an identical way as in Examples 1 and 2. In the end, endflash gas exits heat exchanger 100 as stream 11 at 15°C, 1 bar. This vapor stream 11 can be used as fuel within the plant.

[0059] The air refrigeration cycle which transforms gas stream 2 to liquid stream 6 will now be described, starting with air stream 12. Stream 12, which is at about 36°C and 3.6 bar is compressed in a multistage compressor unit 104 provided with intercooling and aftercooling stages to produce compressed stream 18, which exits the compressor unit 104 at 40°C and 43 bar. It is directed to heat exchanger 114, where is precooled to about -33°C by the countercurrent passage of air refrigerant stream 26. Stream 18 emerges as stream 19 from heat exchanger 114 and is passed to an expander zone 111, where the pressure and the temperature is reduced to about 4 bar and -135°C, respectively (stream 24). Stream 24 passes through both heat exchangers 101 and 100, respectively. In the heat exchanger 101, the stream 24 provides enough cooling to liquefy the natural gas stream 5 to form liquid natural gas (stream 6). Stream 24 emerges as stream 25 from heat exchanger 101 at a temperature of about -81°C and it enters heat exchanger 100, where it precools the natural gas (stream 2). Stream 25 leaves the heat exchanger 100 as stream 26 at about -43°C and 3.7 bar, and is directed to the heat exchanger 114, where this stream precools the countercurrent air stream 18. Stream 26 leaves the heat exchanger 114 as stream 12 and it starts the cycle again.

[0060] The air cycle will have a point for make up in order to compensate for air losses in the air cycle. The air make up will have to be treated in treating facilities to eliminate the CO₂ and water that it can carry.

[0061] Table 4 shows the operating conditions of the main streams of FIG. 3.

Table 4

Stream	P (bar)	T (°C)
2	30	15
3	29.9	-69.1
5	29.8	-68.9
6	29.6	-130.6
7	1.1	-159.5
8	1.1	-159.5
9	1.1	-159.5
10	1.05	-80
11	1	15
12	3.6	36.4

(continued)

Stream	P (bar)	T (°C)
18	43	40
19	42.9	-33.1
24	3.9	-135.4
25	3.8	-80.7
26	3.7	-43.3

Claims

1. A process to obtain Liquefied Natural Gas (LNG) which comprises the use of air as refrigerant.
2. The process according to claim 1, which comprises the following steps:
 - a. compressing air;
 - b. cooling said compressed air of step (a);
 - c. expanding said compressed air once cooled of step (b); and
 - d. using said expanded air (step (c)) for cooling the natural gas stream.
3. The process according to any of the claims 1-2, which further comprises the step:
 - e. incorporating air make-up in order to compensate the air losses.
4. The process according to any of the claims 2-3, wherein the step (a) is carried out in more than one stage.
5. The process according to any of the claims 1-4, wherein the air used to cool natural gas goes back to the beginning of the process (step (a)).
6. The process according to any of the claims 1-4, wherein the air used to cool natural gas is given back to the atmosphere.
7. The process according to claim 1, wherein the natural gas stream comprises the following steps:
 - a. cooling natural gas;
 - b. expanding the cooled natural gas of step (a), obtaining LNG or LNG and a vapor phase (end-flash gas).
8. The process according to claim 7, wherein if two phases are obtained in step (b), the natural gas stream comprises the further step:
 - c. separating said phases: liquid (LNG) and vapor (endflash gas).
9. The process according to any of the claims 7-8, wherein the natural gas stream comprises the additional step:
 - d. separating the natural gas liquids (NGL) before the liquefaction of natural gas.
10. The process according to any of the claims 7-9, wherein the natural gas stream passes to the process with a pressure of at least 1 bar.
11. The process according to any of the claims 7-10, wherein the natural gas is cooled to liquefaction in two stages.
12. The process according to claim 11, wherein the natural gas stream is cooled down, in the first stage of cooling, to a temperature that allows the extraction of natural gas liquids (NGL).
13. The process according to claim 11, wherein the natural gas stream is cooled down, in the second stage of cooling, to a temperature that allows the liquefaction of it.
14. The process according to any of the claims 7-13, wherein natural gas is pre-treated before cooling it.
15. The process according to claim 14, wherein the pre-treatment of natural gas comprises the removal of CO₂, H₂S, H₂O or Hg.
16. The process according to any of the claims 7-15, wherein endflash gas stream is used to cool the natural gas stream.
17. The process according to any of the claims 7-15, wherein the stream of endflash gas is used as fuel gas in said process.
18. A system to carry out the process according to any of the claims 1-17, which comprises a continuous stream of natural gas, gas treatment facilities and an air refrigerant cycle.
19. The system according to claim 18, wherein the air cycle is open.
20. The system according to claim 18, wherein the air cycle is closed.
21. The system according to any of the claims 18-20, which comprises the following pieces of equipment:
 - a. At least one heat exchanger;
 - b. At least one expander;
 - c. At least one compressor; and
 - d. At least one compressor driver.

22. The system according to claim 21, which further comprises:

e. Column for NGL extraction.

23. The system according to any of the claims 21-22, which further comprises:

f. Endflash vessel

24. The system according to any of the claims 18-23, where the heat exchange between the compressed air stream and the exhaust air after cooling and liquefaction takes place in a separate heat exchanger.

25. The system according to any of the claims 18-23, is located on at least one fixed structure.

26. The system according to any of the claims 18-23, is located on at least one mobile structure.

27. Use of the system according to any of the claims 18-26, for stranded natural gas fields.

28. Use of the system according to any of the claims 18-26, for the production of at least 0.1 MTA of LNG.

Amended claims in accordance with Rule 137(2) EPC.

1. A system of production of Liquefied Natural Gas (LNG) comprising:

- a mobile structure, and
- a natural gas liquefaction plant installed on the mobile structure which comprises:

at least one compressor (105, 107, 109) where air (12) is compressed to obtain compressed air (18),

at least one expander (112, 113) where a cooled compressed air (19) is expanded to obtain expanded air (24, 25),

at least one heat exchanger (100, 120, 101) where the natural gas (2, 5) is cooled with the expanded air (24, 25) and with an end-flash gas (9, 10) to obtain a cooled natural gas (3, 6),

an expansion device (102) where the cooled natural gas (6) is expanded to obtain an expanded cooled natural gas (7), and an end-flash vessel (103) where the expanded cooled natural gas (7) is separated in liquefied natural gas LNG (8) and in the end-flash gas (9).

2. A system of production of Liquefied Natural Gas

(LNG) according to claim 1 wherein the heat exchanger (100) further comprises:

an inlet for the compressed air (18), an outlet for the cooled compressed air (19), and an outlet for the air (12) which is further connected to the compressor (105, 107, 109) in a closed refrigeration cycle or with the atmosphere (26) in an open refrigeration cycle.

3. A system of production of Liquefied Natural Gas (LNG) according to claim 1 wherein it comprises an additional heat exchanger (114) where the compressed air (18) is cooled with the air (121) coming from the heat exchanger (120) to obtain the cooled compressed air (19).

4. A system of production of Liquefied Natural Gas (LNG) according to claim 1 wherein it further comprises a fractionation unit B, located after the heat exchanger (100, 120), where the cooled natural gas (3) enters, a natural gas liquids enriched stream (4) is extracted, and a lean natural gas (5) is extracted.

5. A system of production of Liquefied Natural Gas (LNG) according to claim 4 wherein a heat exchanger (101) is located after the fractionation unit B where the lean natural gas (5) is cooled with the expanded air (24) and with the end-flash gas (9) to obtain the cooled natural gas (6).

6. A system of production of Liquefied Natural Gas (LNG) according to claim 1 wherein it further comprises a pretreatment plant A located prior to the heat exchanger (100, 120) where the undesired contaminants or impurities present in the natural gas feed (1) are removed.

7. A system of production of Liquefied Natural Gas (LNG) according to claim 1 wherein it further comprises a treating plant C where CO₂ and water are removed from air (12') taken from the atmosphere, obtaining the air (12) which is directed to the compressor (105, 107, 109).

8. A system of production of Liquefied Natural Gas (LNG) according to claim 1 wherein the mobile structure consists on a barge.

9. A system of production of Liquefied Natural Gas (LNG) according to claim 1 wherein the mobile structure consists on a ship.

10. A method of production of Liquefied Natural Gas (LNG), which comprises the following steps:

- a. compressing air (12) to obtain a compressed air (18),

- b. cooling the compressed air (18) to obtain a cooled compressed air (19),
- c. expanding said cooled compressed air (19) to obtain an expanded air (24, 25),
- d. using the expanded air (24, 25) for cooling the natural gas stream (2, 5) to obtain a cooled natural gas (6),
- e. expanding the cooled natural gas (6) to obtain an expanded natural gas (7) and separating said expanded natural gas in liquid (LNG) (8) and an end-flash gas (9),

wherein the end-flash gas (9) is used to cool the natural gas stream (2, 5).

11. The method according to claim 10, which further comprises the step of:

- f. incorporating air make-up to the air circuit in order to compensate the air losses.

12. The method according claim 10, wherein the step of compressing air (12) is carried out in more than one stage.

13. The method according to claim 10, wherein the expanded air (25) once used to cool the natural gas goes back to the beginning of the process as air (12) which is further compressed.

14. The method according to claim 10, wherein the expanded air (25) once used to cool the natural gas is given back to the atmosphere (26).

15. The method according to claim 10, which comprises the additional step of:

- g. separating the natural gas in natural gas liquids enriched stream (NGL) (4) and a lean gas (5) before the liquefaction of natural gas.

16. The method according to claim 10, wherein the natural gas stream passes to the process with a pressure of at least 1 bar.


17. The method according to claim 10, wherein the natural gas is cooled to liquefaction in two stages.

18. The method according to claim 17, wherein the natural gas stream is cooled down, in the first stage of cooling, to a temperature that allows the extraction of natural gas liquids enriched stream (NGL) (4).

19. The method according to claim 17, wherein the natural gas stream is cooled down, in the second stage of cooling, to a temperature that allows the liquefaction of it.

20. The method according to claim 10 wherein natural gas is pre-treated before cooling it.

21. The method according to claim 20, wherein the pre-treatment of natural gas comprises the removal of CO₂, H₂S, H₂O or Hg.

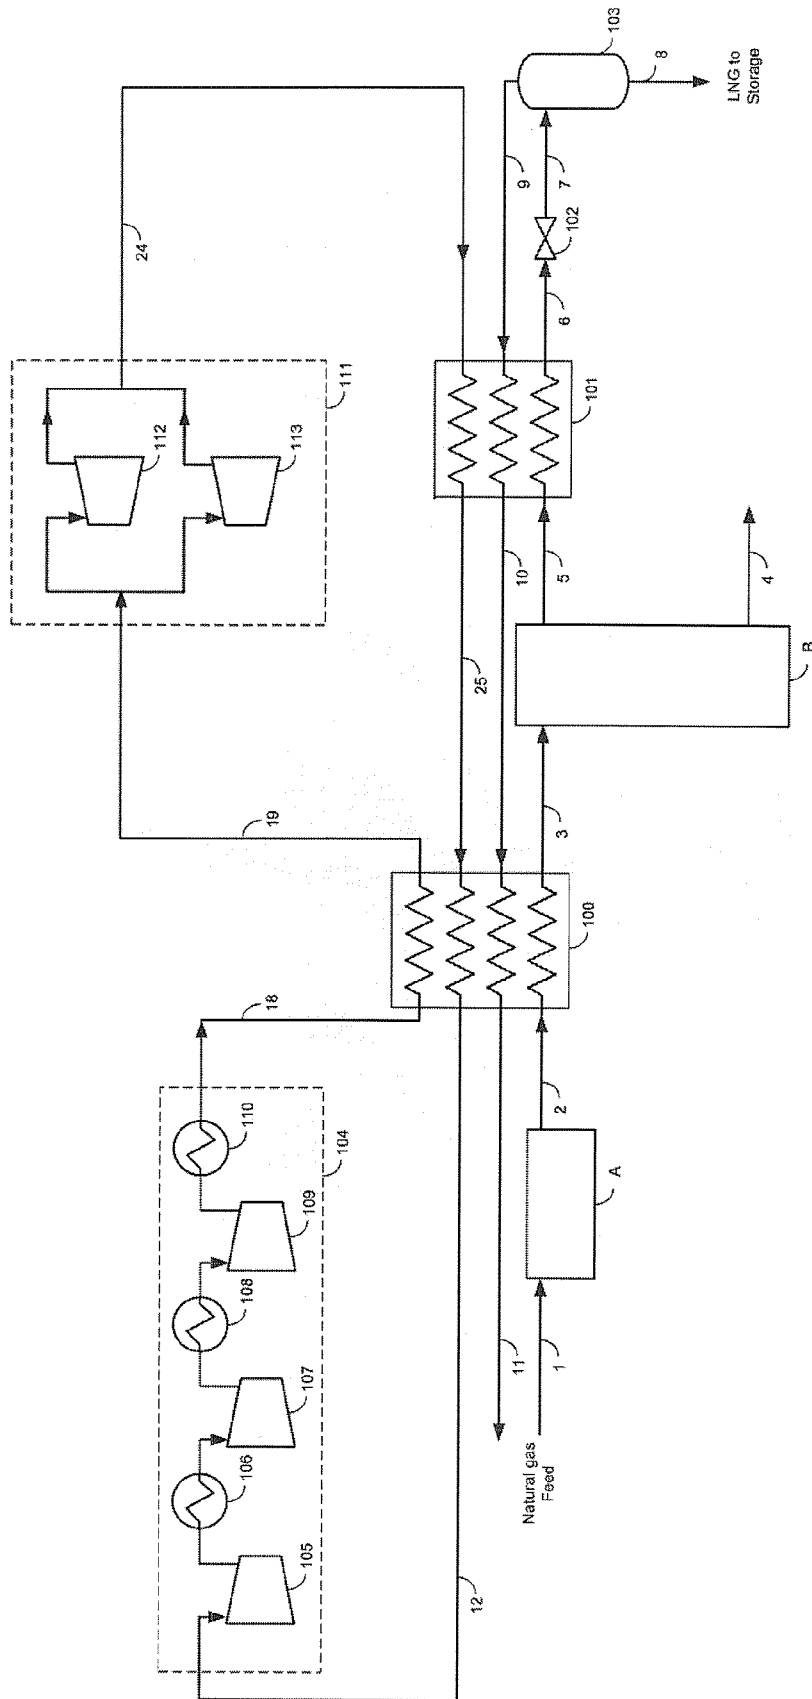

Ἐ


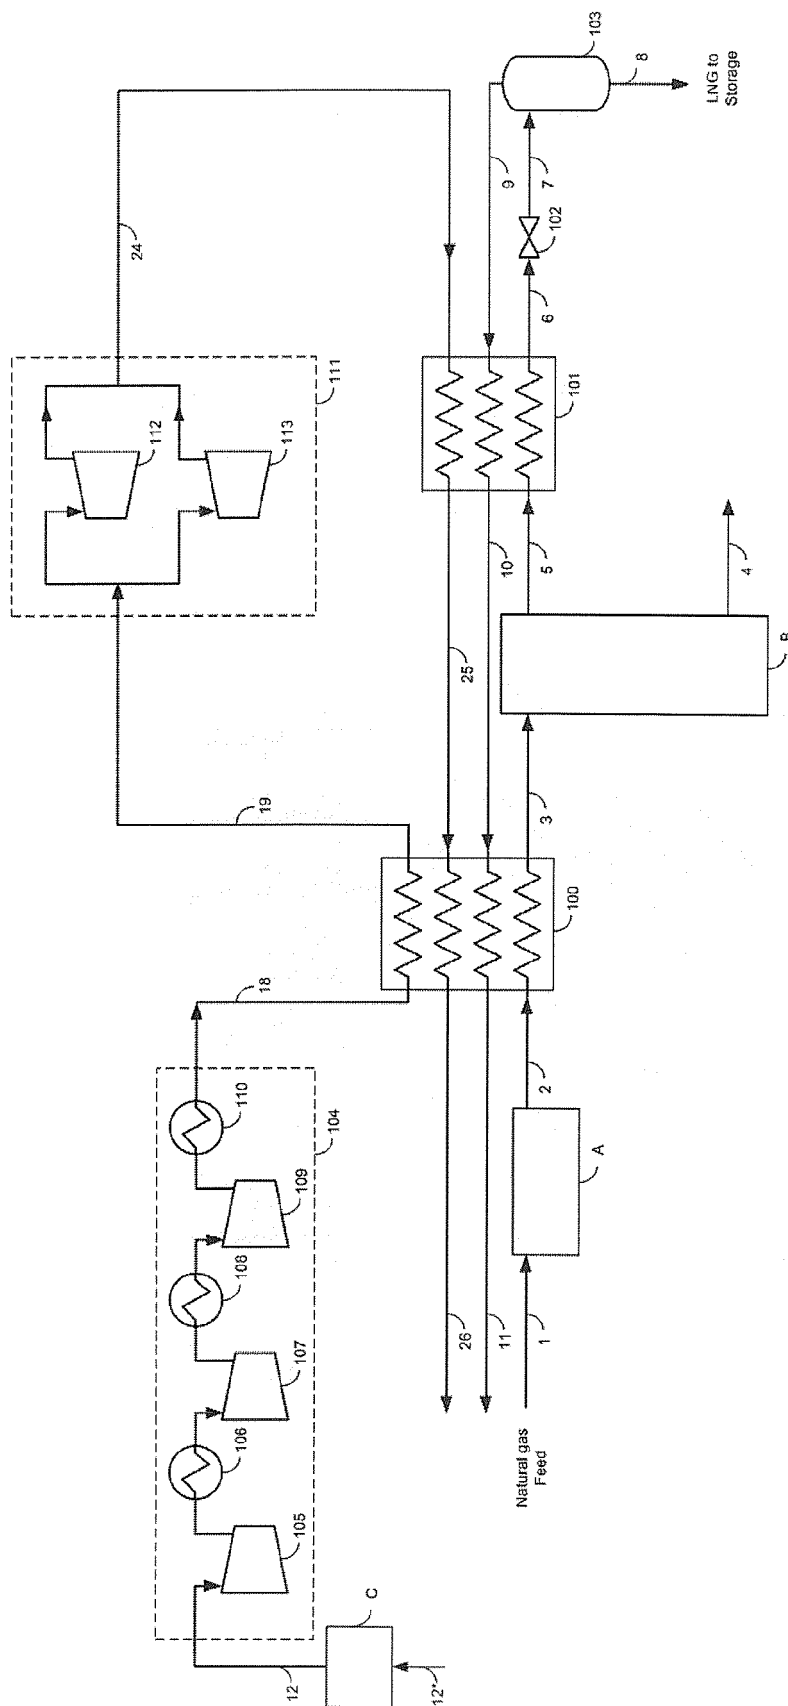


FIG. 2



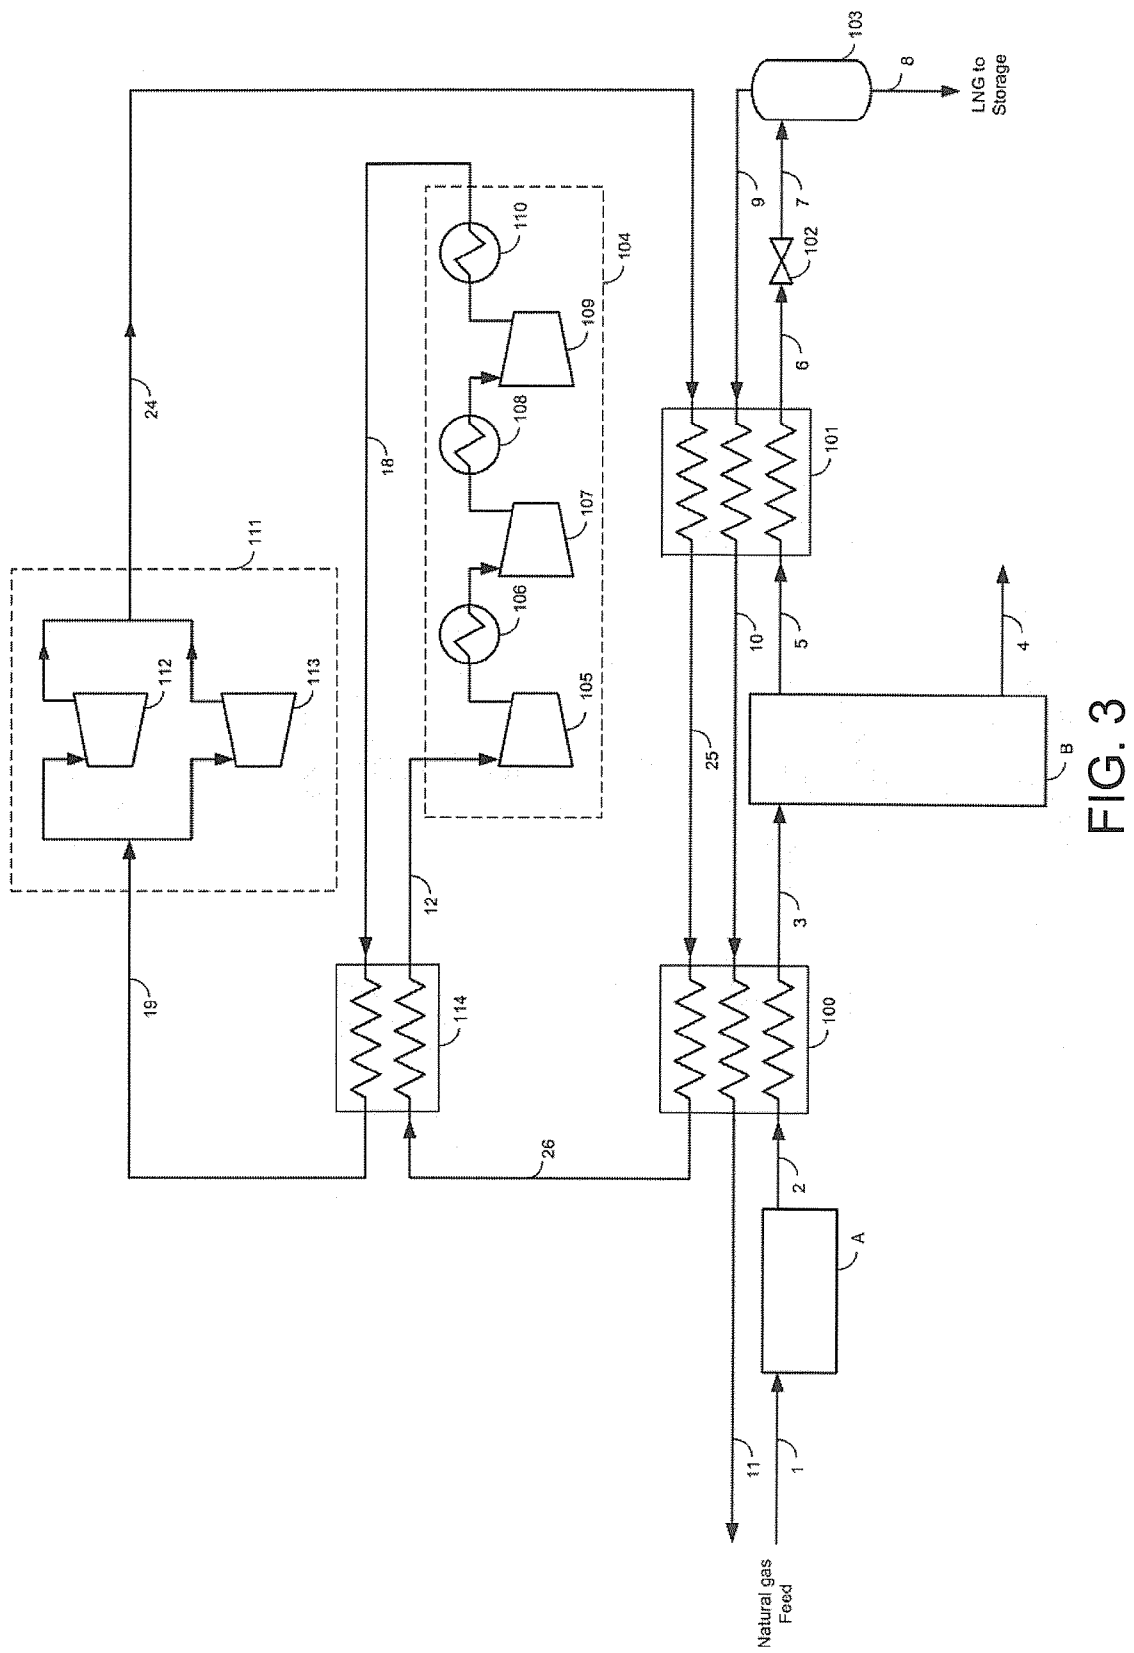

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 06 12 7190

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2004/083756 A1 (TRANIER JEAN-PIERRE [FR]) 6 May 2004 (2004-05-06)	1-7, 9-15, 18-22, 24-28	INV. F25J1/02
Y	* paragraphs [0056], [0062]; figures 1-3,5 *	8,16,17, 23	
X	US 5 931 021 A (SHNAID ISAAC [IL] ET AL) 3 August 1999 (1999-08-03)	1-7, 9-15, 18-22, 24-28	
Y	* column 6, line 37 - line 67; figures 3,6,7 * * column 8, line 66 - column 9, line 17; figure 8 *	8,16,17, 23	
X	FR 1 542 232 A (WILLIAMS ET AL) 11 October 1968 (1968-10-11)	1-7, 9-11,14, 15,18, 19,21, 22,25-28	TECHNICAL FIELDS SEARCHED (IPC)
	* page 2, column 2, paragraph 3; figure 7 *		F25J
Y	EP 1 092 931 A1 (AIR PROD & CHEM [US]) 18 April 2001 (2001-04-18)	8,16,17, 23	
A	* column 8, line 17 - line 21 *	7,9-15, 22,24,25	
Y	TRUE W R: "REDUCING SCALE, INCREASING FLEXIBILITY ARE TARGETS OF NEW LNG DESIGNS" OIL AND GAS JOURNAL, PENNWELL, HOUSTON, TX, US, 6 December 1999 (1999-12-06), pages 54-61, XP001207675 ISSN: 0030-1388	8,16,17, 23	
A	* figures 2,3 *	26-28	
		-/--	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 23 July 2007	Examiner Göritz, Dirk
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

2
EPO FORM 1503 03.82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 06 12 7190

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	<p>HARROLD D: "DESIGN A TURNKEY FLOATING LNG FACILITY"</p> <p>HYDROCARBON PROCESSING, GULF PUBLISHING CO. HOUSTON, US, July 2004 (2004-07), pages 47-51, XP009038900</p> <p>ISSN: 0018-8190</p> <p>* figures 1,3 *</p> <p style="text-align: center;">-----</p>	9-15,22,24,26-28	
			TECHNICAL FIELDS SEARCHED (IPC)
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
Munich		23 July 2007	Göritz, Dirk
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone</p> <p>Y : particularly relevant if combined with another document of the same category</p> <p>A : technological background</p> <p>O : non-written disclosure</p> <p>P : intermediate document</p> <p>T : theory or principle underlying the invention</p> <p>E : earlier patent document, but published on, or after the filing date</p> <p>D : document cited in the application</p> <p>L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

2
EPO FORM 1503 03/82 (P04/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 06 12 7190

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-07-2007

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2004083756 A1	06-05-2004	CN 1501044 A	02-06-2004
		EP 1435497 A2	07-07-2004
		JP 2004156899 A	03-06-2004

US 5931021 A	03-08-1999	NONE	

FR 1542232 A	11-10-1968	NONE	

EP 1092931 A1	18-04-2001	AT 268892 T	15-06-2004
		AT 288575 T	15-02-2005
		AT 300026 T	15-08-2005
		AT 295518 T	15-05-2005
		AT 300027 T	15-08-2005
		AU 744040 B2	14-02-2002
		AU 6250700 A	03-05-2001
		DE 60011365 D1	15-07-2004
		DE 60011365 T2	09-06-2005
		DE 60017951 D1	10-03-2005
		DE 60017951 T2	19-01-2006
		DE 60020173 D1	16-06-2005
		DE 60020173 T2	19-01-2006
		DE 60021434 D1	25-08-2005
		DE 60021434 T2	12-01-2006
		DE 60021437 D1	25-08-2005
		DE 60021437 T2	12-01-2006
		ES 2222145 T3	01-02-2005
		ES 2237717 T3	01-08-2005
		ES 2246442 T3	16-02-2006
		ES 2242122 T3	01-11-2005
		ES 2246486 T3	16-02-2006
		GC 0000141 A	29-06-2005
		ID 27542 A	12-04-2001
		JP 3523177 B2	26-04-2004
		JP 2001165562 A	22-06-2001
		KR 20010040029 A	15-05-2001
		NO 20005109 A	17-04-2001
		TW 454086 B	11-09-2001
		US 6308531 B1	30-10-2001
		US RE39637 E1	22-05-2007

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 4274849 A [0003]