



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
05.11.2008 Bulletin 2008/45

(51) Int Cl.:
B05B 1/16 (2006.01) B05B 1/18 (2006.01)

(21) Application number: **07008958.6**

(22) Date of filing: **03.05.2007**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE SI SK TR
Designated Extension States:
AL BA HR MK RS

(72) Inventor: **Nobili, Fabrizio**
6534 San Vittore (CH)

(74) Representative: **Zardi, Marco**
M. Zardi & Co. S.A.
Via Pioda 6
6900 Lugano (CH)

(71) Applicant: **Nobili, Fabrizio**
6534 San Vittore (CH)

(54) **Improved shower sprayhead**

(57) Sprayhead (2) for showers, of the type conceived to receive a fluid by means of a single conveyance pipe (27), comprising a central nozzle (44) and a plurality of peripheral nozzles (46) for flow delivery. The sprayhead comprises an electrovalve (55) mounted on the

sprayhead (2) for deviating the flow alternatively towards said central nozzle (44) or towards said peripheral nozzles (46), and an electric control (48) to be activated by the user, also mounted on the sprayhead to operate said electrovalve (55).

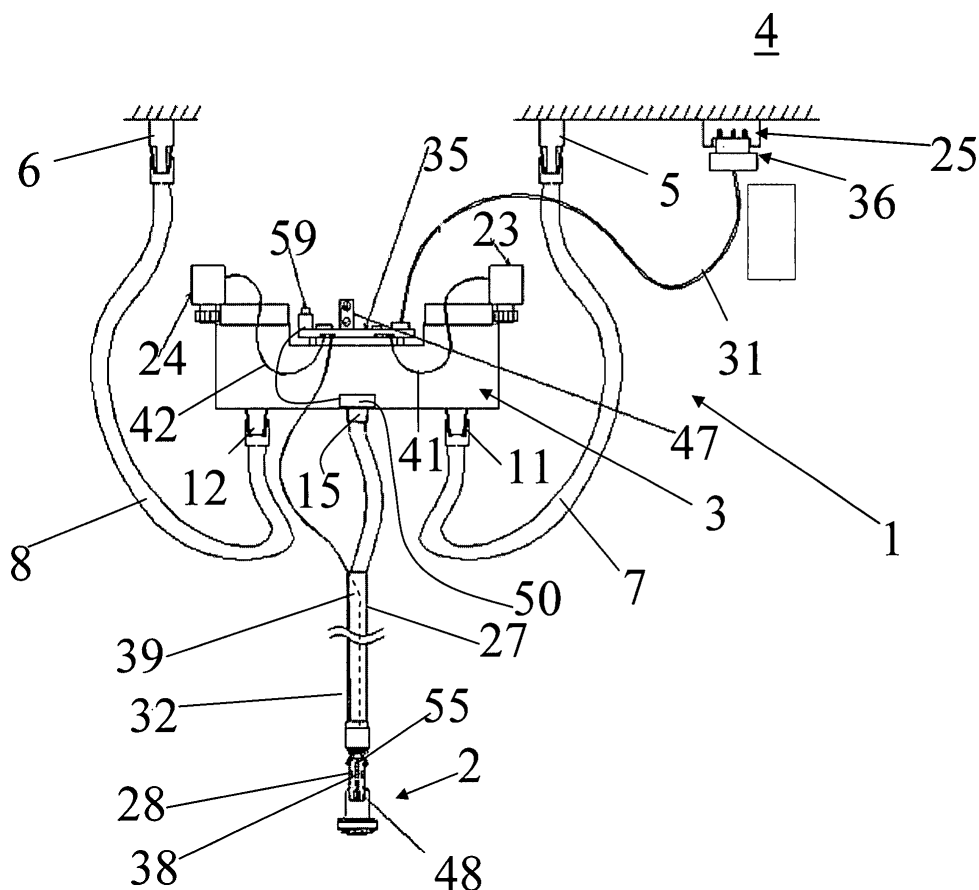


FIG. 1

Description

Field of application

[0001] The present invention relates to a sprayhead for domestic showers, of the type where the fluid is supplied from a single pipe, comprising a central nozzle to deliver the central jet and a plurality of peripheral nozzles for the distribution of a peripheral rain spray.

[0002] More particularly, the invention relates to a delivery sprayhead which is connected by means of a flexible hose to a fluid flow regulator device which is connected to the domestic sanitary equipment.

[0003] The invention relates in particular, but not exclusively, to a sprayhead used as distributor and terminal head fixed on the end of a flexible hose in a kitchen sink or bathroom washbasin, and the following description refers specifically to this field of application with the sole aim of simplifying the description.

Prior Art

[0004] As is commonly known in this specific technical field, a very wide range of sprayheads for washbasins are available on the market, and they differ in shape, size and function.

[0005] Said sprayheads are connected to the water supply by means of a flexible hose and a fluid flow regulator device, in other words, the device supplies and regulates the flow spray of cold, hot and mixed temperature water.

[0006] Normally the regulator unit is installed in a central portion of the sanitary equipment, whether this is a kitchen sink or bathroom basin, or it is mounted on the wall above the sink or basin.

[0007] The sprayhead has the particular advantage in that it can be gripped by the user and pulled out from the compartment where it is stored to be hidden from view, such as a spout fixture mounted with a terminal portion positioned to flow into the sink or basin.

[0008] The flexible hose connected to the regulator device is also inserted inside the fixture cavity. These sprayheads are commonly referred to as "pull-out sprays".

[0009] It should also be noted that the pull-out spray is associated with a fixed faucet which can take the form of a single handle mixer equipped with a manually operated lever on top or on the side, to open and close the water flow and to mix the hot and cold water.

[0010] On the other hand, normally the sprayhead is mounted with a manual control associated with a mechanical press button which deviates the water flow from the central faucet distributor through a centre nozzle that delivers a single jet water flow, to a head which distributes the water in rain fashion around the perimeter through a plurality of tiny nozzles arranged in a ring around the centre nozzle.

[0011] Although they are advantageous under several aspects, all solutions provided by prior art have a com-

mon limit caused by the fact that the user must first activate the control lever on the fixed faucet mounted near the sink or basin in order to obtain water from the sprayhead, regulate the hot/cold mix at the same time, and only after this, can the user grip the pull-out spray.

[0012] The alternative method involves using both hands.

[0013] When the water exits from the sprayhead 2 the flow distribution mode can be changed from peripheral to central water flow by using the mechanical system mounted on the head.

[0014] The technical problem at the base of the present invention, is to provide an improved sprayhead, in particular for pull-out spray devices on sinks and washbasins and similar domestic fixtures, having structural and functional characteristics that permit easy switchover of the peripheral water flow.

[0015] Another aim of the present invention is to provide a sprayhead that incorporates the activation and regulation controls for water flow and the switchover from peripheral to central distribution.

Summary of the invention

[0016] The solution idea at the base of the present invention is to envisage at least one electric control on the sprayhead, electrically connected to an electrovalve for flow switchover, also mounted on the sprayhead.

[0017] According to this solution, the sprayhead is mounted with further electric controls to operate motorised fluid regulation means, associated with the regulating unit, and to cut off the fluid flow, mounted on the same sprayhead.

[0018] In this way, a much simpler flow switchover is obtained, since the electric control is activated by pressing the relative press button on the sprayhead. Furthermore, the presence of the single handle mixer faucet is rendered practically superfluous because the flow rate and temperature are adjusted by the electric controls for regulation and cutoff.

[0019] It should also be stated that in a preferred embodiment of the invention, the sprayhead is mounted with at least one pair of electrical controls, one to open and close the fluid flow, and the other for mixing and regulating the temperature of the hot and cold water, as well as an electric control to deviate the fluid to the peripheral spray or central jet.

[0020] According to this solution, the technical problem is solved by a sprayhead of the type previously described and defined in the characteristics in claim 1.

[0021] The invention also relates to a regulation unit for fluid flow and mixing, comprising at least one sprayhead connected by means of a flexible hose to the regulation unit as described in claim 5.

[0022] The characteristics and advantages of the sprayhead and the regulation unit according to the present invention will be made apparent from the following description of an embodiment provided as a non-limit-

iting example, with reference to the appended drawings.

Brief description of the drawings

[0023]

- Figure 1 shows a schematic view of a regulation unit for fluid flow and mixing according to the present invention, and connected to the end of a hot and cold water delivery supply;
- Figure 2 shows a view in perspective of a sprayhead associated with the regulation unit according to the invention;
- Figure 3 shows a schematic view from above of the regulation unit only shown in figure 1, but without the hydraulic and/or electric connections;
- Figure 4 shows a schematic side view of the regulation unit shown in figure 3;
- Figure 5 shows a schematic view of a partial side cross section of the regulation unit shown in figure 3;
- Figure 6 shows a schematic view in perspective of a sprayhead according to the invention, conceived to be associated with the regulation unit shown in figure 1;
- Figure 7 shows a schematic front view of the sprayhead shown in figure 6;
- Figures 8A and 8B show respective views from the rear and in cross section of the sprayhead 2, to show the presence of an electrovalve or linear switch more clearly, as mounted on the sprayhead in question;
- Figure 9 shows a schematic block diagram of an electronic unit associated with the regulation unit shown in figure 1.

Detailed description of a preferred embodiment

[0024] With reference to the aforesaid figures, the numeral 1 refers throughout to a regulation unit for fluid distribution and mixing according to the present invention and comprising an improved sprayhead 2 having a simplified action, which will be described further on.

[0025] The regulation unit 1 comprises a single block or monoblock unit 3 for connection and water delivery, mounted on the wall 4 in proximity to the hydraulic water delivery ends 5 and 6, respectively for hot and cold water.

[0026] The monoblock unit 3 can be installed under a kitchen sink, not shown because of its conventional nature, but normally positioned opposite and above the aforesaid connection ends 5 and 6.

[0027] Naturally there is no reason why the monoblock unit 3 cannot be installed in a different position, such as above the sink, for example, or hidden in a specific recess in the wall 4, and closed by a hatch if necessary.

[0028] In a similar manner, the same regulation unit 1 for fluid delivery and distribution according to the present invention can also be used in a bathroom, positioned under the washbasin, or on a bathtub.

[0029] The monoblock 3 comprises respective fluid

supply intakes 11 and 12 connected to the delivery ends 5 and 6 of a hot and cold water supply system by means of flexible hoses 7 and 8.

[0030] Said intakes 11 and 12 convey the fluid to a supply outlet 15 located in the monoblock 3 in an intermediate and equidistant position in relation to the aforesaid intakes 11 and 12.

[0031] Advantageously, according to the invention, a respective adjustable opening or closing valve 9, 10, is positioned on the fluid flow path between each of the fluid delivery intakes 11, 12, and the delivery outlet 15. The valves 9 and 10 are able to cut off the fluid, but are also able to regulate the flow rate according to the angular distance the rod is moved. More in particular, a first valve 9 is housed in a respective seat set in the monoblock unit 3 on the side of the cold water delivery point 5, and in a similar manner, a second valve 10 is housed in a corresponding seat in the monoblock unit 3 on the side of the hot water delivery point 6.

[0032] The valves 9 and 10 operate with a progressive action and are equipped with respective control rods 19, 20, externally projecting outside the valve seat and fixed in rotation by means of a respective gear wheel 29, 30, more easily seen in figures 3-5.

[0033] Motorised means are also foreseen to electrically activate the valves 9 and 10. Said motorised means comprise small respective electric motors 23, 24, each one having its own separate rotation shaft fixed to a corresponding gear wheel 29, 30 meshed with a respective gear wheel 33, 34 of the valves 9, 10.

[0034] Each small electric motor is a direct current speed reducer model, for example, and is electrically driven by a respective power outlet on a command and control electronic unit 35, which will be described further on.

[0035] More particularly, the small electric motor 23 activates the rotation of the driving gear wheel 29 whose cogs are meshed with those of the gear wheel 33, fixed to the rod of valve 9.

[0036] In a similar manner, the small electric motor 24 activates the rotation of the driving gear wheel 30 whose cogs are meshed with those of the gear wheel 34, fixed to the rod of valve 10. A pre-established transmission or reduction ratio is foreseen between the gear wheels 30 and 34, to allow each speed reducer to adjust the opening of the relative regulated closure valve with particular precision.

[0037] Therefore, each small electric motor 23, 24 controls the opening of the respective valve 9, 10, and consequently, also the fluid flow of the cold and hot water, respectively.

[0038] The sprayhead 2 can be connected to the outlet 15 of the monoblock unit 3 by means of a single flexible hose 27. For this aim, the sprayhead 2 comprises a conventional threaded connection 52 of a standard size to obtain hermetically sealed connection to one end of the flexible hose 27.

[0039] The sprayhead 2 comprises a central nozzle 44

to distribute a central flow and acts with a plurality of peripheral nozzles for a peripheral rain spray effect.

[0040] According to the present invention, the sprayhead 2 incorporates an electrovalve 55 positioned to deviate the water flow alternatively towards the central nozzle 44, or towards the peripheral nozzle 46, and an electric control 48 that is activated by the user, also mounted on the faucet to operate the electrovalve 55.

[0041] The electric control 48 preferably comprises a button to operate the opening or closing action of the fluid flow.

[0042] The electrovalve 55 mounted on the sprayhead 2 is therefore destined to change over the water flow distribution from the central jet 44 to the peripheral nozzles 46 by activating the press-button described above.

[0043] The sprayhead 2 also comprises an electronic card 56 to contain further electrical commands for driving the motorised means on the regulation unit 1 by means of the electronic control and command unit 35, as schematically shown in figures 6, 7, 8A and 8B.

[0044] The electrical control 48 can be included in the electronic card 56, or can be connected directly to the electrovalve 55 in order to permit separate operation of any further controls foreseen on the sprayhead 2, which will be described further on.

[0045] In other words, in a basic embodiment of the present invention, the button 48 could also be the only button present on the sprayhead 2, and the electrovalve 55 could simply require only basic electrical supply to operate.

[0046] A second electric control 38 and a third electric control 28 are mounted on the sprayhead 2 to regulate the flow rate and the fluid temperature, respectively.

[0047] The second control 38 and the third control 28 are coupled with the motorised means 23, 24, which operate the valves 9 and 10 to regulate the closing and opening action of unit 1.

[0048] In particular, the third electric control 28 for temperature regulation, and the second electric control 38 for flow rate regulation, comprise respective increase and reduction buttons for temperature and flow rate, respectively.

[0049] In a preferred embodiment, the second electric control 38 and the third electric control 28 are connected to the electronic command and control unit 35, through electric connection means 39 that follow the line of the flexible hose 27, contained inside a protection sheath 32 of said flexible hose.

[0050] Figure 9 shows a schematic view of the structure of the electrical connections and interconnections between the electronic unit 35 and the components of unit 1 that regulates the fluid conveyance and distribution.

[0051] The electronic unit 35 is advantageously housed in a hermetically waterproof portion 37 of a protection sheath 26 of the regulation unit 1, as shown in figures 3 to 5.

[0052] The sheath 26 is made from a transparent synthetic plastic material to permit rapid viewing and inspection

of the regulation unit 1 components during maintenance operations. Foreseen on one side of the sheath 26 is the portion 37 for housing the electronic unit 35 supplied by the main line voltage by means of an external transformer 36, inserted into a wall socket installed in proximity to the hydraulic water delivery ends 5 and 6.

[0053] Respective electrical connections 41, 42 are foreseen between the unit 35 and each of the small electric motors 23, 24, as well as between the unit 35 and each of the press buttons 28, 38, and 48 on the sprayhead 2. These latter connections are shown schematically in figures 1 and 9 by means of a single connection 39.

[0054] It is worth noting that the electrical connection 39 is not strictly necessary for the requirements of the present invention, since buttons 28, 38 can be electrically coupled with the electronic unit 35 by means of a wireless type connection. For this purpose, the sprayhead can be equipped with a signal transmitter device in radio frequency, while the unit 35 can contain a receiver for said signals in radio frequency.

[0055] In reference to the diagram in figure 9, the electronic unit 35 comprises a control unit 40 that is supplied by an external transformer 36 by means of a voltage regulator 43. The electronic unit 35 is housed on a support card contained in the portion 37 of sheath 26.

[0056] An external removable battery 47 is also foreseen to maintain the electronic unit 35 running in case of power failure. A circuit portion 49 is foreseen on the unit 35 card to regulate the power supply from battery 47.

[0057] The control unit 40 can be an integrated circuit microcontroller comprising a plurality of control outlets to enable the respective outlet stages 57, 58, of jumper or semi-jumper power transistor to control the small electric motors 23, 24 of the opening and closing regulation valves 9 and 10.

[0058] An interface 53 in bi-directional connection with the control unit 40 and with the commands 28 and 38 of the sprayhead is also foreseen, by means of the connection 39.

[0059] A commonly known mechanical structure can also be maintained in the sprayhead, able to switch over the water flow from the central jet from the centre nozzle 44 which delivers the flow in a peripheral rain spray delivery through the nozzles 46 arranged in a circle around the centre nozzle.

[0060] The regulation unit 1 according to the present invention also comprises a second safety electrovalve 50, in the monoblock 3, provided for opening or closing the fluid conveyance.

[0061] In particular, the second safety electrovalve 50 is automatically operated in a closed position when there is no power supply, in order to shut off the water flow towards the sprayhead 2 when the electrical controls that drive the motorised means are not active, such as during an unexpected power failure or some fault in faucet function.

[0062] The second electrovalve can also be activated manually by means of a press button 59, which can be

positioned on the monoblock 3 for example, in order to cut off the fluid conveyance as required by the user.

[0063] For this purpose, the electronic unit 35 comprises a further outlet stage 51, of the open collector type for example, able to operate the electrovalve 50 in outlet.

[0064] Advantageously, according to the present invention, by simple pressure on button 48 on the sprayhead 2, the user is able to switch over the fluid delivery from the centre nozzle to the peripheral nozzles, and vice versa, by closing the electrovalve 55.

[0065] The aforesaid description demonstrates very clearly how the regulation unit according to the invention resolves the technical problem and provides numerous advantages, the first being the fact that by activating the buttons 28, 38, or 48 present on the sprayhead 2, it is possible to open the fluid flow and to regulate the temperature, flow rate, and flow delivery in either central or peripheral mode.

[0066] The sprayhead can be activated immediately by the user because head is destined per se to be gripped by the user for water flow delivery.

[0067] The invention makes the presence of a mechanical control lever associated with the sprayhead support faucet, totally superfluous.

[0068] Furthermore, the water flow control and regulation is simple and efficient in that the gripping of the sprayhead 2 is the only manual action required for fluid flow delivery.


perature and the flow rate, respectively.


5. Regulation unit (1) for fluid delivery and mixing comprising a monoblock (3) for the hydraulic delivery of the fluid flow **characterised in that** it comprises a sprayhead (2) according to at least one of the previous claims, and motorised means (23, 24) for regulating the temperature and/or flow rate of the fluid, that activate respective valves (9, 10), and an electronic unit (35) to control said motorised means (23, 24), said electronic control means (35) receiving signals for the regulation of the temperature and/or flow rate from said second control (38) and said third control (28) mounted on said sprayhead (2).
6. Regulation unit (1) according to claim 5, **characterised in that** it comprises a safety electrovalve (50) for automatically cutting off the flow conveyance towards said sprayhead (2) following a power failure.
7. Regulation unit (1) according to claim 6, **characterised in that** said safety electrovalve (50) is also operated manually.
8. Regulation unit (1) according to claim 6 or 7, **characterised in that** said safety electrovalve (50) is associated to the delivery monoblock unit (3).


Claims


1. Sprayhead (2) for showers, of the type conceived to receive a fluid by means of a single conveyance pipe (27), comprising a central nozzle (44) for central fluid flow delivery and a plurality of peripheral nozzles (46) for peripheral flow and rain spray delivery, **characterised in that** it comprises an electrovalve (55) mounted on the sprayhead (2) for deviating the flow alternatively towards said central nozzle (44) or towards said peripheral nozzles (46), and an electric control (48) to be activated by the user, also mounted on the sprayhead to operate said electrovalve (55).
2. Sprayhead (2) according to claim 1 **characterised in that** it comprises a second electric control (38) for providing a signal to regulate the water flow rate.
3. Sprayhead (2) according to claim 1 or 2 **characterised in that** it comprises a third electric control (28) for providing a signal to regulate the water temperature.
4. Sprayhead (2) according to claim 3 **characterised in that** said third electric control (28) for regulating the water temperature and said second electric control (38) for regulating the water flow rate comprise respective buttons to increase and reduce the tem-

FIG. 1

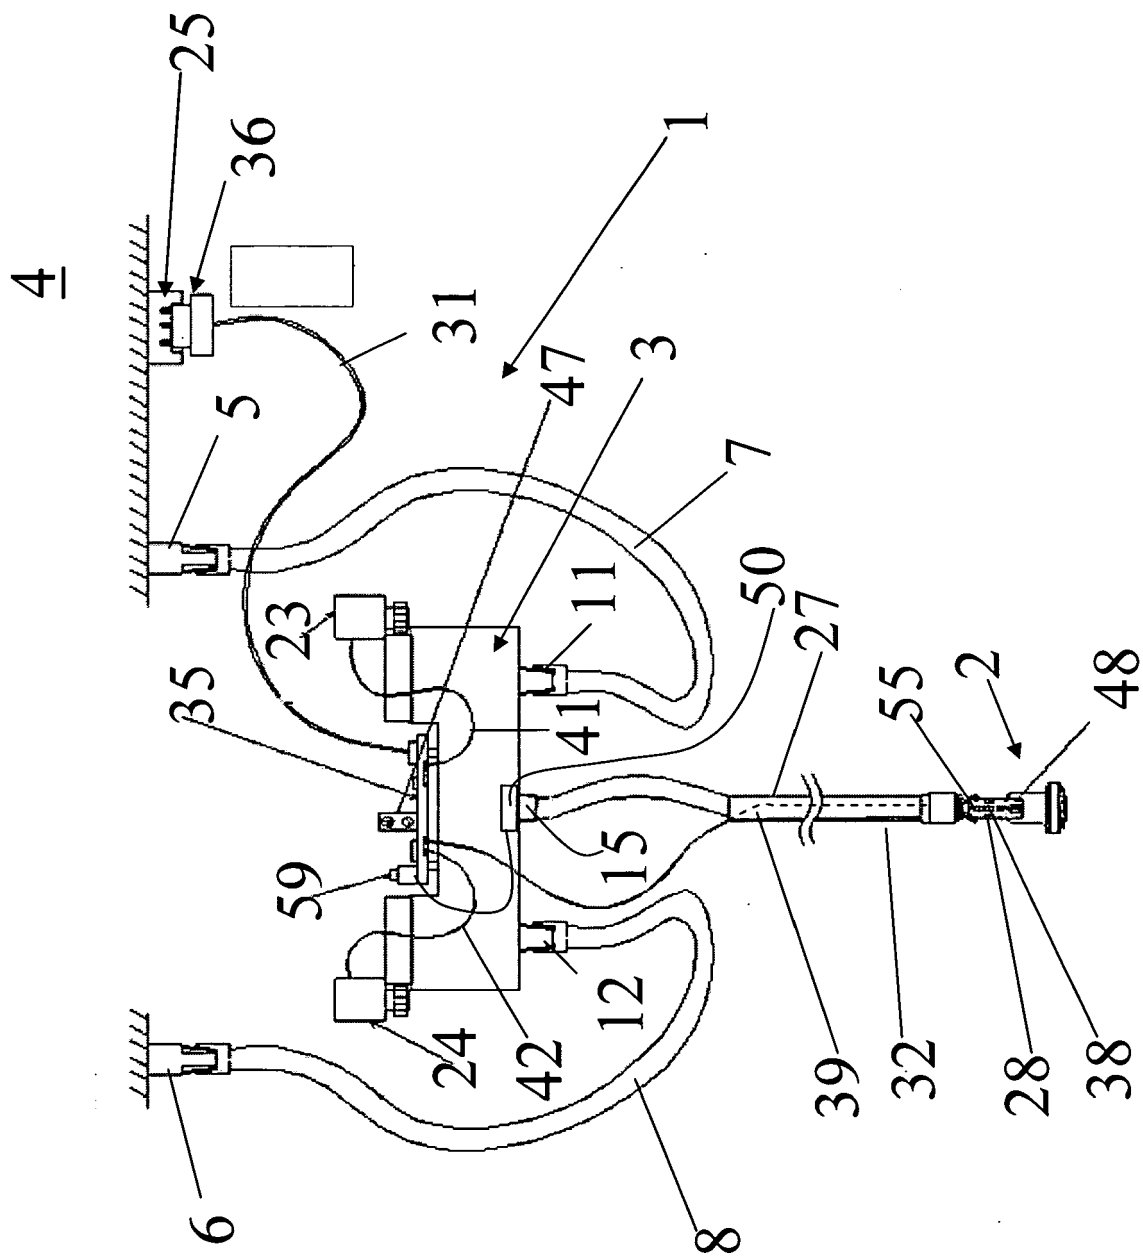

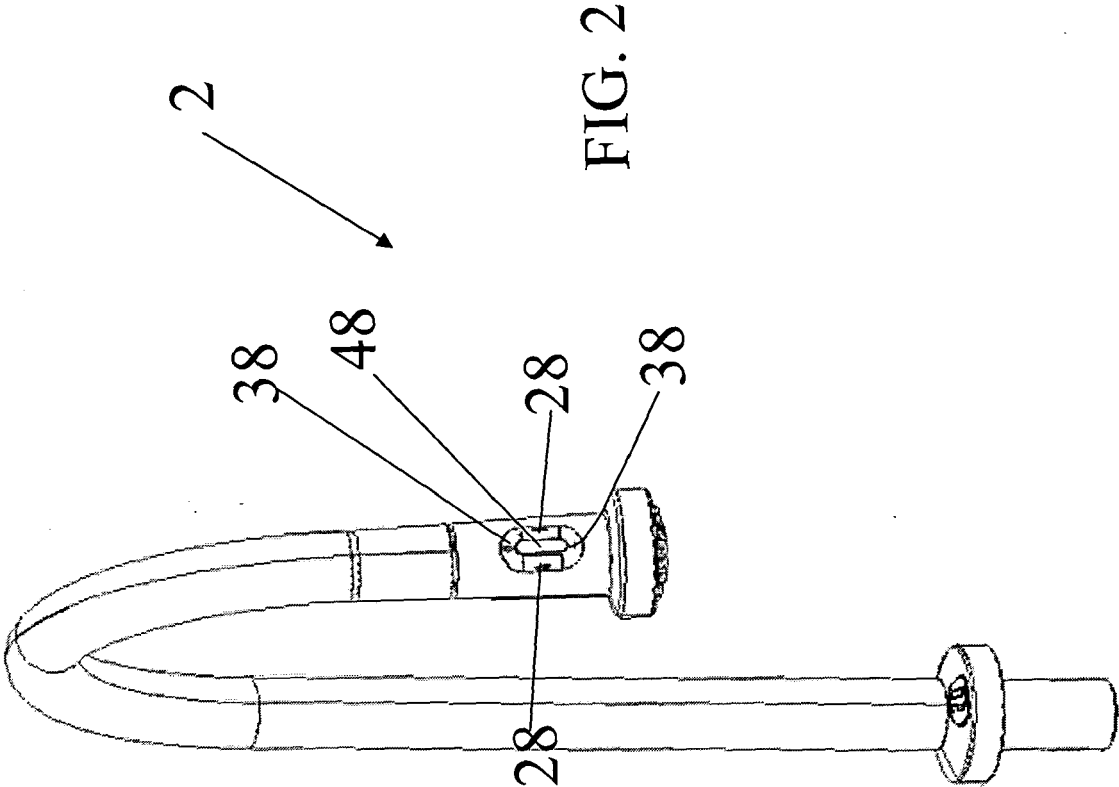

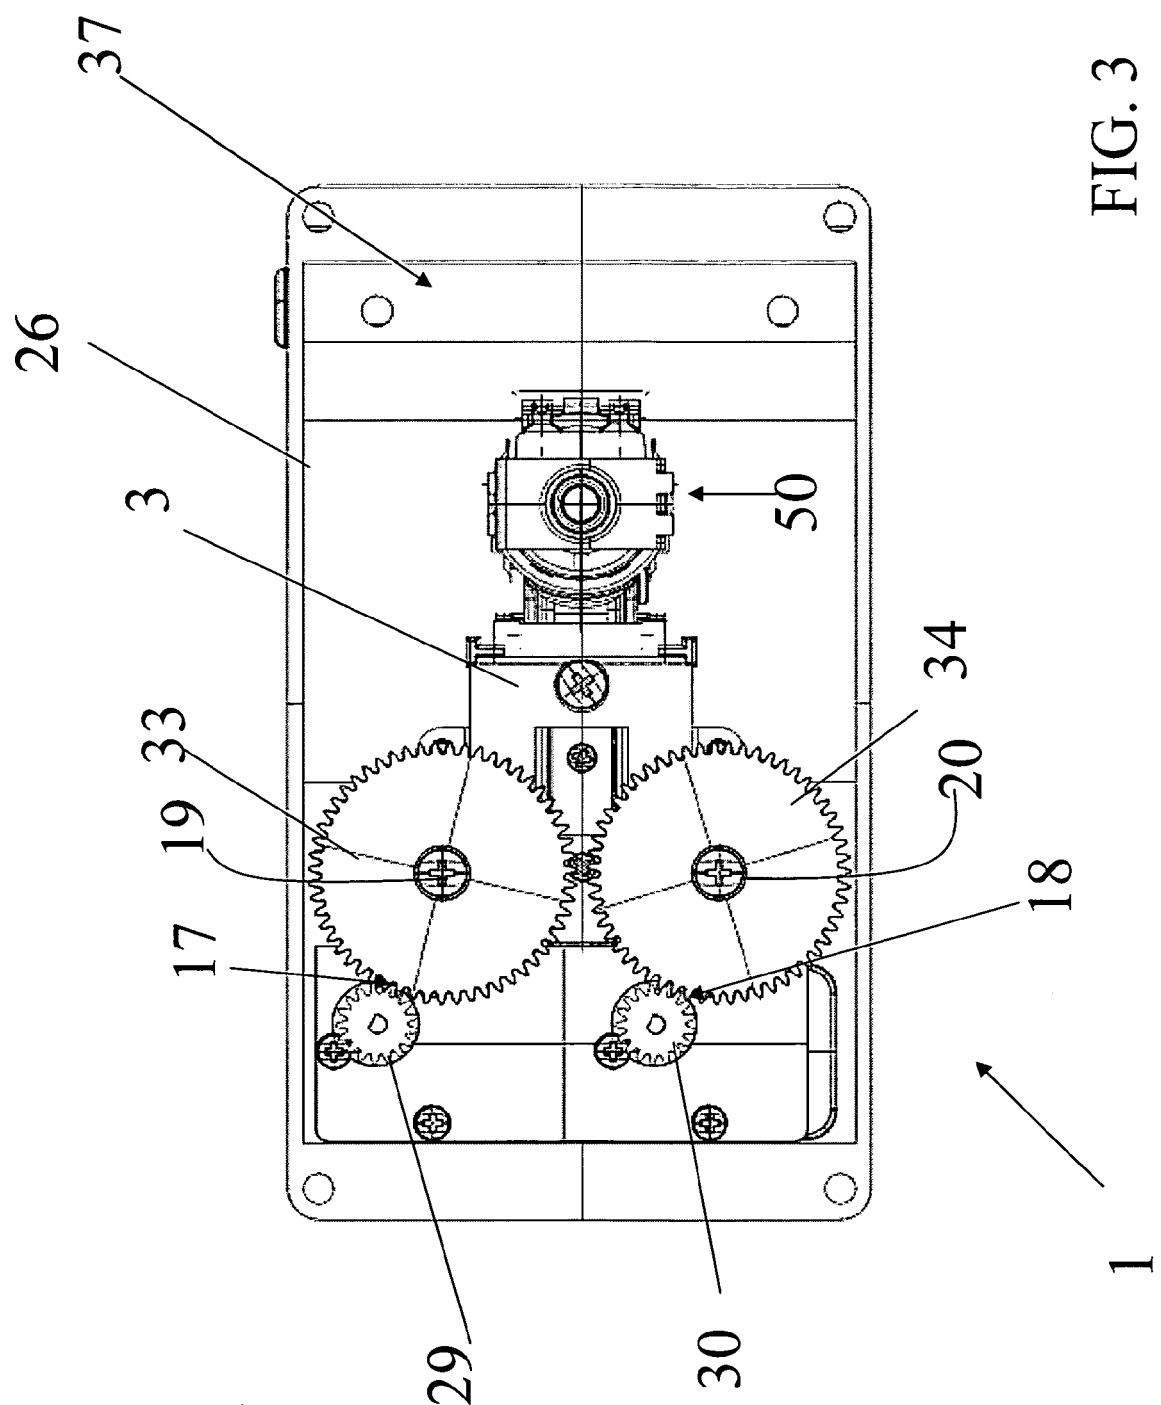

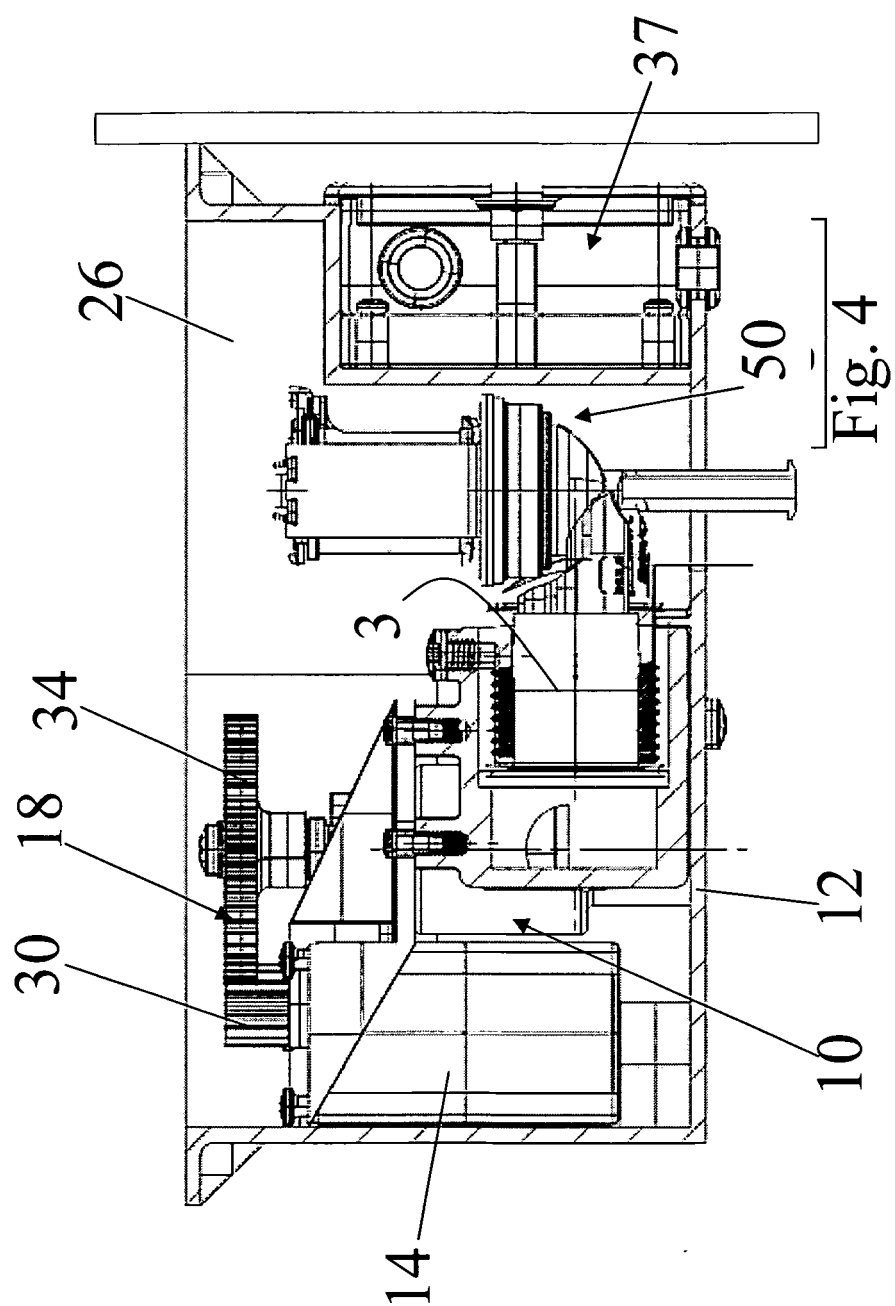

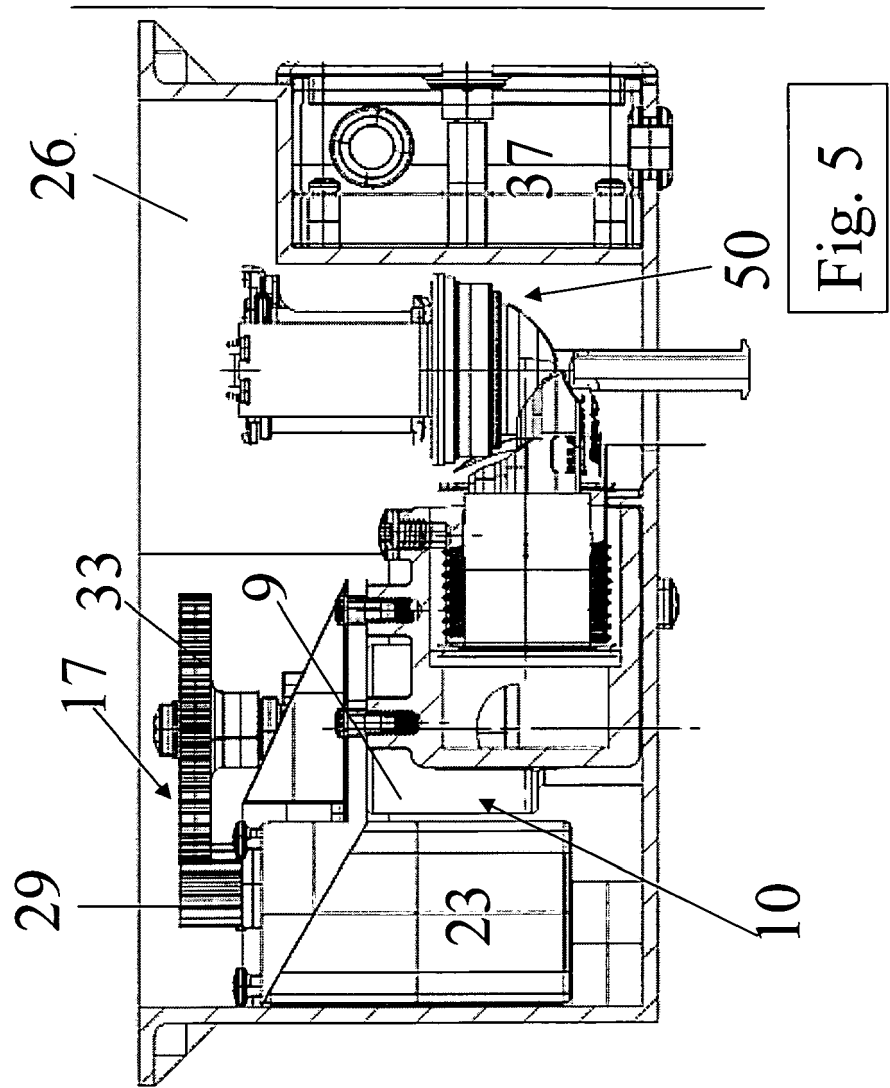


FIG. 6

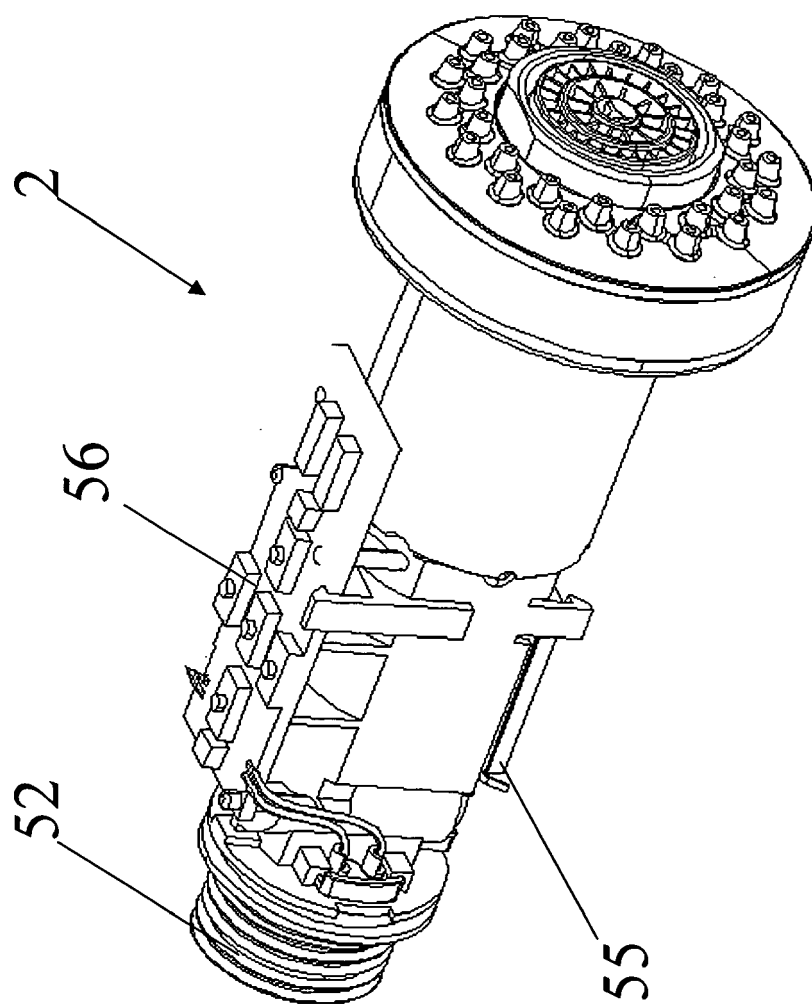
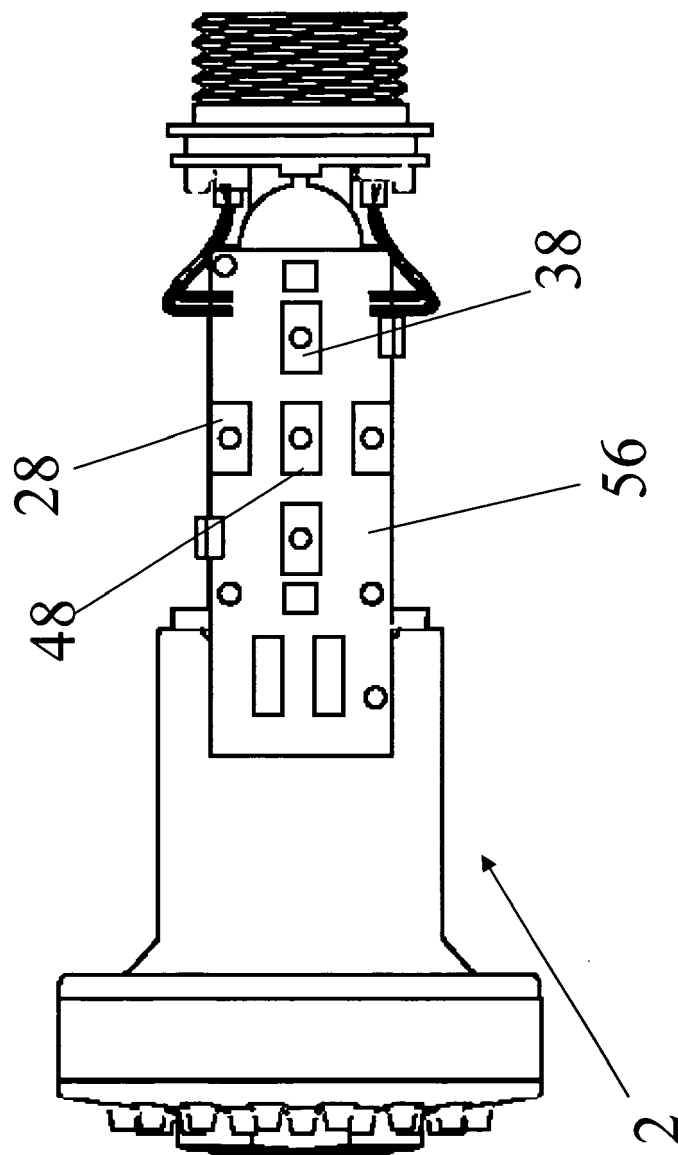
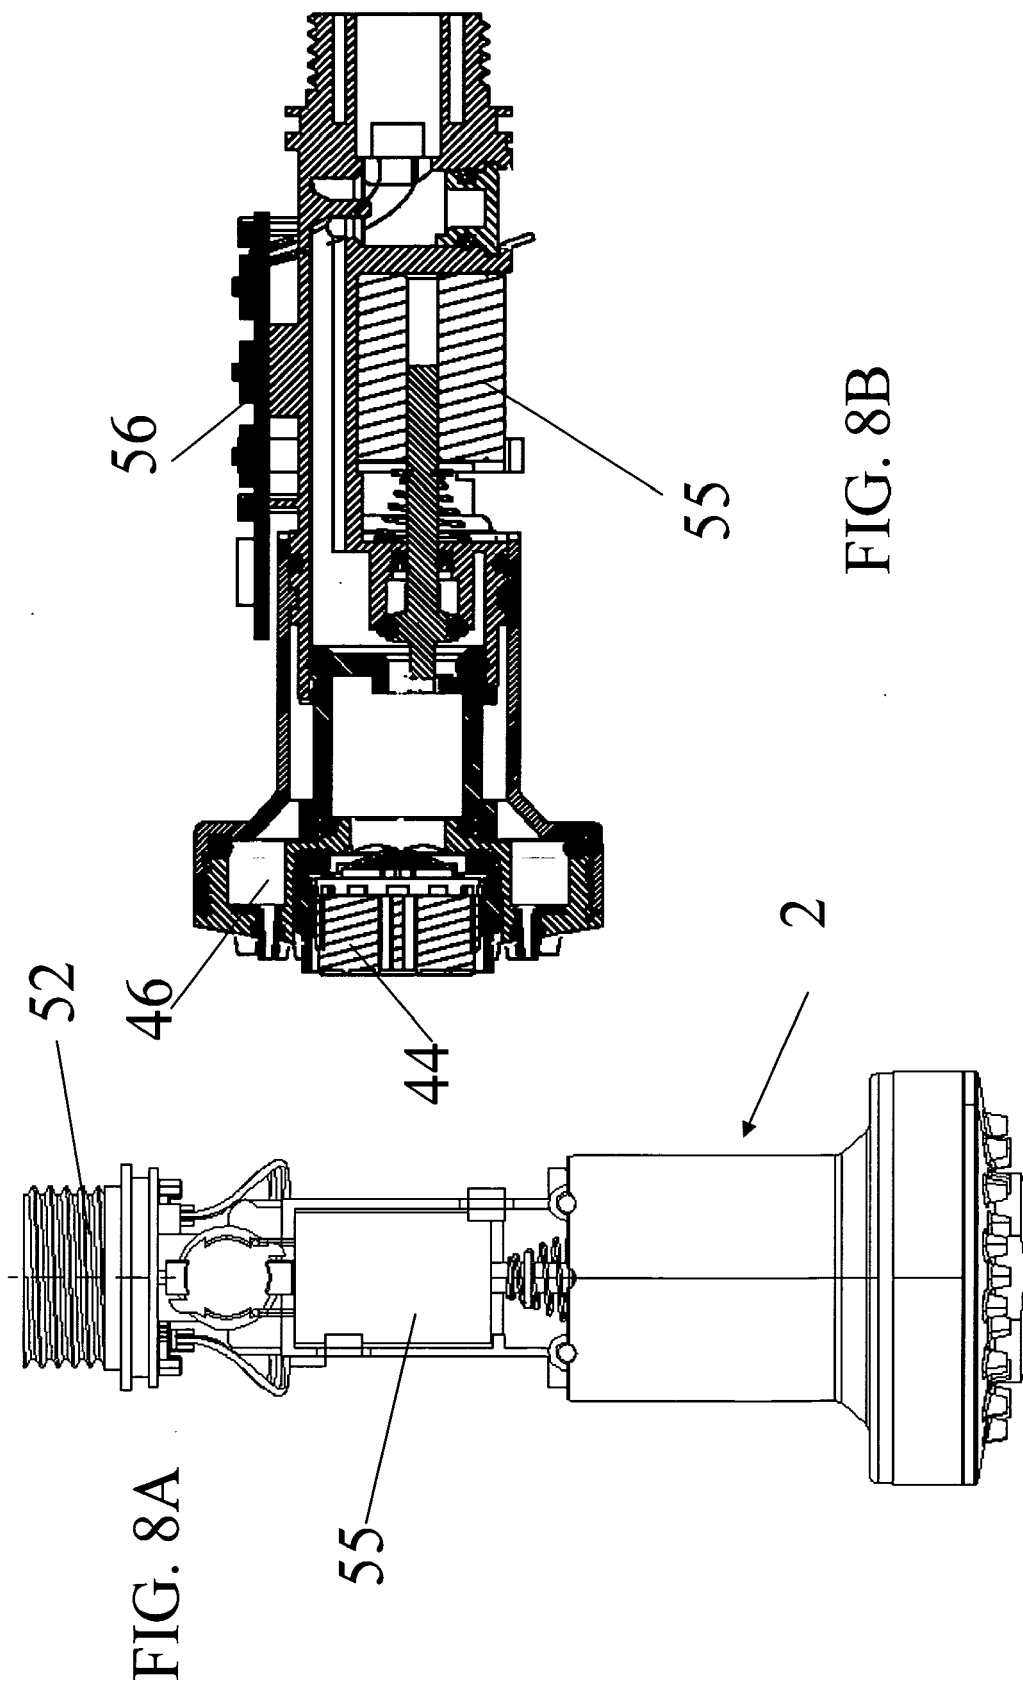


FIG. 7





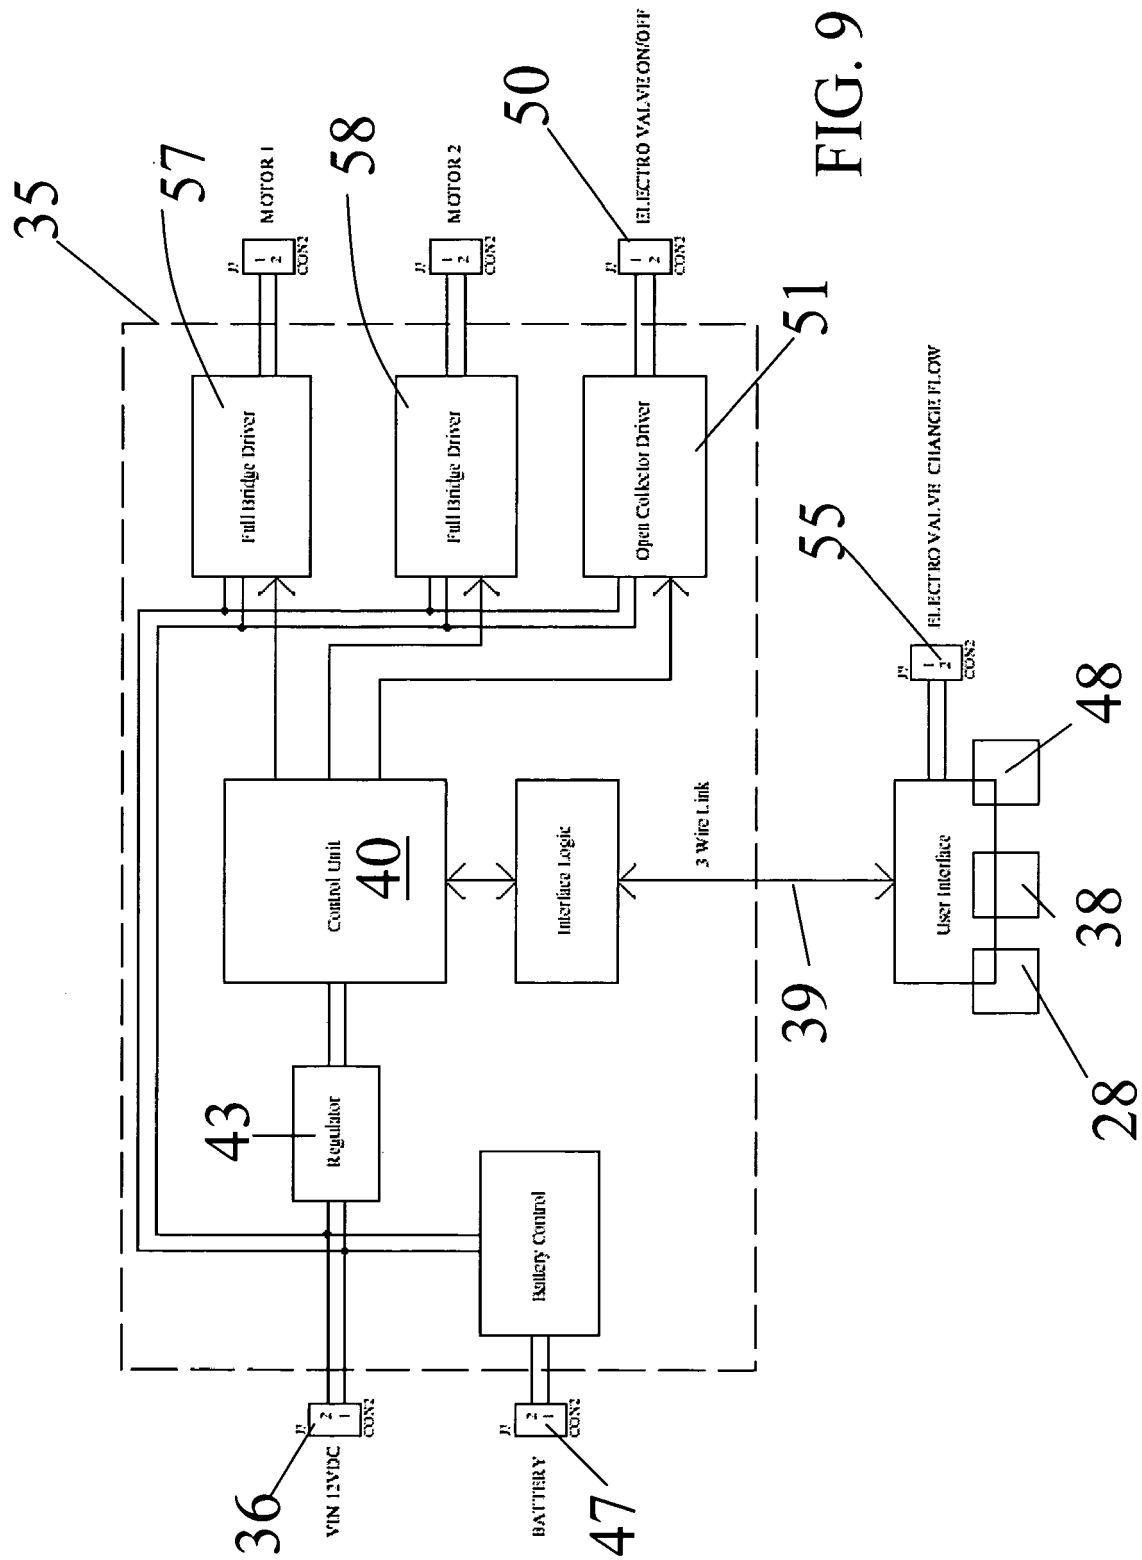


FIG. 9



DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Y	US 2007/018019 A1 (NOBILI FABRIZIO [CH]) 25 January 2007 (2007-01-25) * figure 2 *	1-4	INV. B05B1/16 B05B1/18
A		5-8	
Y	----- EP 1 132 141 A (AMFAG S P A [IT]) 12 September 2001 (2001-09-12) * figure 2 *	1-4	
Y	----- EP 0 499 151 A2 (TOTO LTD [JP]) 19 August 1992 (1992-08-19) * figure 34 *	1-4	
Y	----- US 4 826 129 A (FONG JACH [TW] ET AL) 2 May 1989 (1989-05-02) * figure 1 *	1	
Y	----- DE 88 06 867 U1 (A. U. K. MUELLER GMBH & CO KG, 4000 DUESSELDORF, DE) 21 July 1988 (1988-07-21) * figure 1 *	1	
			TECHNICAL FIELDS SEARCHED (IPC)
			B05B
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 24 September 2007	Examiner Roldán Abalos, Jaime
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 07 00 8958

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-09-2007

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007018019	A1	25-01-2007	NONE
EP 1132141	A	12-09-2001	CN 1319456 A 31-10-2001 IT MN20000013 A1 10-09-2001 US 2001020302 A1 13-09-2001
EP 0499151	A2	19-08-1992	AT 123974 T 15-07-1995 DE 69202995 D1 27-07-1995 DE 69202995 T2 21-12-1995 US 5199639 A 06-04-1993
US 4826129	A	02-05-1989	AU 626190 B2 23-07-1992 AU 3149689 A 09-11-1989 CA 1313171 C 26-01-1993 CN 2049719 U 20-12-1989 DE 3908693 A1 16-11-1989 FR 2652630 A1 05-04-1991 GB 2218186 A 08-11-1989 JP 1167465 U 24-11-1989 KR 920005331 Y1 03-08-1992
DE 8806867	U1	21-07-1988	NONE