

(19)



(11)

EP 1 995 381 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
22.07.2015 Bulletin 2015/30

(51) Int Cl.:
E01F 9/047^(2006.01) E01F 13/12^(2006.01)

(21) Application number: **08103749.1**

(22) Date of filing: **28.04.2008**

(54) Recessed speed reducing system for street traffic

Eingebautes Geschwindigkeitsverringersystem für Straßenverkehr

Système de ralentissement encastré pour trafic routier

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT
RO SE SI SK TR**

(30) Priority: **23.05.2007 IT MC20070105**

(43) Date of publication of application:
26.11.2008 Bulletin 2008/48

(73) Proprietor: **O.M.G. di Geminiani Gino
63044 Comunanza (AP) (IT)**

(72) Inventor: **GEMINIANI, GINO
63044, COMUNANZA (AP) (IT)**

(74) Representative: **Baldi, Claudio
Ing. Claudio Baldi S.r.l.
Viale Cavallotti 13
P.O. Box 187
60035 Jesi (AN) (IT)**

(56) References cited:
**EP-A2- 1 028 197 WO-A1-2007/046753
GB-A- 2 418 445 GB-A- 2 428 067
SE-L- 0 203 458 US-B1- 7 011 470**

EP 1 995 381 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present patent application relates to a recessed speed reducing system for street traffic, according to the preamble of claim 1.

[0002] Solutions used to force drivers to moderate their speed near urban centres or other critical points of the road network have been studied for long.

[0003] To that end, large use is made of traffic lights controlled by speed detectors for the approaching vehicles, and of the so-called speed bumps.

[0004] As it is known, the term "speed bump" refers to a raised bump positioned along the carriageway in transversal direction, in such a way that it cannot be avoided by approaching vehicles.

[0005] Although they are rounded, the said bumps are quite higher than the surface of the road where they are installed, thus making vehicles bump when they pass over the bump at a speed higher than the speed limit.

[0006] Although largely diffused, this technology is impaired by a serious drawback: reference is made to the fact that traditional speed bumps generate some discomfort also for drivers who respect the speed limit.

[0007] This is because, when passing over the speed bump, including at moderate speed, vehicles are subjected to jolting, with negative effects not only for vehicles, but also for the driver's safety.

[0008] US 7,011,470 **discloses a recessed speed reducing system according to the preamble of claim 1 for controlling the speed of a vehicle travelling through a special speed zone. The speed bump comprises a housing having a retractable canister.**

[0009] GB 2 428 067 **discloses a dynamic speed hump comprising a sensor to detect approaching vehicle and a control system which selectively raises or lowers the hump.**

[0010] EP 1 028 197 **discloses a traffic bump comprising a parallelepiped block movably mounted into a road surface.**

[0011] GB 2 418 445 **discloses a retractable speed bump comprising two parallelogram frames to move an upper beam.**

[0012] SE 0 203 458 **discloses a speed bump comprising a plurality of protrusions which are raised or lowered according to a control from a speed sensor.**

[0013] A careful study of the specific situation has resulted in the system of the invention, which is able to slow down drivers who exceed the speed limit, without disturbing the circulation of drivers who respect the said speed limit.

[0014] The system of the invention comprises the features of claim 1.

[0015] As long as the speed detector detects that the vehicle is approaching at moderate speed, the speed bump of the invention remains inside its housing, with the upper side basically flush with the road surface, without creating a sensible discontinuity with respect to the road surface and without discomfort for vehicles.

[0016] When the speed detector detects a vehicle that is approaching at high speed, the speed bump immediately "emerges" from its housing and is brought in very visible position for the approaching driver, forcing him to slow down dramatically.

[0017] Finally, it must be noted that the speed bump of the system of the invention has a modular structure, being composed of a plurality of single elements designed to be mounted side by side and operated in perfect coordination.

[0018] This allows for installing the said speed bump in any type of carriageway, regardless of the road width, as long as the correct number of similar modules is installed in side-by-side position.

[0019] For purposes of clarity, the description of the invention continues with reference to the enclosed drawings, which are intended for purposes of illustration only and not in a limiting sense, whereby:

- figure 1 is a diagrammatic view that shows the system of the invention installed in the carriageway;
- figure 2 is an exploded axonometric view of a module of the speed bump used in the said system;
- figure 3 is a three-quarter axonometric view of the said module in working position;
- figure 4 is a front view of figure 3;
- figure 5 is a sectional view with plane A-A of figure 4;
- figure 6 is a three-quarter axonometric view of the said module in rest position;
- figure 7 is a front view of figure 6;
- figure 8 is a sectional view with plane A-A of figure 7;
- figure 9 is a block diagram of the electronic and hydraulic circuits provided in the system of the invention.

[0020] With reference to fig. 1, the system of the invention includes a speed bump (D) usually provided with rectilinear structure, designed to cover the entire width of a carriageway.

[0021] In this figure, the said bump (D) is shown in working position, protruding from the carriageway; in rest position, the same bump (D) is designed to be "lowered" in order to be perfectly flush with the road surface.

[0022] Two infrared devices (104) are installed on posts at the sides of the speed bump (D), for remote speed detection, being aimed at opposite directions in order to monitor traffic in both directions.

[0023] In view of the speed detected by the said remote speed detectors (104), the speed bump (D) will be either maintained in rest position or brought in working position, as shown in fig. 1.

[0024] Regardless of this possible practical application, the speed bump of the invention (D) may also be associated with one speed detector only, since the need to slow down vehicles is often required in one direction only.

[0025] As anticipated, the bump of the invention (D) is provided with modular structure, which is composed from

time to time of the correct number of identical modules (M) designed to operate in perfect coordination.

[0026] With reference to figs. 2 to 8, each module (M) is made of a basically U-shaped bearing frame designed to be inserted and fixed in transversal direction into the corresponding housing obtained in the road surface.

[0027] The frame (1) includes a horizontal bearing wall (1 a) with rectangular shape, with two identical wings (1 b) protruding from the sides.

[0028] A rectangular platform (2) is fixed in central position on the upper side of the said bearing wall (1 a) between the two vertical wings (1 b).

[0029] Two opposite pairs of uprights (3) are fixed above the platform (2) at the two longitudinal ends of the platform (2), being designed to support a horizontal grid (4) having exactly the same area and rectangular section as the horizontal bottom wall (1 a) of the frame (1).

[0030] In this way, the two transversal borders (4a) of the rectangular grid (4) are designed to be fitted on top of the vertical wings (1 b) of the frame (1) and suitably screwed in.

[0031] The two longitudinal ends of the grid (4) are fitted to the transversal borders of a strip (5) made of rubber or any other elastically stretchable material, designed to exactly cover the surface of the grid (4).

[0032] Four short columns (6) with vertical direction are tightened on the lower side of the grid (4).

[0033] The short columns (6) are designed to be exactly inserted into corresponding bushes (7) fixed under a grated head (8) that operates under the grid (4).

[0034] The grated head (8) is composed of a rectangular plate (8a) with horizontal direction, above which some transversal partitions (8b) in edgeways position with upper convex curved section are mounted and regularly spaced.

[0035] Each partition (8b) is suitably dimensioned and positioned in order to be exactly inserted, from down upwards, into a corresponding longitudinal slot (4b) of the grid (4); the length of the bearing plate (8a) is such that it occupies the space bordered by the two pairs of uprights (3) under the grid (4).

[0036] The upper end of the stem (9) with vertical axis of a double-effect hydraulic cylinder (10) tightened in the centre of the platform (2) fitted above the bearing frame (1) is fitted in central position on the lower side of the bearing plate (8a) of the grated head.

[0037] The grated head (8) is designed to slide vertically in parallel direction, together with the stem (9) of the hydraulic cylinder (10) from a lower stop position to an upper stop position.

[0038] After illustrating the components of the module (M) and their mutual connections, this description continues by explaining the working principles of the system of the invention.

[0039] With reference to figures 6, 7 and 8, as long as the bump of the invention (D) is maintained in rest position, the stem (9) of the hydraulic cylinder (10) mounted on the bottom of the support frame (1) is maintained in

"retracted" position inside the sleeve.

[0040] In this situation the grated head (8) is in lower stop position, which corresponds to a height in which the convex partitions (8b) are maintained inside the corresponding slots (4b) of the grid (4) without protruding from the top.

[0041] In this way, in absence of any deformation stress, the rubber strip (5) is maintained in a perfectly horizontal position above the grid (4) and therefore perfectly flush with the road surface.

[0042] With reference to figures 3, 4 and 5, when the module (M) is brought in working position, the stem (9) of the hydraulic cylinder (10) is extended and the grated head (8) is consequently brought to the upper stop position.

[0043] In this situation, the convex partitions (8b) "emerge" upwards from the corresponding slots (4b) of the grid (4) until they protrude from the top, thus consequently deforming the flexible strip (5).

[0044] Since the grid (4) is basically flush with the road surface, although they are covered by the flexible strip (5), the convex partitions (8b) of the grated head (8) protrude from the road surface, thus adequately interfering with a vehicle approaching at excessive speed.

[0045] As soon as such working requirement no longer exists, the stem (9) of the hydraulic cylinder (10) is retracted again, thus causing a new travel of the grated head (8) to the lower stop position.

[0046] In this way, the convex partitions (8b) are retracted inside the slots (4b) of the grid (4) and the rubber strip (5) spontaneously recovers perfect planarity.

[0047] It must be noted that the perfect planarity of the grated head (8) during the said alternate vertical travels is favoured by the coupling of the columns (6) fitted under the grid (4) with the corresponding bushes (7) fitted under the bearing plate (8a) of the grated head (8).

[0048] With reference to fig. 9, the working principles of the system of the invention are described in detail below.

[0049] It must be noted that the various modules (M) of the speed bump (D) - or, more precisely, their hydraulic pistons (10) - are connected to the same hydraulic circuit (100) provided with a pressure regulator (101), and a valve (102) designed to close and open the circuit (100) and therefore alternatively actuate the hydraulic pistons (10) of the various modules (M).

[0050] The same system also includes an electrical circuit for the automatic control of the said valve (102) of the hydraulic circuit.

[0051] The electrical circuit includes an acoustic sensor (103), one or two infrared sensors (104) for remote speed detection, a manual switch (105) and two safety stops (106, 107).

[0052] In particular, the two safety stops (106, 107) consist in two photocells mounted near the ground, one immediately upstream and one immediately downstream the speed bump (D), in such a way that the luminous rays cross the entire carriageway.

[0053] Because of their position, the two photocells (106, 107) immediately detect the passage of vehicles over the bump (D) when they interrupt the luminous rays.

[0054] According to the main working mode of the system, the hydraulic cylinders (10) of the various modules (M) of the speed bump (D) are actuated, thus "raising" the speed bump (D), when one of the infrared sensors (104) detects an approaching vehicle with excessive speed.

[0055] As soon as the said vehicle has passed, the hydraulic pistons (10) return to rest position, in which the entire speed bump (D) is recessed into the corresponding housing.

[0056] In particular, the control to restore the rest position of the speed bump (D) is given as soon as the two photocells (106, 107) detect that the vehicle for which the speed bump (D) was raised has completely passed over the said bump (D).

[0057] The photocells (106, 107) are also designed to carry out another important function in the system of the invention: to prevent the speed bump (D) from assuming the working position every time a vehicle stops over the said bump (D).

[0058] This measure has been studied in order to avoid the risk of damaging the vehicle stopped over the bump (D) because of the sudden energetic raising of the speed bump (D).

[0059] Taking into account that the interruption of the luminous ray of the two photocells (106, 107) always corresponds to the rest position of the speed bump (D), the photocells (106, 107) are able to prevent the speed bump (D) from assuming the working position while a vehicle stopped "astride" the bump interrupts the luminous rays.

[0060] Whilst reference has been made so far to an embodiment of the system of the invention with two photocells, it is understood that the same working modes can be also actuated in the presence of one photocell only.

[0061] The function of the acoustic sensor (103) is to capture the siren sound of emergency vehicles (fire brigade, ambulances, police, etc.) and temporarily exclude the operation of the infrared speed detectors (104).

[0062] This is done to avoid that these vehicles may unexpectedly find the speed bump (D) in working position, with the consequent need to reduce their speed.

[0063] Moreover, the system of the invention is provided with a manual switch (105) used to permanently "block" the speed bump (D) in working or rest position, until the same switch is actuated again.

[0064] Finally, it must be noted that, despite the foregoing description, various constructive variants may be devised according to the present inventive idea, without modifying the working principles of the system of the invention, provided that they fall under the scope of the appended claims.

[0065] For instance, the hydraulic cylinders (10) designed to raise the speed bump (D) may be replaced with different actuators with similar capacity.

[0066] Likewise, the infrared sensor (104) may be replaced with a different remote speed detector, such as, for instance, sensors composed of two electrical cables drowned transversally in the road surface that are able to determine the speed of an approaching vehicle by detecting the weight of the vehicle and calculating the time taken to cover the distance between the two transversal cables.

Claims

1. Recessed speed reducing system for street traffic, comprising a speed bump (D), composed of a plurality of modules (M), recessed into a corresponding housing near the carriageway and associated with suitable actuators (10), designed to be suddenly brought from rest position, in which it is completely contained inside the said housing, to working position, in which it partially protrudes with respect to the surface of the carriageway, when one or more remote speed detectors (104) that cooperate with it detect an approaching vehicle travelling at excessive speed, and designed to be suddenly brought back to rest position when one or more sensors (106, 107) that cooperate with it detect that the vehicle has completely passed over the said bump (D), **characterised in that** each module (M) of the speed bump (D) comprises:

- a basically U-shaped frame (1) formed of a horizontal wall (1 a) with two identical opposite wings (1 b) protruding from the sides,
- a platform (2) transversally fixed in central position on the upper side of the said horizontal wall (1 a) of the frame (1) in intermediate position between the two vertical wings (1b),
- an actuator (10) fixed above the platform (2) designed to actuate a stem (9) able to make alternate vertical travels,
- a grated head (8) fixed at the upper end of the stem (9) and composed of a rectangular plate (8a) with horizontal direction, above which some transversal partitions (8b) in edgewise position with upper convex curved section are mounted and regularly spaced,
- a horizontal grid (4) supported above the said grated head (8) by uprights (3) fixed to the platform; it being provided that each slot (4b) exactly receives one of the transversal partitions (8b) of the grated head (8) in such a way that, during the alternate vertical travels of the said grated head (8), each transversal partition (8b) is brought from a lower stop position, in which its top convex section is inserted inside the corresponding slot (4b) to an upper stop position, in which it considerably emerges above the said slot (4b),

- an elastically stretchable strip (5) that exactly covers the upper surface of the said grid (4), being fixed at the ends on the transversal borders (4a) of the grid (4).
2. System as claimed in claim 1, **characterised in that** it comprises an acoustic sensor (103) able to prevent the said speed bump (D) from being raised when the siren of an approaching emergency vehicle is detected.
 3. System as claimed in the first or both the above claims, **characterised in that** it comprises a manual switch (105) used to permanently block the speed bump (D) in working or rest position.
 4. System as claimed in one or more of the above claims, **characterised in that** one or more sensors (106, 107) are designed to prevent the speed bump (D) from raising when they detect the presence of a vehicle parked over the bump (D).
 5. System as claimed in one or more of the above claims, **characterised in that** the speed bump (D) is composed of a series of identical cooperating modules (M) mounted side-by-side, each of them provided on top with a strip made of rubber (5) or other elastically stretchable materials in horizontal position flush with the road surface, designed to suffer the interference, from down upwards, of a suitable shaped head (8) that emerges from the housing obtained in the road surface to determine its convex curved position.
 6. System as claimed in anyone of the preceding claims, **characterised in that** the grid (4) is provided in the lower part with short columns (6) with vertical direction, designed to be exactly inserted into corresponding bushes (7) fixed under the grated head (8) in such a way that the first ones are able to drive the alternate vertical travels of the second ones.
 7. System as claimed in one or more of the above claims, **characterised in that** the actuators (10) designed to raise and lower the speed bump (D) are hydraulically actuated.
 8. System as claimed in one or more of claims 1 to 6, **characterised in that** the actuators (10) designed to raise and lower the speed bump (D) are pneumatically actuated.
 9. System as claimed in one or more of claims 1 to 6, **characterised in that** the actuators (10) designed to raise and lower the speed bump (D) are electro-mechanically actuated.
 10. System as claimed in one or more of the above

claims, **characterised in that** the one or more remote speed detectors consist in infrared detectors (104).

- 5 11. System as claimed in one or more of claims 1 to 9, **characterised in that** the one or more remote speed detectors are drowned in the road surface, and able to detect the weight of the approaching vehicles.
- 10 12. System as claimed in one or more of the above claims, **characterised in that** the sensors (106, 107) are optical sensors.

15 Patentansprüche

1. Versenkbare Anlage zur Geschwindigkeitssenkung des Straßenverkehrs, umfassend eine Bremsschwelle (D), bestehend aus mehreren Modulen (M), untergebracht in einem dazugehörigen Gehäuse in der Nähe der Fahrbahn und verbunden mit geeigneten Betätigungselementen (10), dazu befähigt, unverzüglich von einer vollkommen im Inneren des Gehäuses versenkten Ruhestellung in eine teilweise aus der Fläche der Fahrbahn auskragende Arbeitsstellung zu wechseln, wenn ein oder mehrere, mit ihr zusammenarbeitende Geschwindigkeitsdetektoren (104) mit Fernübertragung das Herannahen eines Fahrzeugs mit überhöhter Geschwindigkeit feststellt, und außerdem dazu befähigt, unverzüglich wieder in ihre Ruhestellung zurückzukehren, wenn ein oder mehrere, mit ihr zusammenarbeitende Sensoren (106, 107) feststellen, dass das Fahrzeug die Bremsschwelle (D) überfahren hat, **dadurch gekennzeichnet, dass** jedes Modul (M) der Bremsschwelle (D) Folgendes umfasst:

- einen im Wesentlichen U-förmigen Rahmen (1), der aus einer horizontalen Wand (1a) gebildet wird, aus deren Seiten zwei gegenüberliegende, identische Flügel (1 b) nach oben auskragen,
- eine Plattform (2), die in der Mitte der Oberseite der horizontalen Wand (1a) des Rahmens (1) quer in einer Stellung zwischen den beiden vertikalen Flügeln (1 b) befestigt ist,
- ein Betätigungselement (10), das oberhalb der Plattform (2) befestigt und dazu geeignet ist, einen Schaft (9) zu betätigen, der in der Lage ist, alternierende, vertikale Verfahrwege auszuführen,
- einen Gitterkopf (8), der am oberen Ende des Schafts (9) befestigt ist und aus einer rechteckigen Platte (8a) in horizontaler Stellung besteht, über der einige regelmäßig beabstandete, querlaufende, kreuzweise angeordnete Trennwände (8b) montiert sind, die oberseitig mit einem konvex gebogenen Profil versehen sind,

- ein horizontales Gitter (4), das durch an der Plattform befestigte Ständer (3) oberhalb des Gitterkopfes (8) gehalten wird; wobei vorgesehen ist, dass jeder Schlitz (4b) genau eine der querlaufenden Trennwände (8b) des Gitterkopfes (8) derart aufnimmt, dass bei den alternierenden, vertikalen Fahrwegen des Gitterkopfes (8) jede querlaufende Trennwand (8b) aus einer unteren Endanschlagstellung, bei welcher ihr oberes, konvexes Profil in dem entsprechenden Schlitz (4b) eingesteckt bleibt, in eine obere Endanschlagstellung gebracht wird, in der sie beträchtlich über den Schlitz (4b) hinaus übersteht,
- ein elastisch dehnbares Band (5), das in der Lage ist, die obere Fläche des Gitters (4) exakt zu bedecken, da es an den Enden auf den Querkanten (4a) des Gitters (4) befestigt wird.
2. Anlage nach Anspruch 1, **dadurch gekennzeichnet, dass** sie einen akustischen Sensor (103) umfasst, der in der Lage ist, das Anheben der Bremsschwelle (D) zu verhindern, wenn er den Sirenton eines sich nähernden Rettungsfahrzeugs feststellt.
 3. Anlage nach dem ersten Anspruch oder beiden vorstehenden Ansprüchen, **dadurch gekennzeichnet, dass** sie einen manuell zu betätigenden Schalter (105) zur Dauersperrung der Bremsschwelle (D) in ihrer Arbeitsstellung oder in ihrer Ruhestellung umfasst.
 4. Anlage nach einem oder mehreren der vorstehenden Ansprüche, **dadurch gekennzeichnet, dass** ein oder mehrere Sensoren (106, 107) in der Lage sind, das Anheben der Bremsschwelle (D) zu verhindern, wenn das Vorhandensein eines über der Bremsschwelle geparkten Fahrzeugs festgestellt wird.
 5. Anlage nach einem oder mehreren der vorstehenden Ansprüche, **dadurch gekennzeichnet, dass** die Bremsschwelle (D) aus einer Reihe von zusammenwirkenden, identischen, nebeneinander angeordneten Modulen (M) besteht, die jeweils an ihrer Spitze ein Band (5) aus Gummi oder anderen, elastisch dehnbaren Materialien aufweisen, das horizontal, bündig mit der Fahrbahn abschließend angeordnet, gleichzeitig aber auch dazu bestimmt ist, dem von unten nach oben wirkenden Eingriff eines entsprechend geformten Kopfes (8) ausgesetzt zu werden, der kurz aus seinem Gehäuse im Straßenbett hervortritt und in der Lage ist, ihm eine konvex gebogene Stellung aufzuzwingen.
 6. Anlage nach einem beliebigen der vorstehenden Ansprüche, **dadurch gekennzeichnet, dass** das Gitter (4) unterseitig einige kurze Säulen (6) in vertikaler Stellung aufweist, die dazu geeignet sind, exakt in entsprechende Buchsen (7) einzufallen, die unterhalb des Gitterkopfes (8) derart befestigt sind, dass die ersten in der Lage sind, die alternierenden, vertikalen Fahrwege der zweiten zu führen.
 7. Anlage nach einem oder mehreren der vorstehenden Ansprüche, **dadurch gekennzeichnet, dass** die Betätigungselemente (10), die zum Anheben und Absenken der Bremsschwelle (D) bestimmt sind, hydraulisch betätigt werden.
 8. Anlage nach den vorstehenden Ansprüchen 1 bis 6, **dadurch gekennzeichnet, dass** die Betätigungselemente (10), die zum Anheben und Absenken der Bremsschwelle (D) bestimmt sind, pneumatisch betätigt werden.
 9. Anlage nach einem oder mehreren der Ansprüche 1 bis 6, **dadurch gekennzeichnet, dass** die Betätigungselemente (10), die zum Anheben und Absenken der Bremsschwelle (D) bestimmt sind, elektromechanisch betätigt werden.
 10. Anlage nach einem oder mehreren der vorstehenden Ansprüche, **dadurch gekennzeichnet, dass** der eine oder die mehreren Geschwindigkeitsdetektoren mit Fernübertragung aus ebenso vielen Infrarotdetektoren (104) bestehen.
 11. Anlage nach einem oder mehreren der Ansprüche 1 bis 9, **dadurch gekennzeichnet, dass** der eine oder die mehreren Geschwindigkeitsdetektoren mit Fernübertragung in die Fahrbahn eingesenkt und in der Lage sind, das Gewicht der sich nähernden Fahrzeuge festzustellen.
 12. Anlage nach einem oder mehreren der vorstehenden Ansprüche, **dadurch gekennzeichnet, dass** die Sensoren (106, 107) optische Sensoren sind.

Revendications

1. Système ralentisseur routier escamotable, comprenant un dos d'âne ralentisseur (D), constitué d'une pluralité de modules (M), logé dans un respectif logement réalisé en correspondance de la chaussée et associé à des actionneurs prévus à cet effet (10), en mesure de se disposer rapidement d'une position non opérationnelle, entièrement contenue à l'intérieur du dit logement, à une position opérationnelle, faisant partiellement saillie par rapport à ladite chaussée lorsqu'un ou plusieurs capteurs de la vitesse à distance (104) coopérant avec ledit système relèvent l'arrivée d'un véhicule à vitesse excessive, et en mesure de se rétablir rapidement dans sa dite position de repos lorsqu'un ou plusieurs capteurs

(106, 107) coopérant avec ledit système relèvent que ledit véhicule a complété le franchissement du dit dos d'âne ralentisseur (D),

caractérisé en ce que chacun des modules (M) du dit dos d'âne ralentisseur (D) comprend :

- un châssis (1), pratiquement en « U », formé d'une paroi horizontale (1a) des bords de laquelle forjettent vers le haut deux ailes identiques opposées (1 b),
 - une plate-forme (2) fixée transversalement au centre de la face supérieure de ladite paroi horizontale (1a) du châssis (1), dans une position intermédiaire aux deux ailes verticales (1 b),
 - un actuateur (10) fixé au-dessus de ladite plate-forme (2), apte à activer une tige (9) en mesure d'accomplir des courses alternées en verticale,
 - une tête grillagée (8) fixée à l'extrémité supérieure de ladite tige (9) et constituée d'une plaque rectangulaire (8a), à assiette horizontale, au-dessus de laquelle sont montées, régulièrement espacées, des partitions transversales (8b) disposées de chant et dotées supérieurement d'un profil courbe convexe,
 - une grille à assiette horizontale (4), soutenue dans une position sur jacente ladite tête grillagée (8) par le biais de montants (3) fixés sur ladite plate-forme ; étant prévu que chaque fissure (4b) accueille exactement l'une des dites partitions transversales (8b) de la tête grillagée (8), de façon que, lors des courses alternées en verticale de ladite tête grillagée (8), chaque partition transversale (8b) se déplace sur une position de fin de course inférieure, où son profil convexe de sommité reste logé dans la fissure correspondante (4b), sur une position de fin de course supérieure où elle se trouve à surmonter bien au-dessus de la fissure même (4b),
 - un ruban extensible de manière élastique (5), en mesure de revêtir exactement la surface supérieure de ladite grille (4), car fixé aux extrémités en correspondance des bords transversaux (4a) de la grille (4).
2. Système selon la revendication 1, **caractérisé en ce qu'il** comprend un capteur acoustique (103) en mesure d'empêcher le soulèvement du dit dos d'âne ralentisseur (D) lorsqu'il capte le son de la sirène d'un moyen de secours en arrivée.
3. Système selon la première ou les deux revendications précédentes, **caractérisé en ce qu'il** comprend un interrupteur à actionnement manuel (105) pour le blocage permanent du dos d'âne ralentisseur (D) dans sa position opérationnelle ou dans sa position non opérationnelle.
4. Système selon l'une ou plusieurs des revendications

précédentes, **caractérisé en ce que** lesdits un ou plusieurs capteurs (106, 107) sont en mesure d'empêcher le soulèvement du dos d'âne ralentisseur (D) lorsqu'ils relèvent la présence d'un moyen parké sur le dos d'âne (D) même.

5. Système selon l'une ou plusieurs des revendications précédentes, **caractérisé en ce que** ledit dos d'âne ralentisseur (D) est constitué d'une série de modules identiques (M) coopérants, montés l'un à côté de l'autre, chacun desquels présentant à sa sommité un ruban en caoutchouc (5) ou autres matériaux extensibles de manière élastique, à assiette horizontale, en aplomb à la chaussée, lui aussi destiné à subir l'interférence, du bas vers le haut, d'une tête façonnée à cet effet (8) qui, en dépassant brièvement de son logement creusé dans la chaussée, et en mesure de lui imposer une assiette courbée convexe.
6. Système selon l'une ou plusieurs des revendications précédentes, **caractérisé en ce que** ladite grille (4) présente inférieurement des colonnes courtes (6), à assiette verticale, aptes à s'enfiler exactement dans des douilles correspondantes (7) fixées en-dessous de ladite tête grillagée (8), de façon que les premières soient en mesure de guider les courses alternées verticales des secondes.
7. Système selon l'une ou plusieurs des revendications précédentes, **caractérisé en ce que** les actuateurs (10) préposés au soulèvement et à l'abaissement du dos d'âne ralentisseur (D) sont à actionnement hydraulique.
8. Système selon l'une ou plusieurs des revendications de 1 à 6, **caractérisé en ce que** lesdits actuateurs (10) préposés au soulèvement et à l'abaissement du dos d'âne ralentisseur (D) sont à actionnement pneumatique.
9. Système selon l'une ou plusieurs des revendications de 1 à 6, **caractérisé en ce que** lesdits actuateurs (10) préposés au soulèvement et à l'abaissement du dos d'âne ralentisseur (D) sont à actionnement électromécanique.
10. Système selon l'une ou plusieurs des revendications précédentes, **caractérisé en ce que** lesdits un ou plusieurs capteurs à distance de la vitesse consistent en d'autant capteurs à infrarouges (104).
11. Système selon l'une ou plusieurs des revendications de 1 à 9, **caractérisé en ce que** lesdits un ou plusieurs capteurs à distance de la vitesse sont du type noyé dans la chaussée, en mesure de détecter le poids des véhicules en arrivée.

12. Système selon l'une ou plusieurs des revendications précédentes, **caractérisé en ce que** lesdits capteurs (106, 107) sont du type optique.

5

10

15

20

25

30

35

40

45

50

55

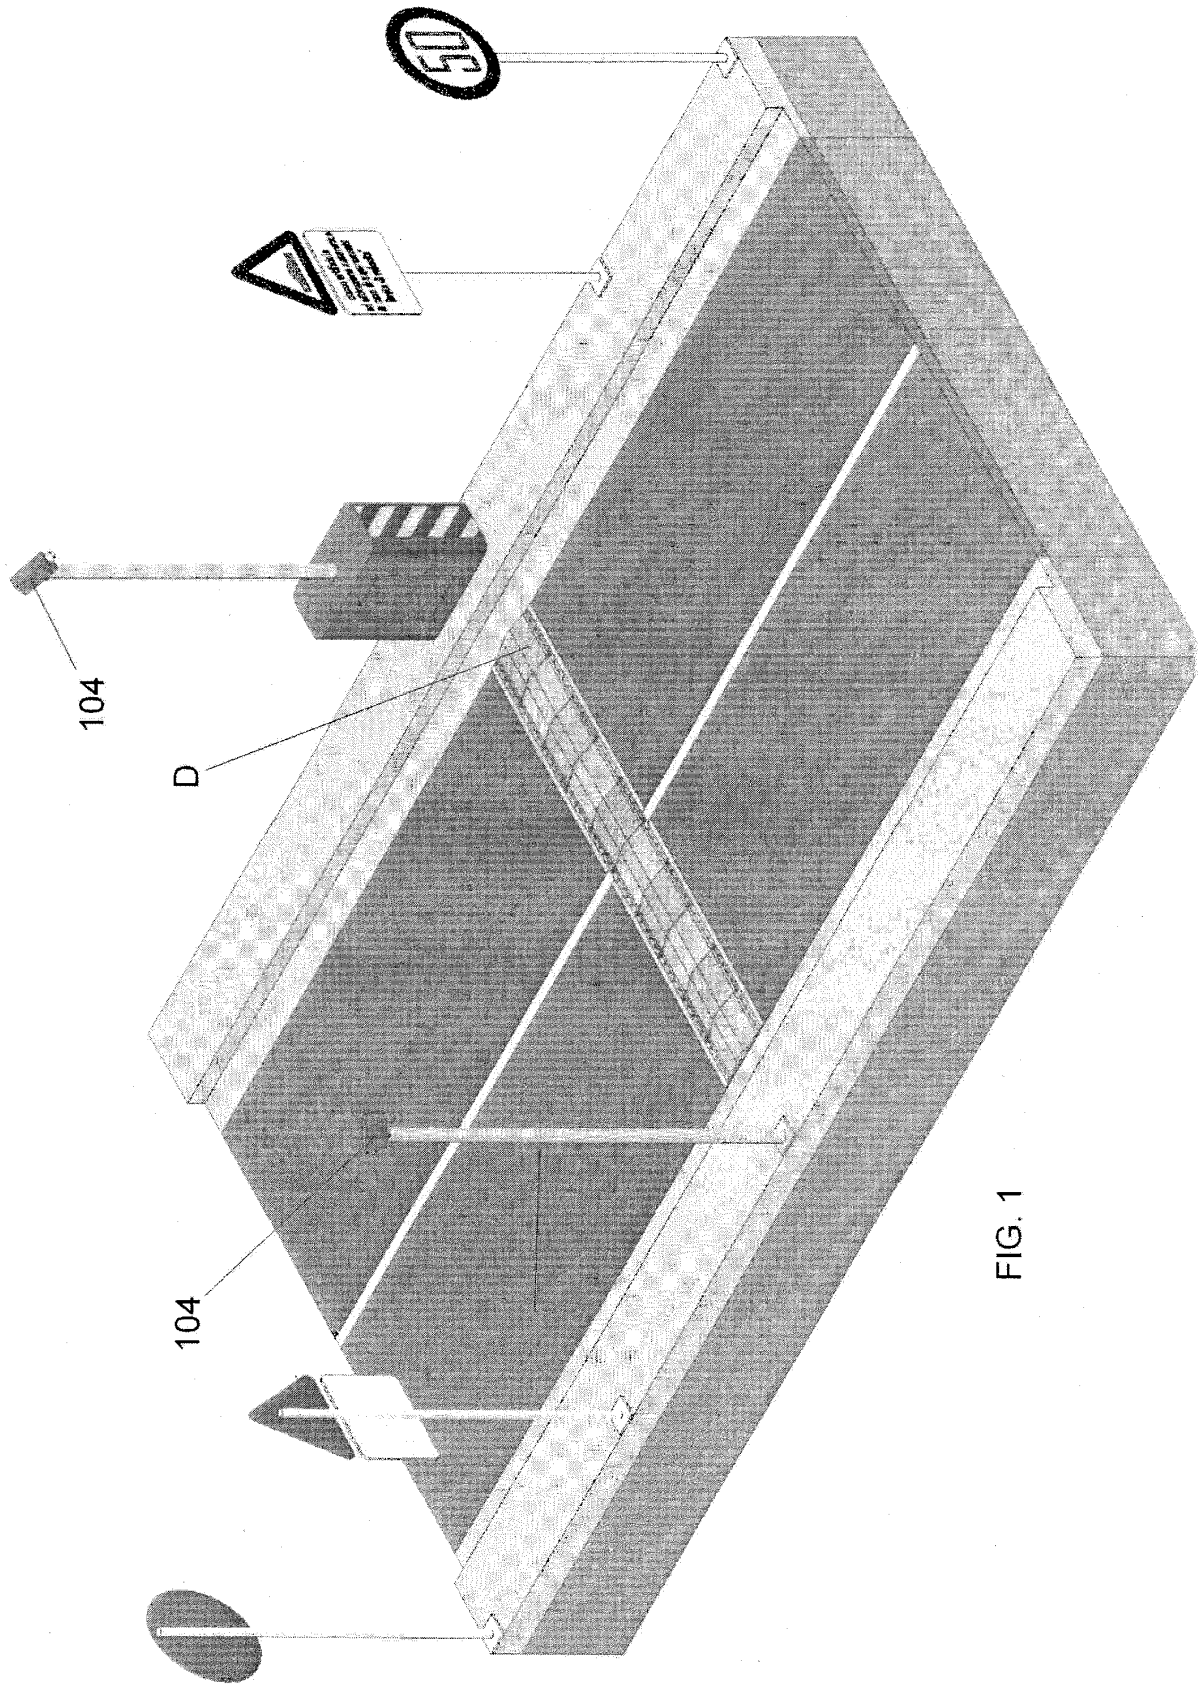
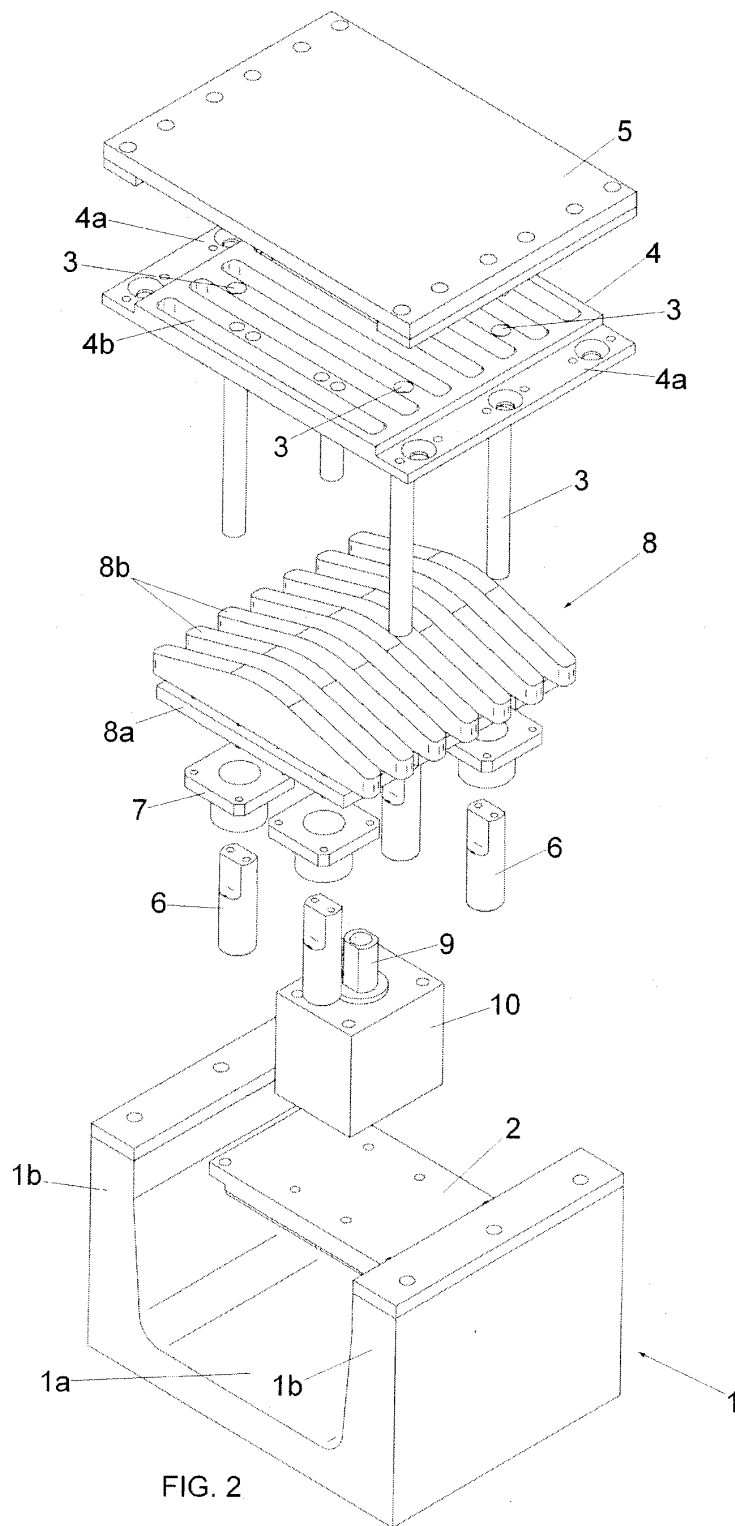


FIG. 1




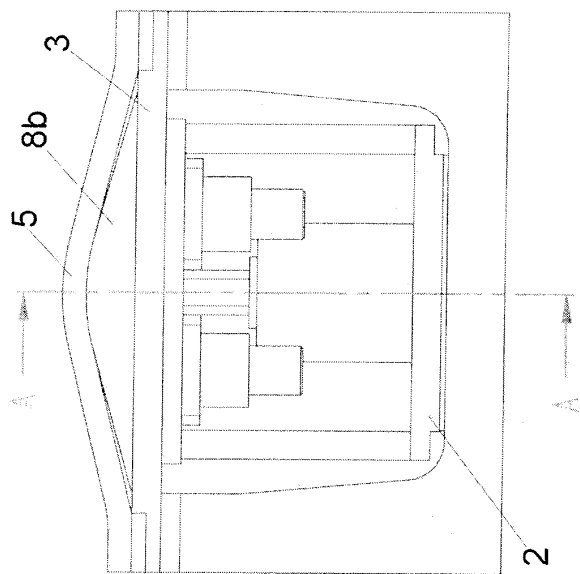


FIG. 4

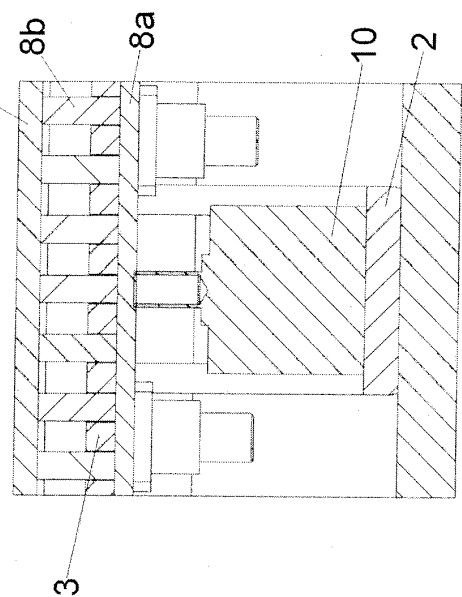

SEZIONE A-A
FIG. 5

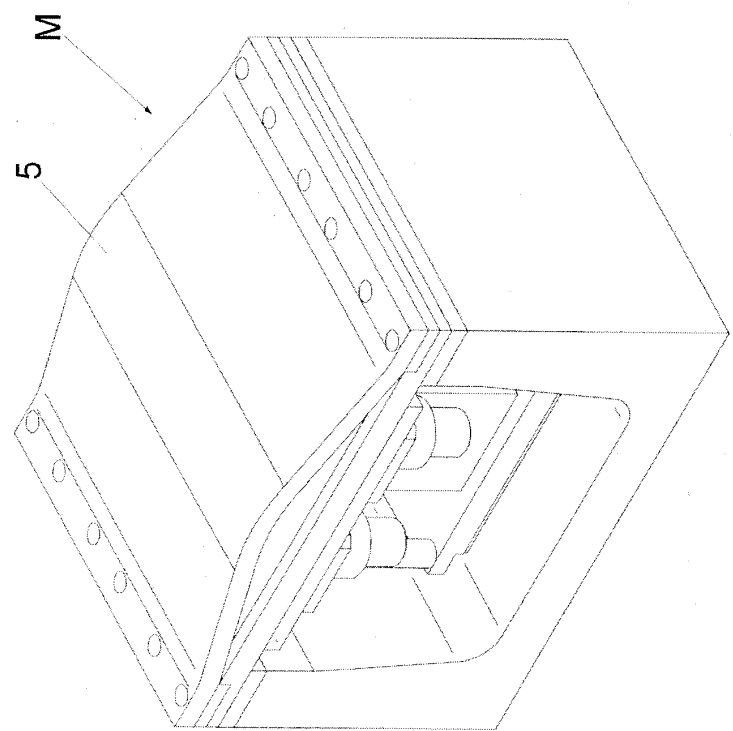


FIG. 3


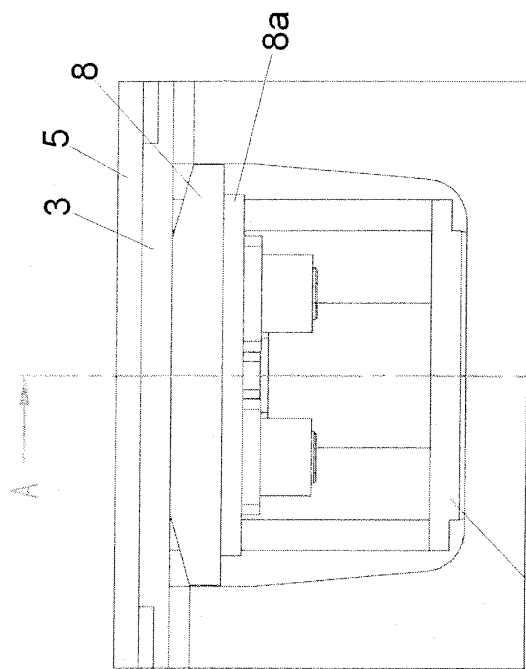


FIG. 7

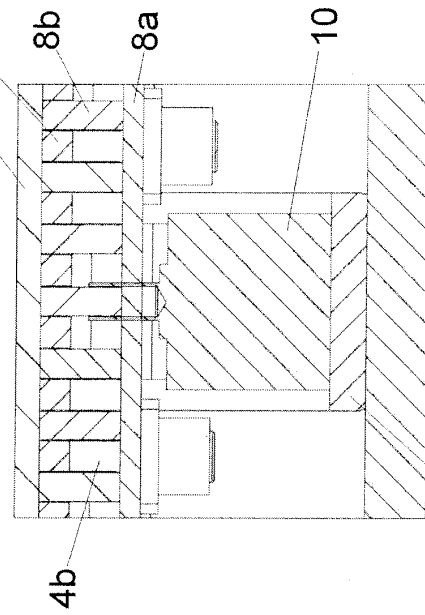

SEZIONE A-A

FIG. 8

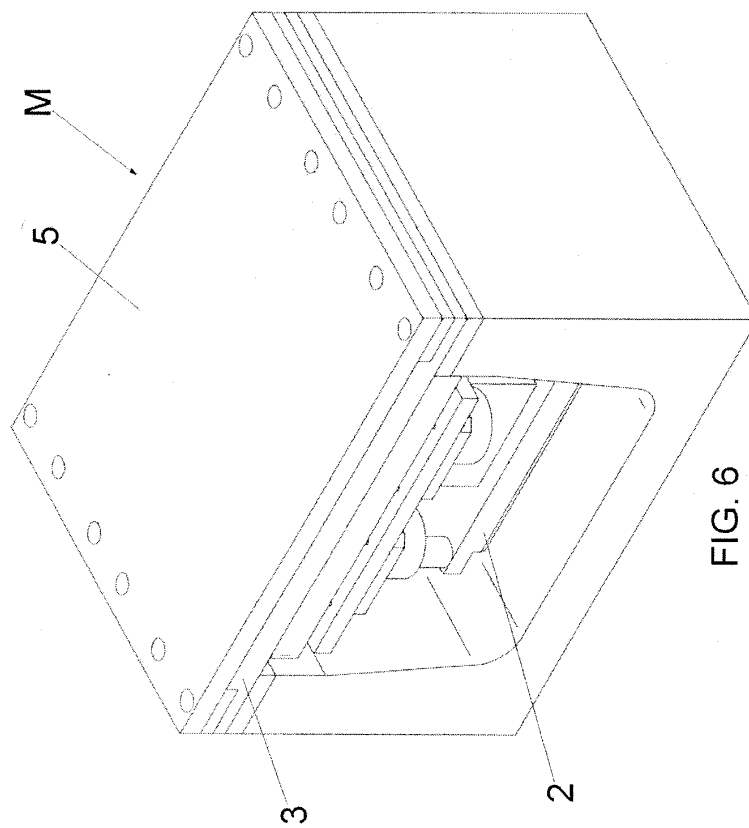


FIG. 6

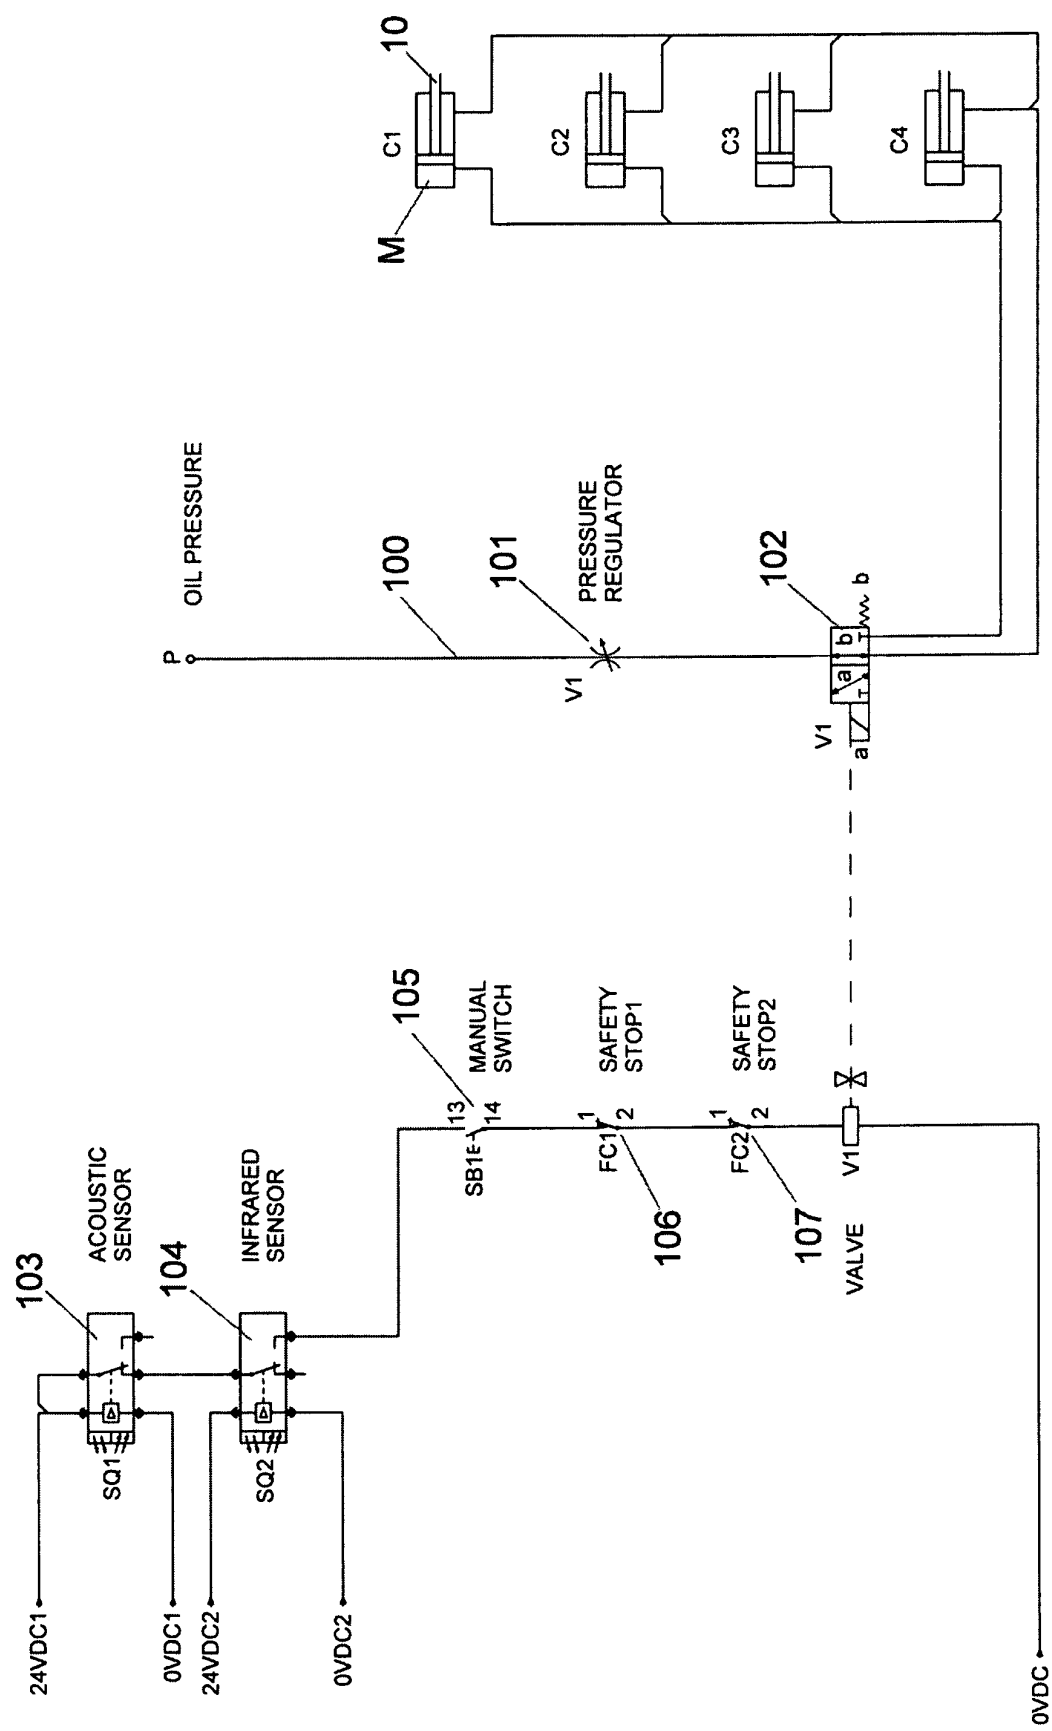


FIG. 9

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 7011470 B [0008]
- GB 2428067 A [0009]
- EP 1028197 A [0010]
- GB 2418445 A [0011]
- SE 0203458 [0012]