(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) **EP 2 000 216 A9**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Search report
Search Report replaced or added

(48) Corrigendum issued on:
18.03.2009 Bulletin 2009/12

(43) Date of publication:
10.12.2008 Bulletin 2008/50

(21) Application number: **07738379.2**

(22) Date of filing: **13.03.2007**

(51) Int Cl.:
B05B 5/025 *(2006.01)* ***B05B 5/16*** *(2006.01)*

(86) International application number:
PCT/JP2007/054907

(87) International publication number:
WO 2007/111120 (04.10.2007 Gazette 2007/40)

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE SI SK TR

(30) Priority: **29.03.2006 JP 2006092196**

(71) Applicant: **Panasonic Electric Works Co., Ltd.**
Kadoma-shi
Osaka (JP)


(72) Inventors:
- **NAKADA, Takayuki**
  Kadoma-shi Osaka 5718686 (JP)
- **SUDA, Hiroshi**
  Kadoma-shi Osaka 5718686 (JP)
- **MACHI, Masaharu**
  Kadoma-shi Osaka 5718686 (JP)
- **WADA, Sumio**
  Kadoma-shi Osaka 571-8686 (JP)
- **ISAKA, Atsushi**
  Kadoma-shi Osaka 571-8686 (JP)
- **SUGAWA, Akihide**
  Kadoma-shi Osaka 5718686 (JP)

(74) Representative: **Appelt, Christian W.**
Forrester & Boehmert
Pettenkoferstrasse 20-22
80336 München (DE)

(54) ELECTROSTATIC ATOMIZATION DEVICE

(57) The liquid supplied to an emitter electrode located at a tip of an atomization nozzle receives the high-voltage and electrically charged. The mist of the charged minute water particles of nanometer sizes is generated from the emitter electrode. A pressure regulating means regulates a pressure applied to the liquid on the tip of the emitter electrode. Therefore, the mode of generating the mist of the charged minute water particles of nanometer sizes or the mode of generating the mist of the charged minute water particles of nanometer and micron size is selected.

Fig.1

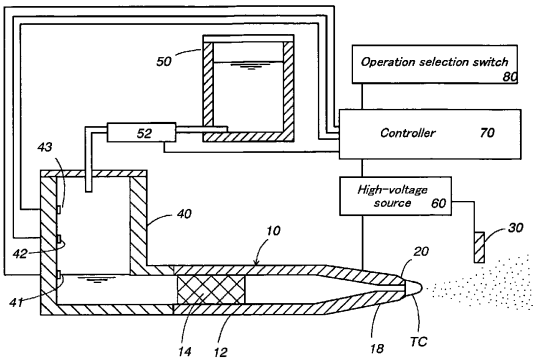

EP 2 000 216 A9

Description

TECHNICAL FIELD

[0001] This invention relates to an electrostatically atomizing device which is capable of generating a mist of charged minute particles of nanometer-sizes which is mixed with a mist of charged minute particles of micron-sizes as necessary.

BACKGROUND ART

[0002] Japanese patent application no. H5-345156 discloses an electrostatically atomizing device which is configured to electrostatically atomize water to generate a mist of the charged minute water particles. The electrostatically atomizing device is configured to cause the water supplied to the emitter electrode to generate a Rayleigh breakup for atomizing the water, thereby generating the mist of the charged minute water particles of nanometer sizes. The mist of the charged minute water particles includes radicals and is capable of floating in a room for many hours. The mist of the charged minute water particles is capable of diffusing into the room and is capable of adhering and penetrating to substances at the room where the mist is diffused, thereby effectively sterilizing and deodorizing the substances. The mist of the charged minute water particles is capable of humidifying the room. However, the mist of the charged minute water particles has diameters of the nanometer-sizes. That is, even if a large amount of the mist is discharged, the mist of the charged minute water particles of nanometer-sizes is not capable of sufficiently humidifying the room. In such matter, the electrostatically atomizing device is generally used with a traditional humidifier which generates water vapor when humidification is required.

DISCLOSURE OF THE INVENTION

[0003] In view of the above problem, the present invention is achieved to provide an electrostatically atomizing device which has functions of decomposing harmful substances, sterilizing the substances, and deodorizing the substances and which has a function of adding a humidifying function as necessary.

[0004] The electrostatically atomizing device in accordance with the present invention comprises a tubular atomization nozzle, a supply tank, and a high-voltage source. The tubular atomization nozzle has an emitter electrode at its tip. The supply tank is configured to contain a volume of liquid and is configured to supply the liquid to the atomization nozzle. The high-voltage source is configured to apply a high-voltage to the emitter electrode to electrostatically charge the liquid which is supplied to the emitter electrode for generating a mist of charged minute liquid particles from the tip of the emitter electrode.

[0005] The water supplied to the emitter electrode is formed into a water ball at the tip of the emitter electrode by a surface tension. The high-voltage source applies the high-voltage to the tip of the emitter electrode, forms a Taylor cone at the water ball which is held at the tip of the emitter electrode, and then concentrates electric charges at a tip of the Taylor cone. The tip of the Taylor cone is charged electrically, and then breaks up, so that the tip of the Taylor cone generates a mist of charged minute water particles of nanometer sizes of 3nm to 100nm, and then is diffused. At this moment, a water in the supply tank applies the water head pressure to the Taylor cone and tilts a balance of the surface tension. Consequently, the portion other than the tip of the Taylor cone breaks up. The portion other than the tip of the Taylor cone concentrates little electrical charge. Therefore, the portion other than the tip of the Taylor cone has little energy to break up, thereby mainly generating a mist of charged minute water particles of micron sizes of 0.1 μm to 10 μm. The mist of the charged minute water particles of nanometer sizes has radicals, and is capable of decomposing harmful substances, sterilizing the space, and deodorizing the space by the radicals. The mist of the charged minute water particles of micron sizes is capable of humidifying the space effectively.

[0006] The feature of the invention resides in that the electrostatically atomizing device includes a pressure regulating means which is configured to regulate a pressure applied to the liquid at the tip of the atomization nozzle. With this configuration, by regulating the pressure applied to the tip of the water, Taylor cone, it is possible to obtain the electrostatically atomizing device which has a mode to generate the breakup only at the tip of the Taylor cone, and which has the other mode to generate the breakup at the portion other than the tip of the Taylor cone as well as to also generate the breakup at the tip of the Taylor cone. Consequently, the electrostatically atomizing device is configured to mainly generate the mist of the charged minute water particles of nanometer sizes. Furthermore, the electrostatically atomizing device is also configured to generate the mist of the charged minute water particles of nanometer sizes as well as to generate the mist of the charged minute water particles of micron sizes. As a result, the electrostatically atomizing device is capable of switching the two operations selectively. Therefore, the electrostatically atomizing device has functions of decomposing the harmful substances, sterilizing and deodorizing by a great deal of radicals that the mist of the charged minute water particles of nanometer sizes has. In addition, the electrostatically atomizing device has functions of humidifying the room as well as has functions of decomposing the harmful substances, sterilizing and deodorizing by a great deal of radicals that the mist of the charged minute water particles of nanometer sizes has. As a result, the electrostatically atomizing device is capable of operating anyone of above functions according to circumstances.

[0007] The pressure regulating means comprises a replenishing means, a controller, and an operation selec-

tion switch. The replenishing means is for replenishing the liquid to the supply tank. The controller is for actuating the replenishing means to control a replenishment quantity of the liquid to the supply tank. The operation selection switch is for selectively operating the controller in one of a first operation mode and a second operation mode. The controller is configured to keep a liquid level of the supply tank to a first liquid level in the first operation mode. The controller is configured to keep the liquid level of the supply tank to a second liquid level in the second operation mode. The second liquid level of the supply tank is higher than the first liquid level of the supply tank. With these configurations, the first level is configured to lessen the water head pressure in the supply tank so as to cause the breakups only at the tip of the Taylor cone. The second level is configured to relatively increase the water head pressure in the supply tank so as to cause the breakups at the portions other than the tip of the Taylor cone as well as at the tip of the Taylor cone. For this reason, the electrostatically atomizing device is capable of mainly generating the mist of the charged minute water particles of nanometer sizes in the first operation mode. The electrostatically atomizing device is capable of generating the mist of the charged minute water particles that the nanometer sizes and the micron sizes are mixed in the second operation mode.

[0008] It is preferred that the supply tank includes a first liquid level sensor and a second liquid level sensor. In this case, the controller is configured to operate the replenishing means so as to keep the liquid level of the supply tank to a liquid level which is determined by the first liquid level sensor in the first operation mode. The controller is configured to operate the replenishing means so as to keep the liquid level of the supply tank to a liquid level which is determined by the second liquid level sensor in the second operation mode. Therefore, it is possible for electrostatically atomizing device to have dual adjustment of the water head pressures applied to the liquid at the tip of the atomization nozzle.

[0009] It is preferred that the replenishing means includes a replenishing tank and a pump. The replenishing tank is configured to contain a volume of liquid and is connected to the supply tank. The pump is configured to supply the liquid from the replenishing tank to the supply tank.

[0010] It is preferred that the atomization nozzle includes a main tube and a capillary tube. The capillary tube extends continuously from the main tube and defines the emitter electrode. The main tube has an inside diameter sufficiently larger than that of the capillary tube so as to be free from a capillary action. The main tube has its rear end which is connected to the supply tank. With this configuration, it is possible to apply the water head pressure in the supply tank to the water which is held at the tip of the capillary tube through the main tube. In the second mode, a high water head pressure kept at the second level in the supply tank applies to the water held at the tip of the capillary tube. Therefore, it is possible for electrostatically atomizing device to generate the mist of the charged minute particles of nanometer sizes and micron sizes at the same time.

[0011] It is preferred that the capillary tube is coaxial with the main tube. The atomization nozzle is fixed to a housing with an axis of the atomization nozzle which is directed in the horizontal direction. The supply tank has a height along a direction perpendicular to an axis of the main tube. The first liquid level is located at a lowermost position for supplying the liquid from said supply tank to the main tube and the capillary tube. In this case of the first level, it is possible to only generate the mist of the charged minute water particles of nanometer sizes effectively by a regulation of the minimizing the water head pressure applied to the liquid supplied to the atomization nozzle.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012]

Fig.1 shows a schematic view of an electrostatically atomizing device with operating the first operation mode in accordance with an embodiment,

Fig.2 shows a schematic view of the electrostatically atomizing device with operating the second operation mode of the above embodiment,

Fig.3 shows a perspective view of the electrostatically atomizing device of above embodiment,

Fig.4 shows a perspective view of the electrostatically atomizing device in a state of removing the cover of above embodiment, and

Fig.5 shows a schematic view of a food storage chamber with the electrostatically atomizing device of above embodiment.

BEST MODE FOR CARRYING OUT THE INVENTION

[0013] An electrostatically atomizing device in accordance with an embodiment of the present invention is explained with reference to attached drawings of Fig.1 and Fig.2. The electrostatically atomizing device comprises an atomization nozzle **10,** an opposed electrode **30,** a high-voltage source **60,** a controller **70,** and an operation selection switch **80.** The atomization nozzle **10** is provided at its tip with an emitter electrode **20.** The opposed electrode **30** is disposed in an opposed relation to the emitter electrode **20.** The high-voltage source **60** is for applying a high-voltage between the emitter electrode **20** and the opposed electrode **30.** The operation selection switch **80** is configured to be selectable between a first operation mode and a second operation mode for selectively operating the controller in one of the first operation mode and the second operation mode. In the first operation mode, the electrostatically atomizing device is configured to only generate a mist of charged minute particles of nanometer sizes of 3nm to 100nm. In the second operation mode, the electrostatically atomizing device is

configured to generate a mist of charged minute particles of nanometer sizes with a mist of charged minute particles of micron sizes of 0.1 μm to 10 μm. The operation selection switch **80** applies the signals to the controller **70** for operating the electrostatically atomizing device in either the first operation mode or the second operation mode. As mentioned later, the controller **70** is configured to actuate a pressure applied to liquid supplied to the tip of the atomization nozzle **10** according to a selection of the first operation mode and the second operation mode. In addition, the controller **70** is configured to actuate a high-voltage value.

[0014] The atomization nozzle **10** has its rear end connected with the supply tank **40.** The liquid, such as water, contained to the supply tank 40 is supplied to a tip of the emitter electrode **20.** The electrostatically atomizing device in this invention is capable of using various liquids instead of the water. But this embodiment explains the electrostatically atomizing device which uses the water as the liquid.

[0015] The water supplied to the emitter electrode **20** develops to the water ball by a surface tension. The high-voltage source is configured to apply the high-voltage, such as - 8kV, to the emitter electrode **20,** so as to generate a high-voltage electrical field between an emitter end at the tip of the emitter electrode **20** and the opposed electrode **30.** The high-voltage electrical field electrostatically charges the water ball by static electricity, and subsequently causes the water ball to generate the mist of the charged minute particles M. The high-voltage between the emitter electrode **20** and the opposed electrode **30** causes a generation of the Coulomb force between the opposed electrode **30** and the water held at the tip of the emitter electrode **20.** Therefore, the high-voltage pulls the water toward the opposed electrode 30 and forms a Taylor cone at a surface of the water, locally. A concentration of the electrical charge at the tip of the Taylor cone TC causes a larger electrical field intensity between the emitter end of the emitter electrode **20** and the opposed electrode, and causes a larger Coulomb force. In this way, the high-voltage electrical field further develops the Taylor cone. Subsequently, the Coulomb force becomes larger than the surface tension of the water W, thereby repeating the breakups of the Taylor cone and generating a large amount of the mist of the charged minute water particles of nanometer sizes. The mist of the charged minute water particles of nanometer sizes is discharged by airflow that an ion wind flowing from the emitter electrode **20** toward and through the opposed electrode **30** causes.

[0016] The supply tank **40** is replenished with the water from a replenishing tank **50** by a pump **52.** The supply tank **40** is provided with water level sensors **41, 42, 43** which are arranged at different height levels and which are configured to output signals of water levels in the supply tank **40** to the controller **70.** The controller **70** controls the pump **52** for keeping the water level to the first water level sensor **41** or the second water level sensor **42** according to the operation mode that the operation selection switch **80** is selected. The operation selection switch **80** cooperates with the replenishing tank **50,** the pump **52,** and the controller **70** to constitute a pressure regulating means which is configured to regulate the pressure applied to the water supplied at the tip of the emitter electrode **20** of the atomization nozzle **10.**

[0017] The atomization nozzle **10** is formed into a tubular configuration and includes a main tube **12** and a capillary tube which extends continuously from the main tube. The capillary tube **18** is coaxial with the main tube **12.** The capillary tube **18** defines the emitter electrode **20.** The main tube **12** has an inside diameter which extends along the length from the supply tank **40** to the tip of the emitter electrode **20.** The inside diameter has a sufficiently large diameter for not to generate a capillary action and is configured to apply a water head pressure to the water ball on the tip of the emitter electrode **20.** The main tube **12** has an inside diameter which is tapered toward the capillary tube **18.** The water applied to the emitter electrode **20,** capillary tube **18,** is developed into the water ball by the surface tension. The first water level sensor **41,** the second water level sensor **42,** and the third water level sensor **43** are arranged to apply the water head pressure of the water in the supply tank to the water ball without breaking the water ball formed by the surface tension. The water in the supply tank **40** applies the water head pressure to the Taylor cone **TC** which is formed by the high-voltage that the high-voltage source applies.

[0018] The atomization nozzle **10** is fixed to a housing and is disposed to have its central axis aligned with the horizontal direction. The supply tank **40** has its height along the vertical direction and is connected with a rear end of the atomization nozzle **10.** The supply tank **40** has height along a direction perpendicular to an axis of the main tube **12.** As shown in Fig.1, the first water level sensor **41** is located at the lowermost position for filling the water to the atomization nozzle **10.** When the water level of the supply tank corresponds to the position of the first water level sensor **41,** the water in the supply tank applies a minimum water head pressure to the Taylor cone **TC**. The second water level sensor **42** is located above the first water level sensor **41.** As shown in Fig.2, when the supply tank **40** contains the water with the water level equally or lower than the second water level sensor **42** and higher than the first water level sensor **41,** the water has a predetermined water head pressure higher than the minimum water head pressure and applies the predetermined water head pressure to the Taylor cone **TC.** The third water level sensor **43** determines a maximum value of the water head pressure that the water contained in the supply tank **40** generates. The Taylor cone receives the minimum water head pressure, generates breakups at its tip, and generates at its tip the mist of the charged minute water particles of nanometer sizes. The Taylor cone **TC** receives the predetermined water head pressure, generates the breakups at the tip of the

Taylor cone and the portion other than the tip of the Taylor cone, and then generates the mist of the charged minute water particles of nanometer sizes and the mist of the charged minute water particles of micron sizes. The supply tank **40** is further supplied with the water by the replenishing tank **50** through the pump **52** and then contains more volume of the water. Finally, the controller **70** is configured to stop the pump **52** when the water level reaches the third water level sensor **43.**

[0019] The Taylor cone **TC** has a shape which is maintained by the surface tension. The high-voltage source **60** is configured to apply the high-voltage to the Taylor cone **TC** which receives the predetermined water head pressure and causes the breakup of the portion of the tip of the Taylor cone where the electrically charge is concentrated. In addition, the high-voltage source **60** causes the portion other than the tip of the Taylor cone to break up. However, the portion other than the tip of the Taylor cone has little electrical-charge than the tip of the Taylor cone. Therefore, the portion other than the tip of the Taylor cone has little energy for breaking up. As a result, the portion other than the tip of the Taylor cone **TC** mainly generates the mist of the charged minute water particles of nanometer sizes. Therefore, the high-voltage source **60** applies the high-voltage to the Taylor cone **TC** which receives the water head pressure at the tip of the emitter electrode **20,** and then causes the generation of the mist of the charged minute water particles of nanometer sizes at the tip of the Taylor cone. In addition, the high-voltage source causes the generation of the mist of the charged minute water particles of micron sizes at the portion other than the tip of the Taylor cone. The mist of the charged minute water particles of nanometer sizes and micron sizes spreads into the room in a diffused state. The supply tank **40** continuously supplies the water to the emitter electrode **20** and continuously forms the Taylor cone **TC** at the emitter electrode **20.** Therefore, the Taylor cone **TC** generates the mist of the charged minute water particles, continuously.

[0020] The mist of the charged minute water particles of nanometer sizes includes radicals. The radicals in the mist of the charged minute water particles of nanometer sizes decompose harmful substances, sterilize substances in the room, and deodorize the substances in the room. The mist of the charged minute water particles of micron sizes spreads into the room and humidifies the room.

[0021] In addition, it is possible for supply tank **40** to further include yet another water level sensor in addition to the above mentioned water level sensors. In this case, it is preferred that the yet another water level sensor is configured to detect the water level between the first water level sensor and the third water level sensor. With this configuration, the controller **70** is capable of regulating the water level between the first water level sensor **41** and the third water level sensor **43.** Therefore, it is possible to obtain the electrostatically atomizing device which is capable of controlling particle size distributions and generation ratio of the mist of the charged minute water particles of nanometer sizes.

[0022] Fig.3 and Fig.4 show the housing **100** which incorporates the parts constituting the electrostatically atomizing device. The housing **100** includes a base 110 and a cover **120** which covers the base **110.** The base **110** is fixed with the supply tank **40,** the atomization nozzle **10,** the replenishing tank **50,** and the pump **52.** The atomization nozzle and supply tank **40** is formed integrally. The opposed electrode **30** is fixed to the cover **120.** The emitter electrode **20** and the opposed electrode **30** are disposed at the outside of the housing. The electrical components which constitute the high-voltage source **60,** the controller **70,** and the pressure regulating means **80** are disposed in the housing **100.** The cover **120** is provided with a window **122** which is for confirming the water level of the supply tank and which is made of transparent material. The replenishing tank **50** is provided with a cap **54.** It is possible to supply the water into the replenishing tank **50** with removing the cap **54** as necessary.

[0023] In the electrostatically atomizing device of this embodiment shown in the Figure, the opposed electrode **30** is disposed at a front side of the emitter electrode **20** and is configured to cooperate with the emitter electrode **20** for generating the high-voltage therebetween. However, the electrostatically atomizing device of this invention is not to be considered limited to what is shown in the drawings. For example, it is possible to use a part of the housing **100** as a ground. In this case, the high-voltage source is configured to apply the high-voltage between the emitter electrode **20** and a part of the housing **100.** The air which surrounds the emitter electrode **20** acts as a ground potential. The air acts as a ground potential around the emitter electrode **20.** The emitter electrode **20** is capable of generating the mist of the charged minute water particles.

[0024] The atomization nozzle **10** is provided with a filter **14.** The filter **14** is for filtering the water, thereby removing minerals such as Calcium and Magnesium from the water. In the case of using a tap water to the electrostatically atomizing device of this invention, the filter **14** prevents the minerals of the tap water from depositing at the tip of the emitter electrode **20.**

[0025] Fig.5 shows a food storage chamber **90** which is configured to store foods such as vegetables. The food storage chamber **90** has an electrostatically atomizing device **M.** The food storage chamber **90** allows the electrostatically atomizing device **M** to generate the mist of the charged minute water particles of nanometer sizes and micron sizes for deodorizing substances, sterilizing the substances, and decomposing harmful substances to an inside of the food storage chamber **90.** In addition, the mist of the charged minute water particles of micron sizes maintains the inside of the food storage chamber **90** at a proper humidity. Especially, in the case of containing the vegetables in the food storage chamber **90,** the food storage chamber **90** is capable of supplying a large amount of the mist of the charged minute water

particles of micron sizes to the vegetables. Therefore, it is possible to obtain the food storage chamber which is capable of preserving the freshness of the vegetables.

[0026] The food storage chamber **90** is provided with a heat insulator **92,** a power switch **94,** and a temperature regulating buttons **95.** The heat insulator **92** is configured to keep the inside of the food storage chamber **90** to a predetermined temperature. The power switch **94** and the temperature regulating buttons 95 are located at an exterior surface of the food storage chamber **90.** The electrostatically atomizing device **M** is configured to start by the power switch **94.** The electrostatically atomizing device **M** is configured to operate according to the selected operation mode of the operation selection switch **80** so as to generate only the mist of the charged minute water particles of nanometer sizes or generate the mist of the charged minute water particles of nanometer sizes with that of micron sizes.

[0027] In the foods, it is known that the leafy vegetables are not capable of preserving the freshness by only wetting a leaf surface. It is possible for leafy vegetables to preserve the freshness by supplying the water to tissues through stomata. Leafs of the leafy vegetables have stomata which have long sides of about 100-200 μm and have short sides of about 10 μm. The mist of the charged minute water particles of nanometer sizes penetrates into the tissue through the stomata. However, the mist of the charged minute water particles of nanometer sizes has extremely small particle sizes. It is impossible to supply a sufficient amount of water to the tissue of the leafy vegetables through the stomata by the mist of the charged minute water particles of nanometer sizes. On the other hand, the mist of the charged minute water particles of micron sizes contains much amount of water than that of micron sizes. Therefore, it is possible to preserve the freshness of the leafy vegetables through the stomata by the mist of the charged minute water particles of micron sizes. In the case of incorporating the electrostatically atomizing device into the food storage chamber **90,** it is preferred that the second operation mode is configured to generate the mist of the charged minute water particles of micron sizes with particle size distributions of less than 10 micrometer. It is more preferred that the second operation mode is configured to generate the mist of the charged minute water particles of micron sizes with the particle size distributions of less than 1.0 to 3.0 micrometer.

[0028] The mist of the charged minute water particles of nanometer sizes is capable of sterilizing and deodorizing surfaces of the leafy vegetables and is capable of decomposing the harmful substances such as agrichemicals adhering to the leafy vegetables. In addition, the mist of the charged minute water particles of nanometer sizes is capable of penetrating into the tissues of the leafy vegetables through the stomata, and then is capable of decomposing the agrichemicals previously penetrating into the tissues, sterilizing and deodorizing the inside of the tissue. In this case, the pressure regulating means and high-voltage source are controlled to generate the mist of the charged minute water particles of nanometer sizes having the particle size distributions of 15 to 30 nanometers.

[0029] The above configuration shows the example of this invention of the electrostatically atomizing device which is incorporated into the food storage chamber 90. However, the invention is not to be considered limited to what is shown in the drawing and described in the specification. The electrostatically atomizing device is capable of using at the room where the mist of the charged minute water particles of nanometer sizes is required. Or more specifically, the electrostatically atomizing device is capable of using at the room where the mist of the charged minute water particles of nanometer sizes with that of micron sizes are required.

Claims

1. An electrostatically atomizing device comprising:

a tubular atomization nozzle having an emitter electrode at its tip;
a supply tank being configured to contain a volume of liquid and supply the liquid to said atomization nozzle;
a high-voltage source being configured to apply a high voltage to the emitter electrode in order to electrostatically charge the liquid supplied thereto for generating a mist of charged minute liquid particles from the tip of the emitter electrode; and
a pressure regulating means configured to regulate a pressure applied to the liquid at the tip of said atomization nozzle.

2. An electrostatically atomizing device as set forth in claim 1, wherein
said pressure regulating means comprises:

a replenishing means for replenishing the liquid to said supply tank;
a controller for actuating said replenishing means to control a replenishment quantity of the liquid to said supply tank; and
an operation selection switch for selectively operating the controller in one of a first operation mode and a second operation mode,
said controller is configured to keep a liquid level of said supply tank to a first liquid level in said first operation mode, and
said controller is configured to keep the liquid level of said supply tank to a second liquid level in said second operation mode, said second liquid level of said supply tank is higher than said first liquid level of said supply tank.

3. An electrostatically atomizing device as set forth in claim 2, wherein
said supply tank includes a first liquid level sensor and a second liquid level sensor,
said controller is configured to operate said replenishing means so as to keep the liquid level of said supply tank to a liquid level determined by said first liquid level sensor in said first operation mode,
said controller is configured to operate said replenishing means so as to keep the liquid level of said supply tank to a liquid level determined by said second liquid level sensor.

4. An electrostatically atomizing device as set forth in claim 2, wherein
said replenishing means includes a replenishing tank configured to contain a volume of liquid and connected to the supply tank, and a pump configured to supply the liquid from said replenishing tank to said supply tank.

5. An electrostatically atomizing device as set forth in claim 2, wherein
said atomization nozzle includes a main tube and a capillary tube which extends continuously from said main tube and which defines said emitter electrode,
said main tube has an inside diameter sufficiently larger than that of said capillary tube so as to be free from a capillary action, and
said main tube has its rear end connected to said supply tank.

6. An electrostatically atomizing device as set forth in claim 5, wherein
said capillary tube is coaxial with said main tube,
said atomization nozzle is fixed to a housing with an axis of said atomization nozzle being directed in the horizontal direction,
said supply tank has a height along a direction perpendicular to an axis of said main tube, and
said first liquid level is located at a lowermost position for supplying the liquid from said supply tank to said main tube and said capillary tube.

Fig.1

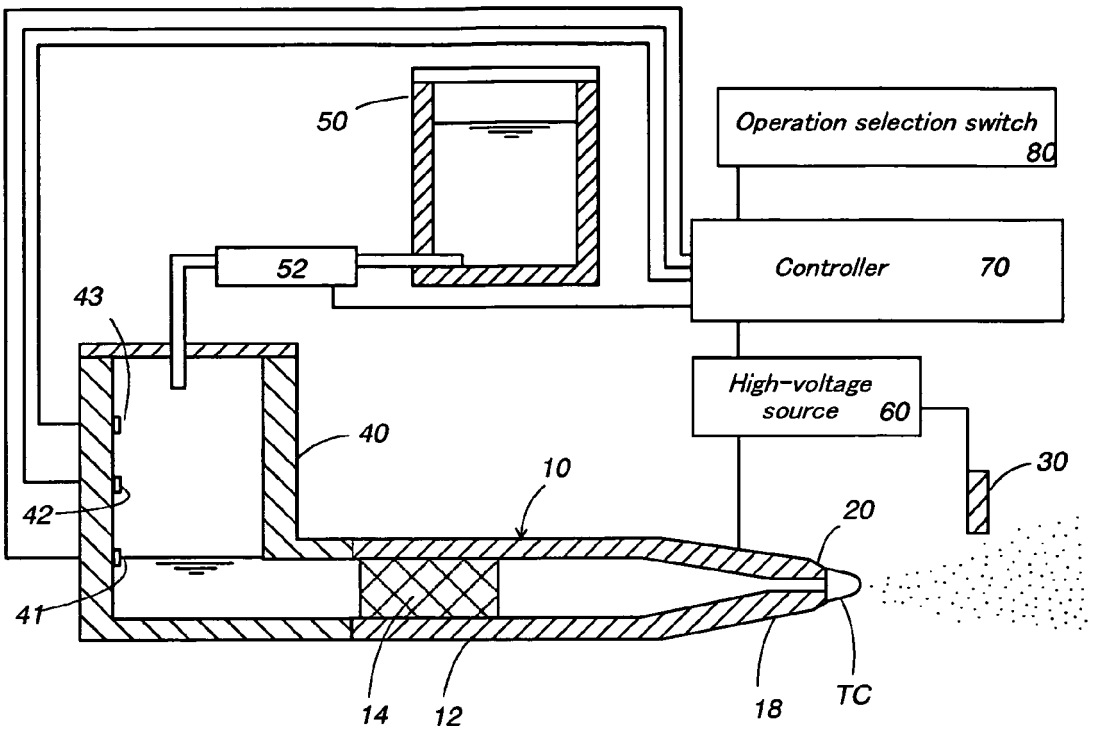

50
Operation selection switch
80
52
Controller
70
43
High-voltage
source
60
40
30
10
42
20
41
14
12
18
TC

Fig.2

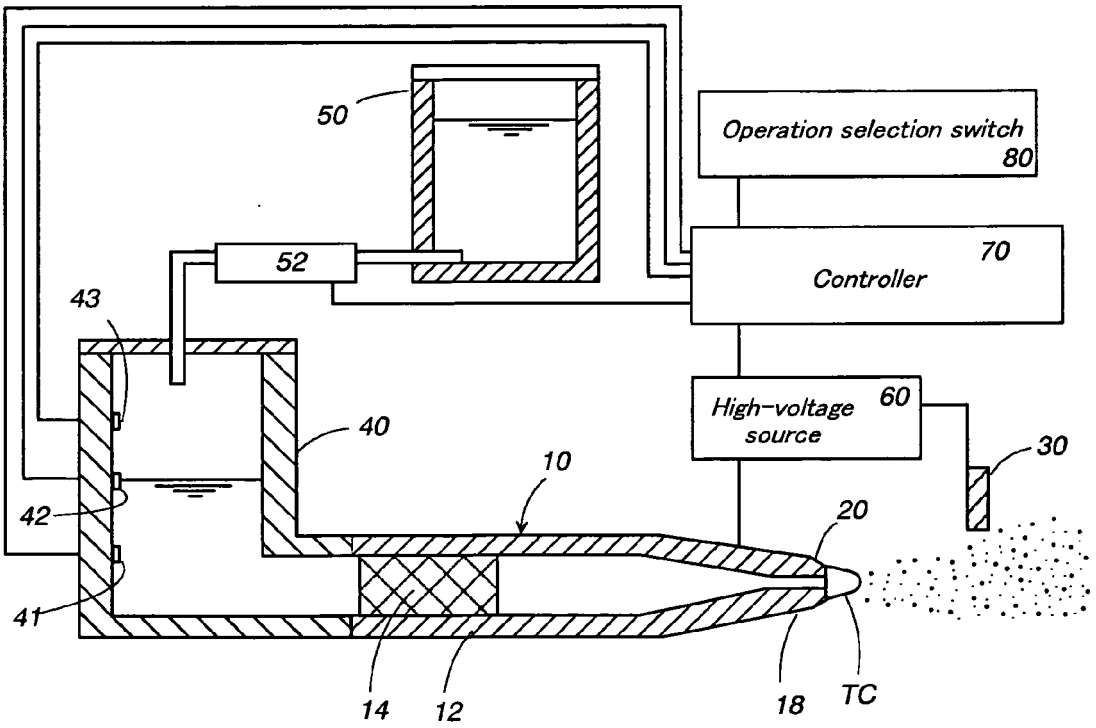

50
Operation selection switch
80
52
70
Controller
43
High-voltage
source
60
40
30
10
42
20
41
14
12
18
TC

Fig.3

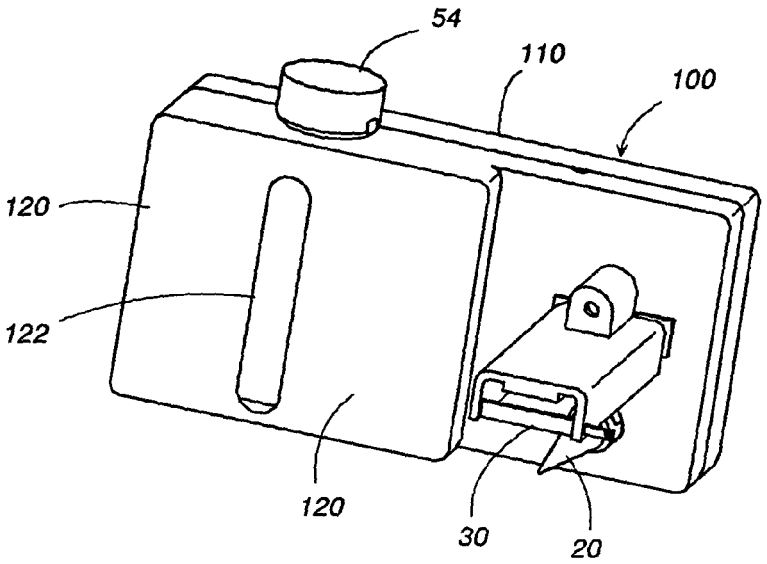


Fig.4


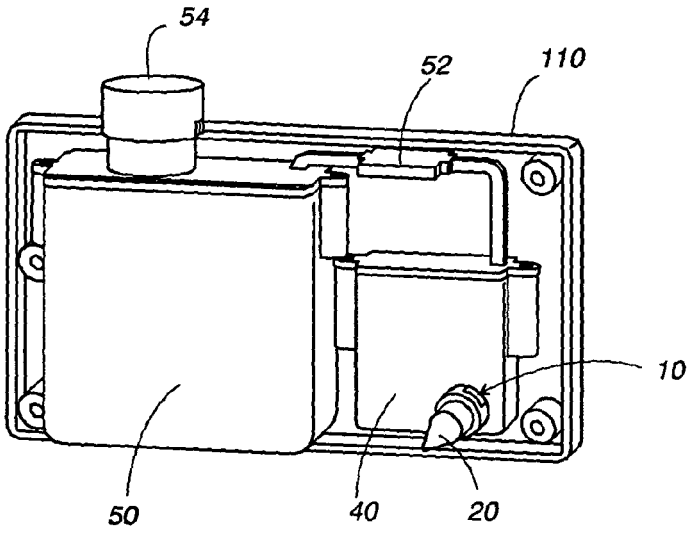


Fig.5

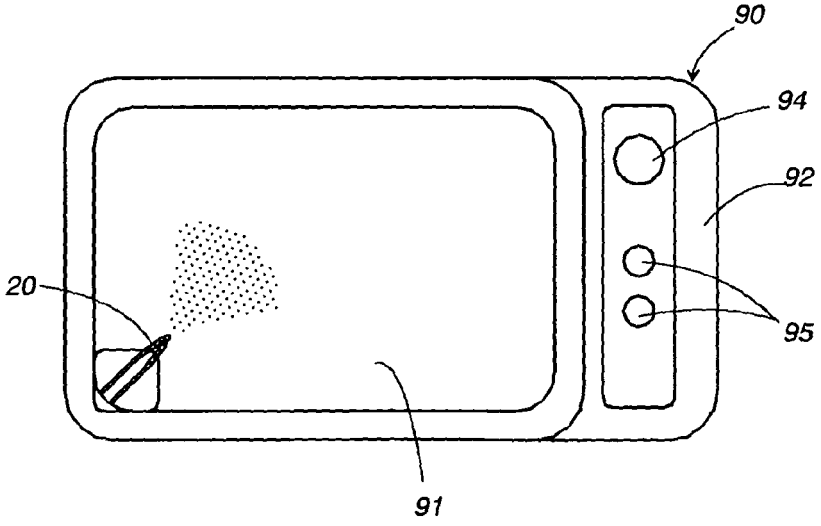

INTERNATIONAL SEARCH REPORT

International application No.
PCT/JP2007/054907

A. CLASSIFICATION OF SUBJECT MATTER
B05B5/025(2006.01)i, *B05B5/16*(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B05B5/00-5/16

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2007
Kokai Jitsuyo Shinan Koho 1971-2007 Toroku Jitsuyo Shinan Koho 1994-2007

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	JP 2005-164139 A (Matsushita Electric Industrial Co., Ltd.), 23 June, 2005 (23.06.05), (Family: none)	1 2-6
Y A	JP 2004-165587 A (National Institute of Advanced Industrial Science and Technology), 10 June, 2004 (10.06.04), & WO 2003/070381 A1 & EP 1477230 A1 & US 2005-116069 A1	1 2-6
A	JP 9-10632 A (Nisshin Steel Co., Ltd.), 14 January, 1997 (14.01.97), (Family: none)	1-6

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
28 May, 2007 (28.05.07)	05 June, 2007 (05.06.07)
Name and mailing address of the ISA/ Japanese Patent Office Facsimile No.	Authorized officer Telephone No.

Form PCT/ISA/210 (second sheet) (April 2005)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP H5345156 B **[0002]**