



(11) **EP 2 003 669 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
29.09.2010 Bulletin 2010/39

(51) Int Cl.:
H01H 13/83 (2006.01)

(21) Application number: **08165757.9**

(22) Date of filing: **18.07.2006**

(54) **Keypad for a handheld electronic device with a light guide**

Klavierähnliche Tastatur mit einer Lichtführung

Clavier de type piano utilisant un guide lumineux

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**

(43) Date of publication of application:
17.12.2008 Bulletin 2008/51

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
06117416.5 / 1 890 310

(73) Proprietor: **RESEARCH IN MOTION LIMITED**
Waterloo, Ontario N2L 3W8 (CA)

(72) Inventor: **Chen, Chao**
Waterloo Ontario N2T 2T8 (CA)

(74) Representative: **Hibbert, Juliet Jane Grace**
Kilburn & Strode LLP
20 Red Lion Street
London WC1R 4PJ (GB)

(56) References cited:
EP-A2- 0 554 084 GB-A- 2 065 373
US-A- 4 163 138 US-A- 4 349 705

EP 2 003 669 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND

Field

[0001] The disclosed and claimed concept relates generally to keypads for handheld electronic devices and, more particularly, to a lighted piano-style keypad.

Background Information

[0002] Numerous types of handheld electronic devices are known. Examples of such handheld electronic devices include, for instance, personal data assistants (PDAs), handheld computers, two-way pagers, cellular telephones, and the like. Many handheld electronic devices also feature a wireless communication capability, although many such handheld electronic devices are stand-alone devices that are functional without communication with other devices.

[0003] Such handheld electronic devices are generally intended to be portable, and thus are of a relatively compact configuration. Piano-style keypads typically provide keys that have very little space therebetween and derive their name from the keys of a piano, which typically are disposed very closely adjacent one another with an extremely small space therebetween. Piano-style keypads provide relatively greater numbers of usable keys in relatively smaller spaces compared with conventionally-spaced keypads due to the very close spacing of the keys of a piano-style keypad. While such piano-style keypads have been generally effective for their intended purposes, such piano-style keypads have not been without limitation.

[0004] Piano-style keypads typically comprise a number of key bodies disposed on a resilient web, and further comprise key caps adhered to the key bodies. The web is deflectable to allow a key body to be translated slightly toward a handheld electronic device when a key is being actuated. While the key bodies are typically spaced apart from one another on the web, the key caps that are adhered to the key bodies typically are disposed very close to one another with minimal space therebetween, thus providing the "piano-style" aspect to the keypad.

[0005] A number of competing factors typically bear upon the ultimate design of a piano-style keypad. For instance, in order to provide long term reliability of the key caps adhered to the key bodies, each key body typically must have an exterior surface with at least about fifteen square millimeters of adherable area for adhering of the key caps to the key bodies. Additionally, the portion of the resilient web that is peripheral to a key body and that is deflectable when a key body is being translated toward the handheld electronic device desirably has a radial length, i.e., a length in a direction pointed away from the key body in the plane of the web, of at least 0.6

millimeters. Such a length has been determined to provide long term reliability while allowing the key bodies to be easily actuated and to provide a desirable tactile response during such actuation.

[0006] An example of a lighted keypad is disclosed in US-A-4349705.

[0007] Some previous keypads have provided a light guide and key bodies formed as a single component that is molded in a multi-step process. The light guide would be formed from a light-transmitting material, such as a clear plastic. The light guide would then be positioned in a mold, and uncured resilient material would be poured into the mold in contact with the light guide. The resilient material would cure, thus providing resilient structures and key bodies molded to the light guide. However, the size of the resilient structures was limited by the size of the light guide. That is, for a given space, the larger the light guide was, the relatively smaller would be the resilient structures and key bodies molded to the light guide.

[0008] As the number of piano-style keys within a given area increases, the adherable surface area of the key bodies and/or the radial length of the web peripheral to the key bodies must decrease, but can only be decreased to a certain extent and cannot be smaller than the aforementioned dimensions. As such, piano-style keypads of a particular size could have only a limited number of keys. It thus would be desirable to provide an improved piano-style keypad that overcomes or at least partially alleviates such limitations.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] A further understanding of the disclosed and claimed concepts can be gained from the following Description when read in conjunction with the accompanying drawings in which:

[0010] Fig. 1 is an exploded perspective view of an improved keypad in accordance with the disclosed and claimed concept;

[0011] Fig. 1A is a schematic view of an exemplary handheld electronic device incorporating the improved keypad of Fig. 1;

[0012] Fig. 2 is another exploded perspective view of the keypad of Fig. 1;

[0013] Fig. 3 is a perspective view of the keypad;

[0014] Fig. 4 is another perspective view of the keypad;

[0015] Fig. 5 is a perspective view a portion of the keypad;

[0016] Fig. 6 is a sectional view as taken along line 6-6 of Fig. 4;

[0017] Fig. 7 is a sectional view as taken along line 7-7 of Fig. 4;

[0018] Fig. 8 is an enlarged view of the encircled portion of Fig. 7;

[0019] Fig. 9 is a view similar to Fig. 8, except showing a key of the keypad in an actuated position.

[0020] Similar numerals refer to similar parts throughout the specification.

DESCRIPTION

[0021] An improved keypad 4 is depicted generally, in whole or in part, in Figs. 1 and 2-9. The improved keypad 4 is a piano-style keypad that can be employed in a handheld electronic device 6, such as is depicted schematically in Fig. 1A. The exemplary handheld electronic device 6 comprises an input apparatus 8, a processor apparatus 10, and an output apparatus 12. The keypad 4 is a component of the input apparatus 8. The processor apparatus 10 is structured to receive input from the input apparatus 8 and to provide output to the output apparatus 12.

[0022] As can be understood from Fig. 1, the keypad 4 comprises a light guide 16 and a key sheet 20. In the exemplary depicted embodiment of the keypad 4, the light guide 16 mounts the key sheet 20 to a substrate 24, such as a printed circuit board of the handheld electric device 6. At least a portion of the key sheet 20 is translucent, as is at least a portion of the light guide 16. As employed herein, the expression "translucent" and variations thereof shall refer broadly to a quality that permits the passage of light and may include a transparent quality wherein light is transmitted without appreciable scattering so that it does not meaningfully alter light waves traveling therethrough. The light guide 16 is configured to transmit light from a light source, such as a number of LEDs 28 on the substrate 24, to the key sheet 20 to provide illumination of the keys 42 (Fig. 4) of the keypad 4. As employed herein, the expression "a number of" and variations thereof shall refer broadly to any nonzero quantity including a quantity of one.

[0023] As can be further seen from Fig. 1, the key sheet 20 comprises a resilient base 32 upon which are disposed a number of key bodies 36. The key sheet 20 additionally includes a number of key caps 40. Each key body 36 has a mounting surface 44 that is substantially planar, for example, and the key caps 40 are adhered to the mounting surfaces 44. As employed herein, the expression "adhered" and variations thereof shall refer broadly to a situation in which two solids are fastened together such as by the use of glue, cement, other adhesive, or through to use of a fusion or other joining process, and between which an adhesive bond or other fusion bond has been created. A key body 36 and a key cap 40 together form a key 42 (Fig. 4) of the keypad 4. The keypad 4 is advantageously configured such that each mounting surface 44 has an adherable area of at least fifteen square millimeters. In the present exemplary embodiment, the mounting surfaces 44 generally each have an adherable area of at least about twenty square millimeters.

[0024] Each key body 36 has an actuator 48 (Figs. 2 and 3) protruding therefrom opposite the mounting surface 44. Each key body 36 is movable between an unactuated position, such as is depicted generally in Fig. 8, and an actuated position, such as is depicted generally in Fig. 9. In the actuated position, the actuator 48 engages a dome 52 that is disposed on the substrate 24, and as

a result completes an electrical circuit of the handheld electronic device 6. The closing of such a circuit can provide, for example, an input to the processor apparatus 10.

[0025] As can be understood from Figs 2 and 3, the base 32 comprises a web 56 and a leg network 60. The key bodies 36 can generally be said to be disposed on the web 56. The leg network 60 protrudes from the web 56 and is engaged with the substrate 24. As can be understood from Figs 8 and 9, the portion of the web 56 that is peripheral to any given key is movable between an undeflected position, such as is depicted generally in Fig. 8, and a deflected position, such as is depicted generally in Fig. 9, when the given key body 36 is moved between its unactuated and actuated positions. The portion of the web 56 peripheral to a given key body 36 is in an undeflected position when the key body 36 is in an unactuated position, such as depicted generally in Fig. 8, and such portion of the web 56 is in a deflected position when the given key body 36 is in an actuated position, such as is depicted generally in Fig. 9.

[0026] The leg network 60 comprises a plurality of legs 64 and a plurality of islands 68. The legs 64 extend between the islands and generally each are formed to include a notch 72 that allows the passage of air from the region between a specific key body 36 and the substrate 24 when the specific key body 36 is moved toward the actuated position.

[0027] The islands 68 generally each have a hole 76 formed therein that serves as a receptacle for a support structure of the light guide 16. The islands 68 are of a cross section in a plane transverse to the plane of the substrate 24 that is relatively larger than a similarly oriented cross sectional area of a leg 64. The islands 68 advantageously resist the deformation of the portions of the web 56 adjacent a particular key body 36 when the particular key body 36 is moved between the unactuated and actuated positions.

[0028] The light guide 16 includes a frame 78, a number of supports 80, and a number of retention members 88. The frame 78 has a number of openings 90 formed therein. The key bodies 36 are disposed within the openings 90. The supports 80 are in the form of pins that protrude from the frame 78 in a direction indicated by the axis 92 in Fig. 2. The supports are receivable in the holes 76, as indicated above, to provide support to the key sheet 20 and to resist movement of the key sheet 20 in directions transverse to the axis 92.

[0029] The supports 80 in the exemplary depicted embodiment, as can be seen in Fig. 2, are of two types. Specifically, the supports 80 include a number of first supports 82 that are of a generally cylindrical configuration and a number of second supports 84 that are generally of a frusto-conic, i.e., truncated cone, configuration. The first supports 82 are receivable with an interference fit in the holes 76. The second supports 84 are receivable in the hole 76 with a generally clearance fit. The first supports 82 provide a relatively greater degree of support to the key sheet 20 than the second supports 84, although

the number of first supports 82 is limited in order to limit the force required to assemble the keypad 4.

[0030] Each retention member 88 comprises a shank 86 protruding from the frame 78 and a latch 94 disposed at a free end of the shank 86. The shanks 86, and thus the retention members 88, protrude from the same face of the frame 78 as the supports 80 and extend from the frame 78 along the axis 92.

[0031] The light guide 16 additionally has a number of recesses 96 formed therein and within which the light sources 28 are disposed when the keypad 4 is in an assembled condition, such as is depicted generally in Figs. 4 and 6. As can be further be seen in Fig. 4, the key caps 40 are closely spaced, meaning that the space between adjacent key caps 40 is very small when compared with the dimensions of each key cap 40, and typically will be no more than about ten percent of a given dimension of a key cap 40, for example, it being noted that the spacing between the key caps 40 depicted in Fig. 4 is greatly exaggerated.

[0032] The latches 94 engage an underside of the substrate 24, i.e., a surface of the substrate 24 opposite that on which the domes 52 are disposed. The engagement of the latches 94 of the light guide 16 with the substrate 24 retains the key sheet 20 mounted to the substrate 24 and disposed generally between the frame 78 and the substrate 24. More particularly, the base 32 is generally interposed between the frame 78 and the substrate 24. As indicated above, the supports 80 of the light guide 16 received in the holes 76 provide support to the key sheet 20 and resist movement of the key sheet 20 in directions transverse to the axis 92. The light guide 16 thus retains the key sheet 20 on the substrate 24 and transmits light from the light sources 28 to the key sheet 20.

[0033] As can be understood from Fig. 9, the portions of the web 56 that are peripheral to a particular key body 36 have a radial distance between the key body 36 and the leg network 60 that is at least 0.6 millimeters, as is indicated by the dimension 98. Such a dimension 98 allows for easy actuation of the key bodies 36, desirable tactile feedback to the user, and long-term reliability.

[0034] As can be further understood from Figs 8 and 9, leg network 60 is disposed generally between the web 56 and the substrate 24. Moreover, it can be seen that the frame 78 is disposed generally between the key caps 40 and the web 56.

[0035] Many of the key bodies 36 are configured such that the mounting surface 44 thereof, such as are depicted generally in Fig. 5, generally each have gross dimensions of roughly 4.0 millimeters by 5.0 millimeters, thereby enabling the mounting surface 44 to have an adherable area of about 20.0 millimeters. As can be understood from Fig. 6, the supports 80 engage the web 56 and also engage the substrate 24.

[0036] The improved keypad 4 is thus configured in a fashion whereby the light guide generally does not serve as a limiting factor in the design of the keypad, which permits a relatively large number of keys 42 to be pro-

vided in a relatively small area. For instance, the keypad 4 could be a full QWERTY, QWERTZ, AZERTY, etc., keypad on a handheld electronic device, such as the handheld electronic device 6, without the handheld electronic device being of an undesirably large size. The improved keypad 4 additionally provides a key sheet 20 that is supported by a light guide 16, which resists unintended movement or slumping of the key sheet 20, and which further contributes to the ability of the keypad 4 to provide a large number of keys 42. The islands 68 advantageously resist unintended closing of circuits of the handheld electronic device 6, and thus resists unintended input to the processor apparatus 10, by mechanically isolating a portion of the web 56 from moving toward its deflected position when an adjacent key body 36 is moved to its actuated position.

[0037] Thus there has been provided a keypad for a handheld electronic device that comprises a light source, the keypad comprising: a key sheet comprising a base and a number of key bodies, at least some of the key bodies each being disposed on the base and being movable between an unactuated position and an actuated position, the key body in the actuated position being structured to complete a circuit of the handheld electronic device, at least a portion of the key sheet being translucent; and a light guide, at least a portion of the light guide being translucent and being structured to transmit light between the light source and the key sheet, the light guide comprising a frame and a number of supports, at least a portion of the frame being disposed adjacent at least a portion of the base, at least some of the supports each engaging the base.

[0038] In a further embodiment, there is provided a keypad for a handheld electronic device that comprises a light source, the keypad comprising: a key sheet comprising a base and a number of key bodies, at least some of the key bodies each being disposed on the base and being movable between an unactuated position and an actuated position, the key body in the actuated position being structured to complete a circuit of the handheld electronic device, at least a portion of the key sheet being translucent; and a light guide, at least a portion of the light guide being translucent and being structured to transmit light between the light source and the key sheet, the key sheet further comprising a number of key caps, at least some of the key caps each being adhered to a key body; and at least a portion of the light guide overlying at least a portion of the base. In this embodiment, the light guide may have a number of openings formed therein, at least some of the key bodies each being disposed within an opening. The light guide may comprise a frame and a number of supports, the openings being formed in the frame, at least a portion of the frame being disposed between the base and the key caps.

[0039] The base may comprise a web and a leg network, the leg network protruding from the web and being structured to engage a substrate of the handheld electronic device, a portion of the web peripheral to a partic-

ular key body being movable between an undeflected position and a deflected position, the portion of the web being in the undeflected position when the particular key body is in the unactuated position, the portion of the web being in the deflected position when the particular key body is in the actuated position.

[0040] In this embodiment, at least a portion of the web may be disposed between the leg network and at least a portion of the light guide and the portion of the web peripheral to the particular key body may extend between the particular key body and at least a portion of the leg network. For instance, the portion of the web that is movable between the undeflected and deflected positions may have at least about 0.6 millimeters between the particular key body and the at least portion of the leg network. The key bodies may each have a mounting surface, at least some of the key caps each being adhered to the mounting surface of a key body, each mounting surface having an area of at least about fifteen square millimeters. The mounting surfaces may be substantially planar.

[0041] In a further embodiment, there is provided a keypad for a handheld electronic device that comprises a light source, the keypad comprising: a key sheet comprising a base and a number of key bodies, at least some of the key bodies each being disposed on the base and being movable between an unactuated position and an actuated position, the key body in the actuated position being structured to complete a circuit of the handheld electronic device, at least a portion of the key sheet being translucent; and a light guide, at least a portion of the light guide being translucent and being structured to transmit light between the light source and the key sheet, the keypad further comprising a substrate; the light guide comprising a frame and a number of retention members, at least some of the retention members each being engaged with the substrate; and at least a portion of the key sheet is disposed between at least a portion of the light guide and at least a portion of the substrate.

[0042] In this embodiment, at least some of the retention members may each comprise a latch that is engaged with the substrate. The light guide may further comprise a number of supports engaged with the key sheet, the retention members and the supports extending away from the frame in a common direction. The base may have a number of holes formed therein, and the supports are pins received in the holes, the pins resisting movement of the base in a direction transverse to the common direction. The key sheet may further comprise a number of key caps, at least some of the key caps each being adhered to a key body. The frame has a number of openings formed therein, at least some of the key bodies each being disposed within an opening. At least a portion of the frame may be disposed between the base and the key caps.

[0043] While specific embodiments of the disclosed and claimed concept have been described in detail, it will be appreciated by those skilled in the art that various modifications and alternatives to those details could be

developed in light of the overall teachings of the disclosure. Accordingly, the particular arrangements disclosed are meant to be illustrative only and not limiting as to the scope of the disclosed and claimed concept which is to be given the full breadth of the claims appended.

Claims

1. A keypad (4) for a handheld electronic device (6) that comprises a light source (28), the keypad comprising:
 - a key sheet (20) comprising a base (32) and a number of key bodies (36), at least some of the key bodies each being disposed on the base and being movable between an unactuated position and an actuated position, the key body in the actuated position being structured to complete a circuit of the handheld electronic device, at least a portion of the key sheet being translucent; and
 - a light guide (16) comprising a frame (78) and a number of supports (80), **characterized in that** at least a portion of the frame is disposed adjacent at least a portion of the base, at least some of the supports engaging the base with an interference fit, at least a portion of the light guide being translucent and being structured to transmit light between the light source and the key sheet.
2. The keypad of Claim 1 wherein the key sheet comprises a number of receptacles (76), at least some of the supports each being received in a receptacle.
3. The keypad of Claim 2 wherein the receptacles are holes formed in the base, and wherein the supports are first supports (82) that are of a cylindrical configuration and second supports (84) that are of a frustoconic configuration that protrude from the frame and that are received in the holes.
4. The keypad of Claim 3 wherein at least some of the first supports (82) each have an interference fit with a hole.
5. The keypad of Claim 1 wherein the base comprises a web (56) and a leg network (60), the leg network protruding from the web and being structured to engage a substrate (24) of the handheld electronic device, a portion of the web peripheral to a particular key body being movable between an undeflected position and a deflected position, the portion of the web being in the undeflected position when the particular key body is in the unactuated position, the portion of the web being in the deflected position when the particular key body is in the actuated position.

6. The keypad of Claim 5 wherein the leg network comprises a plurality of islands (68) structured to engage the substrate, the islands being structured to resist movement of a portion of the web peripheral to one key body toward its deflected position when a portion of the web peripheral to an adjacent key body moves toward its deflected position. 5
7. The keypad of Claim 6 wherein at least some of the islands each have a hole (76) formed therein, and wherein the supports are first supports (82) that are of a cylindrical configuration and second supports (84) that are of a frusto-conic configuration that protrude from the frame and that are received in the holes, at least some of the key bodies being movable along a direction (92) between the unactuated and actuated positions, and wherein the supports protrude along the direction from the frame, the supports resisting movement of the islands transverse to the direction. 10 15 20
8. The keypad of Claim 1 wherein the key sheet further comprises a number of key caps (40), at least some of the key caps each being adhered to a key body. 25
9. The keypad of Claim 8 wherein the light guide frame has a number of openings (90) formed therein, at least some of the key bodies each being disposed within an opening. 30
10. The keypad of Claim 8 wherein at least a portion of the frame is disposed between the base and the key caps. 35
11. The keypad of any of claims 5 or 8 to 10 wherein: 35
at least a portion of the light guide overlies at least a portion of the base.
12. The keypad of Claim 11 when dependent on claim 5 wherein at least a portion of the web is disposed between the leg network and at least a portion of the light guide. 40
13. The keypad of Claim 12 wherein the portion of the web peripheral to the particular key body extends between the particular key body and at least a portion of the leg network. 45
14. The keypad of Claim 13 wherein the portion of the web that is movable between the undeflected and deflected positions has at least 0.6 millimeters between the particular key body and the at least portion of the leg network. 50 55
15. The keypad of Claim 14 wherein the key bodies each have a mounting surface (44), at least some of the key caps each being adhered to the mounting surface of a key body, each mounting surface having an area of at least fifteen square millimeters.
16. The keypad of Claim 14 wherein the mounting surfaces are substantially planar.
17. The keypad of any of Claims 8 to 10 wherein:
the keypad further comprises a substrate (24);
the light guide comprising number of retention members (88), at least some of the retention members each being engaged with the substrate; and
at least a portion of the key sheet being disposed between at least a portion of the light guide and at least a portion of the substrate.
18. The keypad of Claim 17 wherein at least some of the retention members each comprise a latch (94) that is engaged with the substrate.
19. The keypad of Claim 17 wherein the retention members extend away from the frame in the common direction.
20. The keypad of Claim 19 wherein the base has a number of holes (76) formed therein, and wherein the supports are first supports (82) that are of a cylindrical configuration and second supports (84) that are of a frusto-conic configuration received in the holes, the supports resisting movement of the base in a direction transverse to the common direction.

Patentansprüche

1. Tastatur (4) für eine handgehaltene elektronische Vorrichtung (6), die eine Lichtquelle (28) aufweist, wobei die Tastatur aufweist:

eine Tastenplatte (20), die eine Basis (32) und eine Anzahl von Tastenkörpern (36) aufweist, wobei zumindest einige der Tastenkörper jeweils auf der Basis angeordnet sind und bewegbar sind zwischen einer nicht-betätigten Position und einer betätigten Position, wobei der Tastenkörper in der betätigten Position strukturiert ist, einen Schaltkreis der handgehaltenen elektronischen Vorrichtung zu schließen, wobei zumindest ein Teil der Tastenplatte transluzent ist; und
einen Lichtleiter (16), der einen Rahmen (78) und eine Anzahl von Stützen (80) aufweist, **dadurch gekennzeichnet, dass** zumindest ein Teil des Rahmens angrenzend an zumindest einen Teil der Basis angeordnet ist, wobei zumindest einige der Stützen mit der Basis mit einem Presssitz in Eingriff sind, wobei

zumindest ein Teil des Lichtleiters transluzent ist und strukturiert ist, Licht zwischen der Lichtquelle und der Tastenplatte zu übertragen.

2. Tastatur gemäß Anspruch 1, wobei die Tastenplatte eine Anzahl von Aufnahmen (76) aufweist, wobei zumindest einige der Stützen jeweils in einer Aufnahme aufgenommen werden. 5
3. Tastatur gemäß Anspruch 2, wobei die Aufnahmen Löcher sind, die in der Basis ausgebildet sind, und wobei die Stützen erste Stützen (82) sind, die eine zylinderförmige Konfiguration haben, und zweite Stützen (84), die eine kegelstumpfförmige Konfiguration haben, die aus dem Rahmen herausragen und in den Löchern aufgenommen werden. 10
4. Tastatur gemäß Anspruch 3, wobei zumindest einige der ersten Stützen (82) jeweils einen Presssitz mit einem Loch haben. 15
5. Tastatur gemäß Anspruch 1, wobei die Basis ein Netz (56) und ein Schenkel-Netzwerk (60) aufweist, wobei das Schenkel-Netzwerk aus dem Netz herausragt und strukturiert ist, ein Substrat (24) der handgehaltenen elektronischen Vorrichtung zu halten, wobei ein Teil des Netzes, das zu einem bestimmten Tastenkörper peripher ist, bewegbar ist zwischen einer nicht-gebogenen Position und einer gebogenen Position, wobei der Teil des Netzes in der nicht-gebogenen Position ist, wenn der bestimmte Tastenkörper in der nicht-betätigten Position ist, wobei der Teil des Netzes in der gebogenen Position ist, wenn der bestimmte Tastenkörper in der betätigten Position ist. 20
6. Tastatur gemäß Anspruch 5, wobei das Schenkel-Netzwerk eine Vielzahl von Inseln (68) aufweist, die strukturiert sind, das Substrat zu halten, wobei die Inseln strukturiert sind, einer Bewegung eines Teils des Netzes, das peripher zu einem Tastenkörper ist, in Richtung zu seiner gebogenen Position zu widerstehen, wenn ein Teil des Netzes, das zu einem angrenzenden Tastenkörper peripher ist, sich in Richtung zu seiner gebogenen Position bewegt. 25
7. Tastatur gemäß Anspruch 6, wobei zumindest einige der Inseln jeweils ein Loch (76) darin ausgebildet haben, und wobei die Stützen erste Stützen (82) sind, die eine zylinderförmige Konfiguration haben, und zweite Stützen (84) sind, die eine kegelstumpfförmige Konfiguration haben, die aus dem Rahmen herausragen und die in den Löchern aufgenommen werden, wobei zumindest einige der Tastenkörper entlang einer Richtung (92) zwischen den nicht-betätigten und den betätigten Positionen bewegbar sind, und wobei die Stützen entlang der Richtung aus dem Rahmen herausragen, wobei die Stützen einer Be- 30

wegung der Inseln quer zu der Richtung widerstehen.

8. Tastatur gemäß Anspruch 1, wobei die Tastenplatte weiter eine Anzahl von Tastenkappen (40) aufweist, wobei zumindest einige der Tastenkappen an einem Tastenkörper angehaftet sind. 35
9. Tastatur gemäß Anspruch 8, wobei der Lichtleiterahmen eine Anzahl von Öffnungen (90) darin ausgebildet hat, wobei zumindest einige der Tastenkörper jeweils in einer Öffnung angeordnet sind. 40
10. Tastatur gemäß Anspruch 8, wobei zumindest ein Teil des Rahmens zwischen der Basis und den Tastenkappen angeordnet ist. 45
11. Tastatur gemäß einem der Ansprüche 5 oder 8 bis 10, wobei:

zumindest ein Teil des Lichtleiters zumindest einen Teil der Basis überlagert.
12. Tastatur gemäß Anspruch 11, wenn abhängig von Anspruch 5, wobei zumindest ein Teil des Netzes zwischen dem Schenkel-Netzwerk und zumindest einem Teil des Lichtleiters angeordnet ist. 50
13. Tastatur gemäß Anspruch 12, wobei der Teil des Netzes, der peripher zu dem bestimmten Tastenkörper ist, sich zwischen dem bestimmten Tastenkörper und zumindest einem Teil des Schenkel-Netzwerks erstreckt. 55
14. Tastatur gemäß Anspruch 13, wobei der Teil des Netzes, der bewegbar ist zwischen den nicht-gebogenen und gebogenen Positionen, zumindest 0,6 Millimeter zwischen dem bestimmten Tastenkörper und dem zumindest Teil des Schenkel-Netzwerks hat.
15. Tastatur gemäß Anspruch 14, wobei die Tastenkörper jeweils eine Befestigungsoberfläche (44) haben, wobei zumindest einige der Tastenabdeckungen jeweils an der Befestigungsoberfläche eines Tastenkörpers angehaftet sind, wobei jede Befestigungsoberfläche eine Fläche von zumindest fünfzehn Quadratmillimetern hat.
16. Tastatur gemäß Anspruch 14, wobei die Befestigungsoberflächen im Wesentlichen eben sind.
17. Tastatur gemäß einem der Ansprüche 8 bis 10, wobei:

die Tastatur weiter ein Substrat (24) aufweist; wobei der Lichtleiter eine Anzahl von Halteelementen (88) aufweist, wobei zumindest eini-

- ge der Halteelemente jeweils mit dem Substrat in Eingriff sind; und
wobei zumindest ein Teil der Tastenplatte zwischen zumindest einem Teil des Lichtleiters und zumindest einem Teil des Substrats angeordnet ist.
18. Tastatur gemäß Anspruch 17, wobei zumindest einige der Halteelemente jeweils eine Verriegelung (94) umfassen, die mit dem Substrat in Eingriff ist.
19. Tastatur gemäß Anspruch 17, wobei sich die Halteelemente weg von dem Rahmen in die gemeinsame Richtung erstrecken.
20. Tastatur gemäß Anspruch 19, wobei die Basis eine Anzahl von Löchern (76) darin ausgebildet hat, und wobei die Stützen erste Stützen (82) sind, die eine zylinderförmige Konfiguration haben, und zweite Stützen (84) sind, die eine kegelstumpfförmige Konfiguration haben, die in den Löchern aufgenommen sind, wobei die Stützen einer Bewegung der Basis in eine Richtung quer zu der gemeinsamen Richtung widerstehen.
- Revendications**
1. Clavier (4) pour un dispositif électronique portable (6) qui comprend une source de lumière (28), le clavier comprenant :
- une feuille de touches (20) comprenant une base (32) et un certain nombre de corps de touche (36), au moins certains des corps de touche étant chacun disposés sur la base et étant mobiles entre une position non actionnée et une position actionnée, le corps de touche, dans la position actionnée, étant structuré de façon à fermer un circuit du dispositif électronique portable, au moins une partie de la feuille de touches étant translucide ; et
un guide de lumière (16) comprenant un bâti (78) et un certain nombre de supports (80), **caractérisé en ce qu'**au moins une partie du bâti est disposée au voisinage d'au moins une partie de la base, au moins certains des supports venant en prise avec la base avec un ajustement avec serrage, au moins une partie du guide de lumière étant translucide et étant structurée de façon à transmettre de la lumière entre la source de lumière et la feuille de touches.
2. Clavier selon la revendication 1, dans lequel la feuille de touches comprend un certain nombre de réceptacles (76), au moins certains des supports étant chacun reçus dans un réceptacle.
3. Clavier selon la revendication 2, dans lequel les réceptacles sont des trous formés dans la base, et dans lequel les supports sont des premiers supports (82) qui ont une configuration cylindrique et des deuxièmes supports (84) qui ont une configuration tronconique qui font saillie à partir du bâti et qui sont reçus dans les trous.
4. Clavier selon la revendication 3, dans lequel au moins certains des premiers supports (82) ont chacun un ajustement avec serrage avec un trou.
5. Clavier selon la revendication 1, dans lequel la base comprend un film (56) et un réseau de pattes (60), le réseau de pattes faisant saillie à partir du film et étant structuré de façon à venir en prise avec un substrat (24) du dispositif électronique portable, une partie du film périphérique à un corps de touche particulier étant mobile entre une position non infléchie et une position infléchie, la partie du film étant dans la position non infléchie lorsque le corps de touche particulier est dans la position non actionnée, la partie du film étant dans la position infléchie lorsque le corps de touche particulier est dans la position actionnée.
6. Clavier selon la revendication 5, dans lequel le réseau de pattes comprend une pluralité d'îlots (68) structurés de façon à venir en prise avec le substrat, les îlots étant structurés de façon à résister à un déplacement d'une partie du film périphérique à un corps de touche vers sa position infléchie lorsqu'une partie du film périphérique à un corps de touche adjacent se déplace vers sa position infléchie.
7. Clavier selon la revendication 6, dans lequel au moins certains des îlots comportent chacun un trou (76) formé à l'intérieur de ceux-ci, et dans lequel les supports sont des premiers supports (82) qui ont une configuration cylindrique et des deuxièmes supports (84) qui ont une configuration tronconique qui font saillie à partir du bâti et qui sont reçus dans les trous, au moins certains des corps de touche pouvant se déplacer le long d'une direction (92) entre les positions non actionnée et actionnée, et dans lequel les supports font saillie le long de la direction à partir du bâti, les supports résistant au déplacement des îlots transversalement à la direction.
8. Clavier selon la revendication 1, dans lequel la feuille de touches comprend de plus un certain nombre de capuchons de touche (40), au moins certains des capuchons de touche adhérant chacun à un corps de touche.
9. Clavier selon la revendication 8, dans lequel le bâti de guide de lumière comporte un certain nombre d'ouvertures (90) formées à l'intérieur de celui-ci, au

moins certains des corps de touche étant chacun disposés à l'intérieur d'une ouverture.

éléments de rétention s'éloignent du bâti dans la direction commune.

10. Clavier selon la revendication 8, dans lequel au moins une partie du bâti est disposée entre la base et les capuchons de touche. 5
11. Clavier selon l'une quelconque des revendications 5 ou 8 à 10, dans lequel : 10
 - au moins une partie du guide de lumière recouvre au moins une partie de la base.
12. Clavier selon la revendication 11 lorsqu'elle dépend de la revendication 5, dans lequel au moins une partie du film est disposée entre le réseau de pattes et au moins une partie du guide de lumière. 15
13. Clavier selon la revendication 12, dans lequel la partie du film périphérique au corps de touche particulier s'étend entre le corps de touche particulier et au moins une partie du réseau de pattes. 20
14. Clavier selon la revendication 13, dans lequel la partie du film qui est mobile entre les positions non infléchie et infléchie mesure au moins 0,6 millimètres entre le corps de touche particulier et l'au moins une partie du réseau de pattes. 25
15. Clavier selon la revendication 14, dans lequel les corps de touche comportent chacun une surface de montage (44), au moins certains des capuchons de touche adhérant chacun à la surface de montage d'un corps de touche, chaque surface de montage ayant une surface d'au moins quinze millimètres carrés. 30 35
16. Clavier selon la revendication 14, dans lequel les surfaces de montage sont sensiblement planes. 40
17. Clavier selon l'une quelconque des revendications 8 à 10, le clavier comprenant de plus un substrat (24) ; et dans lequel :
 - le guide de lumière comprend un certain nombre d'éléments de rétention (88), au moins certains des éléments de rétention venant chacun en prise avec le substrat ; et 45
 - au moins une partie de la feuille de touches est disposée entre au moins une partie du guide de lumière et au moins une partie du substrat. 50
18. Clavier selon la revendication 17, dans lequel au moins certains des éléments de rétention comprennent chacun un verrou (94) qui vient en prise avec le substrat. 55
19. Clavier selon la revendication 17, dans lequel les

20. Clavier selon la revendication 19, dans lequel la base comporte un certain nombre de trous (76) formés à l'intérieur de celle-ci, et dans lequel les supports sont des premiers supports (82) qui ont une configuration cylindrique et des deuxièmes supports (84) qui ont une configurations tronconique, reçus dans les trous, les supports résistant au déplacement de la base dans une direction transversale à la direction commune.

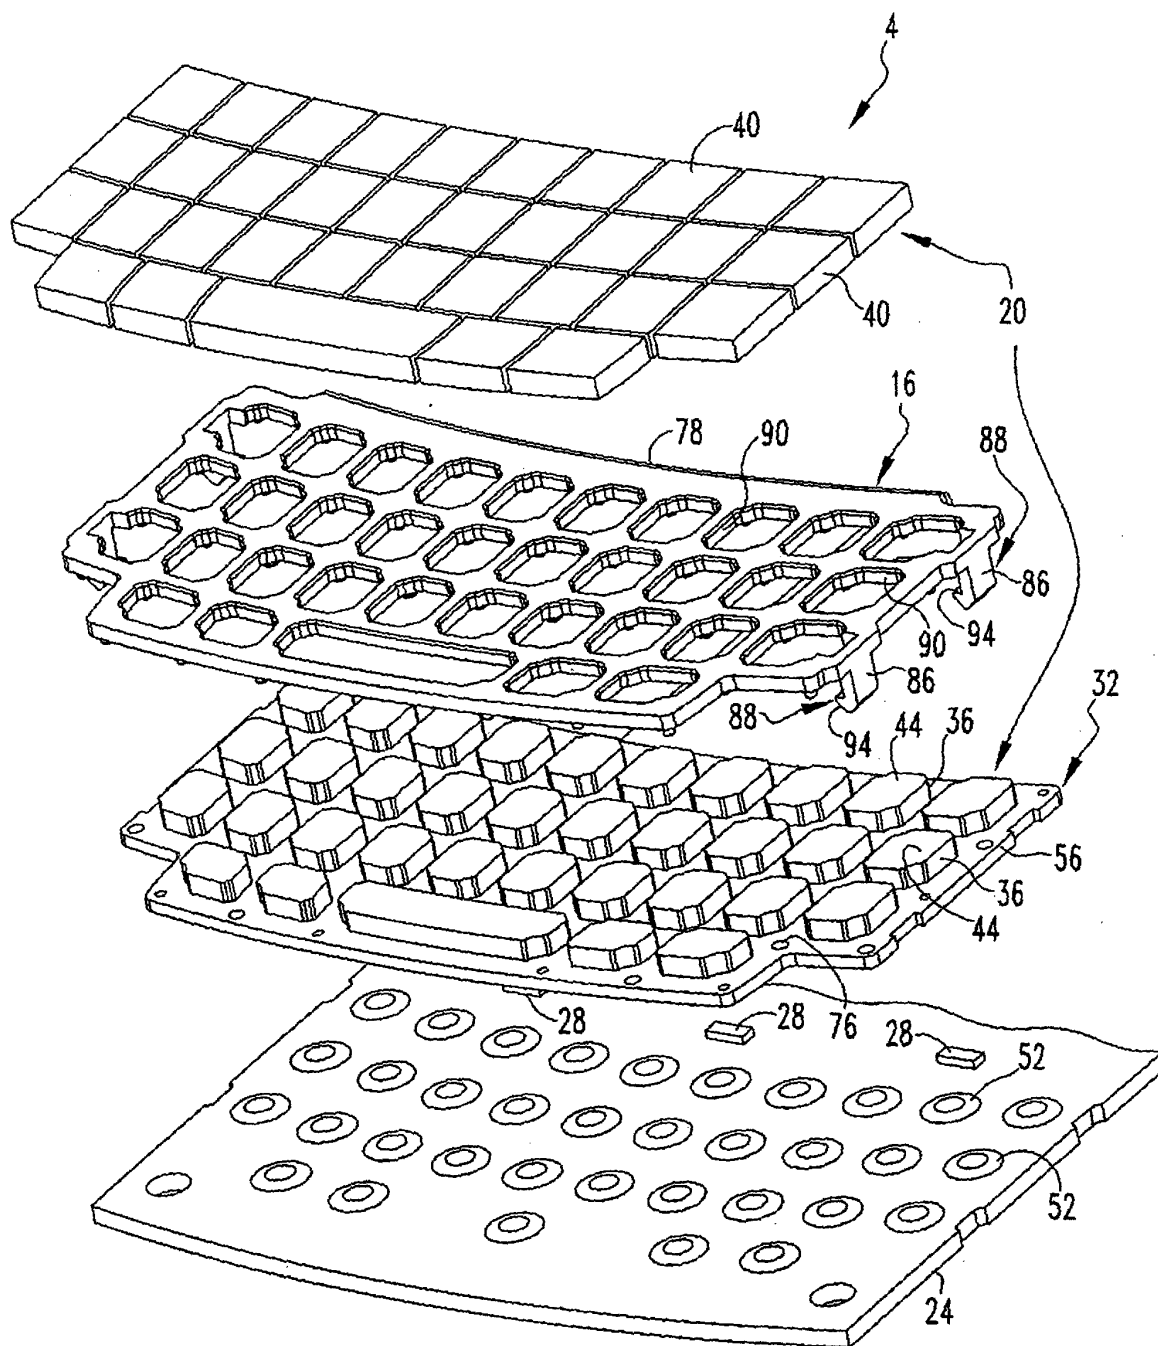


FIG.1

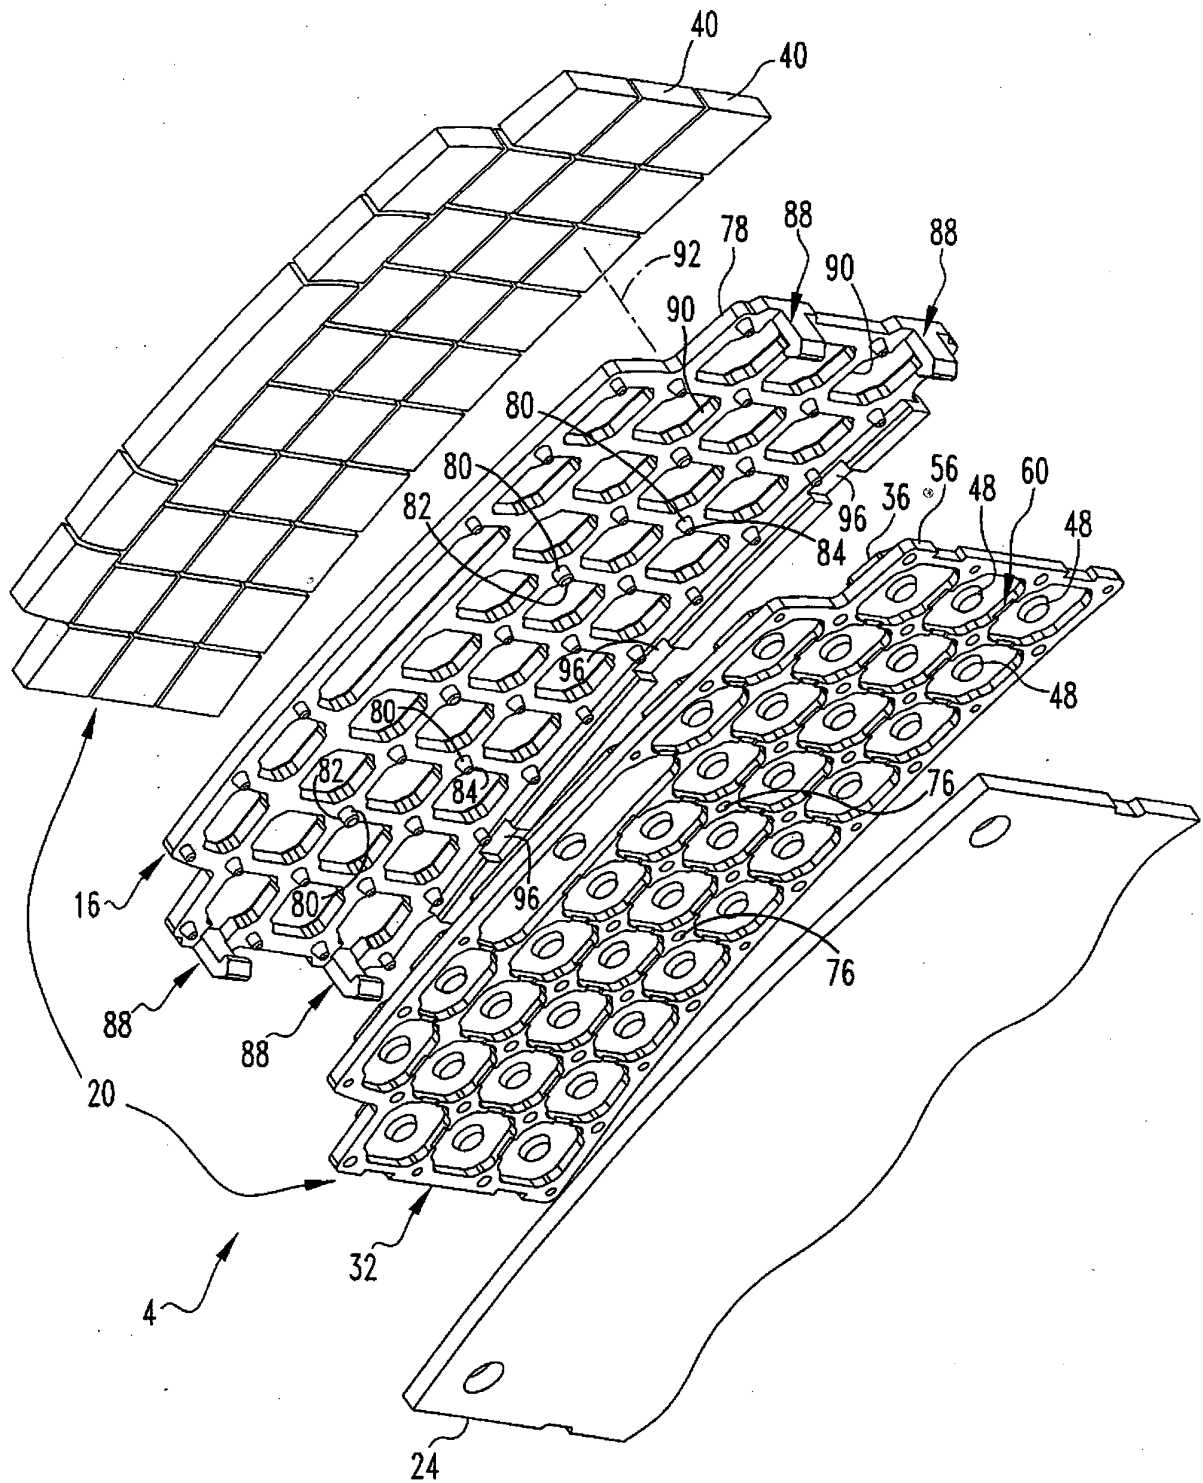
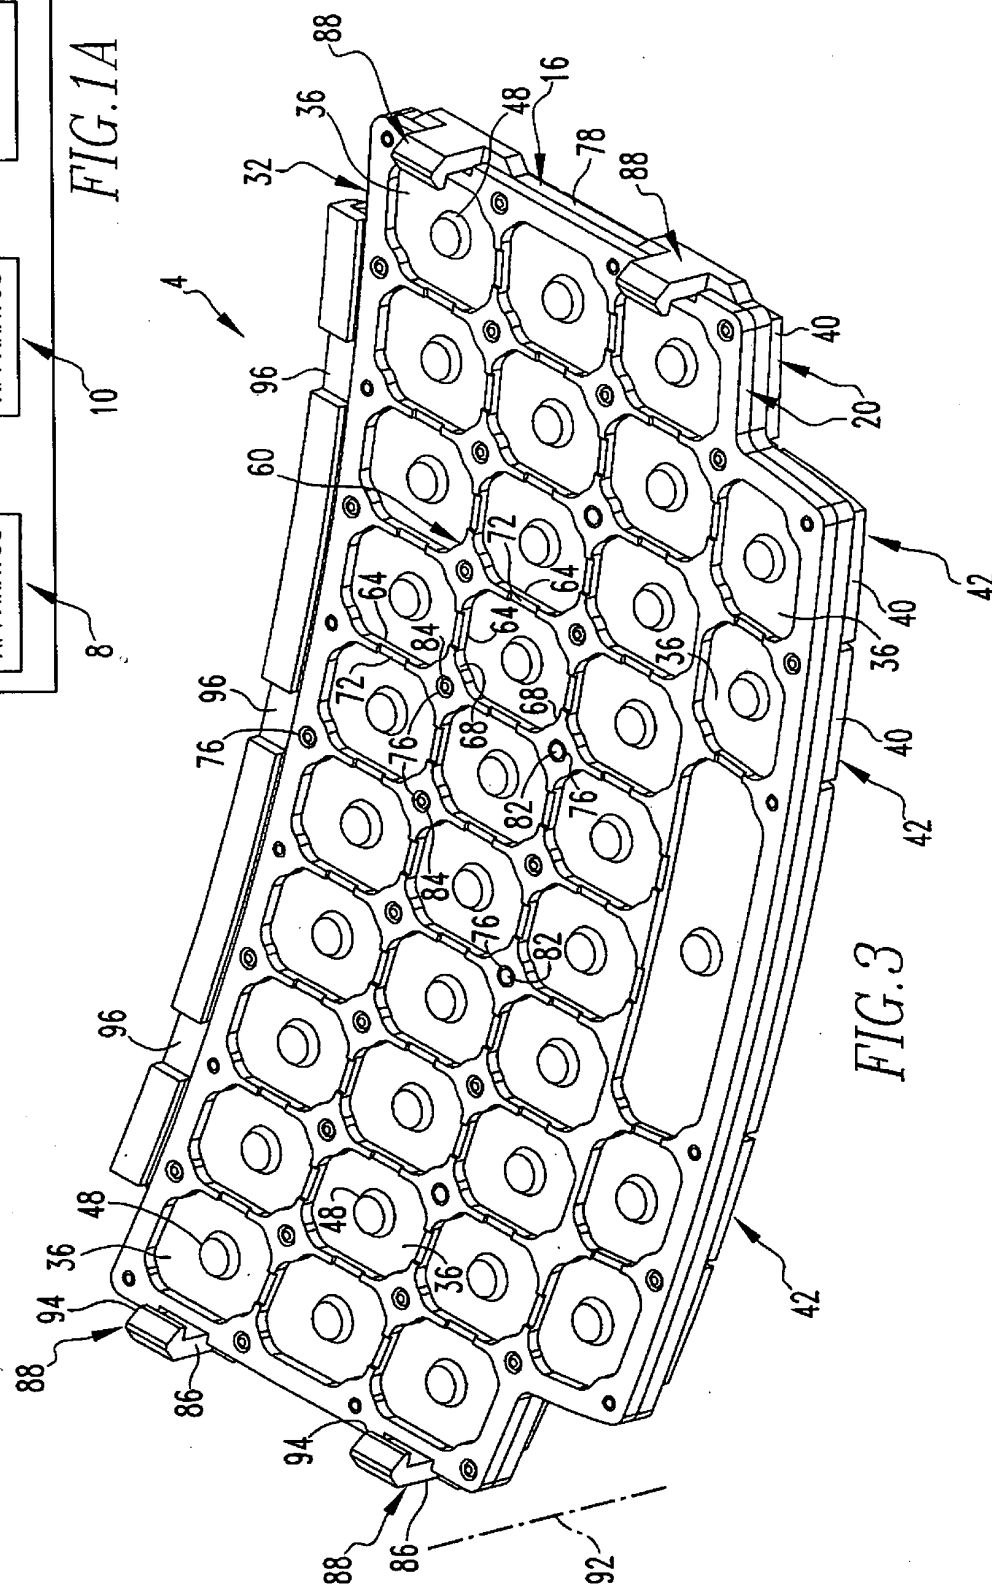
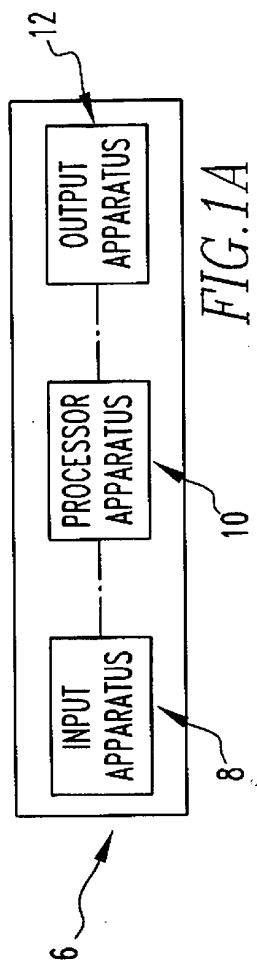
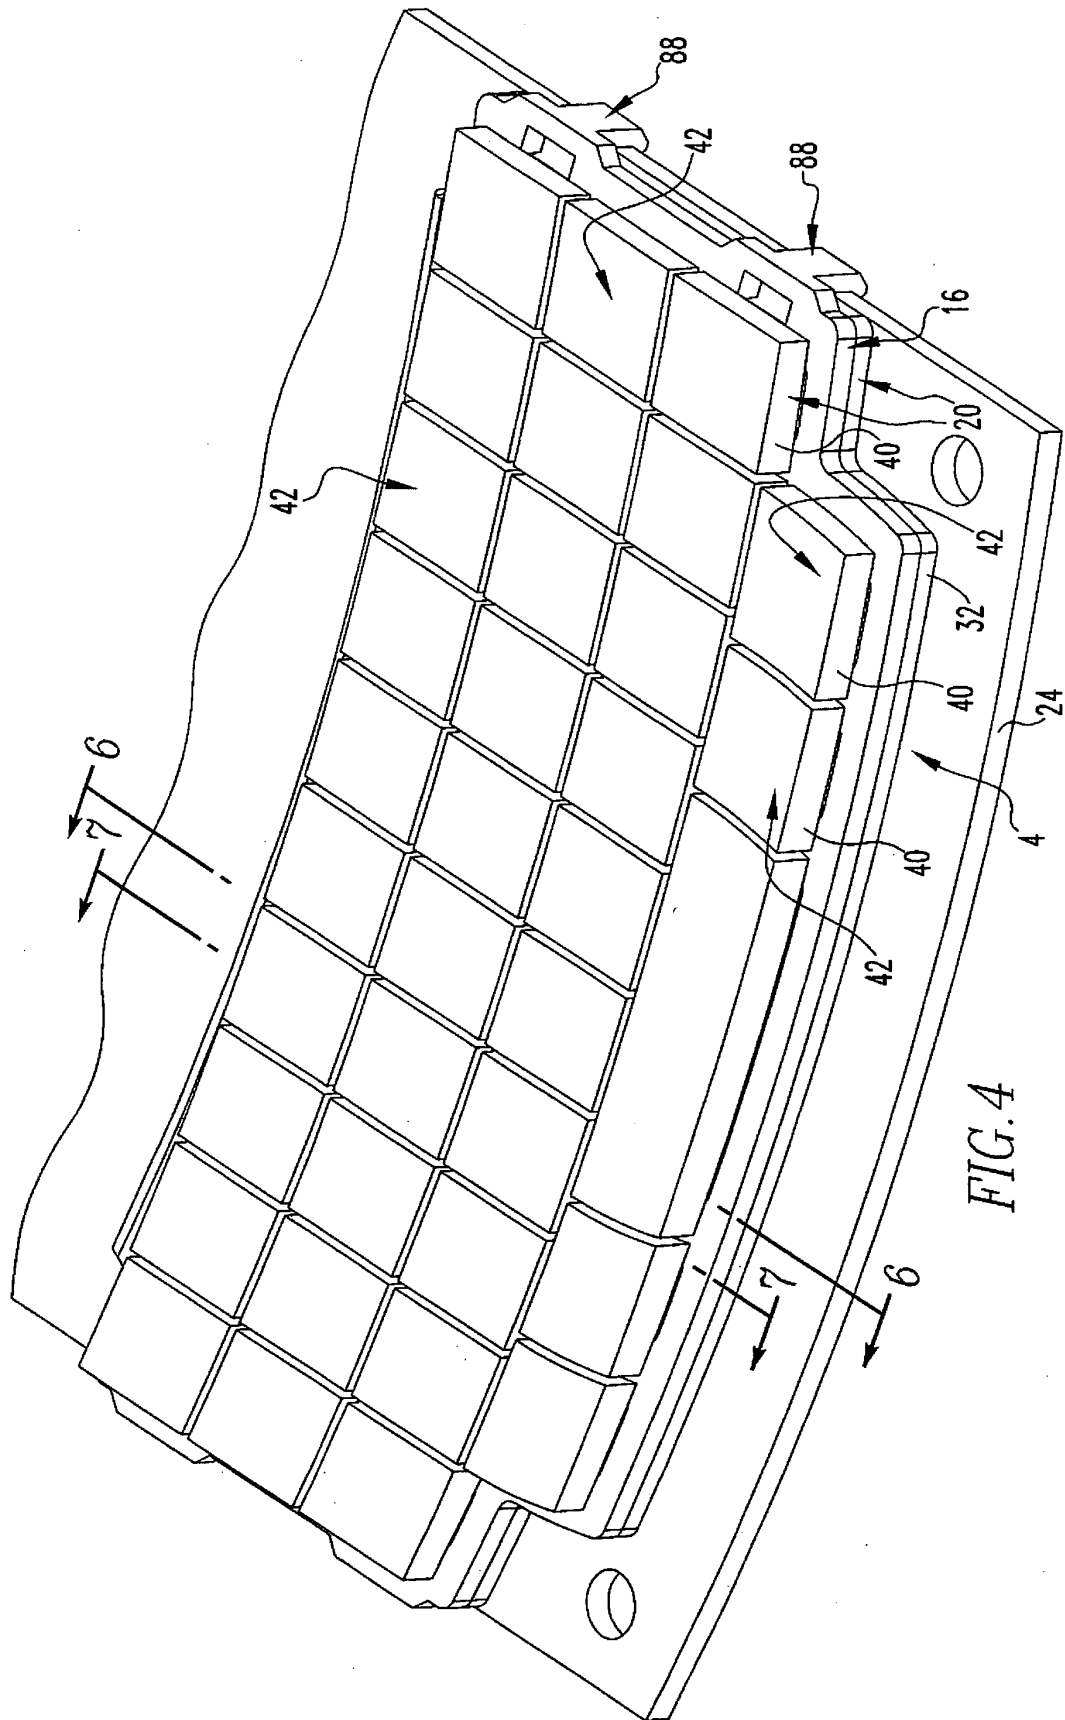


FIG.2





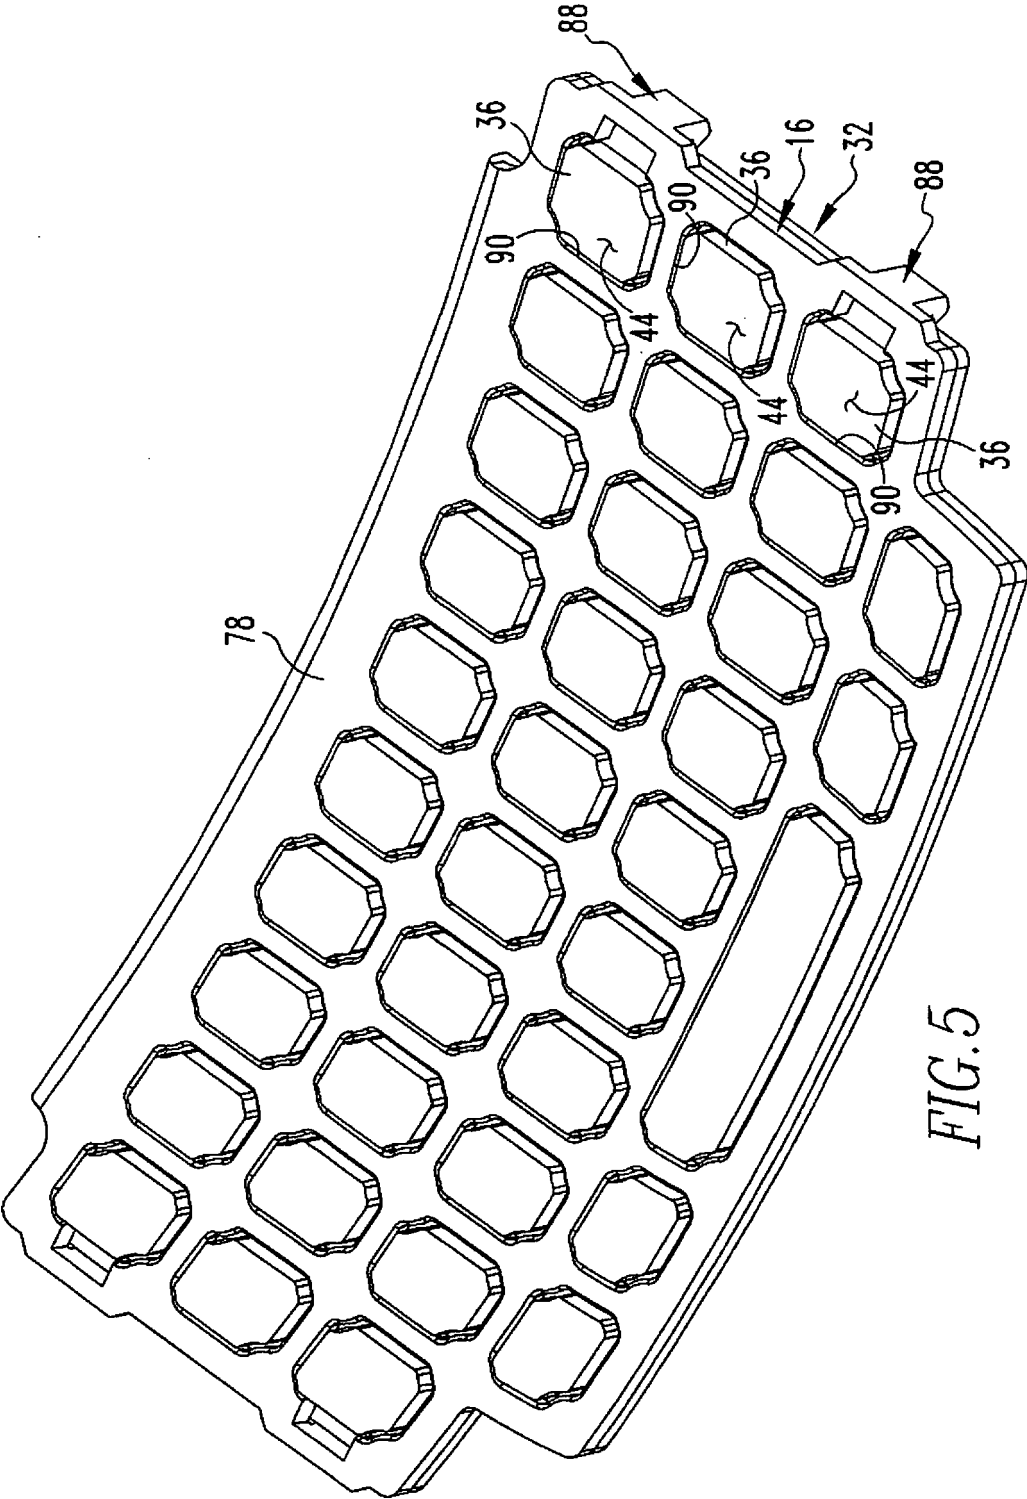
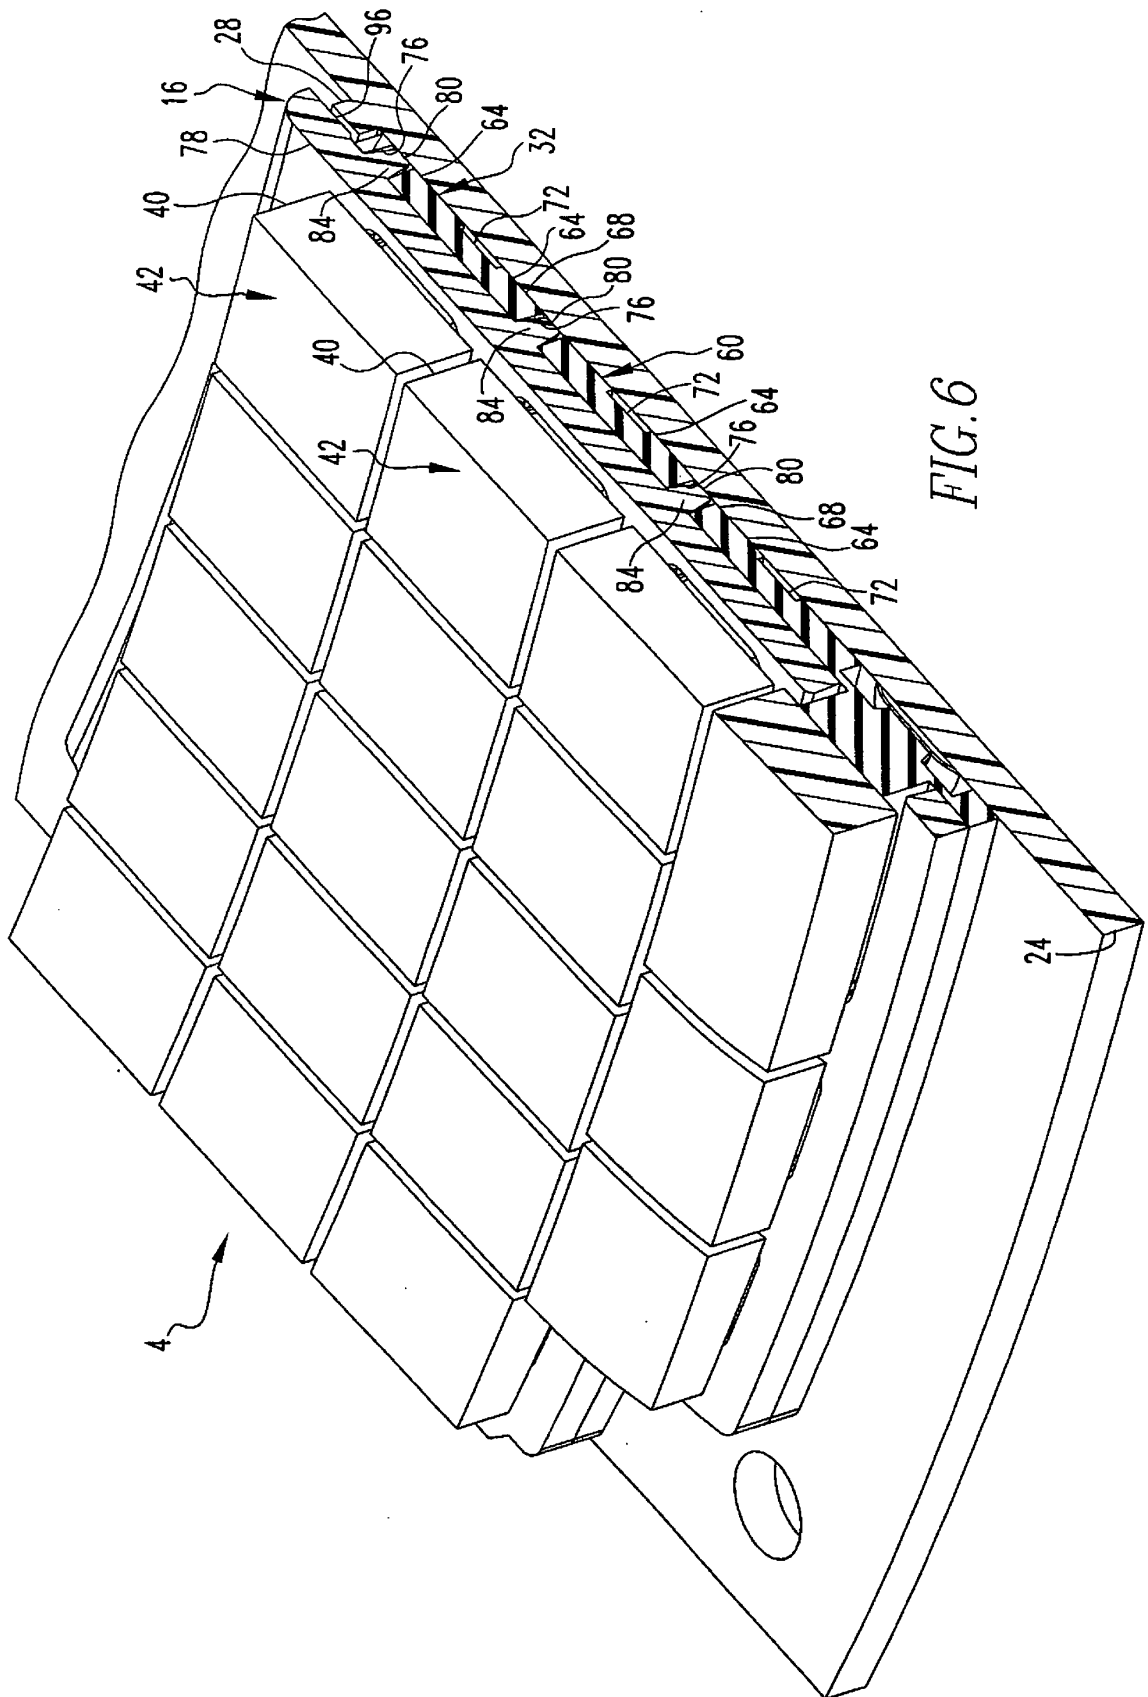


FIG. 5



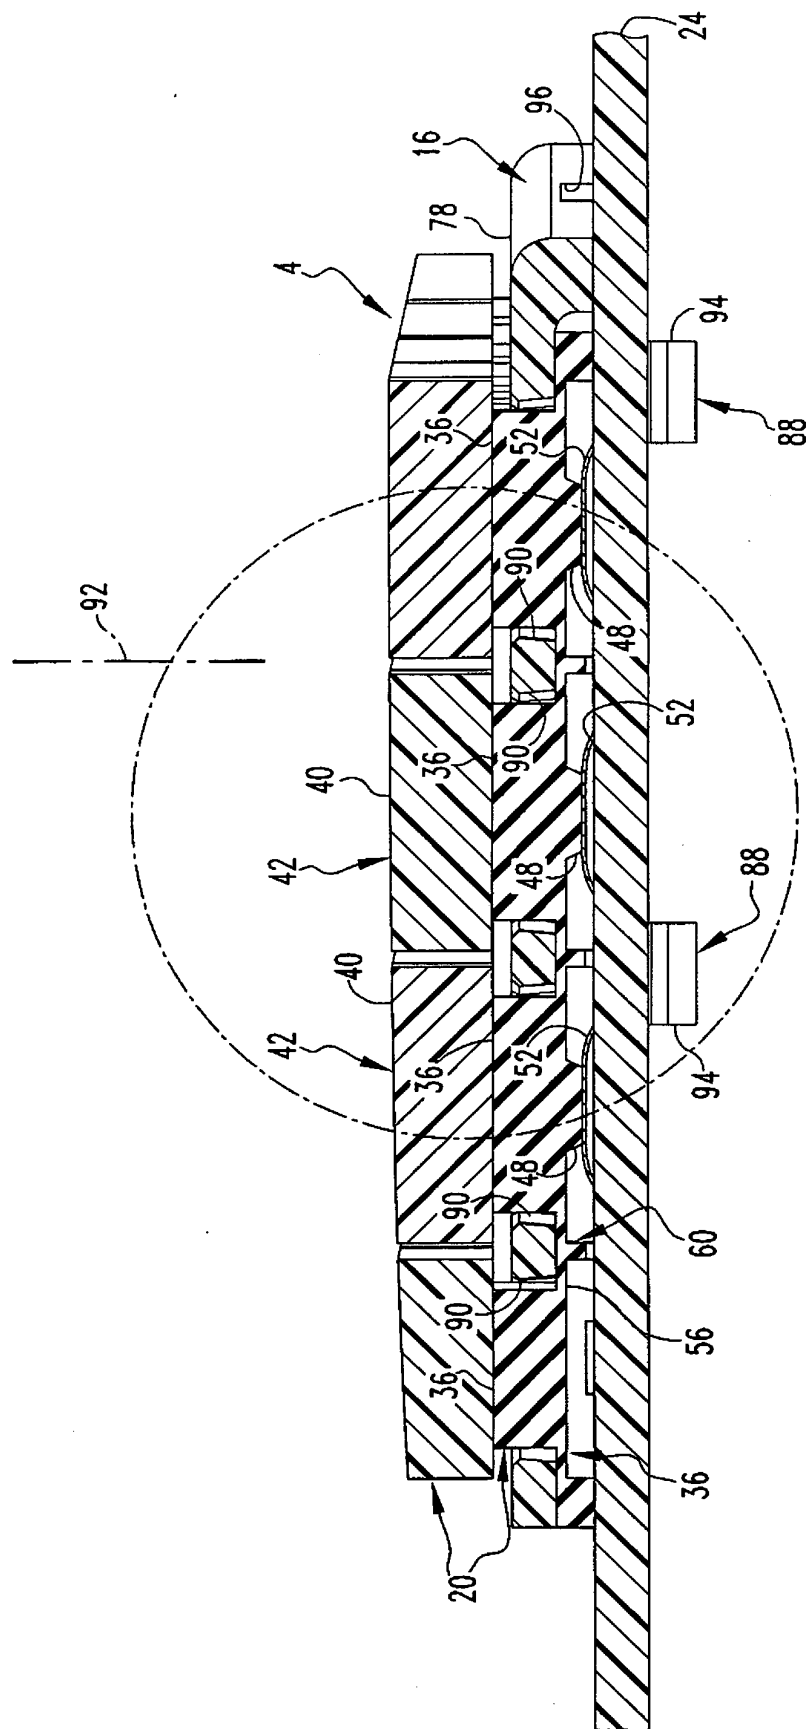


FIG. 7

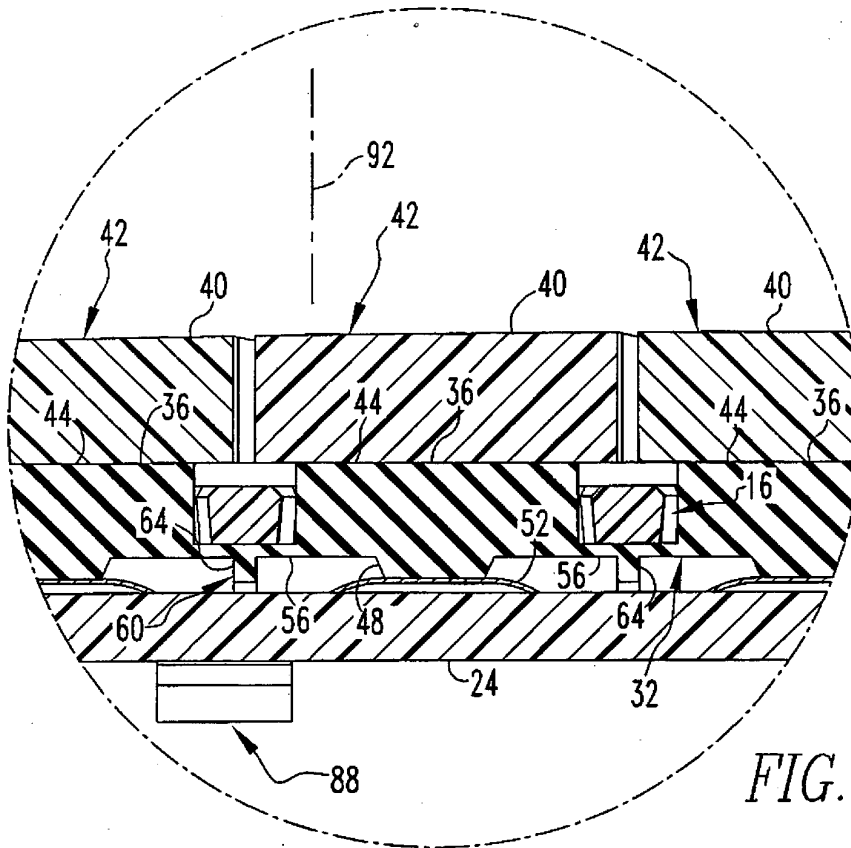


FIG. 8

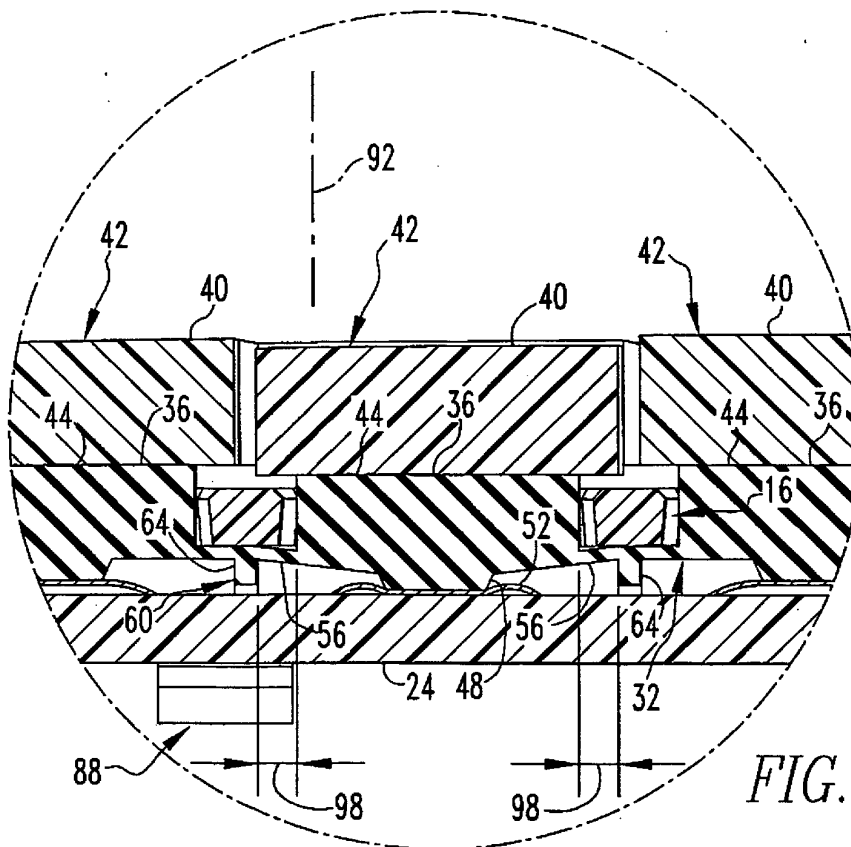


FIG. 9

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 4349705 A [0006]