

(19)



(11)

EP 2 006 052 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
16.04.2014 Bulletin 2014/16

(51) Int Cl.:
B24B 41/06 ^(2012.01) **B24B 3/24** ^(2006.01)

(21) Application number: **07110744.5**

(22) Date of filing: **21.06.2007**

(54) **Emery wheel grinding machine with adjustable drill bit chuck**

Schmirlgelscheibenschleifmaschine mit verstellbarem Bohrfutter

Machine de meulage au disque émeri avec porte-foret ajustable

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE
SI SK TR**

(43) Date of publication of application:
24.12.2008 Bulletin 2008/52

(73) Proprietor: **Taiwan More-Cash Villager Corp.**
Tai Li City, Taichung
Taiwan (CN)

(72) Inventor: **Liao, Ming-Ko**
Ta-Li City,
Taichung, (TW)

(74) Representative: **Hengelhaupt, Jürgen et al**
Gulde Hengelhaupt Ziebig & Schneider
Patentanwälte - Rechtsanwälte
Wallstrasse 58/59
10179 Berlin (DE)

(56) References cited:
FR-A- 1 020 523 US-A- 2 958 167
US-A- 3 039 244 US-B1- 6 652 367

EP 2 006 052 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to emery wheel grinding machine with an adjustable chuck, and more particularly, to an emery wheel grinding machine equipped with an adjustable drill bit chuck suitable for shaving the drill bit or a cutter of a two or more faced and variously lengthed blade of a hobbing cutter other than a single blade one, as per the preamble of claim 1. An example of such a machine is disclosed by US 6 652 367 B.

Description of the Related Art

[0002] A conventional portable grinding machine, as it was disclosed and published by Taiwan Pat. No. 286610, 155338, is composed of a housing, a cap covered at one end thereof, a transmission gearing equipped in the housing, a emery wheel and guiding members. When it is to be used, the whole unit is set on an electric motor with the grinding machine coupled with the main shaft of the electrical drill so as to impart the rotational power of the electrical drill to the emery wheel with transmission gearing for running. At the same time, a drill bit or cutter to be shaved is affixed to the machine unit with the guiding members so as to shave and grind the drill bit or cutter blade to a desired extent.

[0003] With the grinding machine described above, the grinding or shaving effect can only reach to the very small part surrounding the central pointed drill head without reaching further to the portion of the blade edge at the recessed clearance, that greatly degrades the effect of finishing drill bit.

[0004] For an improvement, the applicator invented an innovative Portable Drill Bit Grinding Machine which was patented by Taiwan Pat. No. 547228. As shown in Fig. 1, this newly developed apparatus is essentially composed of an emery wheel 20 driven by a power source associated with a work fixture and a drill bit fixing means 30 for operation. The work fixture is cooperated with a first grinding base 40 for the purpose of affixing the blade of the drill bit in such a manner that its clearance angle is closely fitted to the tilted grinding surface 21 of the emery wheel 20. Then, the work fixture is cooperated with a second grinding base 50 for the purpose of affixing the blade of the drill bit in such a manner that its spiral angle to be closely fitted to the tilted grinding surface 21 of the emery wheel 20.

[0005] As shown in Fig. 1, the drill bit fixing means 30 comprises a work fixture fastening base 31 for setting the work fixture, and a drill bit fastening jig 32. The work fixture fastening base 31 is provided with a mounting hole that allows the work fixture to be engaged in, and a rotation limiting post with a prescribed angle provided at

the circumference of the mounting hole.

[0006] The first grinding base 40 is engaged to a machine housing 10 in front of the emery wheel 20 aligned in the same center line, and is kept a distance with the emery wheel 20 equal to that between the work fixture fastening base 31 and the drill bit fastening jig 32. The first grinding base 40 is approximately configured in L shape with an arcuate sliding slot 41 formed at the base surface thereof. By fastening the arcuate sliding slot 41 with a bolt 42, the first grinding base 40 can practically keep a relevant angle with the emery wheel 20 so as to grind and shave a variety of drills such as standard drill, rugged drill, or ebonite drill having the blades of different clearance angles and recesses.

[0007] The first grinding base 40 has a vertical wall 46 on which being provided with a mounting hole 43 for engaging the work fixture therein, and two rotation limiting posts 44, 45 with a prescribed angle and distance are formed at the circumference of the mounting hole 43. The mounting hole 43 is upwardly inclined with an angle about 10 ~ 25° in order to fit the direction of the blade of the drill bit to be shaved.

[0008] The second grinding base 50 is engaged to the machine housing 10 with a bolt 51 above the emery wheel 20 keeping a distance with the latter equal to that between the work fixture fastening base 31 and the drill bit fastening jig 32. The second grinding base 50 has a mounting hole 52 for engaging the work fixture therein and a rotation limiting post 53 with a prescribed angle standing on the circumference of the mounting hole 52.

[0009] However, the improved portable grinding machine patented by No.547,228 described above is still having a limited use for grinding conventional drill or cutter only, it is inapplicable to a particular drill or cutter with two or more blades.

[0010] For these defects noticeable on the prior art, further improvement is seriously required. The inventor has dedicated great efforts for years to studying and improving these defects and came up with the present invention to be disclosed herein.

SUMMARY OF THE INVENTION

[0011] The present invention is to provide an emery wheel grinding machine, as per claim 1, with adjustable bit chuck which has a tilted T-bushing, and its outer flange is provided with several stop traps with the number corresponding to that of the blades of a hobbing cutter to be shaved. On the outer flange of the T-bushing is also provided with two stop pins for defining the turning angle of the head of the hobbing cutter.

[0012] The tilted T-bushing of the present invention is not only able to adjust the chuck angle according to the figure and number of blades of the hobbing cutter, but also can control the turning angle of the hobbing cutter with the stop pins so that the clearance angles and the recesses between the blades can be effectively shaved.

[0013] The above object and other advantages of the

present invention will become more apparent by describing in detail the preferred embodiments of the present invention with reference to the attached drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014]

FIG. 1 is the three dimensional view of The Portable Drill Bit Grinding Machine Patented by Taiwan Pat. No. 547,228;

FIG. 2 is the three dimensional view of the present invention;

FIG. 3 is the three dimensional view of the T-bushing, chuck head and chuck according to the present invention;

FIG. 4 is the sectional view of the T-bushing according to the present invention;

FIG. 5 is the three dimensional view of a hobbing cutter;

FIG. 6 is a three dimensional view of the emery wheel with an outer annular ring according to the present invention;

Fig. 7 is a schematic view of a hobbing cutter whose blades are to be shaved;

Fig. 8 is a schematic view of another example other than that shown in Fig. 7;

Fig. 9 is a schematic view showing the clearance angle of a hobbing cutter which is under shaving.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0015] Referring to Fig. 2 and Fig. 3, the adjustable drill bit chuck of the present invention which accommodate a grinder 100, is provided with a first drill chuck 100A and a second drill chuck 100B. The former has a containment hole 101, and the latter has a T-bushing 200 with a containment hole 102 respectively. One end 201 of the T-bushing 200 can be inserted into the containment hole 101, while the other end has a larger outer diameter such that an outer flange 202 is emerged out of the containment hole 101 after insertion. Two, three, or four pairs of stop traps 203 are provided along the circumference of the outer flange 202 according to the number of blades of the drill or hobbing cutter to be shaved. The stop traps 203 can be engaged with corresponding clamp studs 103 which are provided on the outer surface of the drill chuck so as to hold the T-bushing 200 in place in the containment hole 101 of the drill chuck.

[0016] Referring to Fig. 4, the T-bushing 200 has a tapered hole 204 in it with a taper angle such that the blade of the drill or hobbing cutter can keep a prescribed inclination angle with the emery wheel when the drill or cutter head is inserted into the tapered hole 204.

[0017] Returning to Fig. 3, in the present invention, the adjustable drill chuck is provided with two pairs of stop pins 301, 302 along the outer flange 202 of the T-bushing

200 so as to control the turning angle of the drill bit chuck. As shown in Fig. 3, after inserting the adjustable check head having confinement grooves 401, 402 into the tapered hole 204, the confinement grooves 401, 402 and the stop pins 301, 302 cooperate to control the turning angle of the chuck head 400 by their mutual positional relation thereby defining the length of the cutter blade to be shaved.

[0018] Referring to Fig. 5, in the present invention, the T-bushing 200 of the adjustable chuck is not only for holding a hobbing cutter 500 to be shaved by exposing a blade length 501, but also can serve in the second drill chuck 100B to finish the clearance angles 502 or recesses 503 of the cutter blades.

[0019] Referring to Fig. 6, if a tilted T type emery wheel 600 is used in the present invention, it is provided an outer ring 601 with larger diameter than that of the main wheel 600 at one side thereof, the grinding surface of the outer ring 601 is covered with a preferably thick emery compounds.

[0020] Referring to FIG. 7, when the blades of a hobbing cutter 500 is to be shaved, at first the T-bushing 200 is inserted into the Z direction containment hole 101 of the first drill bit chuck 100A, then the chuck head 400 holding the hobbing cutter 500 at the chuck side is inserted into the tapered hole 204 in the T-bushing 200 so as to bring the hobbing cutter 500 in contact with the main body of the emery wheel 600 with a tilted angle θ . As the emery wheel 600 rotates, by turning the chuck head 400 according to the mutual positional relation between the confinement grooves 401, 402 and the stop pins 301, 302, the hobbing cutter 500 can be settled to shave its blade. Taking the cutter with two-faced blade for example, as soon as one side of the blade is finished, turning the T-bushing 200 180° and inserting it into the Z direction containment hole 101 of the first drill bit chuck 100A so as to continue shaving the other side of the blade.

[0021] Since the hobbing cutter 500 is in contact with the main body of the emery wheel 600 with a tilted angle θ , the tilted blade can be easily shaved. As shown in Fig. 8, by means of inclining center 500A of the cutter 500 against the corner 602 of the emery wheel 600, the blades 504, 505 with different length can be effectively shaved by turning the chuck head from 0° to 180°.

[0022] Referring to Fig. 9, when a clearance angle θ_1 of the hobbing cutter 500 is to be shaved, at first the T-bushing 200 is inserted into the Y direction containment hole 101 of the second bit chuck 100B, and then by inserting the chuck head 400 which holds the hobbing cutter 500 into the tapered hole 204 of the T-bushing 200 such that the hobbing cutter 500 is in contact with the outer ring 601 of the emery wheel 600 with a tilted angle θ thereby making the cutter 500 to incline a certain angle against the edge 602 of the outer ring 601. By so, the clearance angle of the blade of the cutter 500 can be easily shaved.

[0023] Accordingly, by utilizing the T-bushing 200 with the tapered hole 204 together with the emery wheel 600

with the outer ring 601, the present invention can be applied to shave and finish the hobbing cutter 500 with two, three or even four blades conveniently and easily only by turning the T-bushing 200.

[0024] Although the present invention has been disclosed and illustrated with respect to preferred embodiments thereof, it is to be understood that the invention is not to be so limited and that other changes and modifications can be made within the full intended scope of the invention as hereinafter claimed.

Claims

1. Emery wheel grinding machine (100) with adjustable drill bit chuck (100A) comprising:

an emery wheel (600) for grinding and shaving a drill bit; a bushing (200) in said chuck (100A) for insertion of the head of said drill bit; wherein said bushing (200) is a T-shaped bushing having an outer flange (202) one end thereof can be inserted into a containment hole (101), and the other end including the outer flange (202) extends out of said containment hole (101), **characterized by** said drill bit chuck (100A) including a plurality of clamp studs (103) and said outer flange (202) being provided with several pairs of stop traps (203) along its circumference and can be engaged with said corresponding clamp studs (103) provided on an outer surface of said drill bit chuck (100A), and said T-bushing has a tapered hole (204) in it.

2. The grinding machine as in claim 1, wherein the surface of said outer flange (202) of said T-bushing is provided with two pairs of stop pins (301,302) for controlling the turning angle of said drill bit chuck (100A).

3. The grinding machine as in claim 1, wherein the number of said stop traps (203) provided along the circumference of said outer flange (202) of said T-bushing is determined according to the number of cutter blades to be shaved.

4. The grinding machine as in claim 1, wherein the grinding wheel used in said grinding machine is an emery wheel (600) provided with an outer ring with a larger diameter than that of the main wheel.

Patentansprüche

1. Schmirgelscheibenschleifmaschine (100) mit verstellbarem Bohrfutter (100A), aufweisend:

eine Schmirgelscheibe (600) zum Schleifen und

Schaben eines Bohrers;

eine Hülse (200) im besagten Futter (100A) zum Einsetzen des Kopfs des besagten Bohrers; wobei die besagte Hülse (200) eine T-förmige Hülse ist, die einen Außenflansch (202) aufweist, wobei ein Ende desselben in ein Begrenzungsloch (101) eingesetzt werden kann, und sich das andere Ende, das den Außenflansch (202) aufweist, aus dem besagten Begrenzungsloch (101) erstreckt, **dadurch gekennzeichnet dass** das besagte Bohrfutter (100A) eine Vielzahl von Klemmzapfen (103) aufweist und dass der besagte Außenflansch (202) mit mehreren Paaren von Rastfallen (203) entlang seines Umfangs bereitgestellt wird und mit den besagten korrespondierenden Klemmzapfen (103), die auf einer Außenfläche des besagten Bohrfutters (100A) bereitgestellt werden, in Eingriff gebracht werden kann, und dass die besagte T-Hülse ein kegelförmiges Loch (204) in sich aufweist.

2. Schleifmaschine nach Anspruch 1, wobei die Oberfläche des besagten Außenflanschs (202) der besagten T-Hülse mit zwei Paaren von Anschlagstiften (301, 302) zum Steuern des Drehwinkels des besagten Bohrfutters (100A) bereitgestellt wird.

3. Schleifmaschine nach Anspruch 1, wobei die Zahl der besagten Rastfallen (203), die entlang des Umfangs des besagten Außenflanschs (202) der besagten T-Hülse bereitgestellt werden, gemäß der Zahl der zu schabenden Schneidblätter bestimmt ist.

4. Schleifmaschine nach Anspruch 1, wobei die Schleifscheibe, die in der besagten Schleifmaschine verwendet wird, eine Schmirgelscheibe (600) ist, die mit einem Außenring mit einem größeren Durchmesser als demjenigen der Hauptscheibe bereitgestellt wird.

Revendications

1. Machine de meulage (100) au disque émeri avec porte-foret (100A) ajustable, comprenant :

un disque émeri (600) pour meuler et râper un foret ;

un canon (200) dans ledit porte-foret (100A) conçu pour l'insertion de la tête dudit foret ;

ledit canon (200) étant un canon en forme de T ayant une bride extérieure (202), une extrémité de celle-ci pouvant être insérée dans un trou de retenue (101), et l'autre extrémité comprenant la bride extérieure (202) s'étendant hors dudit trou (101) de retenue, **caractérisée en ce que** ledit porte-foret (100A) comprend une pluralité

de boulons de serrage (103) et que ladite bride extérieure (202) est pourvue de plusieurs paires de clenches de blocage (203) le long de son périmètre et peut s'encliqueter avec lesdits boulons de serrage (103) correspondants prévus sur une surface externe dudit porte-foret (100A), et que ledit canon en forme de T a un trou conique (204) dans celui-ci.

2. Machine de meulage selon la revendication 1, dans laquelle la surface de ladite bride extérieure (202) dudit canon en forme de T est pourvu de deux paires de goupilles de blocage (301, 302) pour commander l'angle de rotation dudit porte-foret (100A).
3. Machine de meulage selon la revendication 1, dans laquelle le nombre desdites clenches de blocage (203) prévues le long du périmètre de ladite bride extérieure (202) dudit canon en forme de T est déterminé en fonction du nombre des lames de coupe à râper.
4. Machine de meulage selon la revendication 1, dans lequel le disque de meulage utilisé dans ladite machine de meulage est un disque émeri (600) pourvu d'un anneau extérieur ayant un diamètre supérieur à celui du disque principal.

5

10

15

20

25

30

35

40

45

50

55

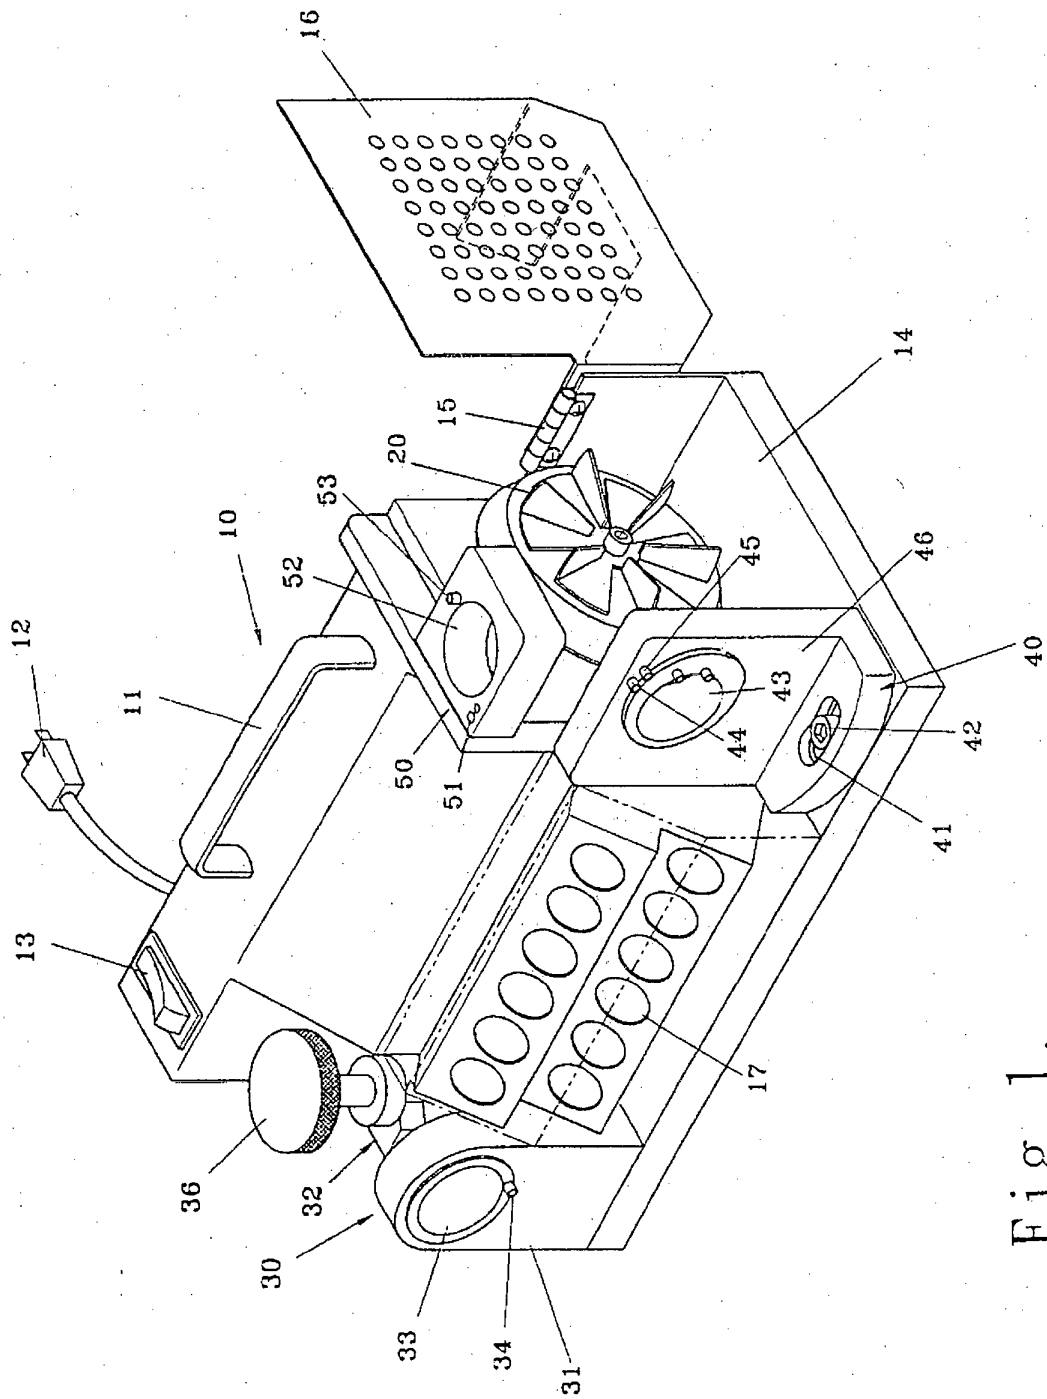


Fig. 1.

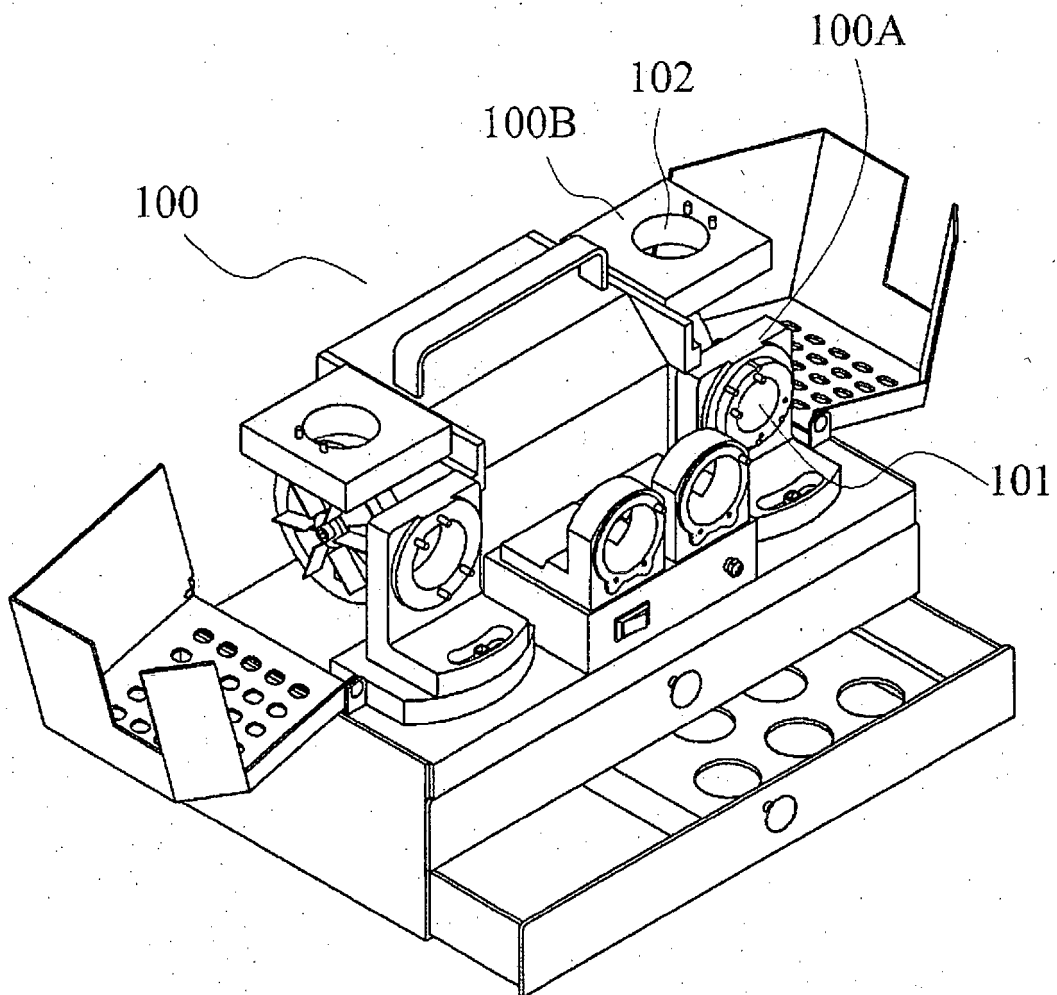


Fig. 2

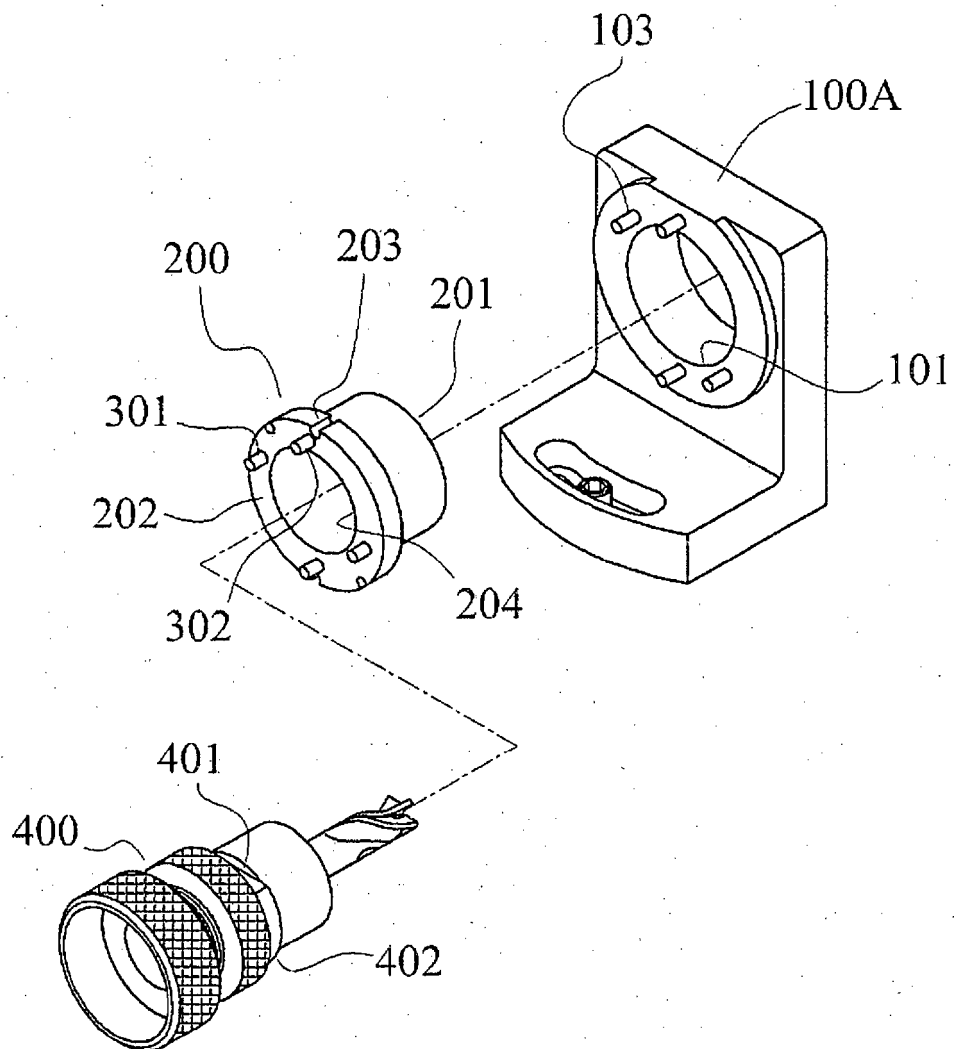


Fig. 3

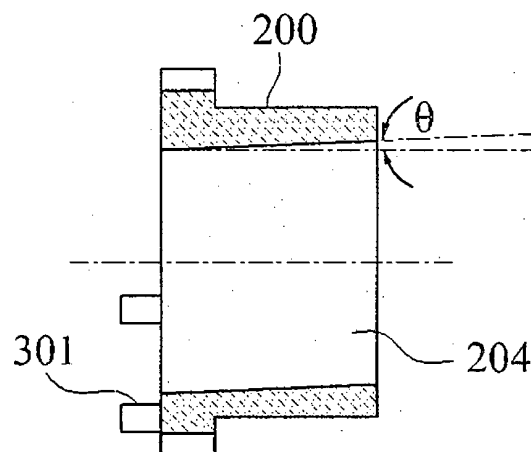


Fig. 4

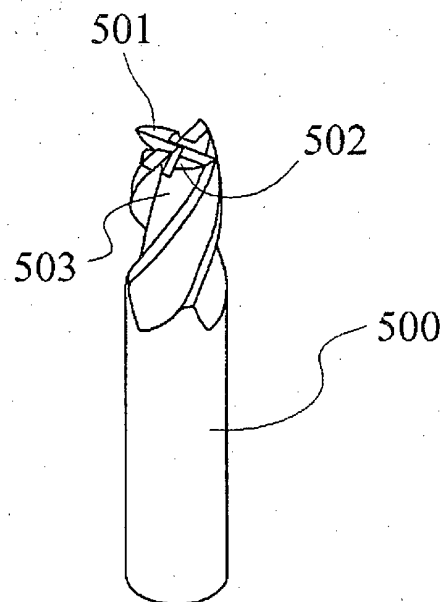


Fig. 5

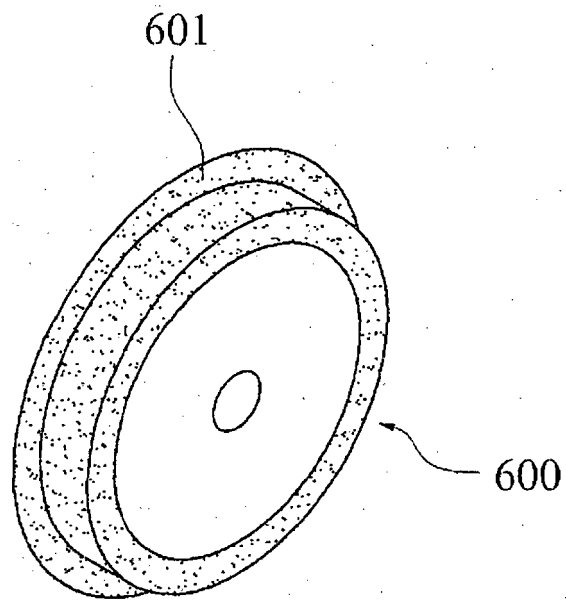


Fig. 6

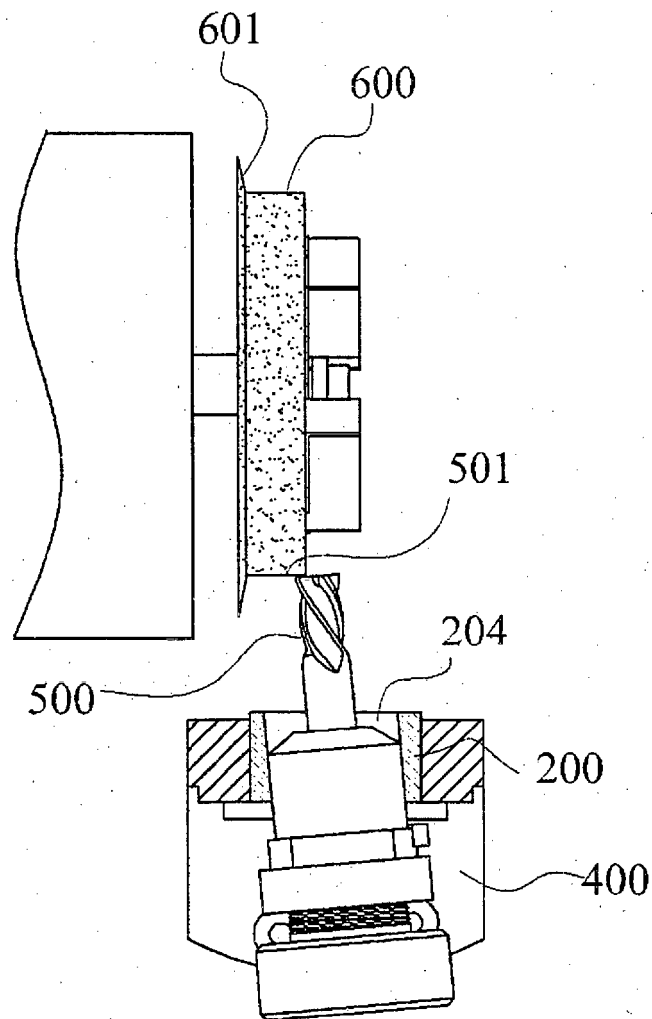


Fig. 7

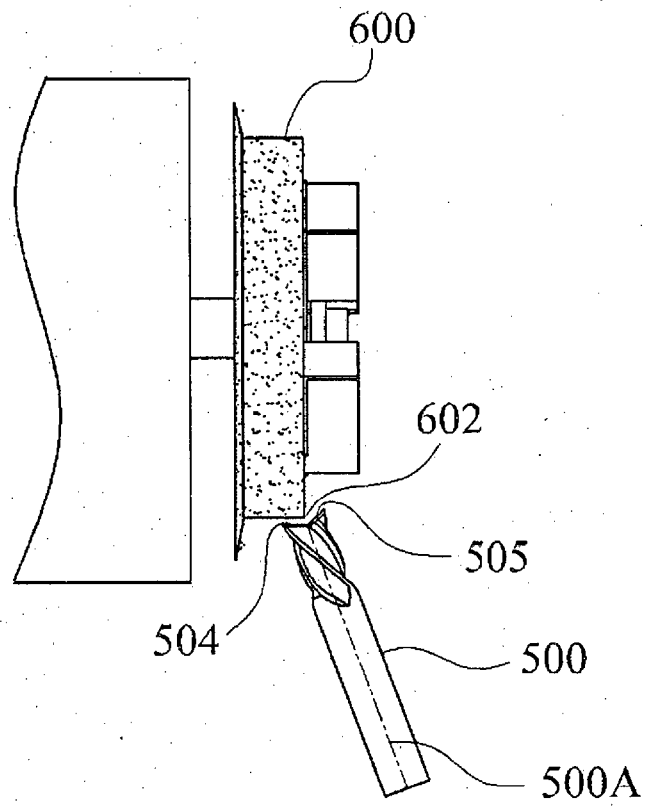


Fig. 8

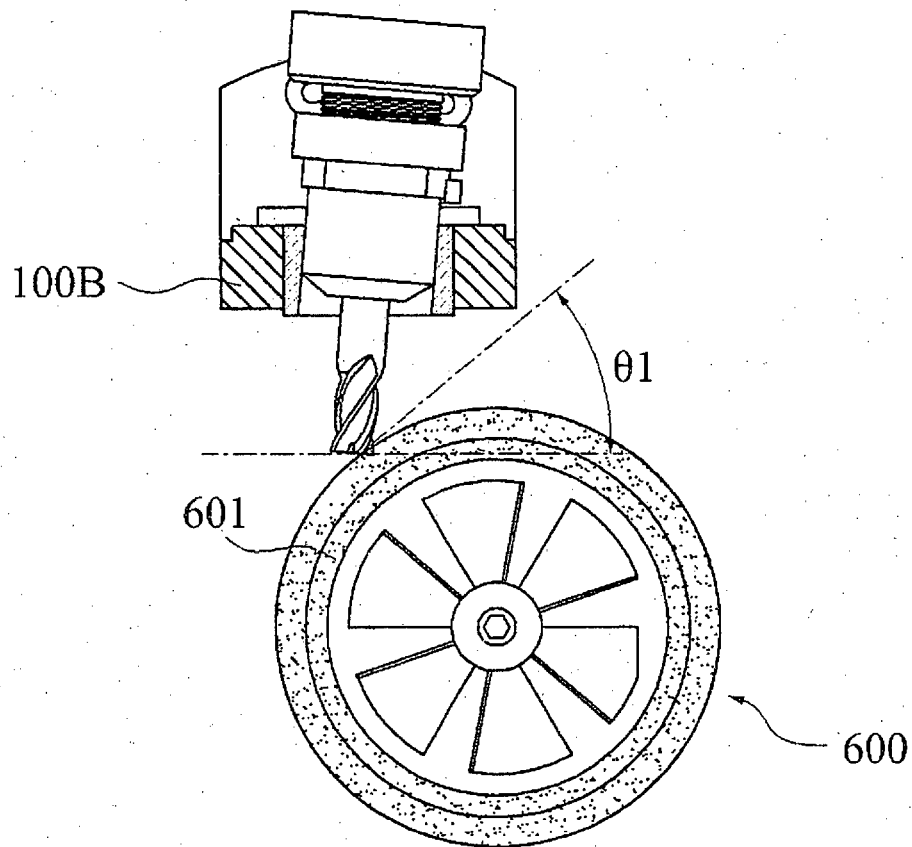


Fig. 9

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6652367 B [0001]
- TW 286610 [0002]
- TW 155338 [0002]
- TW 547228 [0004] [0009] [0014]