



(11) **EP 2 019 402 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
21.07.2010 Bulletin 2010/29

(51) Int Cl.:
H01H 13/705 ^(2006.01) **G06F 3/023** ^(2006.01)
H01H 23/30 ^(2006.01)

(21) Application number: **08168945.7**

(22) Date of filing: **23.02.2005**

(54) **Handheld electronic device and keypad providing enhanced usability and reduced size, and associated method**

Tragbare elektronische Vorrichtung und Tastatur mit verbesserter Nutzbarkeit und reduzierter Größe und zugehöriges Verfahren

Dispositif électronique portable et clavier permettant un usage amélioré et une taille réduite, et procédé correspondant

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR**
Designated Extension States:
AL BA HR LV MK YU

(43) Date of publication of application:
28.01.2009 Bulletin 2009/05

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
05251030.2 / 1 696 448

(73) Proprietor: **RESEARCH IN MOTION LIMITED**
Waterloo, Ontario N2L 3W8 (CA)

(72) Inventors:
• **Griffin, Jason T.**
Kitchener Ontario N2P 2L3 (CA)
• **Fyke, Steven Henry**
Waterloo Ontario N2J 4T3 (CA)

(74) Representative: **Howson, Richard G.B.**
Kilburn & Strode LLP
20 Red Lion Street
London WC1R 4PJ (GB)

(56) References cited:
DE-A1- 19 537 296 DE-A1- 19 728 260
GB-A- 2 391 110 US-A- 4 654 488
US-A1- 2001 035 333 US-A1- 2003 012 368

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 019 402 B1

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The invention relates generally to handheld electronic devices and, more particularly, to a keypad for a handheld electronic device.

Background Information

[0002] Numerous types of handheld electronic devices are known. Examples of such handheld electronic devices include, for instance, personal data assistants (PDAs), handheld computers, two-way pagers, cellular telephones, and the like. Such handheld electronic devices are generally intended to be portable and thus must be relatively small. Many handheld electronic devices feature wireless communication capability, although many such handheld electronic devices are stand-alone devices. Since handheld electronic devices typically are portable, it is also desired that the form factor of the devices be sufficiently small and ergonomic that they can conveniently be transported with a belt clip, in a user's pocket, manually, or in a briefcase. Advancements in technology have permitted the form factor of such handheld electronic devices to be reduced while increasing their versatility and functionality, such as by increasing the number of functions provided by the device as well as increasing the number of software applications and the variety of their features. However, as the form factor of a handheld electronic device decreases and the number of functions provided by the device increases, the device potentially can become awkward and difficult to use. Thus, it is also desirable to improve the usability of a handheld electronic device as its form factor is reduced and its versatility is increased. Previous attempts to increase such usability have had limitations.

[0003] One such type of solution has involved the use of large numbers of keys which, when pressed in various combinations, would produce various functions. For instance, adjacent keys were depressed simultaneously to provide additional functions. In mobile electronics, keys oftentimes are operatively connected with metal or carbon coated poly domes that act as switches for the keys and that are elastically collapsible and provide tactile feedback to a user when the domes are collapsed from a relaxed position to a deflected position. Tactile switches provide a similar function. The simultaneous pressing of multiple keys to provide a given function thus oftentimes can result in the collapsing of multiple domes, which can result in a confusing and/or undesirable tactile feedback to a user. Other attempts at improving usability have involved decreasing the quantity of keys on a handheld device while increasing the number of functions each key is to serve. Such systems potentially can become cumbersome because the various functions of a

given key may additionally require the pressing of a SHIFT key, an ALT key, or another key to provide the various functions. In such a circumstance, the required multiple key pushing requires multiple hand movements which can interfere with user friendliness. A similar conventional keypad is disclosed in the US 2003/0012368A.

SUMMARY OF THE INVENTION

[0004] An improved handheld electronic device, keypad, and method in accordance with the invention as disclosed in the claims meet these and other needs. An improved handheld electronic device having an improved keypad provides enhanced usability and reduced size by organizing its keys in pairs, with a pair of keys being disposed on a support. Each key of a pair of keys is individually actuatable. An actuation of a key causes a primary conductor associated with the key set to electrically to connect a pair of contacts and to cause a secondary conductor associated with the key to electrically connect another pair of contacts. The primary conductor is a collapsible dome or a tactile switch or deflectable structure that can electrically connect the pair of contacts and that can provide a particular tactile feedback to the user. The secondary conductor is a conductor other than a collapsible dome or a tactile switch. An actuation of any key or of any pair of keys thus provides to the user a consistent tactile feedback, i.e., from a collapse of a single dome. An improved method in accordance with the invention is also disclosed.

[0005] Accordingly, an aspect of the invention is to provide an improved handheld electronic device, an improved keypad, and an improved method that provide enhanced usability.

[0006] Another aspect of the invention is to provide an improved handheld electronic device and an improved keypad having keys that are organized in pairs to enable the keypad to have a reduced overall size.

[0007] Another aspect of the invention is to provide an improved handheld electronic device and an improved keypad that provide both collapsible domes (or alternative switches providing tactile feedback) and conductive carbon elements (or alternative switches generally not providing tactile feedback), with a collapsing of a dome providing a tactile feedback to the user.

[0008] Another aspect of the invention is to provide an improved method of enabling input into a handheld electronic device wherein keys of the handheld electronic device have linguistic elements assigned thereto and wherein pairs of keys also have linguistic elements assigned thereto, with the improved method providing a plurality of modes for detecting input from the keys.

[0009] Another aspect of the invention is to provide an improved handheld device and an improved keypad that enables a small form factor while still providing enhanced usability or user friendliness.

[0010] Accordingly, an aspect of the invention is to provide an improved keypad that is structured to be incor-

porated into a handheld electronic device. The general nature of the keypad can be stated as including a contact apparatus, a button apparatus, a primary conductor portion, and a secondary conductor portion. The contact apparatus includes a plurality of electrical contacts. The button apparatus includes a number of key sets. Each key set of at least a portion of the number of key sets includes a pair of keys and a support, with the pair of keys being disposed on the support. The primary conductor portion includes a number of primary conductors that are elastically deflectable between a relaxed position and a deflected position. Each primary conductor of at least a portion of the number of primary conductors in the deflected position electrically connects together a pair of electrical contacts of the plurality of electrical contacts. The secondary conductor portion includes a number of secondary conductors that are movable between a first position and a second position. Each secondary conductor of at least a portion of the number of secondary conductors in the second position electrically connects together a pair of electrical contacts of the plurality of electrical contacts. The pair of keys includes a first key and a second key, with the first key being movable between an unactuated position and an actuated position, and with the second key being movable between an unactuated position and an actuated position. A primary conductor which corresponds with the key set is in the deflected position when the first key is in the actuated position. A first secondary conductor which corresponds with the first key is in the second position when the first key is in the actuated position. The primary conductor which corresponds with the key set is in the deflected position when the second key is in the actuated position. A second secondary conductor which corresponds with the second key is in the second position when the second key is in the actuated position.

[0011] Another aspect of the invention is to provide an improved handheld electronic device, the general nature of which can be stated as including a processor apparatus, an input apparatus, and an output apparatus. The processor apparatus includes a processor and a memory. The input apparatus includes a keypad and is cooperable with the processor apparatus to provide input to the processor apparatus. The output apparatus is cooperable with the processor apparatus to receive signals from the processor apparatus and to provide output. The keypad includes a contact apparatus, a button apparatus, a primary conductor portion, and a secondary conductor portion. The contact apparatus includes a plurality of electrical contacts. The button apparatus includes a number of key sets. Each key set of at least a portion of the number of key sets includes a pair of keys and a support, with the pair of keys being disposed on the support. The primary conductor portion includes a number of primary conductors that are elastically deflectable between a relaxed position and a deflected position. Each primary conductor of at least a portion of the number of primary conductors in the deflected position electrically

connects together a pair of electrical contacts of the plurality of electrical contacts. The secondary conductor portion includes a number of secondary conductors that are movable between a first position and a second position. Each secondary conductor of at least a portion of the number of secondary conductors in the second position electrically connects together a pair of electrical contacts of the plurality of electrical contacts. The pair of keys includes a first key and a second key, with the first key being movable between an unactuated position and an actuated position, and with the second key being movable between an unactuated position and an actuated position. A primary conductor which corresponds with the key set is in the deflected position when the first key is in the actuated position. A first secondary conductor which corresponds with the first key is in the second position when the first key is in the actuated position. The primary conductor which corresponds with the key set is in the deflected position when the second key is in the actuated position. A second secondary conductor which corresponds with the second key is in the second position when the second key is in the actuated position.

[0012] Another aspect of the invention is to provide an improved method of enabling input into a handheld electronic device. The handheld electronic device is of a type that includes an input apparatus having a pair of keys, with the pair of keys including a first key having a first linguistic element assigned thereto and a second key having a second linguistic element assigned thereto, and with the pair of keys having a third linguistic element assigned thereto. The handheld electronic device is operable in at least a first input mode and a second input mode. The general nature of the method can be stated as including detecting in the first input mode at least one of i) an actuation of the first key as being an input of the first linguistic element; and ii) an actuation of the second key as being an input of the second linguistic element. The method further includes detecting in the second input mode an actuation of the first key as being an input of the third linguistic element and an actuation of the second key as being an input of the third linguistic element.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] A full understanding of the invention can be gained from the following Description of the Preferred Embodiment when read in conjunction with the accompanying drawings in which:

Fig. 1 is a block diagram of an improved handheld electronic device in accordance with the invention;
 Fig. 2 is a top plan view of an improved keypad in accordance with the invention;
 Fig. 3 is an exploded perspective view of the keypad of Fig. 2;
 Fig. 4 is a sectional view as taken along line 4-4 of Fig. 2;
 Fig. 5 is a top plan view of a printed circuit board of

the keypad of Fig. 2;

Fig. 6 is an enlarged view of a portion of Fig. 4 and depicts each of a first key and a second key of a pair of keys in an unactuated position;

Fig. 7 is a view similar to Fig. 6, except depicting the first key in an actuated position; and

Fig. 8 is a view similar to Fig. 6, except depicting the second key in an actuated position.

[0014] Similar numerals refer to similar parts throughout the specification.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[0015] An improved handheld electronic device 4 in accordance with the invention is depicted schematically in Fig. 1. The handheld electronic device 4 includes an improved keypad 8 in accordance with the invention that is depicted, in whole or in part, in Figs. 2-8. The handheld electronic device 4 and the keypad 8 advantageously are configured to be of a relatively small size while providing enhanced usability, for example, in accordance with an improved method in accordance with the invention, as will be set forth more fully below.

[0016] The handheld electronic device 4 includes an input apparatus 6, a processor apparatus 10, a housing 12, and an output apparatus 14. The input apparatus 6 includes the keypad 8. The output apparatus 14 includes a display 16. The keypad 8 and the display 16 are disposed on the housing 12.

[0017] The processor apparatus 10 includes a suitable processor 18 such as, without limitation, a microprocessor (μ P). The processor apparatus 10 further includes a memory 20 having a number of routines 22 stored therein that are executable on the processor 18. The routines 22 executed on the processor 18 provide functionality to inputs received from the keypad 8 and provide outputs to the display 16. The memory 20 can be any of a variety of storage devices and may include one or more of, for example and without limitation, RAM, ROM, EPROM, EEPROM, and/or other appropriate storage device. Examples of handheld electronic devices are included in U.S. Patent Nos. 6,452,588 and 6,489,950, which are incorporated by reference herein.

[0018] As can be seen in Fig. 2, the exemplary keypad 8 includes a plurality of keys 60. Many of the keys 60 have a linguistic element 24 assigned thereto. As employed herein, the expression "linguistic element" and variations thereof shall refer broadly to any type of character, ideogram, numerical reference, and/or other symbol that can be employed to provide linguistic expression, and can expressly include portions of the same such as strokes and the like without limitation. Many of the keys 60 are organized in pairs 32 of keys 60. A pair 32 of adjacent keys 60 can have an alternate linguistic element 28 assigned thereto. As will be set forth in greater detail below, the handheld electronic device 4 and the method of the invention allow input in a plurality of input modes.

Depending upon which input mode is active on the handheld electronic device 4, an actuation of a key 60 can cause an input of the linguistic element 24 assigned to the actuated key 60 or can cause an input of the alternate linguistic element 28 assigned to the key 60 and to the key 60 adjacent thereto which form a pair 32.

[0019] As can be understood from Figs. 3-4 and 6-8, the keypad 8 includes a button apparatus 40, a primary conductor portion 44 (Figs. 6-8), a secondary conductor portion 48 (Figs. 4 and 6-8), and a contact apparatus in the form of a printed circuit board 56. It is noted that the primary conductor portion is not expressly depicted in Fig. 3 for purposes of clarity. The button apparatus 40 includes a number of key sets 36, a number of bridging members 38 extending between some of the key sets 36, and a flexible mount 66. As employed herein, the expression of "a number of" and variations thereof shall refer broadly to any nonzero quantity, including a quantity of one.

[0020] The key sets 36 each generally include a pair 32 of the keys 60, a support 64, and an actuator 70. In the exemplary embodiment depicted herein, the support 64 is disposed between the keys 60 of the pair 32, and the actuator 70 is disposed generally adjacent the support 64. A small gap 42 is provided between the keys 60 adjacent the support 64, i.e., the support 64 terminates at the gap 42. The gap 42 provides a small space 120 between the keys 60 of the key set 36 to provide to the user a visual and tactile differentiation between the two adjacent keys 60. The support 64 serves to connect together the keys 60 of a pair of keys 32.

[0021] The flexible mount 66 is disposed generally between the keys 60 and the printed circuit board 56. The exemplary mount 66 depicted herein includes a plurality of downwardly-depending legs 46 that are engageable with the printed circuit board 56.

[0022] The actuators 70 in the present exemplary embodiment are formed on the supports 64 and may extend across at least a portion of one or more of the keys 60 of the key set 36. In the present exemplary embodiment, the actuators 70 extend through openings 84 formed in the flexible mount 66. It is noted that in other embodiments the actuators 70 may be formed as a part of the flexible mount 66 without departing from the concept of the invention. The exemplary flexible mount 66 is formed of a flexible silicone compound but could be made of other materials without departing from the concept of the invention.

[0023] The primary conductor portion 44 (Figs. 6-8) includes a plurality of conductive domes 68 which, in the present exemplary embodiment, are disposed on the printed circuit board 56. The domes 68 are elastically deflectable between a relaxed position, i.e., Fig. 6, and a deflected position, i.e., Figs. 7-8. The movement of the domes 68 between the relaxed and deflected positions occurs via elastic deformation of the domes 68 and causes the domes to "snap" between the relaxed and deflected positions to provide a desirable tactile feedback to the

user.

[0024] It is understood that in other embodiments of the invention tactile switches or other tactile switching structures may be employed in place of the domes 68 without departing from the concept of the invention. As employed herein, therefore, references to a collapse of a dome and/or a tactile feedback resulting therefrom shall expressly include, for example, tactile switches and other such structures, as well as tactile feedback therefrom. Such other structures are understood to be elastically deflectable between a relaxed position and a deflected position and to provide tactile feedback to the user.

[0025] The domes 68 in the deflected position connect together a set of primary contacts 96, such as are depicted in Fig. 5, to complete an electrical circuit therebetween. The exemplary sets of primary contacts 96 each include a ball contact 104 and a ring contact 108 that are concentrically disposed on the printed circuit board 56. When a dome 68 is in the relaxed position, its circular edge, i.e., the portion of the dome 68 opposite the proud portion thereof, is disposed on the ring contact 108 of the associated set of primary contacts 96. When the dome 68 is in the deflected position, its previously proud portion engages the ball contact 98 of the associated pair of primary contacts 96 to complete an electrical circuit therebetween to provide an input that can be detected by the processor 18. The domes 68 may be made in whole or in part of metal or another electrical conductor.

[0026] The secondary conductor portion 48 includes a plurality of carbon pills 76 which, in the present exemplary embodiment, are disposed on the flexible mount 66. The carbon pills 76 are small members that are formed of or are coated with an electrically conductive carbon material. The carbon pills 76 can be, for instance, adhered or otherwise mounted to the flexible mount 66. Similarly, the flexible mount 66 could be formed, i.e., cured, in physical contact with the carbon pills 76, whereby the flexible mount 66 could be formed to the carbon pills 76 to retain the carbon pills 76 thereon. Other configurations are possible. It is also noted that the carbon pills 76 could be disposed on the keys 60 themselves without departing from the concept of the invention.

[0027] Each carbon pill 76 is movable between a first position, i.e., Fig. 6, and a second position, as is variously depicted in Figs. 7-8. In the second position, a carbon pill 76 electrically connects together an associated set of secondary contacts 100, such as are depicted generally in Fig. 5. The sets of secondary contacts 100 are of an "intermeshed comb" configuration that includes a first comb contact 112 and a second comb contact 116 having a number of fingers that are adjacent or are intermeshed. When a carbon pill 76 engages a set of secondary contacts 100, it completes an electrical circuit between the first comb contact 112 and the second comb contact 116 to provide an input that can be detected by the processor 18.

[0028] It is understood that the domes 68 and the carbon pills 76 can be said to serve as switches for the keys

60. The domes provide a tactile feedback in being elastically deformed between the relaxed and deflected positions. The carbon pills 76 moving between the first and second positions to engage the secondary contacts 100 generally do not provide any tactile feedback apart from the resistance provided by elastic deformation of the flexible mount 66 which, in any event, is not the same as the tactile feedback provided by the domes 68.

[0029] Each key 60 has an associated carbon pill 76 that is associated therewith and that is moved between its first and second positions when the key 60 is actuated. Each key set 36 has an associated dome 68 associated therewith that is elastically deflectable between the relaxed and deflected positions upon an actuation of a key 60 of the aforementioned key set 36. Each key 60 of a key set 36 thus also has associated therewith the same associated dome 68.

[0030] An exemplary embodiment of a key set 36 having a pair 32 of keys 60 is depicted in Figs. 6-8. The pair 32 of keys 60 includes a first key 60', a second key 60'', and a support 64 disposed therebetween. The key set 36 also includes an associated actuator 70 that can be said to be associated with the support 64 and the keys 60' and 60'' and that is engaged with the proud portion of an associated dome 68. A first carbon pill 76' is associated with first key 60', and a second carbon pill 76'' is associated with the second key 60''. In Fig. 6, the first and second keys 60' and 60'' are each in an unactuated position, whereby the dome 68 is in the relaxed position and the first and second carbon pills 76' and 76'' are each in the first position.

[0031] In Fig. 7, the first key 60' has been actuated and thus has been moved from its unactuated position to an actuated position. When the first key 60' is in the actuated position, the dome 68 has been elastically deformed by the actuator 70 to the deflected position, thereby providing to the user the tactile feedback associated with such movement of the dome 68. Actuation of the first key 60' also elastically deflects or flexes the mount 66 which moves the first carbon pill 76' from the first position to the second position. As such, the dome 68 has electrically connected together the associated set of primary contacts 96, and the first carbon pill 76' has electrically connected together the associated set of secondary contacts 100. The completion of a circuit that includes the aforementioned set of primary contacts 96 and the completion of the circuit that includes the aforementioned set of secondary contacts 100 each provide an input that can be detected by the processor 18. Upon releasing the first key 60', the elastic energy stored in the dome 68 in the deflected position and the mount 66 in the flexed condition cause the first key 60' to rebound to its unactuated position, as is depicted generally in Fig. 6.

[0032] In Fig. 8, the second key 60'' is depicted as having been actuated from its unactuated position to an actuated position. The dome 68 is in the deflected position, and the second carbon pill 76'' is in a second position where it electrically connects together another set of sec-

ondary contacts 100.

[0033] In actuating the first key 60' or the second key 60", the support 64 pivots slightly and is translated slightly toward the printed circuit board 56, the dome 68 moves between the relaxed position and the deflected position, and either the first carbon pill 76' or second carbon pill 76" is moved from its first position to its second position. Despite the first and second keys 60' and 60" each being disposed on a common support 64, the first and second keys 60' and 60" can be actuated independently of one another.

[0034] By arranging the keys 60 in the pairs 32, the keypad 68 can advantageously have an overall size that is relatively smaller than other keypads. In this regard, it can be seen that the keys 60 of any pair 32 have the space 120 therebetween that is of a certain width, such as might be measured in the horizontal plane from the perspective of Fig. 4. A given key set 36 is spaced from an adjacent key set 36 by what may be called a pitch space 124 therebetween, such as might be measured in the same plane as the space 120. It can be seen that at least some of the spaces 120 are relatively smaller than at least some of the pitch spaces 124. The keys 60 in any given pair 32 are, however, clearly spaced apart from one another and thus are individually identifiable by a user. The tighter spacing between certain of the keys 60, i.e., between the keys 60 in any given pair 32, than between other keys 60, i.e., a key 60 from a given pair 32 and an adjacent key 60 in an adjacent pair 32, enables the keypad 8 to have an overall relatively smaller configuration than if all of the keys 60 were spaced the same distance apart. In the present exemplary embodiment, the differential size between the space 120 and the pitch space 124 allows the keypad 8 to be relatively narrow, as can be measured in a plane corresponding with the horizontal direction in Fig. 4. Other arrangements of the keys 60 could provide relatively smaller overall dimensions in other directions in a fashion that would be within the scope of the invention.

[0035] In accordance with an aspect of the invention, the routines 22 include an input routine that provides to the handheld electronic device 4 a plurality of input modes. The input modes could be, for example and without limitation, a text input mode, a telephone mode, a numeric mode, and/or other input mode. An actuation of any given key 60 could provide an input to the processor 18 that could be detected by the processor 18 as being a number of different inputs depending upon which of the input modes is currently active on the handheld electronic device 4. In the exemplary keypad 8 depicted generally in Fig. 2, many of the keys 60 have assigned thereto a linguistic element 24 which, in the present example, may be a Roman letter. Moreover, many of the pairs 32 of keys 60 have assigned thereto an alternate linguistic element 28 in the form of, for example, an Arabic numeral, i.e., a digit. The alternate linguistic elements 28 are arranged on the keypad 8 in the form of a touch-tone keypad that additionally provides an asterisk, i.e., *, assigned to

one of the keys 60 and a number symbol or pound sign, i.e., #, assigned to another key 60 at locations corresponding with those of a conventional touch-tone layout.

[0036] If, for example, the text input mode is active on the handheld electronic device 4, an actuation of a key 60 having a linguistic element 24 assigned thereto such as in the nature of a Roman letter will result in an input to the processor 18 that is detected by the processor 18 as being the linguistic element 24. On the other hand, if the telephone input mode or the numeric input mode, for example and without limitation, is active on the handheld electronic device 4, an actuation of a key 60 that is part of a pair 32 having assigned thereto an alternate linguistic element 28 in the form of, for example, an Arabic numeral will provide an input to the processor 18 that is detected by the processor 18 as being the alternate linguistic element 28. Such a detection will occur despite the actuated key 60 itself also having assigned thereto a linguistic element 24 in the nature of a Roman letter. When the handheld electronic device 4 is in the telephone input mode or the numeric input mode, for example and without limitation, an actuation of either or both of the keys 60 in any given pair 32 to which an alternate linguistic element 28 has been assigned will result in an input to the processor 18 that is detected by the processor 18 as being the alternate linguistic element 28. It is understood that other types of input modes can be employed and/or other types of linguistic elements can be assigned to the keys 60 and/or the pairs 32 without departing from the concept of the invention.

[0037] The handheld electronic device 4 thus advantageously is configured to be of a relatively small size and to have enhanced functionality that is provided, for example, by the method of the invention. The method of the invention provides enhanced functionality by, in addition to allowing an input of a linguistic element 24 assigned to a key 60 by actuating the key 60, also providing for the entry of alternate linguistic elements 28 that are assigned to pairs 32 of the keys 60. When an input mode of the type that detects actuations of keys 60 as being inputs of such alternate linguistic elements 28 is active on the handheld electronic device 4, an actuation of either of the keys 60 of a given pair 32 will result in an input of the alternate linguistic element 28 assigned to the pair 32. As such, a user desiring to enter such an alternate linguistic element 28 can press either or both of the keys 60 in the pair 32, which facilitates rapid entry of such inputs. Such entry can be rapid because, for instance, the user can press either or both of such keys 60 without a concern of specifically pressing one key 60 or the other key 60. This advantageously also allows a user to pay relatively less attention when providing certain inputs than would be the case if the user were required to actuate only a particular key 60. Moreover, regardless of which key 60 of a pair 32 a user actuates, or if a user actuates both keys 60 simultaneously, the user will receive a desirable and consistent tactile feedback in the nature of a collapse of a single dome 68.

[0038] While specific embodiments of the invention have been described in detail, it will be appreciated by those skilled in the art that various modifications and alternatives to those details could be developed in light of the overall teachings of the disclosure. Accordingly, the particular arrangements disclosed are meant to be illustrative only and not limiting as to the scope of the invention which is to be given the full breadth of the claims appended and any and all equivalents thereof.

[0039] In an alternative embodiment, a keypad is structured to be incorporated into a handheld electronic device, the keypad including: a contact apparatus comprising a plurality of electrical contacts; a button apparatus comprising a number of key sets, each key set of at least a portion of the number of key sets comprising a pair of keys and a support, the pair of keys being disposed on the support; a primary conductor portion comprising a number of primary conductors that are elastically deflectable between a relaxed position and a deflected position, each primary conductor of at least a portion of the number of primary conductors in the deflected position electrically connecting together a pair of electrical contacts of the plurality of electrical contacts; a secondary conductor portion comprising a number of secondary conductors that are movable between a first position and a second position, each secondary conductor of at least a portion of the number of secondary conductors in the second position electrically connecting together a pair of electrical contacts of the plurality of electrical contacts; the pair of keys comprising a first key and a second key, the first key being movable between an unactuated position and an actuated position, the second key being movable between an unactuated position and an actuated position; a primary conductor of the number of primary conductors which corresponds with the key set being in the deflected position when the first key is in the actuated position; a first secondary conductor of the at least a portion of the number of secondary conductors which corresponds with the first key being in the second position when the first key is in the actuated position; the primary conductor which corresponds with the key set being in the deflected position when the second key is in the actuated position; and, a second secondary conductor of the at least a portion of the number of secondary conductors which corresponds with the second key being in the second position when the second key is in the actuated position.

[0040] The contact apparatus may include a printed circuit board, wherein the primary conductors and the secondary conductors are disposed generally between the printed circuit board and the keys, and wherein the support of a key set is disposed generally between the pair of keys of the key set.

[0041] Preferably, the secondary conductors may be conductive carbon elements movable by the key sets into conductive contact with the electrical contacts. More preferably, the button apparatus includes a flexible mount, at least a portion of the key sets of the number of key

sets being disposed on the mount, and at least a portion of the secondary conductors of the number of secondary conductors being disposed on the mount, the mount being structured to be flexed when at least one of a first key and a second key of a key set of the at least a portion of the key sets is actuated.

[0042] The first key may have a first linguistic element assigned thereto, wherein the second key has a second linguistic element assigned thereto, and wherein the key set has a third linguistic element assigned thereto.

[0043] A key set of the number of key sets may be disposed adjacent another key set of the number of key sets, the another key set comprising another support and another pair of keys comprising another first key and another second key, the support between the first key and the second key providing a space between the first key and the second key, the another support between the another first key and the another second key providing another space between the another first key and the another second key, the key set and the another key set having a pitch space therebetween, the space and the another space being smaller than the pitch space.

[0044] Preferably, the button apparatus includes a number of actuators, each key set of at least a portion of the number of key sets having associated therewith an associated actuator of the number of actuators which extends away from the key set in a direction generally toward the contact apparatus and which is engageable with an associated primary conductor of the number of primary conductors to move the associated primary conductor between the relaxed position and the deflected position. More preferably, the button apparatus includes a flexible mount disposed generally between the contact apparatus and at least a portion of the key sets of the number of key sets, and wherein at least a portion of the associated actuators are each one of a protrusion formed on the flexible mount and a protrusion that is formed on a key set of the number of key sets and that extends through an opening formed in the flexible mount.

[0045] The button apparatus may include a number of actuators, each key set of at least a portion of the number of key sets having associated therewith an associated actuator of the number of actuators which extends away from the key set in a direction generally toward the contact apparatus and which is engageable with an associated primary conductor of the number of primary conductors to move the associated primary conductor between the relaxed position and the deflected position. At least a portion of the associated actuators are each disposed generally adjacent the support of the key set.

[0046] The first secondary conductor may be disposed generally between the first key and the contact apparatus, with the second secondary conductor being disposed generally between the second key and the contact apparatus.

[0047] In another alternative embodiment, a handheld electronic device includes: a processor apparatus including a processor and a memory; an input apparatus in-

cluding a keypad, the input apparatus being cooperable with the processor apparatus to provide input to the processor apparatus; and, an output apparatus co-operable with the processor apparatus to receive signals from the processor apparatus and to provide output. The keypad includes a contact apparatus, a button apparatus, a primary conductor portion, and a secondary conductor portion. The contact apparatus includes a plurality of electrical contacts. The button apparatus includes a number of key sets, each key set of at least a portion of the number of key sets comprising a pair of keys and a support, the pair of keys being disposed on the support. The primary conductor portion includes a number of primary conductors that are elastically deflectable between a relaxed position and a deflected position, each primary conductor of at least a portion of the number of primary conductors in the deflected position electrically connecting together a pair of electrical contacts of the plurality of electrical contacts. The secondary conductor portion includes a number of secondary conductors that are movable between a first position and a second position, each secondary conductor of at least a portion of the number of secondary conductors in the second position electrically connecting together a pair of electrical contacts of the plurality of electrical contacts. The pair of keys includes a first key and a second key, the first key being movable between an unactuated position and an actuated position, the second key being movable between an unactuated position and an actuated position. A primary conductor of the number of primary conductors which corresponds with the key set is in the deflected position when the first key is in the actuated position. A first secondary conductor of the at least a portion of the number of secondary conductors which corresponds with the first key is in the second position when the first key is in the actuated position. The primary conductor which corresponds with the key set is in the deflected position when the second key is in the actuated position. A second secondary conductor of the at least a portion of the number of secondary conductors which corresponds with the second key is in the second position when the second key is in the actuated position.

[0048] The contact apparatus may include a printed circuit board, wherein the primary conductors and the secondary conductors are disposed generally between the printed circuit board and the keys, and wherein the support of a key set is disposed generally between the pair of keys of the key set.

[0049] Preferably, the secondary conductors are conductive carbon elements movable by the key sets into conductive contact with the electrical contacts. More preferably, the button apparatus includes a flexible mount, at least a portion of the key sets of the number of key sets being disposed on the mount, and at least a portion of the secondary conductors of the number of secondary conductors being disposed on the mount, the mount being structured to be flexed when at least one of a first key and a second key of a key set of the at least a portion of

the key sets is actuated.

[0050] Preferably, the first key has a first linguistic element assigned thereto, wherein the second key has a second linguistic element assigned thereto, and wherein the key set has a third linguistic element assigned thereto. More preferably, the memory includes a number of routines stored therein, at least one of the routines being executable on the processor to provide to the processor a plurality of input modes, the plurality of input modes including a first input mode and a second input mode, the processor in the first input mode being adapted to detect an actuation of the first key as an input of the first linguistic element and to detect an actuation of the second key as an input of the second linguistic element, the processor in the second input mode being adapted to detect an actuation of the first key as an input of the third linguistic element and to detect an actuation of the second key as an input of the third linguistic element.

[0051] A key set of the number of key sets may be disposed adjacent another key set of the number of key sets, the another key set including another support and another pair of keys including another first key and another second key, the support between the first key and the second key providing a space between the first key and the second key, the another support between the another first key and the another second key providing another space between the another first key and the another second key, the key set and the another key set having a pitch space therebetween, the space and the another space being smaller than the pitch space.

[0052] Preferably, the button apparatus includes a number of actuators, each key set of at least a portion of the number of key sets having associated therewith an associated actuator of the number of actuators which extends away from the key set in a direction generally toward the contact apparatus and which is engageable with an associated primary conductor of the number of primary conductors to move the associated primary conductor between the relaxed position and the deflected position. More preferably, the button apparatus includes a flexible mount disposed generally between the contact apparatus and at least a portion of the key sets of the number of key sets, and wherein at least a portion of the associated actuators are each one of a protrusion formed on the flexible mount and a protrusion that is formed on a key set of the number of key sets and that extends through an opening formed in the flexible mount.

[0053] The button apparatus may include a number of actuators, each key set of at least a portion of the number of key sets having associated therewith an associated actuator of the number of actuators which extends away from the key set in a direction generally toward the contact apparatus and which is engageable with an associated primary conductor of the number of primary conductors to move the associated primary conductor between the relaxed position and the deflected position. At least a portion of the associated actuators are each disposed generally adjacent the support of the key set.

[0054] The first secondary conductor may be disposed generally between the first key and the contact apparatus, and wherein the second secondary conductor is disposed generally between the second key and the contact apparatus.

[0055] In a further alternative embodiment, a method enables input into a handheld electronic device of a type that includes an input apparatus having a pair of keys, the pair of keys including a first key having a first linguistic element assigned thereto and a second key having a second linguistic element assigned thereto, the pair of keys having a third linguistic element assigned thereto, the handheld electronic device being operable in at least a first input mode and a second input mode. The method includes: detecting in the first input mode at least one of an actuation of the first key as being an input of the first linguistic element, and an actuation of the second key as being an input of the second linguistic element; and, detecting in the second input mode an actuation of the first key as being an input of the third linguistic element and an actuation of the second key as being an input of the third linguistic element.

[0056] The detecting in the first input mode may include detecting in a text mode, with the detecting in the second input mode including at least one of detecting in a telephone mode and detecting in a numeric mode.

Claims

1. A keypad (8) structured to be incorporated into an electronic device (4) and comprising:

a contact apparatus (56) comprising a plurality of electrical contacts;

a primary conductor portion (44) comprising a number of primary conductors (68) that are movable between a first position and a second position, at least some of the primary conductors in the second position each electrically connecting together a pair of the electrical contacts (96); a secondary conductor portion (48) comprising a number of secondary conductors (76) that are movable between a first position and a second position, at least some of the secondary conductors in the second position each electrically connecting together a pair of the electrical contacts (100);

a button apparatus (40) comprising a number of key sets (36), at least some of the key sets each comprising:

a first key (60) movable between a first position and a second position,

a second key (60) movable between a first position and a second position, and

a support (64), the first and second keys being disposed on the support; for each of

at least some of the key sets:

a primary conductor comprising an elastically deflectable structure corresponding with the key set and being in the second position when the first key is in the second position, and in the second position when the second key is in the second position; the elastically deflectable structure arranged to provide a consistent tactile feedback whether the first key, the second key, or both the first and second keys are moved between the first and second positions, one of the secondary conductors corresponding with the first key and being in the second position when the first key is in the second position; and another of secondary conductors corresponding with the second key and being in the second position when the second key is in the second position.

2. The keypad of Claim 1 wherein the contact apparatus further comprises a printed circuit board (56), the primary conductors and the secondary conductors being disposed generally between the printed circuit board and the key sets, the support of one of the key sets being disposed generally between the first key and the second key of the key set.

3. The keypad of Claim 1 wherein at least some of the secondary conductors each comprise a conductive carbon element (76) movable into conductive contact with the electrical contacts.

4. The keypad of Claim 3 wherein the button apparatus further comprises a flexible mount (66), at least some of the key sets and at least some of the secondary conductors being disposed on the mount, the mount being structured to be flexed when at least one of a first key and a second key of one of the key sets is moved between the first and second positions.

5. The keypad of Claim 1 wherein the first key of one of the key sets has a first linguistic element (24) assigned thereto, wherein the second key of the one of the key sets has a second linguistic element (24) assigned thereto, and wherein the one of the key sets has a third linguistic element (28) assigned thereto.

6. The keypad of Claim 1 wherein the button apparatus further comprises a number of actuators (70), at least some of the key sets each having associated therewith an associated actuator that extends away from the key set in a direction generally toward the contact apparatus and which is engageable with an associated one of the primary conductors to move the associated one of the primary conductors between the

first and second positions.

7. The keypad of Claim 6 wherein the button apparatus further comprises a flexible mount (66) disposed generally between the contact apparatus and at least some of the key sets, and wherein at least some of the associated actuators are each one of:

a protrusion formed on the flexible mount, and a protrusion formed on one of the key sets and extending through an opening (84) formed in the flexible mount.

8. The keypad of Claim 6 wherein at least some of the associated actuators are each disposed generally adjacent the support of one of the key sets.

9. The keypad of Claim 1 wherein the one of the secondary conductors is disposed generally between the first key and the contact apparatus, and wherein the another of the secondary conductors is disposed generally between the second key and the contact apparatus.

10. An electronic device (4) comprising:

a processor apparatus (10) comprising a processor (18) and a memory (20);
an input apparatus comprising the keypad of any preceding claim and being structured to provide input to the processor apparatus; and
an output apparatus (14) structured to receive signals from the processor apparatus and to provide output.

11. The electronic device of Claim 10 wherein the memory has a number of routines (22) stored therein which, when executed on the processor, provide a plurality of input modes comprising a first input mode and a second input mode, the first key of the one of the key sets having a first linguistic element (24) assigned thereto, the second key of the one of the key sets having a second linguistic element (24) assigned thereto, and the one of the key sets having a third linguistic element (28) assigned thereto, the processor in the first input mode being structured to detect an actuation of the first key as an input of the first linguistic element and to detect an actuation of the second key as an input of the second linguistic element, the processor in the second input mode being structured to detect an actuation of the first key as an input of the third linguistic element and to detect an actuation of the second key as an input of the third linguistic element.

12. A method of enabling input into the electronic device of Claim 11, the method comprising:

detecting in the first input mode at least one of:

an actuation of the first key as being an input of the first linguistic element, and
an actuation of the second key as being an input of the second linguistic element; and

detecting in the second input mode an actuation of the first key as being an input of the third linguistic element and an actuation of the second key as being an input of the third linguistic element.

13. The method of Claim 12 wherein the detecting in the first input mode comprises detecting in a text mode, and wherein the detecting in the second input mode comprises at least one of detecting in a telephone mode and detecting in a numeric mode.

14. The keypad of Claim 1 wherein the support of one of the key sets provides a space (120) between the first key and the second key of the one of the key sets, the one of the key sets and another of the key sets being disposed adjacent one another, the one of the key sets and the another of the key sets having a pitch space (124) therebetween, the space being smaller than the pitch space.

Patentansprüche

1. Tastatur (8), die strukturiert ist, in eine elektronische Vorrichtung (4) eingebunden zu werden, und aufweist:

eine Kontaktvorrichtung (56), die eine Vielzahl von elektrischen Kontakten aufweist;
einen primären Leiter-Abschnitt (44), der eine Anzahl von primären Leitern (68) aufweist, die zwischen einer ersten Position und einer zweiten Position bewegbar sind, wobei zumindest einige der primären Leiter in der zweiten Position jeweils ein Paar der elektrischen Kontakte (96) miteinander verbinden;
einen sekundären Leiter-Abschnitt (48), der eine Anzahl von sekundären Leitern (76) aufweist, die zwischen einer ersten Position und einer zweiten Position bewegbar sind, wobei zumindest einige der sekundären Leiter in der zweiten Position jeweils ein Paar der elektrischen Kontakte (100) miteinander verbinden;
eine Tastenvorrichtung (40), die eine Anzahl von Tastensätzen (36) aufweist, wobei zumindest einige der Tastensätze jeweils aufweisen:

eine erste Taste (60), die zwischen einer ersten Position und einer zweiten Position bewegbar ist,

eine zweite Taste (60), die zwischen einer ersten Position und einer zweiten Position bewegbar ist, und eine Stütze bzw. Auflage (64), wobei die ersten und zweiten Tasten auf der Auflage angeordnet sind; für jeden von zumindest einigen der Tastensätze:

einen primären Leiter, der eine elastisch biegbare Struktur aufweist, die dem Tastensatz entspricht und in der zweiten Position ist, wenn die erste Taste in der zweiten Position ist, und in der zweiten Position ist, wenn die zweite Taste in der zweiten Position ist; wobei die elastisch biegbare Struktur ausgebildet ist, ein konsistentes taktilen Feedback bzw. Rückinformation zu liefern, ob die erste Taste, die zweite Taste oder sowohl die erste als auch die zweite Taste zwischen den ersten und zweiten Positionen bewegt werden, wobei einer der sekundären Leiter der ersten Taste entspricht und in der zweiten Position ist, wenn die erste Taste in der zweiten Position ist; und wobei ein anderer der sekundären Leiter der zweiten Taste entspricht und in der zweiten Position ist, wenn die zweite Taste in der zweiten Position ist.

2. Tastatur gemäß Anspruch 1, wobei die Kontaktvorrichtung weiter aufweist eine Leiterplatte (56), wobei die primären Leiter und die sekundären Leiter im Allgemeinen zwischen der Leiterplatte und den Tastensätzen angeordnet sind, wobei die Auflage von einem der Tastensätze im Allgemeinen zwischen der ersten Taste und der zweiten Taste des Tastensatzes angeordnet ist.

3. Tastatur gemäß Anspruch 1, wobei zumindest einige der sekundären Leiter jeweils ein leitendes Kohlenstoffelement (76) aufweisen, das in einen leitenden Kontakt mit den elektrischen Kontakten bewegt werden kann.

4. Tastatur gemäß Anspruch 3, wobei die Tastenvorrichtung weiter aufweist eine flexible Befestigung (66), wobei zumindest einige der Tastensätze und zumindest einige der sekundären Leiter auf der Befestigung angeordnet sind, wobei die Befestigung strukturiert ist, gebogen zu werden, wenn zumindest eine einer ersten Taste und einer zweiten Taste von einem der Tastensätze zwischen den ersten und zweiten Positionen bewegt wird.

5. Tastatur gemäß Anspruch 1, wobei die erste Taste

von einem der Tastensätze ein erstes linguistisches Element (24) zugewiesen hat, wobei die zweite Taste von dem einen der Tastensätze ein zweites linguistisches Element (24) zugewiesen hat und wobei das eine der Tastensätze ein drittes linguistisches Element (28) zugewiesen hat.

6. Tastatur gemäß Anspruch 1, wobei die Tastenvorrichtung weiter eine Anzahl von Aktuatoren (70) aufweist, wobei zumindest einige der Tastensätze jeweils einen zugehörigen Aktuator zugehörig haben, der sich weg von dem Tastensatz in eine Richtung im Allgemeinen hin zu der Kontaktvorrichtung erstreckt und der mit einem zugehörigen der primären Leiter in Kontakt bringbar ist, um den zugehörigen der primären Leiter zwischen den ersten und zweiten Positionen zu bewegen.

7. Tastatur gemäß Anspruch 6, wobei die Tastenvorrichtung weiter eine flexible Befestigung (66) aufweist, die im Allgemeinen zwischen der Kontaktvorrichtung und zumindest einigen der Tastensätze angeordnet ist, und wobei zumindest einige der zugehörigen Aktuatoren jeweils eines sind aus:

einem Vorsprung, der auf der flexiblen Befestigung ausgebildet ist, und
einem Vorsprung, der auf einem der Tastensätze ausgebildet ist und sich durch eine Öffnung (84) erstreckt, die in der flexiblen Befestigung ausgebildet ist.

8. Tastatur gemäß Anspruch 6, wobei zumindest einige der zugehörigen Aktuatoren jeweils im Allgemeinen angrenzend an die Auflage eines der Tastensätze angeordnet sind.

9. Tastatur gemäß Anspruch 1, wobei der eine der sekundären Leiter im Allgemeinen zwischen der ersten Taste und der Kontaktvorrichtung angeordnet ist und wobei der andere der sekundären Leiter im Allgemeinen zwischen der zweiten Taste und der Kontaktvorrichtung angeordnet ist.

10. Elektronische Vorrichtung (4), die aufweist:

eine Prozessorvorrichtung (10), die einen Prozessor (18) und einen Speicher (20) aufweist; eine Eingabevorrichtung, welche die Tastatur gemäß einem vorhergehenden Anspruch aufweist und strukturiert ist, eine Eingabe in die Prozessorvorrichtung vorzusehen; und eine Ausgabevorrichtung (14), die strukturiert ist, Signale von der Prozessorvorrichtung empfangen und eine Ausgabe vorzusehen.

11. Elektronische Vorrichtung gemäß Anspruch 10, wobei der Speicher eine Anzahl von Routinen (22) darin

gespeichert hat, die bei Ausführung auf dem Prozessor eine Vielzahl von Eingabemodi vorsehen, die einen ersten Eingabemodus und einen zweiten Eingabemodus aufweisen, wobei die erste Taste von einem der Tastensätze ein erstes linguistisches Element (24) zugewiesen hat, die zweite Taste von einem der Tastensätze ein zweites linguistisches Element (24) zugewiesen hat, und der eine der Tastensätze ein drittes linguistisches Element (28) zugewiesen hat, wobei der Prozessor in dem ersten Eingabemodus strukturiert ist, eine Betätigung der ersten Taste als eine Eingabe des ersten linguistischen Elements zu erfassen, und eine Betätigung der zweiten Taste als eine Eingabe des zweiten linguistischen Elements zu erfassen, wobei der Prozessor in dem zweiten Eingabemodus strukturiert ist, eine Betätigung der ersten Taste als eine Eingabe des dritten linguistischen Elements zu erfassen, und eine Betätigung der zweiten Taste als eine Eingabe des dritten linguistischen Elements zu erfassen.

12. Verfahren zum Ermöglichen einer Eingabe in die elektronische Vorrichtung gemäß Anspruch 11, wobei das Verfahren aufweist:

Erfassen in dem ersten Eingabemodus zumindest eines aus:

einer Betätigung der ersten Taste als eine Eingabe des ersten linguistischen Elements, und
einer Betätigung der zweiten Taste als eine Eingabe des zweiten linguistischen Elements; und,

Erfassen in dem zweiten Eingabemodus einer Betätigung der ersten Taste als eine Eingabe des dritten linguistischen Elements und einer Betätigung der zweiten Taste als eine Eingabe des dritten linguistischen Elements.

13. Verfahren gemäß Anspruch 12, wobei das Erfassen in dem ersten Eingabemodus ein Erfassen in einem Text-Modus aufweist, und wobei das Erfassen in dem zweiten Eingabemodus zumindest eines aufweist eines Erfassens in einem Telefonmodus und eines Erfassens in einem numerischen Modus.

14. Tastatur gemäß Anspruch 1, wobei die Stütze bzw. Auflage von einem der Tastensätze einen Raum (120) zwischen der ersten Taste und der zweiten Taste des einen der Tastensätze vorsieht, wobei der eine der Tastensätze und ein anderer der Tastensätze aneinander angrenzend angeordnet sind, wobei der eine der Tastensätze und der andere der Tastensätze einen Abstandsraum (124) zwischen sich haben, wobei der Raum kleiner als der Ab-

standsraum ist.

Revendications

1. Pavé numérique (8) structuré de sorte à être incorporé dans un dispositif électronique (4) et comprenant :

un appareil (56) à contacts comprenant une pluralité de contacts électriques ;

une partie (44) à conducteurs primaires comprenant un certain nombre de conducteurs primaires (68) qui sont mobiles entre une première position et une deuxième position, au moins certains des conducteurs primaires dans la deuxième position reliant chacun électriquement entre eux une paire des contacts électriques (96) ;

une partie (48) à conducteurs secondaires comprenant un certain nombre de conducteurs secondaires (76) qui sont mobiles entre une première position et une deuxième position, au moins certains des conducteurs secondaires dans la deuxième position reliant chacun électriquement entre eux une paire des contacts électriques (100) ;

un appareil (40) à boutons comprenant un certain nombre d'ensemble (36) de touches, au moins certains ensembles de touches comprenant chacun :

une première touche (60) mobile entre une première position et une deuxième position, une deuxième touche (60) mobile entre une première position et une deuxième position, et

un support (64), les première et deuxième touches étant disposées sur le support ; pour chacun d'au moins certains des ensembles de touches :

un conducteur primaire comprenant une structure pouvant être déviée élastiquement correspondant à l'ensemble de touches et se trouvant dans la deuxième position lorsque la première touche se trouve dans la deuxième position, et dans la deuxième position lorsque la deuxième touche se trouve dans la deuxième position ; la structure pouvant être déviée élastiquement agencée afin de fournir un retour tactile conséquent si la première touche, la deuxième touche, ou les deux touches à la fois sont déplacées entre les première et deuxième positions, l'un des conducteurs secondaires correspondant à la première touche et se trouvant

- dans la deuxième position lorsque la première touche se trouve dans la deuxième position ; et
un autre des conducteurs secondaires correspondant à la deuxième touche et se trouvant dans la deuxième position lorsque la deuxième touche se trouve dans la deuxième position.
2. Pavé numérique de la revendication 1, dans lequel l'appareil à contacts comprend en outre une carte de circuit imprimé (56), les premiers conducteurs et les deuxièmes conducteurs étant disposés globalement entre la carte de circuit imprimé et les ensembles de touches, le support de l'un des ensembles de touches étant disposé globalement entre la première touche et la deuxième touche de l'ensemble de touches.
 3. Pavé numérique de la revendication 1, dans lequel au moins certains des conducteurs secondaires comprennent chacun un élément (76) à carbone conducteur déplaçable en un contact conducteur avec les contacts électriques.
 4. Pavé numérique de la revendication 3, dans lequel l'appareil à boutons comprend en outre une monture flexible (66), au moins certains des ensembles de touches et au moins certains des conducteurs secondaires étant disposés sur la monture, la monture étant structurée de sorte à être fléchie lorsqu'au moins l'une d'une première touche et d'une deuxième touche de l'un des ensembles de touches est déplacée entre les première et deuxième positions.
 5. Pavé numérique de la revendication 1, dans lequel la première touche de l'un des ensembles de touches a un premier élément linguistique (24) qui lui est attribué, où la deuxième touche de l'un des ensembles de touches a un deuxième élément linguistique (24) qui lui est attribué, et où l'un des ensembles de touches a un troisième élément linguistique (28) qui lui est attribué.
 6. Pavé numérique de la revendication 1, dans lequel l'appareil à boutons comprend en outre un certain nombre d'actionneurs (70), à chacun d'au moins certains des ensembles de touches est associé un actionneur associé qui s'étend loin de l'ensemble de touches dans une direction globalement vers l'appareil à contacts et qui est engageable avec un conducteur associé des conducteurs primaires pour déplacer le conducteur associé des conducteurs primaires entre les première et deuxième positions.
 7. Pavé numérique de la revendication 6, dans lequel l'appareil à boutons comprend en outre une monture flexible (66) disposée globalement entre l'appareil à contacts et au moins certains des ensembles de touches, et où chacun d'au moins certains des actionneurs associés est l'un :
 - d'une protubérance formée sur la monture flexible, et
 - d'une protubérance formée sur l'un des ensembles de touches et s'étendant à travers une ouverture (84) formée dans la monture flexible.
 8. Pavé numérique de la revendication 6, dans lequel chacun d'au moins certains des actionneurs associés est disposé globalement adjacent au support de l'un des ensembles de touches.
 9. Pavé numérique de la revendication 1, dans lequel l'un des conducteurs secondaires est disposé globalement entre la première touche et l'appareil à contacts, et où l'autre des conducteurs secondaires est disposé globalement entre la deuxième touche et l'appareil à contacts.
 10. Dispositif électronique (4) comprenant :
 - un appareil à processeur (10) comprenant un processeur (18) et une mémoire (20) ;
 - un appareil d'entrée comprenant le pavé numérique de l'une des revendications précédentes et étant structuré afin de fournir une entrée à l'appareil à processeur ; et
 - un appareil (14) de sortie structuré pour recevoir des signaux provenant de l'appareil à processeur et pour fournir une sortie.
 11. Dispositif électronique de la revendication 10, dans lequel la mémoire a un nombre de sous-programmes (22) qui y sont stockés, qui, lorsqu'ils sont exécutés sur le processeur, fournissent une pluralité de modes d'entrée comprenant un premier mode d'entrée et un deuxième mode d'entrée, la première touche de l'un des ensembles de touches ayant un premier élément linguistique (24) qui lui est attribué, la deuxième touche de l'un des ensembles de touches ayant un deuxième élément linguistique (24) qui lui est attribué, et l'un des ensembles de touches ayant un troisième élément linguistique (28) qui lui est attribué, le processeur dans le premier mode d'entrée étant structuré afin de détecter un actionnement de la première touche comme entrée du premier élément linguistique et afin de détecter un actionnement de la deuxième touche comme entrée du deuxième élément linguistique, le processeur dans le deuxième mode d'entrée étant structuré afin de détecter un actionnement de la première touche comme entrée du troisième élément linguistique et afin de détecter un actionnement de la deuxième touche comme entrée du troisième élément linguistique.

12. Procédé permettant une entrée dans le dispositif électronique de la revendication 11, le procédé comprenant le fait :

de détecter dans le premier mode d'entrée au moins l'un : 5

d'un actionnement de la première touche comme étant une entrée du premier élément linguistique ; et 10

d'un actionnement de la deuxième touche comme étant une entrée du deuxième élément linguistique ; et

de détecter dans le deuxième mode d'entrée un actionnement de la première touche comme étant une entrée du troisième élément linguistique et un actionnement de la deuxième touche comme étant une entrée du troisième élément linguistique. 15 20

13. Procédé de la revendication 12, dans lequel la détection dans le premier mode d'entrée comprend une détection dans un mode textuel, et où la détection dans le deuxième mode d'entrée comprend au moins l'une d'une détection dans un mode téléphonique et d'une détection dans un mode numérique. 25

14. Pavé numérique de la revendication 1, dans lequel le support de l'un des ensembles de touches fournit un espace (120) entre la première touche et la deuxième touche de l'un des ensembles de touches, l'un des ensembles de touches et un autre des ensembles de touches étant disposés adjacents l'un à l'autre, l'un des ensembles de touches et l'autre des ensembles de touches ayant un espace (124) de pas entre les deux, l'espace étant plus petit que l'espace de pas. 30 35

40

45

50

55

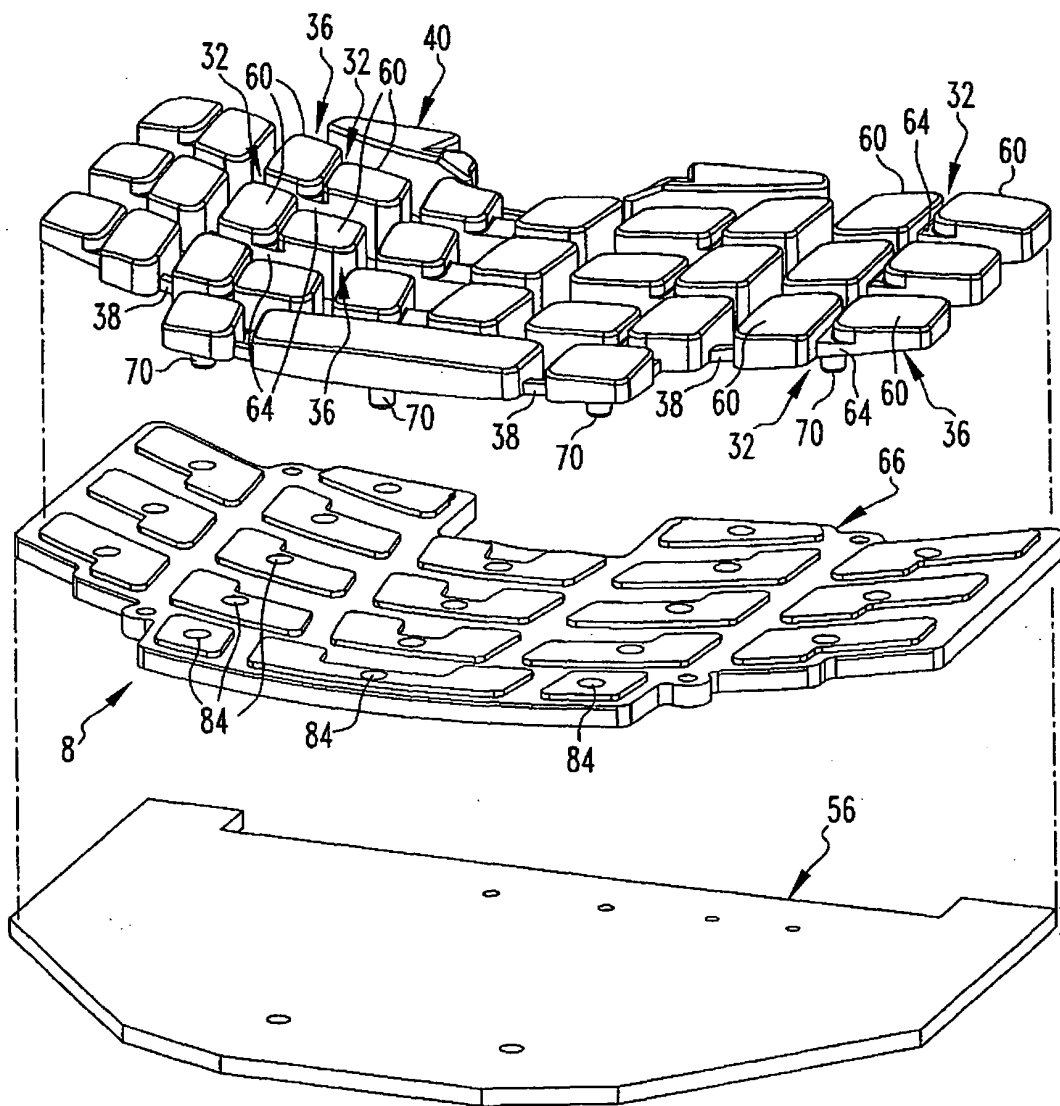
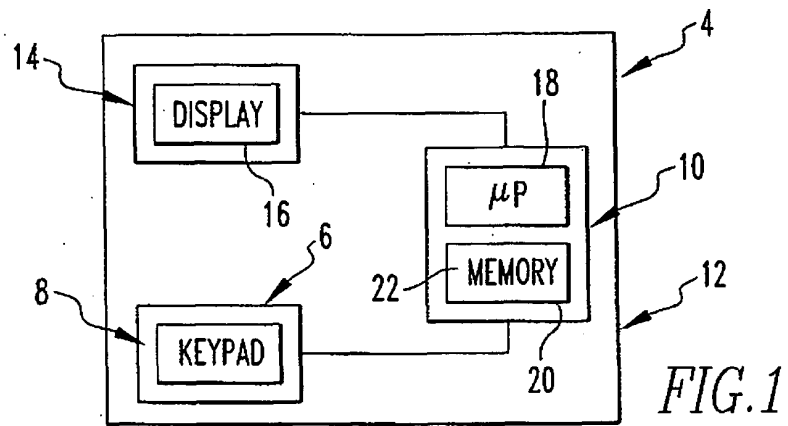


FIG. 3

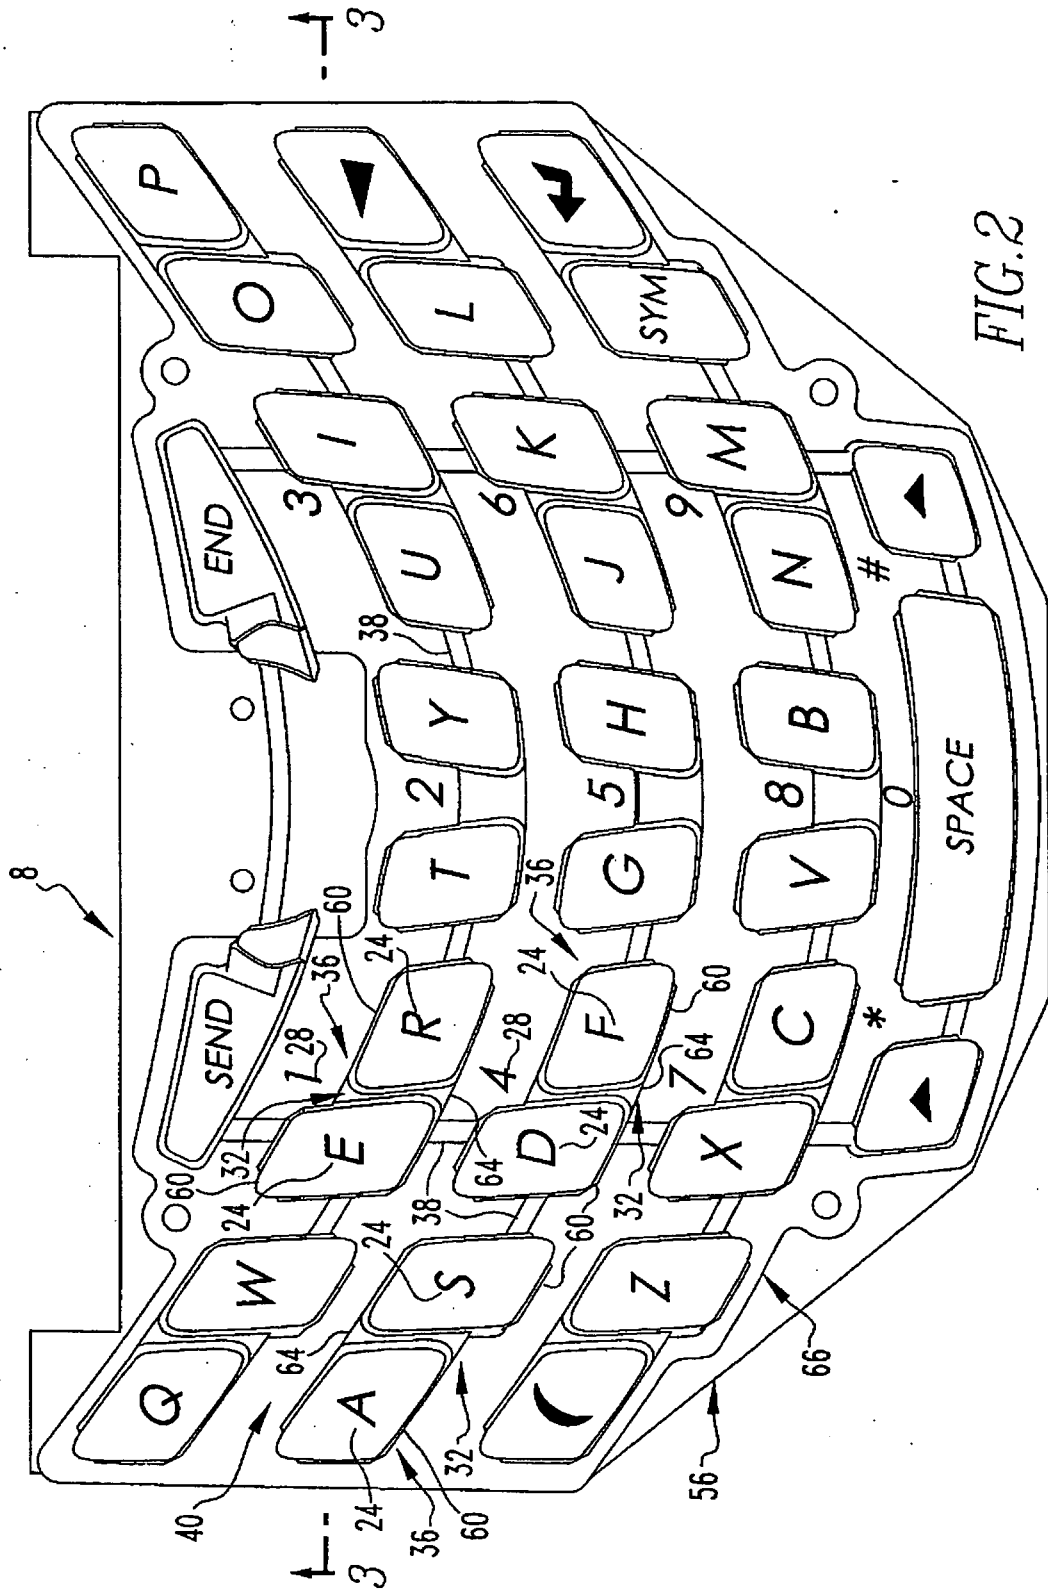
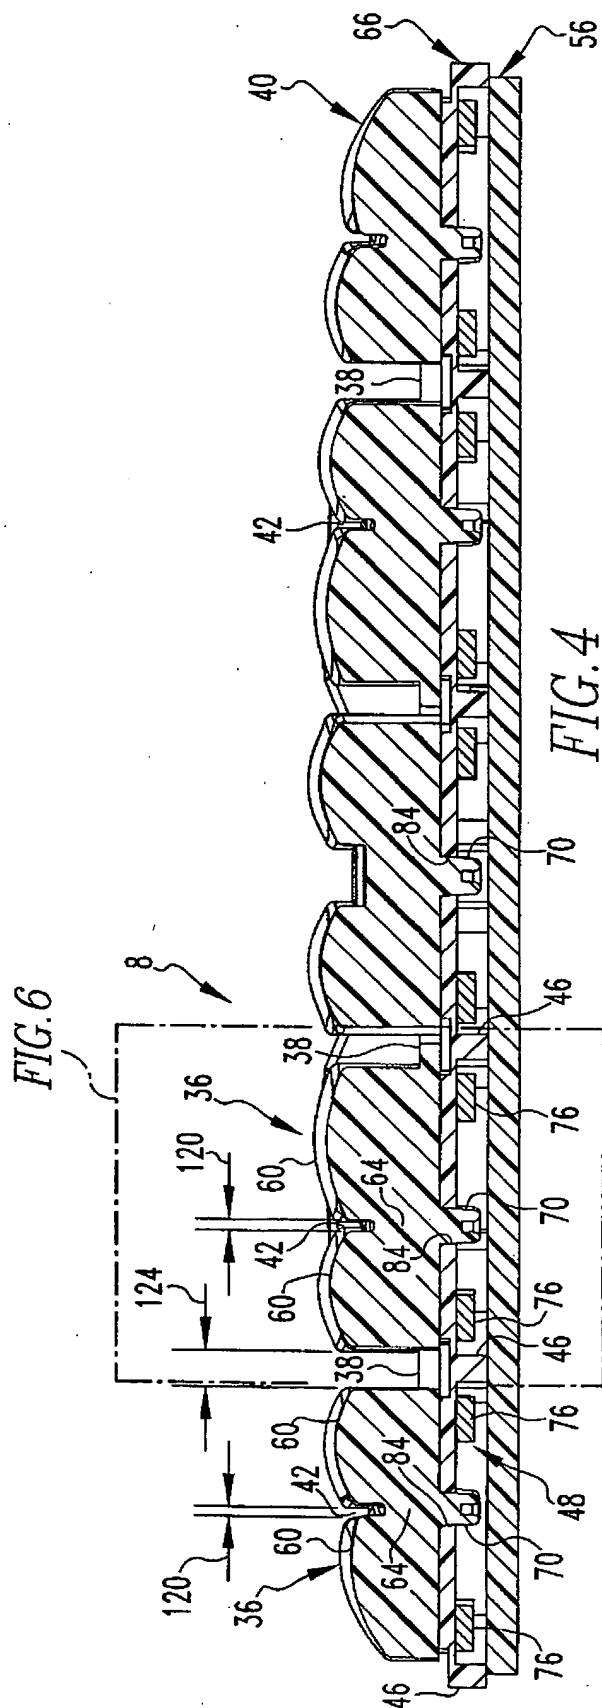
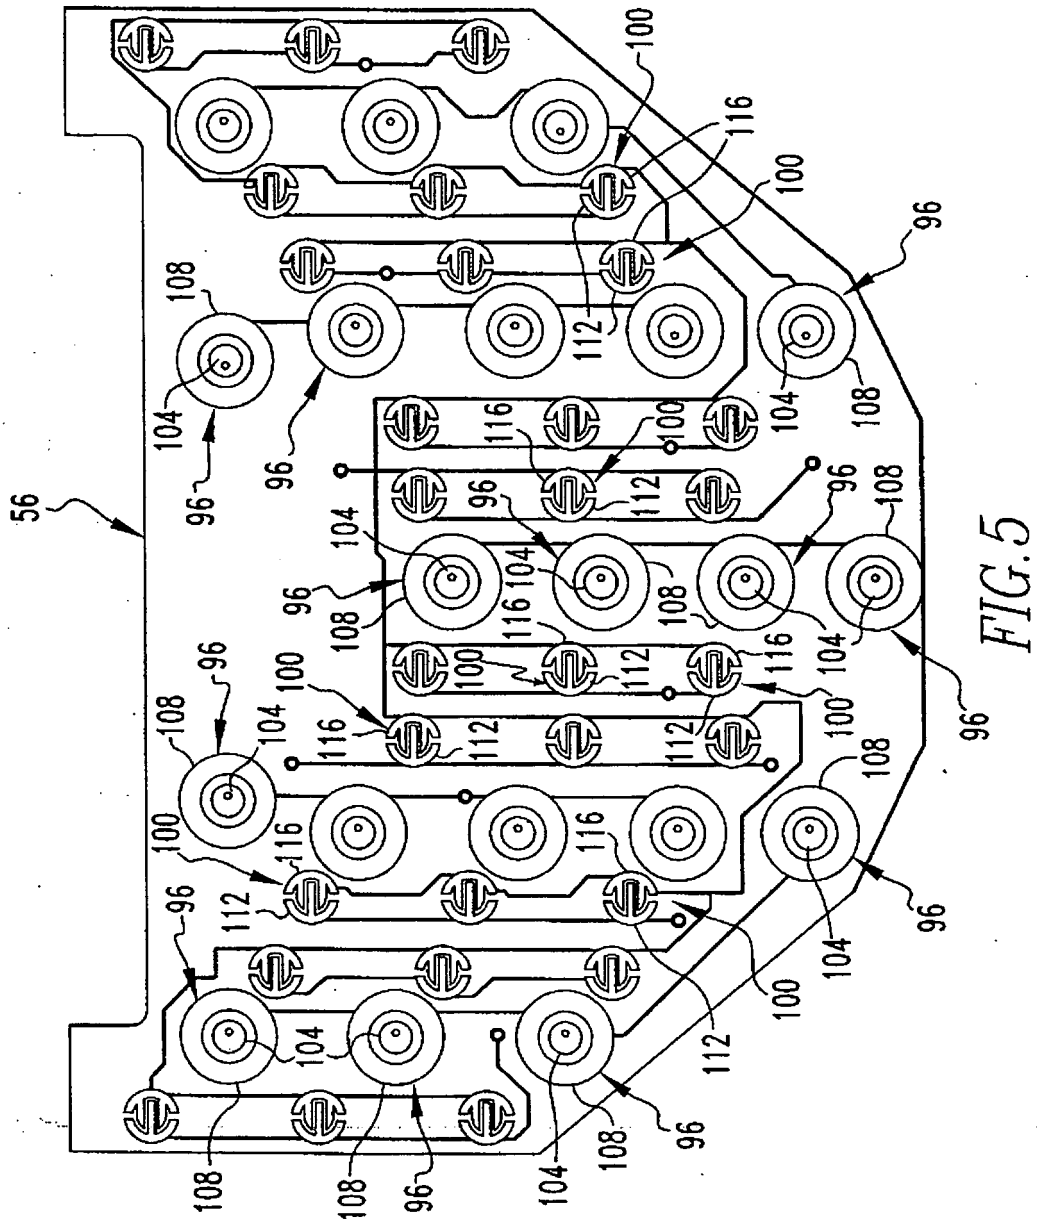
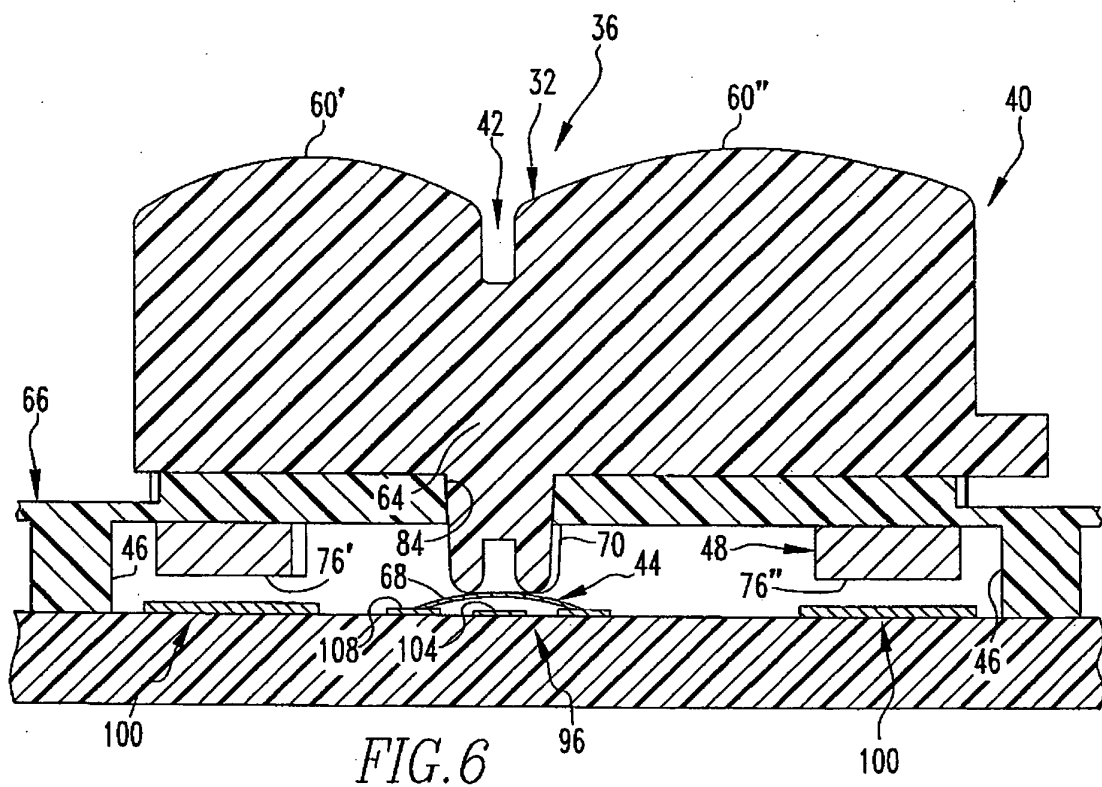
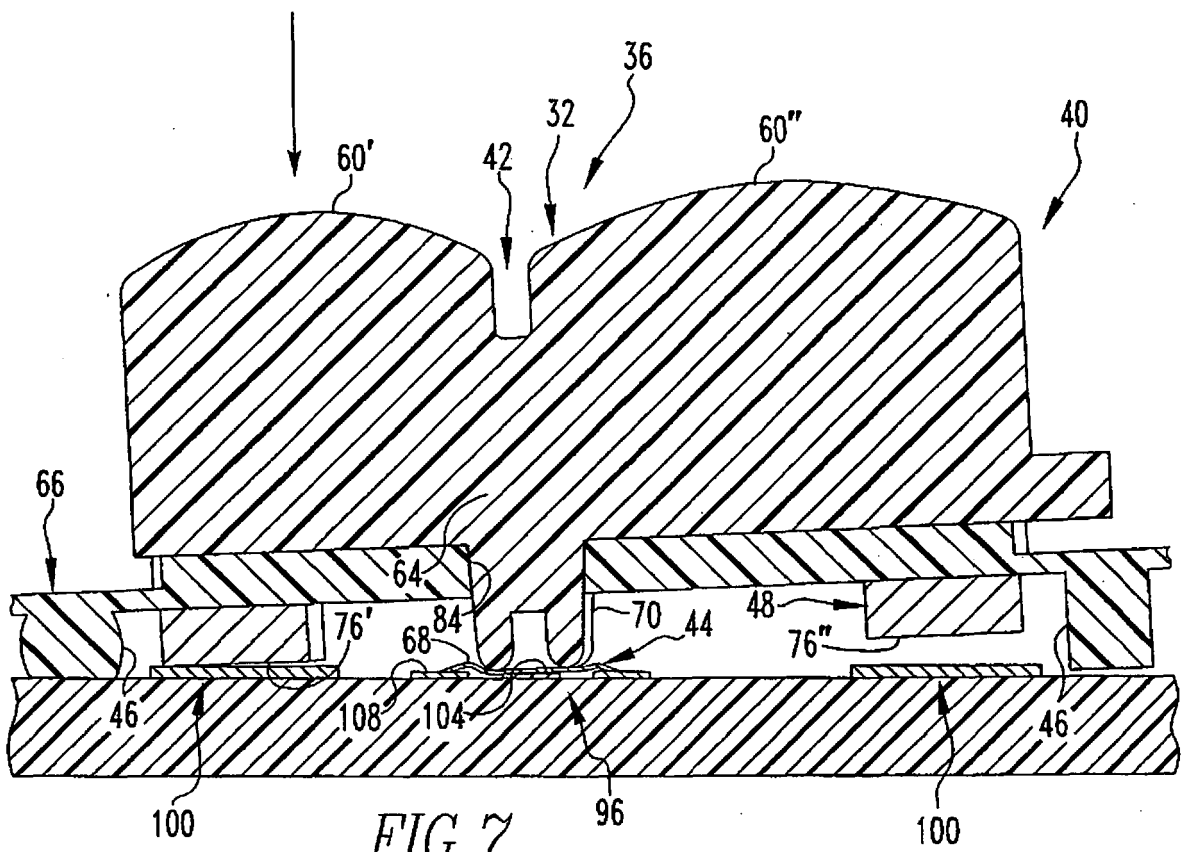


FIG. 2









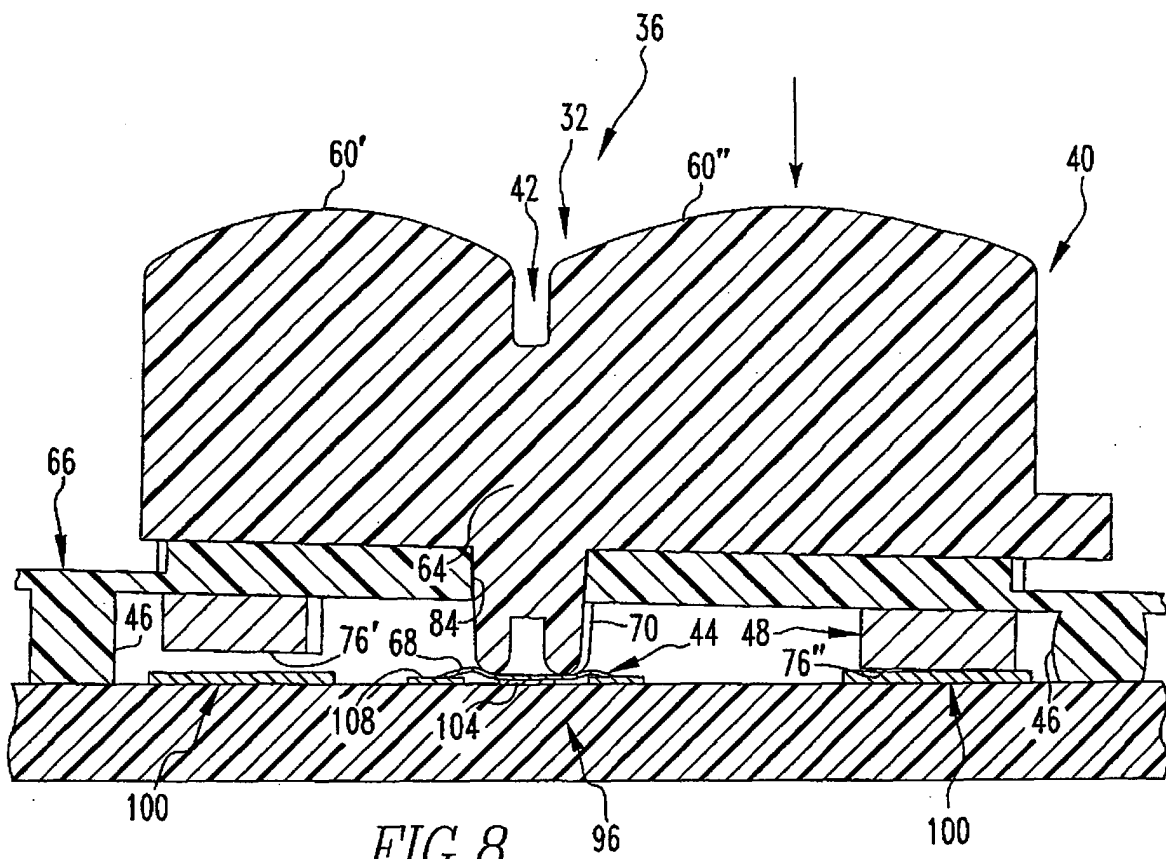


FIG. 8

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20030012368 A [0003]
- US 6452588 B [0017]
- US 6489950 B [0017]