



(11) **EP 2 024 158 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see
Description Paragraph(s) 7, 10

(51) Int Cl.:
B29C 44/08 (2006.01) B29C 67/24 (2006.01)

(86) International application number:
PCT/EP2007/054722

(48) Corrigendum issued on:
15.06.2011 Bulletin 2011/24

(87) International publication number:
WO 2007/135033 (29.11.2007 Gazette 2007/48)

(45) Date of publication and mention
of the grant of the patent:
22.12.2010 Bulletin 2010/51

(21) Application number: **07729170.6**

(22) Date of filing: **15.05.2007**

(54) **MULTILAYERED PART AND METHOD FOR PRODUCING IT**
MEHRSCHICHTIGES TEIL UND VERFAHREN ZUR SEINER HERSTELLUNG
PIECE MULTICOUCHE ET PROCEDE DE PRODUCTION DE LA MÊME

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE
SI SK TR

(30) Priority: **18.05.2006 EP 06114167**

(43) Date of publication of application:
18.02.2009 Bulletin 2009/08

(73) Proprietor: **RECTICEL Automobilsysteme GmbH**
53619 Rheinbreitbach (DE)

(72) Inventors:
• **DESEURE, Jürgen**
9230 Wetteren (BE)
• **DE METSENAERE, Koen**
9230 Wetteren (BE)

- **RAEYMACKERS, Gert**
9230 Wetteren (BE)
- **DE WINTER, Hugo**
9230 Wetteren (BE)
- **MOENS, Siegfried**
9230 Wetteren (BE)
- **MEERT, Dirk**
9230 Wetteren (BE)

(74) Representative: **Van Reet, Joseph et al**
Gevers
Intellectual Property House
Holidaystraat 5
1831 Diegem (BE)

(56) References cited:
EP-A1- 0 807 505 DE-A1- 3 725 436
US-A1- 2004 099 989

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 024 158 B9

Description

[0001] The present invention relates to a method for producing a multilayered part which comprises a moulded core and a flexible polyurethane layer formed by a flexible polyurethane skin layer or by a flexible integral skin polyurethane foam layer. The core itself comprises a moulded substrate layer which is made of a substrate material having a Shore A hardness higher than 60. The flexible polyurethane layer has an average density higher than 400 kg/m³ and preferably higher than 500 kg/m³. The method comprises the steps of providing a mould having at least a first and a second mould section which are movable with respect to one another to open and close the mould; providing the moulded core inside the mould so that a gap exists between the surface of the core and the internal wall of the mould when the mould is closed; introducing a polyurethane reaction mixture in said gap between the surface of the core and the internal wall of the mould to overmould at least a first area of the core surface with the polyurethane reaction mixture; allowing the polyurethane reaction mixture to cure in said gap to produce the flexible polyurethane layer therein; and opening the mould and removing the produced multilayered part.

[0002] The multilayered part may in particular be an interior trim part for the automotive industry which comprises a flexible skin layer, or a flexible integral skin foam layer, and a rigid substrate layer, moulded in accordance with a three-dimensional shape, as core. The larger interior trim parts are usually produced by positioning a pre-manufactured substrate layer on a first mould section and a pre-manufacture skin layer on a second mould section and by applying a polyurethane backfoam system between the substrate and skin layers. In this way the skin layer is adhered to the substrate layer and a soft feel is provided by the backfoam layer. The polyurethane skin layer can be produced by spraying the polyurethane reaction mixture onto a mould surface as disclosed for example in EP-B-0 379 246. For sealing off the cavity of the backfoam mould, the substrate layer can be pressed against the elastomeric skin layer as disclosed in WO 2005/021230.

[0003] For producing smaller trim parts, the above described backfoam system is quite expensive and involves relatively high scrap rates (for example due to visible defects in the produced part for instance by air bubbles produced during the backfoaming process which might become visible after aging). In practice, the flexible polyurethane skin layer is therefore usually moulded for such smaller parts directly over the substrate layer, more particularly according to a so-called ROM (reaction overmoulding) process. In the known ROM processes, the rigid substrate or core is positioned onto the lower mould section, more particularly onto a flexible seal which is provided in a groove in the lower mould section, and after having lowered the upper mould section on top of the lower mould section a polyurethane reaction mixture is

injected in the closed mould cavity to cover the surface area of the core delimited by the seal.

[0004] US 7 014 208 discloses a process for producing an interior vehicle trim panel, more particularly an airbag covering portion of an instrument panel, wherein a structural core layer is overmoulded with a thermoplastic elastomer or alternatively with a polyurethane skin material. In the airbag covering portion of the instrument panel the core layer is composed of a thermoplastic substrate layer which is moulded against the back of a sheet of a relatively flexible hinge material. The hinge material is preferably formed of a thermoplastic elastomer. To increase the tensile strength of the hinge material, a scrim of nylon or polyester is embedded therein. The instrument panel is rendered soft and smooth to the touch by using a skin material for the outer layer which has, compared to the substrate, a generally soft tactile feel.

[0005] A drawback of above described ROM processes is that, although the polyurethane skin material may provide a softer tactile feel than the rigid substrate, it does not provide the desired softness as obtainable by the presence of a flexible or semi-flexible backfoam layer between the substrate layer and the skin layer.

[0006] A further drawback is that the flexible seal which is to be provided in the ROM mould poses a number of problems. First of all, since the rigid substrate is positioned on top of the seal, the seal determines the position of the substrate in the mould and therefore the width of the gap between the surface of the substrate and the inner surface of the mould or in other words the thickness of the flexible skin layer. Due to the tolerances of the depth of the seal groove (in practice +/- 0.1 mm) and of the total height of the seal (in practice +/- 0.4 mm: including the tolerances of the seal body and of the projecting seal lip) the thickness of the skin may vary considerably (in the worst case +/- 0.5 mm or a total fluctuation of 1 mm), especially relative to the average thickness of the skin which is for example 1.2 to 1.4 mm. The thinner the skin layer, the more visible surface defects become, such as air bubbles. Furthermore, when the trim part will later be integrated in a car interior (e.g. in an instrument panel), the transition will not be flush because of these skin thickness variations. This leads to scrap. A further problem of the seal is that it is cut manually and positioned manually into the seal groove. Besides the time needed to do this, this manual handling causes an extra fluctuation in sealing efficiency: too long seals will protrude the substrate extra upwards, too short seals will cause contamination of the seal groove with reactive polyurethane material, which of course has to be avoided because of mould cleaning time waste.

[0007] To obtain a substantially flash free polyurethane layer moulded by a ROM process over a substrate without having to provide a seal in the mould, US 2004/0108614 discloses to provide the substrate with a projecting, continuous circuitous ridge that forms a seal between the substrate and the upper mould section. A drawback of this known process is that the substrate has

to be made of a material that exhibits suitable compressibility and deformability to achieve the required sealing function. The process can thus be used for example for producing acoustic barrier systems for motor vehicles as disclosed in US 2004/0108614, but not for other, more rigid or self-supporting interior trim parts for vehicles.

[0008] The Patent Application Publication US 2004/0099989 discloses (cf. example 2) a multilayered part comprising a moulded core comprising a moulded substrate layer made of a material having a Shore A hardness higher than 60 (the second hard polyurethane of example 2, having hardness of 80 Shore A) and one moulded softer material onto which the substrate layer is moulded, said softer material having a Shore A hardness lower than 60 (the first soft polyurethane having hardness of 20 Shore 00). This publication further discloses that the surface of the softer material is covered by a skin that can be made of a thermoplastic polyurethane film (cf. par. [0014]).

[0009] An object of the present invention is therefore to provide a new method for producing a multilayered part wherein the polyurethane skin layer is produced by a ROM process onto the core comprising the substrate layer, which method enables to achieve a softer feel as obtainable by a backfoam layer and/or which method enables to obviate the above described problems relating to the seal required in the ROM process.

[0010] To achieve this object, the method according to the present invention is **characterised in that** the core which is overmoulded with the polyurethane reaction mixture for producing the flexible polyurethane layer comprises the substrate layer and at least one softer moulded part which is moulded onto the substrate layer or the substrate layer is moulded onto the softer moulded part or the substrate layer and the moulded softer part are moulded against one another, said softer moulded part being made of a softer material with a Shore A hardness lower than 60 and forming a second area of the core surface.

[0011] The method according to the invention enables to achieve, in a first embodiment, a softer feel as obtainable by a backfoam layer by providing the moulded softer part, or one of the moulded softer parts, of the core in such a location on the substrate layer that the first area of the core surface, i.e. the area of the core surface which is overmoulded with the polyurethane reaction mixture, overlaps with the second area of the core surface, i.e. the area formed by the softer material, so that in the area of overlap the softer material forms a softer layer between the substrate layer and the flexible polyurethane layer. In a second embodiment, the method according to the invention also enables to solve the above described seal problems by providing the softer moulded part, or another one of the softer moulded parts, of the core in such a location on the substrate layer that the softer material extends at least partially along an edge of said first area, and by positioning the moulded core, which has been manufactured in advance, in the mould so that the softer

material contacts the internal wall of the mould to form a moulded seal for said polyurethane reaction mixture when this polyurethane reaction mixture is moulded over said first area of the core surface.

[0012] An important advantage of the method according to the invention is that the production of a moulded core comprising in addition to the harder substrate material also a softer material involves only relatively small additional costs, especially when both the substrate material and the softer material are thermoplastic materials so that the core can be made by a multicomponent moulding process (for example by a so-called 2K injection moulding, by a combination of an injection and a low pressure moulding process such as a compression moulding process or by a co-injection moulding process). These additional costs are considerably smaller than the extra costs to mould, in an additional step, a backfoam layer between the substrate layer and the flexible skin layer. Also, the additional costs to provide a soft material with a sealing function on the substrate material are very low compared to the costs related to manually positioning the seals in the mould and to the scrap resulting from this manual process.

[0013] The present invention also relates to the multilayered part obtainable by the method according to the invention.

[0014] Other particularities and advantages of the invention will become apparent from the following description of some particular embodiments of the method and of the multilayered part according to the present invention. The reference numerals used in this description relate to the annexed drawings wherein:

Figure 1 illustrates schematically the step of moulding a substrate layer in a first closed mould;

Figure 2 illustrates the step of overmoulding the substrate layer in a second closed mould with a softer material to obtain a moulded core;

Figure 3 illustrates the step of overmoulding the core in a third mould with a polyurethane reaction mixture to produce a flexible polyurethane skin layer according to a reaction overmoulding (ROM) process;

Figure 4 illustrates schematically the multilayered part obtained by the method illustrated in the previous figures; and.

Figure 5 illustrates schematically another embodiment of the multilayered part.

[0015] The invention relates to a method for producing a multilayered part, in particular an interior trim part for an automotive vehicle, and to the part obtainable by that method. The trim part will usually be a relatively small trim part such as an ash can lid or a cup holder, although also larger trim parts can be produced by this method.

[0016] Figures 4 and 5 illustrate schematically a multilayered part which can be produced by the method according to the invention. This part comprises a relatively rigid substrate layer 1, two softer moulded parts, namely

a softer layer 2 and a seal 3, and a flexible polyurethane layer 4. In Figure 4 the softer layer 2 is situated in a recessed portion of the substrate layer 1 so that its top surface is substantially flush with the surface of the substrate layer 1 whilst in Figure 5 the softer layer 2 protrudes out of the substrate layer.

[0017] According to the invention, the substrate layer 1 is made of a substrate material which has a Shore A hardness higher than 60 whilst the softer moulded parts, i.e. the softer layer 2 and the seal 3, are made of a softer material having a Shore A hardness lower than 60. The softer layer 2 and the seal 3 can either be made of the same or of a different material.

[0018] The softer layer 2 is moulded onto the substrate layer 1 or the substrate layer 1 is moulded onto the softer layer. Independently of the way wherein the softer layer 2 is moulded, the seal 3 is also moulded onto the substrate layer 1 or the substrate layer is moulded onto the seal. Alternatively, the substrate material and the softer material can be moulded simultaneously, in particular by a co-injection moulding process, so that the substrate layer 1 and the softer moulded part 2, 3 are moulded against one another. The substrate layer 1, the softer layer 2 and the seal 3 thus form a core 5 which is moulded of the softer material (or materials if the seal is made of a different material than the softer layer) and of the substrate material. The flexible polyurethane layer 4 covers a first area of the core surface. The seal 3 extends along an edge of this first area whilst the softer layer 2 forms a second area of the core surface which overlaps with the first area so that in the area of overlap, the softer layer 2 is situated between the substrate layer 1 and the flexible polyurethane layer 4 to provide for an additional soft feel.

[0019] The substrate layer 1 is relatively rigid and has in particular a flexural modulus, measured according to ASTM D790, higher than 500 MPa, preferably higher than 700 MPa. Although the substrate layer can be made of a thermosetting material, for example of a polyurethane material which is preferably reinforced with glass fibres or with a glass fibre mat, the substrate is preferably made of a thermoplastic material which may also be reinforced, in particular with glass fibres. This thermoplastic material is preferably selected from the group consisting of PC (polycarbonate), ABS (acrylonitrile butadiene styrene) and ABS blends, in particular PC/ABS, SMA (styrene maleic anhydride), PPO (polyphenylene oxide), TPO (thermoplastic olefin), in particular PP (polypropylene), polyacetals, in particular POMs (polyoxymethylenes), nylon, polyester, acrylic and polysulfone. The flexible polyurethane layer 4 is relatively flexible and has in particular a flexural modulus, measured according to ASTM D790, lower than 100 MPa, preferably lower than 75 MPa, more preferably lower than 55 MPa and most preferably lower than 40 MPa. Suitable reaction mixtures for producing the flexible polyurethane layer are disclosed for example in EP-B-0 929 586 and in WO 04/000905, which are included herein by reference.

[0020] In the area wherein the softer layer 2 is situated between the flexible polyurethane layer 4 and the substrate layer 1, the flexible polyurethane layer 4 is preferably a flexible polyurethane skin layer (which usually has an average density higher than 600 kg/m³) having an average thickness smaller than 2.2 mm, preferably smaller than 1.9 mm and more preferably smaller than 1.6 mm. In this way, the softness of the softer layer 2 can be felt optimally when touching the outside of the multilayered part. The skin layer will usually have a thickness larger than 0.4 mm, preferably larger than 0.7 mm and more preferably larger than 1.0 mm. The flexible polyurethane layer may also be a flexible integral skin polyurethane foam layer. Such a layer is thicker than the polyurethane skin layer and may provide some further softness to the trim part. This is especially advantageous in areas wherein the multilayered part does not comprise a softer layer 2 or when the multilayered part does not contain a softer layer 2 at all. Both in the case of a skin layer and in the case of an integral skin foam layer, the flexible polyurethane layer has an average overall density higher than 400 kg/m³, and preferably higher than 500 kg/m³ to provide the required mechanical properties (tensile strength, tear resistance, ...).

[0021] In view of achieving a softer feel such as the softer feel obtainable by a conventional backfoam layer, the material of the softer layer 2 situated between the outer polyurethane layer 4 and the substrate layer 1 has preferably a Shore A hardness lower than 30, more preferably lower than 20 and most preferably lower than 10. Moreover, the softer layer 2 has preferably an average thickness greater than 2 mm, more preferably greater than 3 mm. In order to avoid processing problems when moulding the softer layer 2, it has preferably an average thickness smaller than 10 mm, and more preferably smaller than 7 mm.

[0022] The Shore A hardness is determined in accordance with DIN 53505. If the softer layer 2 has a thickness smaller than 6 mm, two or more layers should be stacked onto one another when doing the hardness measurement since the DIN standard specifies a minimum sample thickness of 6 mm. The average thickness of the softer layer 2 can easily be calculated by dividing its surface area, i.e. the area of the core formed by the softer layer, by its volume.

[0023] In view of its sealing function during the production of the multilayered part, which will be described more into detail hereinafter, the softer material of the seal 3 has preferably a Shore A hardness which is lower than 50, more preferably lower than 40, and higher than 10. The seal 3 has further preferably an average height (measured in the direction wherein the seal 3 is urged in the production process against the mould surface) of at least 1 mm, more preferably of at least 2 mm and more preferably of at least 3 mm. Moreover, the seal 3 is preferably at least partially recessed in a groove 6 in the moulded substrate layer 1 so that it protrudes over a smaller distance out of the substrate layer 1 in the pro-

duced part and so that it receives some lateral support from the substrate material when the seal is pressed against the mould surface.

[0024] The material of the seal 3 and the material of the softer layer 2 have preferably an average density higher than 300 kg/m³, preferably higher than 400 kg/m³ and more preferably higher than 500 kg/m³. Such a high density is advantageous during the production process more particularly for the seal to achieve an effective sealing and for the softer layer to provide an adequate support during the moulding of the flexible polyurethane layer on top of the softer layer. The softer material is preferably a non-cellular or micro-cellular material but may also be a cellular material obtained by the use of a physical or chemical blowing agent. When the density of the cellular material is above the above-mentioned lower limits, most of the cells will be closed cells so that also an effective sealing or support can be achieved.

[0025] The softer material used for the seal 3 or for the softer layer 2 may be a thermosetting polyurethane material but is preferably a thermoplastic elastomer. This thermoplastic elastomer may be selected from the group consisting of thermoplastic urethanes (TPUs), styrene copolymers, thermoplastic olefins (TPOs), thermoplastic silicones and elastomeric alloys. The softer material preferably comprises at least one thermoplastic styrene block copolymer, in particular styrene-ethylene-butylene-styrene block copolymer (SEBS) and/or styrene-butylene-styrene block copolymer (SBS).

[0026] Figures 1 to 3 illustrate a method which can be used to produce the multilayered part shown in Figure 4.

[0027] In a first step, illustrated in Figure 1, the substrate layer 1 is made in a first closed mould comprising an upper 7 and a lower mould section 8. When the substrate is made of a thermosetting material, more particularly of a rigid polyurethane material, it can be produced in the mould 7, 8 in accordance with an S-RIM (Structural RIM, insertion of glass fibre mat), an R-RIM (Reinforced RIM, glass or other fibres admixed into the polyurethane reaction mixture), an LFI (Long Fibre Injection) or a similar process. In the method according to the invention, the substrate layer 1 is however preferably made of a thermoplastic material. The substrate layer 1 is preferably made by an injection moulding process in the mould 7, 8 but may also be produced therein in accordance with an injection pressure moulding process or in accordance with a low pressure moulding process (e.g. a compression moulding process). In all of these processes, the substrate material is moulded under pressure in a closed mould 7, 8 so that the substrate layer 1 has quite accurate dimensions.

[0028] In the second step, the moulded substrate layer 1 is transferred to a second mould which comprises an upper 9 and a lower mould section 10. The mould cavity of this second mould is somewhat larger than the mould cavity of the first mould to provide additional space for moulding the softer layer 2 and the seal 3. When the softer material comprises a thermosetting polyurethane

material, the softer layer 2 and the seal 3 can be produced in accordance with a ROM process in the second mould 9, 10, more particularly by injecting a polyurethane reaction mixture in the mould cavity. The softer material is however preferably a thermoplastic material which is preferably moulded in accordance with an injection moulding process. It can also be moulded in accordance with an injection pressure moulding or a low pressure moulding process. In all of these processes, the softer material is moulded under pressure in a closed mould 9, 10 so that the softer layer 2 and the seal 3 also have quite accurate dimensions.

[0029] Instead of using a second mould, i.e. a two steps process, it is also possible to use a one step process wherein the substrate materials stays on the same mould section when moulding the softer material. This can be done by providing one or more slides in the first mould or by providing a further upper or lower mould section and replacing the upper 7 or the lower mould section 8 by this further mould section to mould the softer layer 2 or the seal 3. For some designs, it may also be possible to inject the softer material and the substrate material simultaneously in the first mould, in accordance with a co-injection moulding process. Moreover, it is also possible to use two different materials for the softer layer 2 and for the seal 3. These two materials can be moulded successively, either in the same mould (by withdrawing slides or by providing an additional mould section) or in an additional mould. An advantage of using a thermoplastic material for the substrate layer 1 and a further thermoplastic material for the softer layer 2 and/or for the seal 3 is that the additional costs for providing the softer layer 2 and/or the seal 3 can be kept quite low.

[0030] In a third step, the moulded core formed by the substrate layer 1 overmoulded with the softer material 2, 3 is transferred to a third mould comprising an upper 11 and a lower mould section 12. The core 1, 2, 3 is positioned onto the lower mould section 12 so that the core rests with its seal 3 onto the mould surface. The lower mould section 12 is provided with vacuum channels 13 so that a vacuum can be created in the portion of the mould cavity delimited by the seal 3. In this way, the core 1, 2, 3 is drawn towards the mould surface and the seal 3 is somewhat compressed against this mould surface. Due to the fact that the seal 3 has been moulded in a closed mould, its dimensions are quite accurate so that the core is accurately positioned into the third mould 11, 12.

[0031] After having positioned the core 1, 2, 3 in the third mould 11, 12, the mould is closed. In this closed position, a gap 14 remains between the surface of the core and the internal wall of the mould 11, 12. To produce the flexible polyurethane layer 4, a polyurethane reaction mixture is introduced in this gap 14 to overmould at least a first area of the core surface according to a ROM process (reaction overmoulding process). The polyurethane reaction mixture is more particularly injected in the closed mould according to a Reaction Injection Moulding (RIM)

process After having allowed the reaction mixture to cure to produce the flexible polyurethane layer, the multilayered part can be demoulded.

[0032] For a skilled person it will be clear that some modification can be applied to the above described method. Instead of first moulding the substrate layer 1 in the first mould 7, 8, it is also possible to mould first the softer layer 2 and/or the seal 3. The substrate material can then be moulded over the softer layer 2 and/or over the seal 3. The softer layer 2 and/or the substrate layer 1 do not necessarily have to be moulded in a closed mould as described hereabove but they could possibly be moulded onto the other layer without using a closed mould. After having produced the substrate layer 1, the material for the softer layer 2 could for example be poured or sprayed in the required thickness onto the substrate layer 1, especially when using a polyurethane reaction mixture for producing the softer layer 2. When a thermoplastic material is used, this material can be moulded for example by a powder slush moulding technique.

[0033] Instead of positioning a pre-manufactured core 1, 2, 3 in the mould 11, 12, it is also possible to position only the substrate layer 1 (preferably provided with the seal 3 when the lower mould section 11 does not comprise a seal) onto the lower mould section 12, to mould the softer layer 2 over the substrate layer 1, by means of an additional upper mould section which has the same mould surface as the upper mould section 9 illustrated in Figure 2, and to overmould subsequently the thus produced core with the polyurethane reaction mixture for the polyurethane layer after having replaced the additional upper mould section by the upper mould section 11 illustrated in Figure 3.

[0034] The materials of the substrate layer 1, of the softer layer 2 and of the flexible polyurethane layer 4 can also be moulded in a one step process. In such a one step process, the substrate layer 1 is maintained onto one of the mould sections against which it is produced, and the softer layer and the flexible polyurethane layer are moulded successively onto the substrate layer after having withdrawn one or more slides or after having provided another mould section.

[0035] In an alternative embodiment the substrate layer 1 is not provided with a seal 3 but the seal is provided on the lower mould section 12. In a further alternative embodiment the substrate layer 1 is not provided with the softer layer 2 but only with the seal 3. In this embodiment, a softer feel can be obtained by using a polyurethane reaction mixture which comprises a chemical (water) or a physical blowing agent to produce the flexible polyurethane layer 4. The process conditions, i.e. the mould temperature is controlled in such a manner that a denser skin is formed against the mould surface so that the polyurethane layer 4 is an integral skin foam layer. Such an integral skin foam technique is disclosed for example in EP-A-0 927 138.

[0036] In order to improve the adhesion between between the moulded core and the flexible polyurethane

layer, the surface of the moulded core can be pretreated before it is overmoulded with the polyurethane material. This can be done by example by treating the surface with a primer, or by polarising the surface e.g. by a corona treatment, or by a plasma gas treatment. These techniques, which are well-known to the skilled in the art, are for instance referred to in W02006/042818 or in DE10025734.

10 **Example 1**

[0037] A PC/ABS substrate layer was moulded by injection moulding in the form of a plate of 20X20 cm. One side of this plate was overmoulded with a layer of SEBS having a thickness of 6 mm. The SEBS had a density of about 1000 kg/m³ and a Shore A hardness of 0. The layer of SEBS was subsequently overmoulded with a polyurethane reaction mixture to produce a polyurethane skin layer having an average thickness of 1.2 mm and a density of about 900 kg/m³.

[0038] To measure the additional soft feel obtained by the SEBS layer, the ILD (Indentation Load Deflection) value of the multilayered part was measured, this means the force needed to impress the material 2 mm with a press stamp of 14 mm at a speed of 5 mm/min. The same ILD value was measured of a conventional multilayered part composed of a PC/ABS substrate layer, a conventional semi-flexible polyurethane backfoam layer (having a thickness of 15 mm) and a same polyurethane skin layer having also an average thickness of 1.2 mm. The ILD value for the multilayered ROM part obtained by the method according to the invention comprised 24 N whilst the ILD value of the conventional backfoamed part comprised 22 N. This shows that a same soft feel can be achieved by a less complex and cheaper ROM process and this even with a softer layer which is thinner than a conventional backfoam layer.

40 **Claims**

1. A method for producing a multilayered part comprising a moulded core (5) and a flexible polyurethane layer (4) formed by a flexible polyurethane skin layer or by a flexible integral skin polyurethane foam layer, the moulded core (5) comprising a moulded substrate layer (1) made of a substrate material having a Shore A hardness higher than 60 and the flexible polyurethane layer (4) having an average density higher than 400 kg/m³, preferably higher than 500 kg/m³, which method comprises the steps of:

- providing a mould (11, 12) having at least a first and a second mould section which are movable with respect to one another to open and close the mould;
- providing said core (5) inside said mould (11, 12) so that a gap (14) exists between the surface

of the core (5) and the internal wall of the mould when the mould is closed;

- introducing a polyurethane reaction mixture in said gap (14) between the surface of the core (5) and the internal wall of the mould (11, 12) to overmould at least a first area of the core surface with the polyurethane reaction mixture;
- allowing said polyurethane reaction mixture to cure in said gap (14) to produce the flexible polyurethane layer (4) therein; and
- opening the mould (11, 12) and removing the produced multilayered part,

wherein

the moulded core (5) which is provided in said mould (11, 12) comprises said substrate layer (1) and at least one softer moulded part (2, 3), which is moulded onto the substrate layer (1) or said substrate layer (1) is moulded onto the softer moulded part (2, 3) or the substrate layer (1) and the softer moulded part (2, 3) are moulded against one another, said softer moulded part (2, 3) being made of a softer material with a Shore A hardness lower than 60 and forming a second area of the core surface and the first area of the surface of the moulded core comprises at least one area which is not formed by the softer moulded part.

2. A method according to claim 1, **characterised in that** said first area of the core surface overlaps with said second area thereof so that in the area of overlap said softer moulded part forms a softer layer (2) between the substrate layer (1) and the flexible polyurethane layer (4).
3. A method according to claim 2, **characterised in that** the flexible polyurethane layer (4) is a flexible polyurethane skin layer having in said area of overlap an average thickness smaller than 2.2 mm, preferably smaller than 1.9 mm and more preferably smaller than 1.6 mm.
4. A method according to claim 2 or 3, **characterised in that** said softer layer (2) has in said area of overlap an average thickness of less than 10 mm, preferably of less than 7 mm, the average thickness of the softer layer (2) being preferably greater than 2 mm and more preferably greater than 3 mm.
5. A method according to any one of the claims 2 to 4, **characterised in that** the material of said softer layer (2) has a Shore A hardness lower than 30, preferably lower than 20 and more preferably lower than 10.
6. A method according to any one of the claims 1 to 5, **characterised in that** the step of providing the core (5) inside said mould (11, 12) comprises the step of

positioning a pre-manufactured moulded core (5) in the mould.

7. A method according to any one of the claims 1 to 5, **characterised in that** the step of providing the core (5) inside said mould (11, 12) comprises the step of positioning a pre-manufactured substrate layer (1) in the mould and the step of moulding the softer moulded part (2, 3) in said mould onto the substrate layer (1), the softer moulded part (2, 3) being in particular produced from a further polyurethane reaction mixture in accordance with a RIM process.
8. A method according to any one of the claims 1 to 4, **characterised in that** said softer moulded part (3) extends at least partially along an edge of said first area, the core (5) being provided inside said mould by positioning a pre-manufactured moulded core (5), comprising said substrate layer (1) and said softer moulded part (3), in the mould so that said softer moulded part (3) contacts the internal wall of the mould (11, 12) to form a moulded seal (3) for said polyurethane reaction mixture when this polyurethane reaction mixture is moulded over said first area of the core surface.
9. A method according to claim 8, **characterised in that** said moulded seal (3) is at least partially recessed in a groove (6) in the moulded substrate layer (1).
10. A method according to claim 8 or 9, **characterised in that** said seal (3) has an average height of at least 1 mm, preferably of at least 2 mm and more preferably of at least 3 mm.
11. A method according to any one of the claims 8 to 10, **characterised in that** the material of said seal (3) has a Shore A hardness higher than 10.
12. A method according to any one of the claims 8 to 11, **characterised in that** the material of said seal (3) has a Shore A hardness lower than 50 and preferably lower than 40.
13. A method according to any one of the claims 1 to 12, **characterised in that** said softer material has an average density higher than 300 kg/m³, preferably higher than 400 kg/m³ and more preferably higher than 500 kg/m³.
14. A method according to any one of the claims 1 to 13, **characterised in that** said softer material is a thermosetting polyurethane material.
15. A method according to any one of the claims 1 to 13, **characterised in that** said softer material comprises a thermoplastic elastomer, preferably a thermo-

plastic elastomer selected from the group consisting of thermoplastic urethanes (TPUs), styrene copolymers, thermoplastic olefins (TPOs), elastomeric alloys and thermoplastic silicones.

16. A method according to claim 15, **characterised in that** said softer material comprises at least one thermoplastic styrene block copolymer, in particular styrene-ethylene-butylene-styrene block copolymer (SEBS) and/or styrene-butylene-styrene block copolymer (SBS).
17. A method according to any one of the claims 1 to 16, **characterised in that** said substrate layer (1) is made of a thermoplastic material which is optionally reinforced in particular with fibres, and is in particular an injection moulded substrate layer, which thermoplastic material is preferably selected from the group consisting of PC (polycarbonate), ABS (acrylonitrile butadiene styrene) and ABS blends, in particular PC/ABS, SMA (styrene maleic anhydride), PPO (polyphenylene oxide), TPO (thermoplastic olefin), in particular PP (polypropylene), polyacetals, in particular POMs (polyoxymethylenes), nylon, polyester, acrylic and polysulfone.
18. A method according to any one of the claims 1 to 17, **characterised in that** it comprises the further step of moulding said substrate material (1) and said softer moulded part (2, 3) to produce the moulded core (5).
19. A method according to claim 18, **characterised in that** said substrate material is moulded under pressure in a closed mould (7, 8) to produce the substrate layer (1).
20. A method according to claim 18, **characterised in that** said softer moulded part (2, 3) is moulded under pressure in a closed mould (9, 10).
21. A method according to claim 18, **characterised in that** either said softer moulded part is moulded onto the substrate layer or the substrate layer is moulded onto the softer moulded part, said substrate layer being preferably moulded under pressure in a closed mould (7, 8) and, more preferably, said softer moulded part being also moulded under pressure in a further closed mould (9, 10), said further closed mould (9, 10) being either the same or different from said closed mould (7, 8).
22. A method according to claim 18, **characterised in that** the substrate layer (1) and the moulded softer part (2, 3) are produced according to a multi-component injection process wherein said substrate material and said softer material are co-injected in a closed mould.

5

10

15

20

25

30

35

40

45

50

55

23. A method according to any one of the claims 1 to 22, **characterised in that** said flexible polyurethane layer (4) is made by a reaction injection overmoulding (ROM) process wherein said polyurethane reaction mixture is injected in said gap (14) between the surface of the core (5) and the internal wall of said mould (11, 12).
24. A multilayered part obtainable by a method according to any one of the claims 1 to 23 and comprising a moulded core (5) having a surface, at least a first area of which is overmoulded with a polyurethane reaction mixture forming a flexible polyurethane layer (4) formed by a flexible polyurethane skin layer or a flexible integral skin polyurethane foam layer and having an average density higher than 400 kg/m³ and preferably higher than 500 kg/m³, **characterised in that** said moulded core (5) comprises a moulded substrate layer (1) and at least one softer moulded part (2, 3) which is moulded onto the substrate layer (1) or the substrate layer (1) is moulded onto the softer moulded part (2, 3) or the substrate layer (1) and the softer moulded part (2, 3) are moulded against one another, the moulded substrate layer (1) being made of a substrate material with a Shore A hardness higher than 60 and the softer moulded part being made of a softer material with a Shore A hardness lower than 60 and forming a second area of the core surface, the first area of the surface of the moulded core comprising at least one area which is not formed by the softer moulded part.
25. A multilayered part according to claim 24, **characterised in that** said first area of the core surface overlaps with said second area thereof so that in the area of overlap said softer moulded part forms a softer layer (2) between the substrate layer (1) and the flexible polyurethane layer (4) which is preferably a flexible polyurethane skin layer having in said area of overlap an average thickness of between 0.4 and 2.5 mm, preferably of between 0.8 and 2.0 mm and more preferably of between 1.0 and 1.6 mm.
26. A multilayered part according to claim 25, **characterised in that** the material of said softer layer (2) has a Shore A hardness lower than 30, preferably lower less than 20 and more preferably lower than 10.
27. A multilayered part according to claim 24 or 25, **characterised in that** said softer moulded part (3) extends at least partially along an edge of said first area.
28. A multilayered part according to claim 27, **characterised in that** the softer material of the softer moulded part (3) which extends along an edge of said first area has a Shore A hardness lower than 50 and pref-

erably higher than 10.

29. A multilayered part according to any one of the claims 24 to 28, **characterised in that** said softer material has a density higher than 300 kg/m^3 , preferably higher than 400 kg/m^3 and more preferably higher than 500 kg/m^3 .
30. A multilayered part according to any one of the claims 24 to 29, **characterised in that** said softer material comprises a thermoplastic elastomer, preferably a thermoplastic elastomer selected from the group consisting of thermoplastic urethanes (TPUs), styrene copolymers, thermoplastic olefins (TPOs), thermoplastic silicones and elastomeric alloys.

Patentansprüche

1. Ein Verfahren zur Herstellung eines mehrschichtigen Teils, welches einen Formkern (5) und eine flexible Polyurethanschicht (4) umfasst, geformt durch eine flexible Polyurethanhautschicht oder durch eine flexible vollständige Haut-Polyurethanschicht, wobei der Formkern (5) eine geformte Trägerschicht (1) umfasst, die aus einem Trägermaterial mit einer Shore-A-Härte von mehr als 60 besteht, und wobei die flexible Polyurethanschicht (4) eine durchschnittliche Dichte von mehr als 400 kg/m^3 , vorzugsweise mehr als 500 kg/m^3 , hat, wobei das Verfahren folgende Schritte umfasst:

- Beistellen eines Formstücks (11, 12) mit zumindest einem ersten und einem zweiten Formabschnitt, die in Bezug zueinander beweglich sind, um das Formstück zu öffnen und zu schließen;
- Beistellen des erwähnten Kerns (5) im erwähnten Formstück (11, 12), sodass ein Raum (14) zwischen der Oberfläche des Kerns (5) und der Innenwand des Formstücks entsteht, wenn das Formstück geschlossen ist;
- Einbringen einer Polyurethanreaktionsmischung in den erwähnten Raum (14) zwischen der Oberfläche des Kerns (5) und der Innenwand des Formstücks (11, 12), um zumindest einen ersten Bereich der Kernoberfläche mit der Polyurethanreaktionsmischung zu umspritzen;
- Aushärten der erwähnten Polyurethanreaktionsmischung im erwähnten Raum (14), um darin die flexible Polyurethanschicht (4) herzustellen; und
- Öffnen des Formstücks (11, 12) und Entnehmen des hergestellten mehrschichtigen Teils,

wobei

der Formkern (5), der im erwähnten Formstück (11, 12) beigestellt ist, die erwähnte Trägerschicht (1)

und zumindest ein weiches Formteil (2, 3) umfasst, das auf die Trägerschicht (1) geformt wird, oder die erwähnte Trägerschicht (1) auf das weichere Formteil (2, 3) geformt wird, oder die Trägerschicht (1) und das weichere Formteil (2, 3) aneinander geformt werden, wobei das weichere Formteil (2, 3) aus einem weichen Material mit einer Shore-A-Härte von weniger als 60 hergestellt ist und einen zweiten Bereich der Kernoberfläche bildet, und der erste Bereich der Oberfläche des Formkerns zumindest einen Bereich umfasst, der nicht durch das weichere Formteil geformt ist.

2. Ein Verfahren nach Anspruch 1, **dadurch gekennzeichnet, dass** der erwähnte erste Bereich der Kernoberfläche mit dem erwähnten zweiten Bereich davon überlappt, sodass das erwähnte weichere Formteil im Bereich der Überlappung eine weichere Schicht (2) zwischen der Trägerschicht (1) und der flexiblen Polyurethanschicht (4) formt.
3. Ein Verfahren nach Anspruch 2, **dadurch gekennzeichnet, dass** die flexible Polyurethanschicht (4) eine flexible Polyurethanhautschicht ist, die im erwähnten Bereich der Überlappung eine durchschnittliche Dicke von weniger als 2,2 mm, vorzugsweise weniger als 1,9 mm und am besten weniger als 1,6 mm hat.
4. Ein Verfahren nach den Ansprüchen 2 oder 3, **dadurch gekennzeichnet, dass** die erwähnte weichere Schicht (2) im erwähnten Bereich der Überlappung eine durchschnittliche Dicke von weniger als 10 mm hat, vorzugsweise weniger als 7 mm, wobei die durchschnittliche Dicke der weichen Schicht (2) vorzugsweise mehr als 2 mm beträgt und noch besser mehr als 3 mm.
5. Ein Verfahren nach irgendeinem der Ansprüche 2 bis 4, **dadurch gekennzeichnet, dass** das Material der erwähnten weichen Schicht (2) eine Shore-A-Härte von weniger als 30 hat, vorzugsweise weniger als 20 und noch besser weniger als 10.
6. Ein Verfahren nach irgendeinem der Ansprüche 1 bis 5, **dadurch gekennzeichnet, dass** der Schritt des Beistellens des Kerns (5) im erwähnten Formstück (11, 12) den Schritt des Einlegens eines vorgefertigten Formkerns (5) in das Formstück umfasst.
7. Ein Verfahren nach irgendeinem der Ansprüche 1 bis 5, **dadurch gekennzeichnet, dass** der Schritt des Beistellens des Kerns (5) im erwähnten Formstück (11, 12) den Schritt des Einlegens einer vorgefertigten Trägerschicht (1) in das Formstück und den Schritt des Formens des weichen Formteils (2, 3) im erwähnten Formstück auf die Trägerschicht (1) umfasst, wobei das weichere Formteil (2, 3) ins-

besondere aus einer weiteren Polyurethanreaktionsmischung nach einem RIM-Verfahren hergestellt ist.

8. Ein Verfahren nach irgendeinem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** das erwähnte weichere Formteil (3) sich zumindest teilweise entlang eines Rands des erwähnten ersten Bereichs ausstreckt, wobei der Kern (5) im erwähnten Formstück beigestellt ist, indem ein vorgefertigter Formkern (5), bestehend aus der erwähnten Trägerschicht (1) und dem erwähnten weicheren Formteil (3), in das Formstück eingelegt wird, sodass das erwähnte weichere Formteil (3) die Innenwand des Formstücks (11, 12) berührt, um ein geformtes Siegel (3) für die erwähnte Polyurethanreaktionsmischung zu formen, wenn diese Polyurethanreaktionsmischung über dem erwähnten ersten Bereich der Kernoberfläche geformt wird. 5
9. Ein Verfahren nach Anspruch 8, **dadurch gekennzeichnet, dass** das erwähnte geformte Siegel (3) zumindest teilweise in einer Nut (6) in der geformten Trägerschicht (1) versenkt ist. 10
10. Ein Verfahren nach Anspruch 8 oder 9, **dadurch gekennzeichnet, dass** das erwähnte Siegel (3) eine durchschnittliche Höhe von mindestens 1 mm, vorzugsweise mindestens 2 mm und noch besser mindestens 3 mm hat. 15
11. Ein Verfahren nach irgendeinem der Ansprüche 8 bis 10, **dadurch gekennzeichnet, dass** das Material des erwähnten Siegels (3) eine Shore-A-Härte von mehr als 10 hat. 20
12. Ein Verfahren nach irgendeinem der Ansprüche 8 bis 11, **dadurch gekennzeichnet, dass** das Material des erwähnten Siegels (3) eine Shore-A-Härte von weniger als 50 und vorzugsweise weniger als 40 hat. 25
13. Ein Verfahren nach irgendeinem der Ansprüche 1 bis 12, **dadurch gekennzeichnet, dass** das erwähnte weichere Material eine durchschnittliche Dichte von mehr als 300 kg/m³, vorzugsweise mehr als 400 kg/m³ und noch besser von mehr als 500 kg/m³ hat. 30
14. Ein Verfahren nach irgendeinem der Ansprüche 1 bis 13, **dadurch gekennzeichnet, dass** das erwähnte weichere Material ein wärmehärtendes Polyurethanmaterial ist. 35
15. Ein Verfahren nach irgendeinem der Ansprüche 1 bis 13, **dadurch gekennzeichnet, dass** das erwähnte weichere Material ein thermoplastisches Elastomer umfasst, vorzugsweise ein thermoplasti-

sches Elastomer aus der Gruppe bestehend aus thermoplastischen Urethanen (TPU), Styrolcopolymeren, thermoplastischen Olefinen (TPO), elastomeren Mischungen und thermoplastischen Silikonen.

16. Ein Verfahren nach Anspruch 15, **dadurch gekennzeichnet, dass** das erwähnte weichere Material zumindest ein thermoplastisches Styrol-Block-Copolymer umfasst, insbesondere Styrol-Ethylen-Butylen-Styrol-Block-Polymer (SEBS) und/oder Styrol-Butylen-Styrol-Block-Polymer (SBS). 40
17. Ein Verfahren nach irgendeinem der Ansprüche 1 bis 16, **dadurch gekennzeichnet, dass** die erwähnte Trägerschicht (1) aus einem thermoplastischen Material hergestellt ist, welches optional verstärkt ist, insbesondere durch Fasern, und insbesondere eine spritzgegossene Trägerschicht ist, wobei das thermoplastische Material vorzugsweise aus der Gruppe bestehend aus PC (Polycarbonat), ABS (Acrylnitril-Butadien-Styrol) und ABS-Mischungen, insbesondere PC/ABS, SMA (Styrol-Maleinsäureanhydrid), PPO (Polyphenylenoxid), TPO (thermoplastisches Olefin), insbesondere PP (Polypropylen), Polyacetalen, insbesondere POM (Polyoxymethylene), Nylon, Polyester, Acryl und Polysulfon ausgewählt wird. 45
18. Ein Verfahren nach irgendeinem der Ansprüche 1 bis 17, **dadurch gekennzeichnet, dass** es den weiteren Schritt des Formens des erwähnten Trägermaterials (1) und des erwähnten weicheren Formteils (2, 3) umfasst, um den Formkern (5) herzustellen. 50
19. Ein Verfahren nach Anspruch 18, **dadurch gekennzeichnet, dass** das erwähnte Trägermaterial unter Druck in einem geschlossenen Formstück (7, 8) geformt wird, um die Trägerschicht (1) herzustellen. 55
20. Ein Verfahren nach Anspruch 18, **dadurch gekennzeichnet, dass** das erwähnte weichere Formteil (2, 3) unter Druck in einem geschlossenen Formstück (9, 10) geformt wird. 60
21. Ein Verfahren nach Anspruch 18, **dadurch gekennzeichnet, dass** entweder das erwähnte weichere Formteil auf die Trägerschicht oder die Trägerschicht auf das weichere Formteil geformt wird, wobei die erwähnte Trägerschicht vorzugsweise unter Druck in einem geschlossenen Formstück (7, 8) geformt wird und, noch besser, das erwähnte weichere Formteil auch unter Druck in einem weiteren geschlossenen Formstück (9, 10) geformt wird, wobei das erwähnte weitere geschlossene Formstück (9, 10) entweder dasselbe geschlossene Formstück (7, 8) oder ein anderes Formstück ist. 65

22. Ein Verfahren nach Anspruch 18, **dadurch gekennzeichnet, dass** die Trägerschicht (1) und das geformte weichere Teil (2, 3) nach einem Mehrkomponenten-Einspritzverfahren hergestellt werden, wobei das erwähnte Trägermaterial und das erwähnte weichere Material im Sandwich-Spritzgussverfahren in ein geschlossenes Formstück eingespritzt werden.
23. Ein Verfahren nach irgendeinem der Ansprüche 1 bis 22, **dadurch gekennzeichnet, dass** die erwähnte flexible Polyurethanschicht (4) durch ein ROM-Verfahren (*Reaction Injection Overmoulding*) hergestellt ist, wobei die erwähnte Polyurethanreaktionsmischung in den erwähnten Raum (14) zwischen der Oberfläche des Kerns (5) und der Innenwand des erwähnten Formstücks (11, 12) eingespritzt wird.
24. Ein mehrschichtiges Teil erhältlich nach einem Verfahren nach irgendeinem der Ansprüche 1 bis 23 und bestehend aus einem Formkern (5) mit einer Oberfläche, von der zumindest ein erster Bereich mit einer Polyurethanreaktionsmischung umspritzt ist, welche eine flexible Polyurethanschicht (4) bestehend aus einer flexiblen Polyurethanhautschicht oder einer flexiblen vollständigen Haut-Polyurethanschaumschicht formt und eine durchschnittliche Dichte von mehr als 400 kg/m³ und vorzugsweise mehr als 500 kg/m³ hat, **dadurch gekennzeichnet, dass** der erwähnte Formkern (5) eine geformte Trägerschicht (1) und zumindest ein weicheres Formteil (2, 3) umfasst, das auf die Trägerschicht (1) geformt ist, oder die Trägerschicht (1) wird auf das weichere Formteil (2, 3) geformt oder die Trägerschicht (1) und das weichere Formteil (2, 3) werden aneinander geformt, wobei die geformte Trägerschicht (1) aus einem Trägermaterial mit einer Shore-A-Härte von mehr als 60 hergestellt ist und das weichere Formteil aus einem weicheren Material mit einer Shore-A-Härte von weniger als 60 hergestellt ist und einen zweiten Bereich der Kernoberfläche bildet, wobei der erste Bereich der Oberfläche des Formkerns zumindest einen Bereich umfasst, der nicht durch das weichere Formteil gebildet ist.
25. Ein mehrschichtiges Teil nach Anspruch 24, **dadurch gekennzeichnet, dass** der erwähnte erste Bereich der Kernoberfläche mit dem erwähnten zweiten Bereich davon überlappt, sodass das erwähnte weichere Formteil im Bereich der Überlappung eine weichere Schicht (2) zwischen der Trägerschicht (1) und der flexiblen Polyurethanschicht (4) bildet, die vorzugsweise eine flexible Polyurethanhautschicht mit einer durchschnittlichen Dicke im erwähnten Bereich der Überlappung von zwischen 0,4 und 2,5 mm ist, vorzugsweise zwischen 0,8 und 2,0 mm und noch besser zwischen 1,0 und

1,6 mm.

26. Ein mehrschichtiges Teil nach Anspruch 25, **dadurch gekennzeichnet, dass** das Material der erwähnten weicheren Schicht (2) eine Shore-A-Härte von weniger als 30 hat, vorzugsweise weniger als 20 und noch besser weniger als 10.
27. Ein mehrschichtiges Teil nach Anspruch 24 oder 25, **dadurch gekennzeichnet, dass** das erwähnte weichere Formteil (3) sich zumindest teilweise entlang eines Rands des erwähnten ersten Bereichs ausstreckt.
28. Ein mehrschichtiges Teil nach Anspruch 27, **dadurch gekennzeichnet, dass** das weichere Material des weicheren Formteils (3), das sich entlang eines Rands des erwähnten ersten Bereichs ausstreckt, eine Shore-A-Härte von weniger als 50 und vorzugsweise mehr als 10 hat.
29. Ein mehrschichtiges Teil nach irgendeinem der Ansprüche 24 bis 28, **dadurch gekennzeichnet, dass** das erwähnte weichere Material eine Dichte von mehr als 300 kg/m³, vorzugsweise mehr als 400 kg/m³ und noch besser von mehr als 500 kg/m³ hat.
30. Ein mehrschichtiges Teil nach irgendeinem der Ansprüche 24 bis 29, **dadurch gekennzeichnet, dass** das erwähnte weichere Material ein thermoplastisches Elastomer umfasst, vorzugsweise ein thermoplastisches Elastomer aus der Gruppe bestehend aus thermoplastischen Urethanen (TPU), Styrolcopolymeren, thermoplastischen Olefinen (TPO), thermoplastischen Silikonen und elastomeren Mischungen.

Revendications

1. Procédé de production d'une pièce multicouche comprenant un noyau moulé (5) et une couche de polyuréthane flexible (4) formée par une couche de peau en polyuréthane flexible ou par une couche de peau en mousse de polyuréthane flexible d'une seule pièce, le noyau moulé (5) comprenant une couche substrat moulée (1) réalisée dans un matériau de substrat ayant une dureté Shore A supérieure à 60 et la couche de polyuréthane flexible (4) ayant une masse volumique supérieure à 400 kg / m³, de préférence supérieure à 500 kg / m³, lequel procédé comprend les étapes consistant à :
- prévoir un moule (11, 12) ayant au moins une première et une deuxième partie de moule qui peuvent être déplacées l'une par rapport à l'autre pour ouvrir et fermer le moule;
 - prévoir ledit noyau (5) à l'intérieur dudit moule

(11, 12) de manière qu'il y ait un espace (14) entre la surface du noyau (5) et la paroi intérieure du moule quand le moule est fermé;

- introduire un mélange de réaction de polyuréthane dans ledit espace (14) entre la surface du noyau (5) et la paroi intérieure du moule (11, 12) pour recouvrir au moins une première zone de la surface du noyau avec le mélange de réaction de polyuréthane;
- laisser ledit mélange de réaction de polyuréthane durcir dans ledit espace (14) pour y produire la couche de polyuréthane flexible; et
- ouvrir le moule (11, 12) et retirer la pièce multicouche produite, selon lequel

le noyau moulé (5) qui est prévu dans ledit moule (11, 12) comprend ladite couche substrat (1) et au moins une partie moulée plus souple (2, 3), qui est moulée sur ladite couche substrat (1) ou ladite couche substrat (1) est moulée sur la partie moulée plus souple (2, 3) ou la couche substrat (1) et la partie moulée plus souple (2, 3) sont moulées l'une contre l'autre, ladite partie moulée plus souple (2, 3) étant réalisée dans un matériau plus souple ayant une dureté Shore A inférieure à 60 et formant une deuxième zone de la surface du noyau et la première zone de la surface du noyau moulé comprend au moins une zone qui n'est pas formée par la partie moulée plus souple.

2. Procédé selon la revendication 1, **caractérisé en ce que** ladite première zone de la surface du noyau recouvre partiellement ladite deuxième zone de celle-ci de sorte que dans la zone de recouvrement partiel, ladite partie moulée plus souple forme une couche plus souple (2) entre la couche substrat (1) et la couche de polyuréthane flexible (4).
3. Procédé selon la revendication 2, **caractérisé en ce que** la couche de polyuréthane flexible (4) est une couche de peau en polyuréthane flexible ayant dans ladite zone de recouvrement partiel une épaisseur moyenne inférieure à 2,2 mm, de préférence inférieure à 1,9 mm et mieux encore inférieure à 1,6 mm.
4. Procédé selon la revendication 2 ou 3, **caractérisé en ce que** ladite couche plus souple (2) a dans ladite zone de recouvrement partiel une épaisseur moyenne de moins de 10 mm, de préférence de moins de 7 mm, l'épaisseur moyenne de la couche plus souple (2) étant de préférence supérieure à 2 mm et mieux encore supérieure à 3 mm.
5. Procédé selon l'une quelconque des revendications 2 à 4, **caractérisé en ce que** le matériau de ladite couche plus souple (2) a une dureté Shore A inférieure à 30, de préférence inférieure à 20 et mieux

encore inférieure à 10.

6. Procédé selon l'une quelconque des revendications 1 à 5, **caractérisé en ce que** l'étape consistant à prévoir le noyau (5) à l'intérieur dudit moule (11, 12) comprend l'étape consistant à positionner un noyau moulé préfabriqué (5) dans le moule.
7. Procédé selon l'une quelconque des revendications 1 à 5, **caractérisé en ce que** l'étape consistant à prévoir le noyau (5) à l'intérieur dudit moule (11, 12) comprend l'étape consistant à positionner une couche substrat préfabriquée (1) dans le moule et l'étape consistant à mouler la partie moulée plus souple (2, 3) dans ledit moule sur la couche substrat (1), la partie moulée plus souple (2, 3) étant en particulier produite à partir d'un autre mélange de réaction de polyuréthane selon un processus RIM (moulage par injection et réaction).
8. Procédé selon l'une quelconque des revendications 1 à 4, **caractérisé en ce que** ladite partie moulée plus souple (3) s'étend au moins en partie le long d'un bord de ladite première zone, le noyau (5) étant prévu à l'intérieur dudit moule par positionnement d'un noyau moulé préfabriqué (5), comprenant ladite couche substrat (1) et ladite partie moulée plus souple (3), dans le moule de sorte que ladite partie moulée plus souple (3) entre en contact avec la paroi intérieure du moule (11, 12) pour former un joint moulé (3) pour ledit mélange de réaction de polyuréthane quand ce mélange de réaction de polyuréthane est moulé sur ladite première zone de la surface du noyau.
9. Procédé selon la revendication 8, **caractérisé en ce que** ledit joint moulé (3) est au moins en partie enfoncé dans une gorge (6) dans la couche substrat moulée (1).
10. Procédé selon la revendication 8 ou 9, **caractérisé en ce que** ledit joint moulé (3) a une hauteur moyenne d'au moins 1 mm, de préférence d'au moins 2 mm et mieux encore d'au moins 3 mm.
11. Procédé selon l'une quelconque des revendications 8 à 10, **caractérisé en ce que** le matériau dudit joint (3) a une dureté Shore A supérieure à 10.
12. Procédé selon l'une quelconque des revendications 8 à 11, **caractérisé en ce que** le matériau dudit joint (3) a une dureté Shore A inférieure à 50 et de préférence inférieure à 40.
13. Procédé selon l'une quelconque des revendications 1 à 12, **caractérisé en ce que** ledit matériau plus souple a une masse volumique moyenne supérieure à 300 kg / m³, de préférence supérieure à 400 kg /

m³ et mieux encore supérieure à 500 kg / m³.

14. Procédé selon l'une quelconque des revendications 1 à 13, **caractérisé en ce que** ledit matériau plus souple est un matériau de polyuréthane thermodurcissable. 5
15. Procédé selon l'une quelconque des revendications 1 à 13, **caractérisé en ce que** ledit matériau plus souple comprend un élastomère thermoplastique, de préférence un élastomère thermoplastique choisi dans le groupe consistant en uréthanes thermoplastiques (TPU), copolymères de styrène, oléfines thermoplastiques (TPO), alliages élastomères et silicones thermoplastiques. 10
16. Procédé selon la revendication 15, **caractérisé en ce que** ledit matériau plus souple comprend au moins un copolymère à blocs de styrène, en particulier un copolymère à blocs de styrène - éthylène - butylène - styrène (SEBS) et / ou un copolymère à blocs de styrène - butylène - styrène (SBS). 20
17. Procédé selon l'une quelconque des revendications 1 à 16, **caractérisé en ce que** ladite couche substrat (1) est réalisée dans un matériau thermoplastique qui est optionnellement renforcé en particulier avec des fibres, et est en particulier une couche substrat moulée par injection, lequel matériau thermoplastique est de préférence sélectionné dans le groupe consistant en PC (polycarbonate), ABS (acrylonitrile butadiène styrène) et mélanges ABS, en particulier PC / ABS, SMA (anhydride maléique de styrène), PPO (oxyde de polyphénylène), TPO (oléfine thermoplastique), en particulier PP (polypropylène), polyacétals, en particulier POM (polyoxyméthylènes), nylon, polyester, acrylique et polysulfone. 25 30 35
18. Procédé selon l'une quelconque des revendications 1 à 17, **caractérisé en ce qu'il** comprend l'étape supplémentaire consistant à mouler ledit matériau de substrat (1) et ladite partie plus souple (2, 3) pour produire le noyau moulé (5). 40
19. Procédé selon la revendication 18, **caractérisé en ce que** ledit matériau de substrat est moulé sous pression dans un moule fermé (7, 8) pour produire ladite couche substrat (1). 45
20. Procédé selon la revendication 18, **caractérisé en ce que** ladite couche plus souple (2, 3) est moulé sous pression dans un moule fermé (9, 10). 50
21. Procédé selon la revendication 18, **caractérisé en ce que** soit ladite partie plus souple est moulée sur la couche substrat ou la couche substrat est moulée sur la partie plus souple, ladite couche substrat étant de préférence moulée sous pression dans un moule 55

fermé (7, 8) et, mieux encore, ladite partie plus souple étant également moulée sous pression dans un autre moule fermé (9, 10), ledit autre moule fermé (9, 10) étant soit identique soit différent dudit moule fermé (7, 8).

22. Procédé selon la revendication 18, **caractérisé en ce que** ladite couche substrat (1) et la partie moulée plus souple (2, 3) sont produites selon un processus d'injection de multiples composants dans lequel ledit matériau de substrat et ledit matériau plus souple sont co-injectés dans un moule fermé.
23. Procédé selon l'une quelconque des revendications 1 à 22, **caractérisé en ce que** ladite couche de polyuréthane flexible (4) est réalisée par un processus de surmoulage par injection et réaction (ROM) dans lequel ledit mélange de réaction de polyuréthane est injecté dans ledit espace (14) entre la surface du noyau (5) et la paroi intérieure dudit moule (11, 12).
24. Pièce multicouche pouvant être obtenue par un procédé selon l'une quelconque des revendications 1 à 23 et comprenant un noyau moulé (5) ayant une surface dont au moins une première zone est surmoulée avec un mélange de réaction de polyuréthane formant une couche de polyuréthane flexible (4) formée par une couche de peau de polyuréthane flexible ou une couche de peau en mousse de polyuréthane flexible d'une seule pièce et ayant une masse volumique moyenne supérieure à 400 kg / m³ et de préférence supérieure à 500 kg / m³, **caractérisée en ce que** ledit noyau moulé (5) comprend une couche substrat moulée (1) et au moins une partie moulée plus souple (2, 3) qui est moulée sur ladite couche substrat (1) ou ladite couche substrat (1) est moulée sur la partie moulée plus souple (2, 3) ou la couche substrat (1) et la partie moulée plus souple (2, 3) sont moulées l'une contre l'autre, ladite couche substrat moulée (1) étant réalisée dans un matériau de substrat ayant une dureté Shore A supérieure à 60 et la partie moulée plus souple étant réalisée dans un matériau plus souple ayant une dureté Shore A inférieure à 60 et formant une deuxième zone de la surface du noyau, la première zone de la surface du noyau moulé comprenant au moins une zone qui n'est pas formée par la partie moulée plus souple.
25. Pièce multicouche selon la revendication 24, **caractérisée en ce que** ladite première zone de la surface du noyau recouvre partiellement ladite deuxième zone de celle-ci de sorte que dans la zone de recouvrement partielle, ladite partie moulée plus souple forme une couche plus souple (2) entre la couche substrat (1) et la couche de polyuréthane flexible (4) qui est de préférence une couche de peau de polyuréthane flexible ayant dans ladite zone de recouvrement partielle une épaisseur moyenne comprise

entre 0,4 et 2,5 mm, de préférence comprise entre 0,8 et 2,0 mm et mieux encore comprise entre 1,0 et 1,6 mm.

26. Pièce multicouche selon la revendication 25, **caractérisée en ce que** le matériau de ladite couche plus souple (2) a une dureté Shore A inférieure à 30, de préférence inférieure à 20 et mieux encore inférieure à 10. 5
27. Pièce multicouche selon la revendication 24 ou 25, **caractérisée en ce que** ladite partie moulée plus souple (3) s'étend au moins en partie le long d'un bord de ladite première zone. 10
28. Pièce multicouche selon la revendication 27, **caractérisée en ce que** le matériau plus souple ladite partie moulée plus souple (3) qui s'étend le long d'un bord de ladite première zone a une dureté Shore A inférieure à 50 et de préférence supérieure à 10. 15
29. Pièce multicouche selon l'une quelconque des revendications 24 à 28, **caractérisée en ce que** ledit matériau plus souple a une masse volumique supérieure à 300 kg / m³, de préférence supérieure à 400 kg / m³ et mieux encore supérieure à 500 kg / m³. 20
30. Pièce multicouche selon l'une quelconque des revendications 24 à 29, **caractérisée en ce que** ledit matériau plus souple comprend un élastomère thermoplastique, de préférence un élastomère thermoplastique choisi dans le groupe consistant en uréthanes thermoplastiques (TPU), copolymères de styrène, oléfines thermoplastiques (TPO), silicones thermoplastiques et alliages élastomères. 25

40

45

50

55

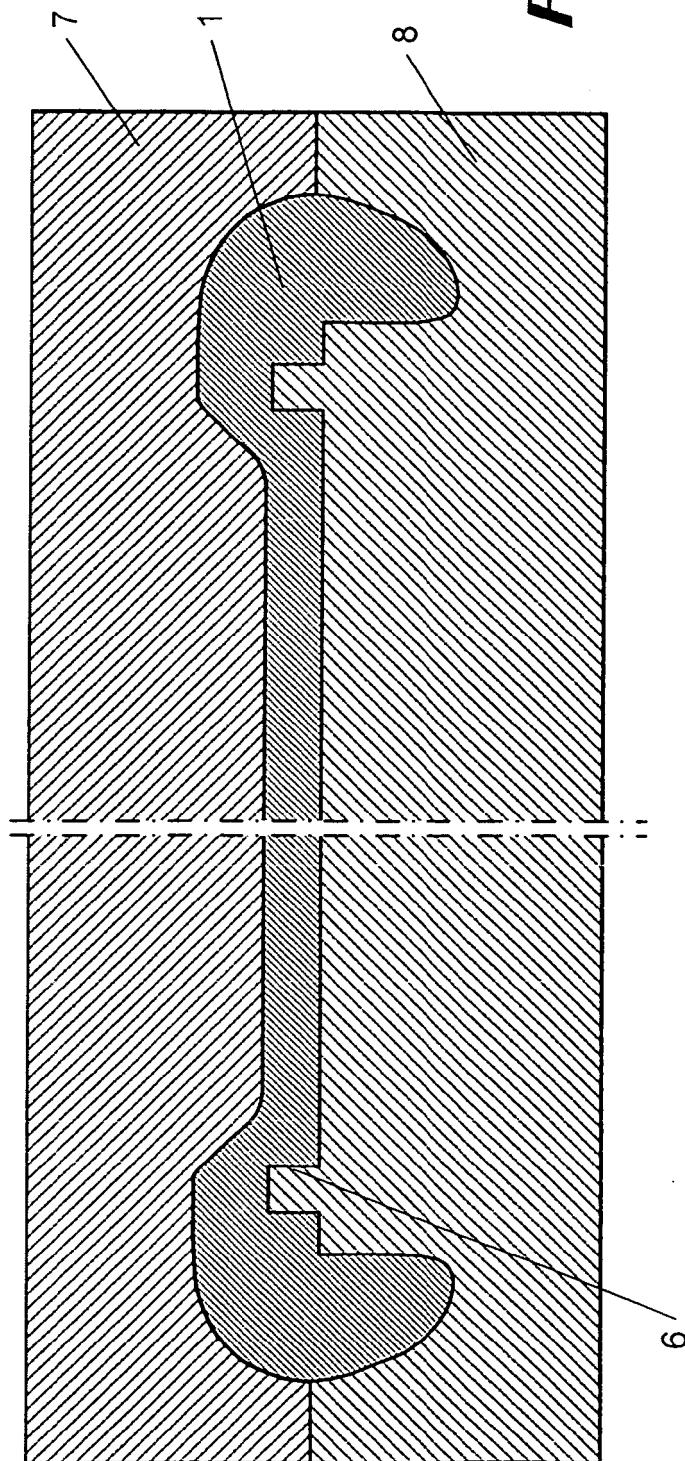


Fig. 1

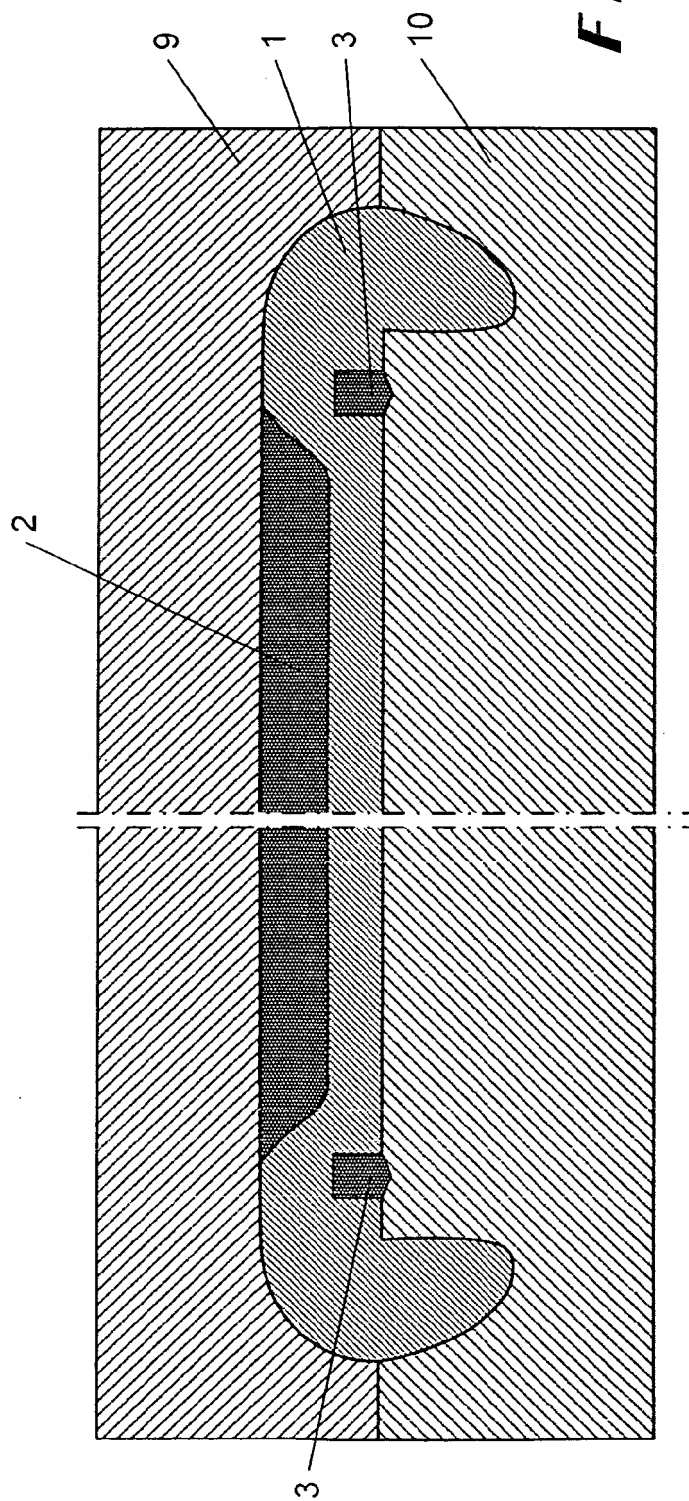


Fig. 2



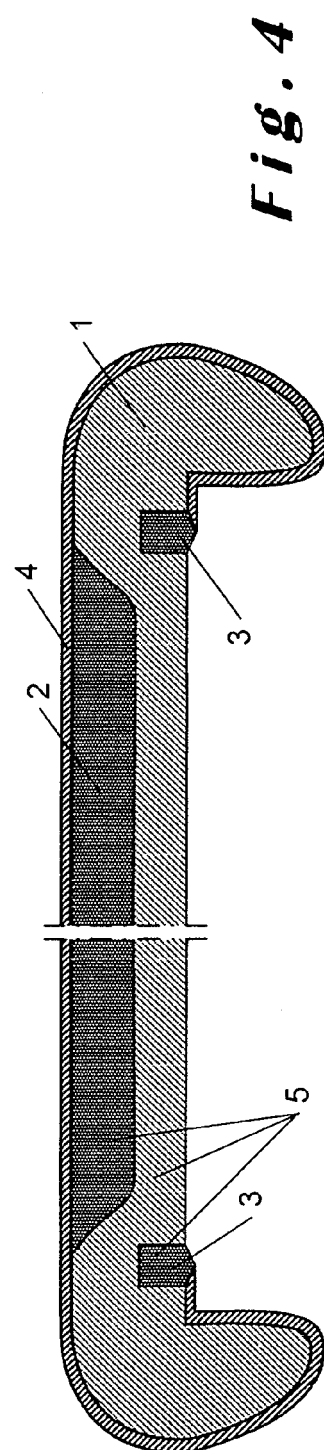


Fig. 5

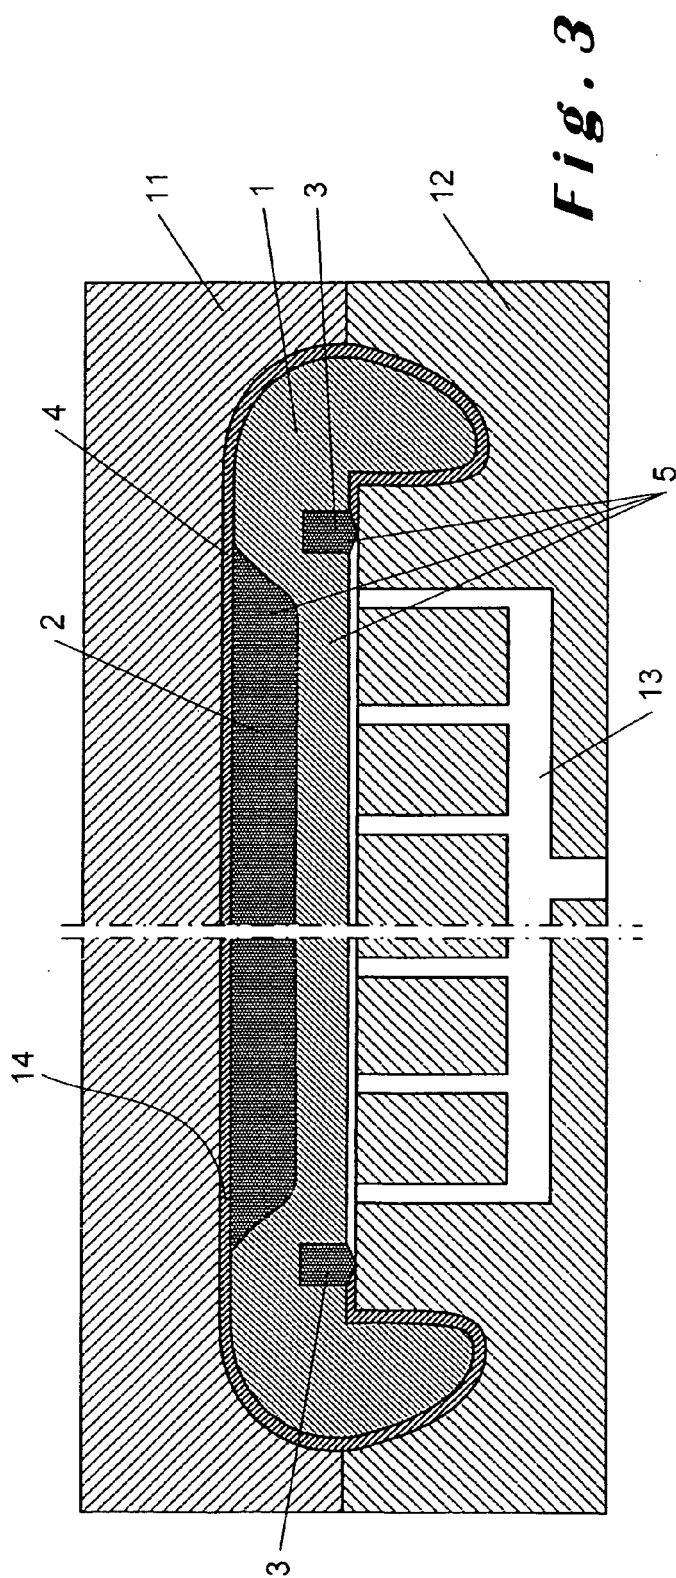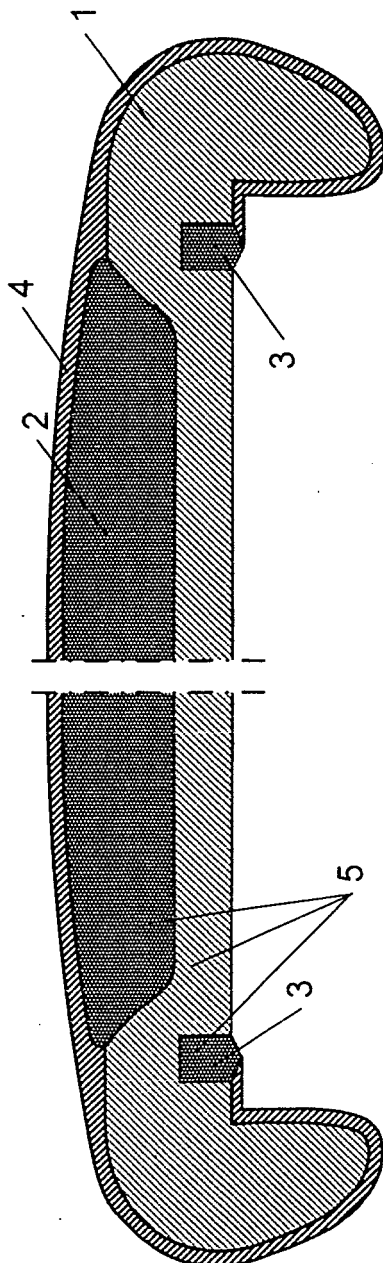

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 0379246 B **[0002]**
- WO 2005021230 A **[0002]**
- US 7014208 B **[0004]**
- US 20040108614 A **[0007]**
- US 20040099989 A **[0008]**
- EP 0929586 B **[0019]**
- WO 04000905 A **[0019]**
- EP 0927138 A **[0035]**
- WO 2006042818 A **[0036]**
- DE 10025734 **[0036]**