



(11) **EP 2 043 476 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
28.03.2012 Bulletin 2012/13

(21) Application number: **06800075.1**

(22) Date of filing: **14.07.2006**

(51) Int Cl.:
A45C 11/00 (2006.01)

(86) International application number:
PCT/US2006/027469

(87) International publication number:
WO 2008/008073 (17.01.2008 Gazette 2008/03)

(54) **SCREW CAP PACKAGE FOR CONTACT LENS**

SCHRAUBKAPPENPACKUNG FÜR KONTAKTLINSE

EMBALLAGE POUR LENTILLES DE CONTACT COMPRENANT UN RÉCEPTACLE À CAPUCHON À VIS

(84) Designated Contracting States:
DE FR GB IE IT

(43) Date of publication of application:
08.04.2009 Bulletin 2009/15

(73) Proprietor: **Johnson and Johnson Vision Care, Inc.**
Jacksonville, FL 32256 (US)

(72) Inventors:
• **TOKARSKI, Michael**
Ponte Vedra, FL 32082 (US)
• **PECK, James**
Jacksonville, FL 32224 (US)
• **DZWILL, Edward**
Flemington, NJ 08822 (US)
• **BROCK, George**
St. Augustine, FL 32092 (US)

- **SCHULTE, Michael D.**
Columbus, OH 43221 (US)
- **COLEMAN, Ronald K.**
Columbus, OH 43214 (US)
- **DAVIS, James R.**
Pickerington, OH 43147 (US)

(74) Representative: **Tunstall, Christopher Stephen**
Carpmaels & Ransford
One Southampton Row
London
WC1B 5HA (GB)

(56) References cited:
EP-A2- 0 223 581 EP-A2- 1 122 183
WO-A-2004/085278 US-A1- 5 954 233

EP 2 043 476 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Field of the Invention

[0001] The present invention relates to a contact lens package and, more particularly, to a screw cap package adapted for improved accessibility.

Background of the Invention

[0002] Typically, contact lenses have been packaged in blister packs. Each blister pack is equipped with a single lens and has a concave-shaped receptacle for receiving the lens and a cover removable attached to the receptacle for enclosing the lens in the receptacle. While conventional blister packs provide a convenient means for shipping and storing contact lenses, they are not designed to consistently provide easy access to the contact lenses. Such a contact lenses package is known from EP223581. Accordingly, there is a need for a contact lens package that consistently provides easy accessibility to the contact lens enclosed therein.

Summary of the Invention

[0003] The present invention overcomes the disadvantages and shortcomings of the prior art discussed above by providing a new and improved contact lens package which includes a holder having a receptacle formed in one end of the holder, the receptacle being sized and shaped so as to hold a contact lens. The package also includes a cap attached to the holder such that the cap is movable from the end of the holder where the receptacle is formed toward an opposite end thereof. The cap has a seal positioned adjacent the end of the holder where the receptacle is formed for sealing the contact lens within the receptacle. The cap is movable from a first position, in which the cap is proximal to the end of the holder where the receptacle is formed, to a second position, in which the cap is intermediate the ends of the holder. As the cap moves from its first position to its second position, the end of the holder where the receptacle is formed ruptures the seal.

Brief Description of the Drawings

[0004] For a more complete understanding of the present invention, reference is made to the following detailed description of an exemplary embodiment considered in conjunction with the accompanying drawings, in which:

FIG. 1 is a perspective view of a screw cap package constructed in accordance with an exemplary embodiment of the present invention, showing the screw cap package in its closed position;

FIG. 2 is a perspective view of the screw cap package of FIG. 1, showing the screw cap package in its open

position;

FIG. 3 is an exploded perspective view of the screw cap package shown in FIG. 1;

FIG. 4 is a cross-sectional view, taken along section lines 4-4 and looking in the direction of the arrows, of the screw cap package shown in FIG. 1 in its closed position; and

FIG. 5 is a cross-sectional view, taken along section lines 5-5 and looking in the direction of the arrows, of the screw cap package shown in FIG. 1 in its open position.

Detailed Description of the Invention

[0005] FIGS. 1-5 show a screw cap package 10 (or contact lens package) which includes a holder 12 and a screw cap 14 adapted to be moveable relative to the holder 12. The holder 12 has a main section 16 and a base 18 attached to the main section 16. The main section 16 of the holder 12 has a series of external threads 20 adapted to mate with the screw cap 14 for purposes to be discussed hereinafter.

[0006] With particular reference to FIG. 3, the main section 16 of the holder 12 includes an annular rim 22, an opening 24 and a concave-shaped receptacle 26, all of which are formed in one end of the holder 12. The receptacle 26 is sized and shaped so as to receive a contact lens 28 and a conventional contact lens solution 30 (see FIGS. 4 and 5), such as saline solution, for maintaining the contact lens 28 in a hydrated state. The holder 12 has an internal bore 32 (see FIGS. 4 and 5) formed within an opposite end 34 of the holder 12. Alternatively, the holder 12 can be completely solid.

[0007] Referring to FIGS. 1-3, the screw cap 14 includes a cylindrically-shaped external wall 36 having an annular edge 38 and a center opening 40 (see FIG. 3). The external wall 36 has a plurality of longitudinally extending grooves 42 spaced along an outer surface thereof. The grooves 42 are designed for allowing a user to attain a firm grip on the screw cap 14 and to make it easier to rotate the screw cap 14. A breakable seal 44 is affixed to the annular edge 38 of the screw cap 14 so as to cover the center opening 40. The seal 44 can be made from any suitable material (e.g., a clear high barrier polymer laminate or a clear high barrier coextrusion) adapted to provide a reliable liquid-tight seal and to break in response to the application of a predetermined force.

[0008] Referring again to FIG. 3, the screw cap 14 also includes a series of internal threads 46 adapted to threadedly engage and mate with the external threads 20 on the main section 16 of the holder 12. The internal threads 46 and the external threads 20 cooperate with each other so as to allow the screw cap 14 to be securely connected to the holder 12 and also to allow relative movement between the screw cap 14 and the holder 12, as the screw cap 14 is rotated relative to the holder 12.

[0009] With reference to FIG. 4, the screw cap 14 is attached to the holder 12 such that the internal threads

46 of the screw cap 14 mate with the external threads 20 of the holder 12 and the breakable seal 44 is positioned above the opening 24 of the holder 12. In this position, the seal 44 of the screw cap 14 covers the receptacle 26 formed in the opening 24 of the holder 12 to thereby enclose and seal the contact lens 28 stored within the receptacle 26. The screw cap package 10 is assembled and delivered to the user in this closed position, as shown in FIG. 1.

[0010] Referring to FIG. 5, the screw cap package 10 is opened as follows. A user grips the screw cap 14 with his or her fingers and then rotates the screw cap 14 relative to the holder 12. In this manner, the screw cap 14 is screwed (threaded) down over the holder 12. As a result, the breakable seal 44 on the screw cap 14 is forced against the annular rim 22 of the holder 12, thereby rupturing the seal 44 so as to expose the contact lens 28 (see FIG. 2) stored within the receptacle 26. The contact lens 28 can then be removed from the screw cap package 10.

[0011] It should be appreciated that the present invention provides a number of advantages and benefits. For instance, the present invention provides a screw cap package 10 adapted for improved accessibility.

[0012] It will be understood that the embodiment described herein is merely exemplary and that a person skilled in the art may make many variations and modifications without departing from the spirit and scope of the invention. For example, although the internal threads 46 and the external threads 20 cooperate with each other so as to allow relative movement between the screw cap 14 and the holder 12, other mechanisms can be utilized to allow relative movement between the screw cap 14 and the holder 12. All such variations and modifications are intended to be included within the scope of the invention as defined in the appended claims.

Claims

1. A package (10) for contact lenses, comprising a holder (12) having a receptacle formed in one end of said holder, said receptacle being sized and shaped so as to hold a contact lens; and a cap (14) attached to said holder such that said cap is movable relative to said holder, said cap having a seal (44) positioned adjacent said one end of said holder for sealing a contact lens within said receptacle, said cap (14) being movable from a first position, in which said cap is proximal to said one end of said holder, to a second position, in which said cap is intermediate said one end of said holder and an opposite end thereof, whereby said one end of said holder ruptures said seal (44) as said cap moves from its said first position to its said second position.
2. A package (10) for contact lenses, comprising a holder (12) having a receptacle formed in one end of said holder; a contact lens stored in said receptacle along with a predetermined quantity of contact lens solution; and a cap (14) attached to said holder such that said cap is movable relative to said holder, said cap (14) having a seal (44) positioned adjacent said one end of said holder for sealing said contact lens within said receptacle, said cap being movable from a first position, in which said cap is proximal to said one end of said holder, to a second position, in which said cap is intermediate said one end of said holder and an opposite end thereof, whereby said one end of said holder ruptures said seal (44) as said cap moves from its said first position to its said second position.
3. The package of Claim 1 or 2, wherein said holder includes a series of external threads.
4. The package of Claim 3, wherein said cap includes a series of internal threads adapted to threadedly mate with said external threads of said holder.
5. The package of Claim 4, wherein said external threads of said holder and said internal threads of said cap cooperate with each other so as to allow said cap to be connected to said holder.
6. The package of Claim 5, wherein said external threads of said holder and said internal threads of said cap cooperate with each other so as to allow relative movement between said holder and said cap when said screw cap is rotated relative to said holder.
7. The package of Claim 6 when dependent on claim 1, wherein said holder has an internal bore in said opposite end thereof.
8. The package of Claim 7, wherein said one end of said holder includes an annular rim adjacent said receptacle.
9. The package of Claim 6 or 8, wherein said cap includes gripping means for gripping and rotating said cap.
10. The package of Claim 9, wherein said gripping means includes a plurality of longitudinally extending grooves formed in said cap.
11. The package of Claim 10, wherein said holder has an internal bore in said opposite end thereof.
12. The package of Claim 10 when dependent on claim 8, wherein said cap includes an annular edge which supports said seal.
13. The package of Claim 12, wherein said seal is made of a clear high barrier polymer laminate.

14. The package of Claim 12, wherein said seal is made of a clear high barrier coextrusion.

zwischen dem Halter und der Kappe zu gestatten.

Patentansprüche

1. Packung (10) für Kontaktlinsen, die einen Halter (12) mit einem in einem Ende des Halters gebildeten Behältnis, das so bemessen und gestaltet ist, dass es eine Kontaktlinse aufnimmt, und eine Kappe (14) umfasst, die so am Halter angebracht ist, dass sie bezüglich des Halters beweglich ist, die eine neben dem einen Ende des Halters positionierte Dichtung (44) zum Abdichten einer Kontaktlinse in dem Behältnis hat und die aus einer ersten Position, in der die Kappe zu dem einen Ende des Halters proximal ist, in eine zweite Position beweglich ist, in der die Kappe zwischen dem einen Ende des Halters und einem gegenüberliegenden Ende davon liegt, wobei das eine Ende des Halters die Dichtung (44) durchbricht, wenn sich die Kappe aus ihrer ersten Position in ihre zweite Position bewegt.

5

7. Packung nach Anspruch 6, wenn dieser von Anspruch 1 abhängig ist, wobei der Halter in seinem gegenüberliegenden Ende eine Innenbohrung hat.

10

8. Packung nach Anspruch 7, wobei das eine Ende des Halters einen ringförmigen Rand neben dem Behältnis aufweist.

15

9. Packung nach Anspruch 6 oder 8, wobei die Kappe ein Greifmittel zum Ergreifen und Drehen der Kappe aufweist.

20

10. Packung nach Anspruch 9, wobei das Greifmittel mehrere sich in Längsrichtung erstreckende und in der Kappe gebildete Nuten aufweist.

11. Packung nach Anspruch 10, wobei der Halter in seinem gegenüberliegenden Ende eine Innenbohrung hat.

25

12. Packung nach Anspruch 10, wenn dieser von Anspruch 8 abhängig ist, wobei die Kappe eine ringförmige Kante aufweist, die die Dichtung stützt.

30

13. Packung nach Anspruch 12, wobei die Dichtung aus einem klaren Hochbarriere-Polymerlaminat hergestellt ist.

35

14. Packung nach Anspruch 12, wobei die Dichtung aus einem klaren Hochbarriere-Coextrudat hergestellt ist.

2. Packung (10) für Kontaktlinsen, die einen Halter (12) mit einem in einem Ende des Halters gebildeten Behältnis, eine Kontaktlinse, die zusammen mit einer vorbestimmten Menge an Kontaktlinsenlösung in dem Behältnis gelagert ist, und eine Kappe (14) umfasst, die so am Halter angebracht ist, dass sie bezüglich des Halters beweglich ist, die eine neben dem einen Ende des Halters positionierte Dichtung (44) zum Abdichten der Kontaktlinse in dem Behältnis hat und die aus einer ersten Position, in der die Kappe zu dem einen Ende des Halters proximal ist, in eine zweite Position beweglich ist, in der die Kappe zwischen dem einen Ende des Halters und einem gegenüberliegenden Ende davon liegt, wobei das eine Ende des Halters die Dichtung (44) durchbricht, wenn sich die Kappe aus ihrer ersten Position in ihre zweite Position bewegt.

40

3. Packung nach Anspruch 1 oder 2, wobei der Halter ein Außengewinde aufweist.

45

4. Packung nach Anspruch 3, wobei die Kappe ein Innengewinde aufweist, das geeignet ist, mit dem Außengewinde des Halters gewindemäßig zusammenzupassen.

50

5. Packung nach Anspruch 4, wobei das Außengewinde des Halters und das Innengewinde der Kappe zusammenwirken, damit die Kappe mit dem Halter verbunden werden kann.

55

6. Packung nach Anspruch 5, wobei das Außengewinde des Halters und das Innengewinde der Kappe zusammenwirken, um beim Drehen der Schraubkappe bezüglich des Halters eine Relativbewegung

Revendications

1. Emballage (10) pour lentilles de contact, comprenant un étui (12) doté d'un récipient formé dans une extrémité dudit étui, ledit récipient étant dimensionné et formé de manière à contenir une lentille de contact ; et un capuchon (14) fixé audit étui de telle sorte que ledit capuchon puisse être déplacé par rapport audit étui, ledit capuchon possédant un joint d'étanchéité (44) positionné de manière adjacente à ladite une extrémité dudit étui pour sceller une lentille de contact à l'intérieur dudit récipient, ledit capuchon (14) pouvant être déplacé d'une première position, dans laquelle ledit capuchon est situé à proximité de ladite une extrémité dudit étui, à une deuxième position, dans laquelle ledit capuchon est situé entre ladite une extrémité dudit étui et une extrémité opposée de ce dernier, ladite une extrémité dudit étui rompant ledit joint d'étanchéité (44) lorsque ledit capuchon se déplace de sa dite première position à sa dite deuxième position.

2. Emballage (10) pour lentilles de contact, compre-

- nant un étui (12) doté d'un récipient formé dans une extrémité dudit étui ; une lentille de contact conservée dans ledit récipient avec une quantité prédéfinie de solution pour lentilles de contact ; et un capuchon (14) fixé audit étui de telle sorte que ledit capuchon puisse être déplacé par rapport audit étui, ledit capuchon (14) possédant un joint d'étanchéité (44) positionné de manière adjacente à ladite une extrémité dudit étui pour sceller ladite lentille de contact à l'intérieur dudit récipient, ledit capuchon pouvant être déplacé d'une première position, dans laquelle ledit capuchon est situé à proximité de ladite une extrémité dudit étui, à une deuxième position, dans laquelle ledit capuchon est situé entre ladite une extrémité dudit étui et une extrémité opposée de ce dernier, ladite une extrémité dudit étui rompant ledit joint d'étanchéité (44) lorsque ledit capuchon se déplace de sa dite première position à sa dite deuxième position.
- 20
3. Emballage selon la revendication 1 ou 2, dans lequel ledit étui comporte une série de filetages extérieurs.
4. Emballage selon la revendication 3, dans lequel ledit capuchon comporte une série de filetages intérieurs conçus pour être accouplés par vissage auxdits filetages extérieurs dudit étui.
- 25
5. Emballage selon la revendication 4, dans lequel lesdits filetages extérieurs dudit étui et lesdits filetages intérieurs dudit capuchon coopèrent les uns avec les autres de manière à permettre audit capuchon d'être relié audit étui.
- 30
6. Emballage selon la revendication 5, dans lequel lesdits filetages extérieurs dudit étui et lesdits filetages intérieurs dudit capuchon coopèrent les uns avec les autres de manière à permettre un mouvement relatif entre ledit étui et ledit capuchon lorsque ledit capuchon à vis est tourné par rapport audit étui.
- 35
- 40
7. Emballage selon la revendication 6, lorsqu'elle dépend de la revendication 1, dans lequel ledit étui possède un trou intérieur dans ladite extrémité opposée de ce dernier.
- 45
8. Emballage selon la revendication 7, dans lequel ladite une extrémité dudit étui comporte un rebord annulaire adjacent audit récipient.
- 50
9. Emballage selon la revendication 6 ou 8, dans lequel ledit capuchon comporte un moyen de préhension pour saisir et faire tourner ledit capuchon.
10. Emballage selon la revendication 9, dans lequel ledit moyen de préhension comporte une pluralité de rainures s'étendant longitudinalement formées dans ledit capuchon.
- 55
11. Emballage selon la revendication 10, dans lequel ledit étui possède un trou intérieur dans ladite extrémité opposée de ce dernier.
- 5
12. Emballage selon la revendication 10, lorsqu'elle dépend de la revendication 8, dans lequel ledit capuchon comporte un bord annulaire qui supporte ledit joint d'étanchéité.
- 10
13. Emballage selon la revendication 12, dans lequel ledit joint d'étanchéité est constitué d'un stratifié en polymère à haute barrière transparent.
- 15
14. Emballage selon la revendication 12, dans lequel ledit joint d'étanchéité est constitué d'une coextrusion à haute barrière transparente.

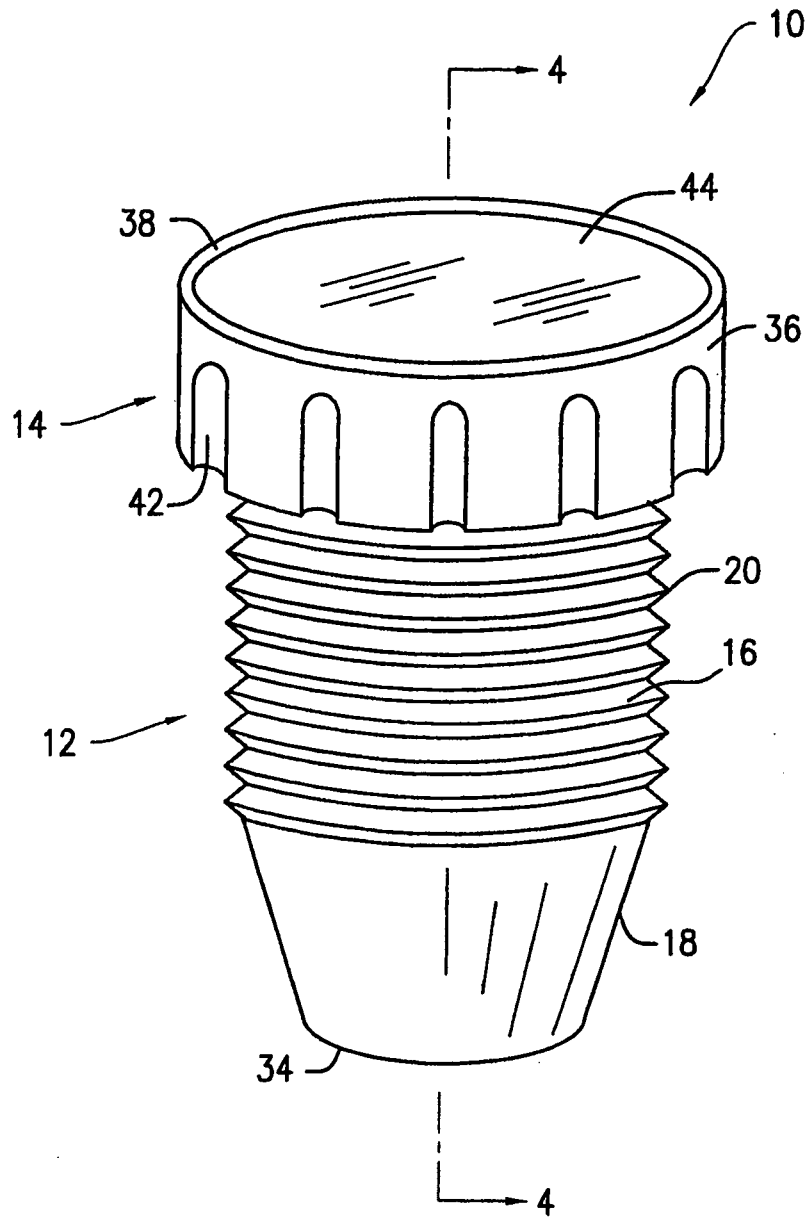


FIG. 1

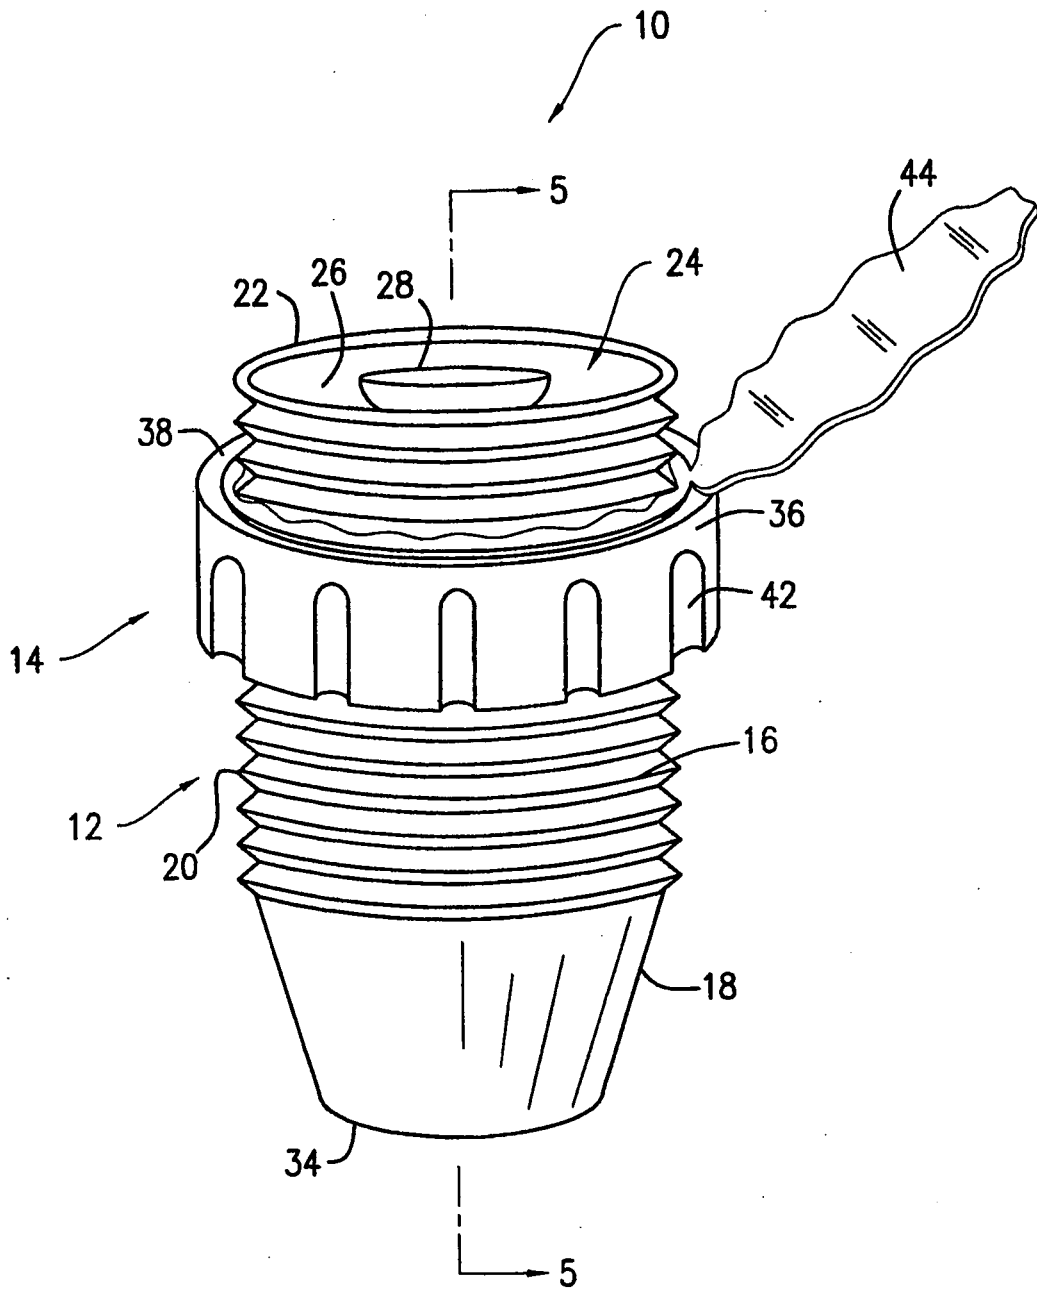


FIG. 2

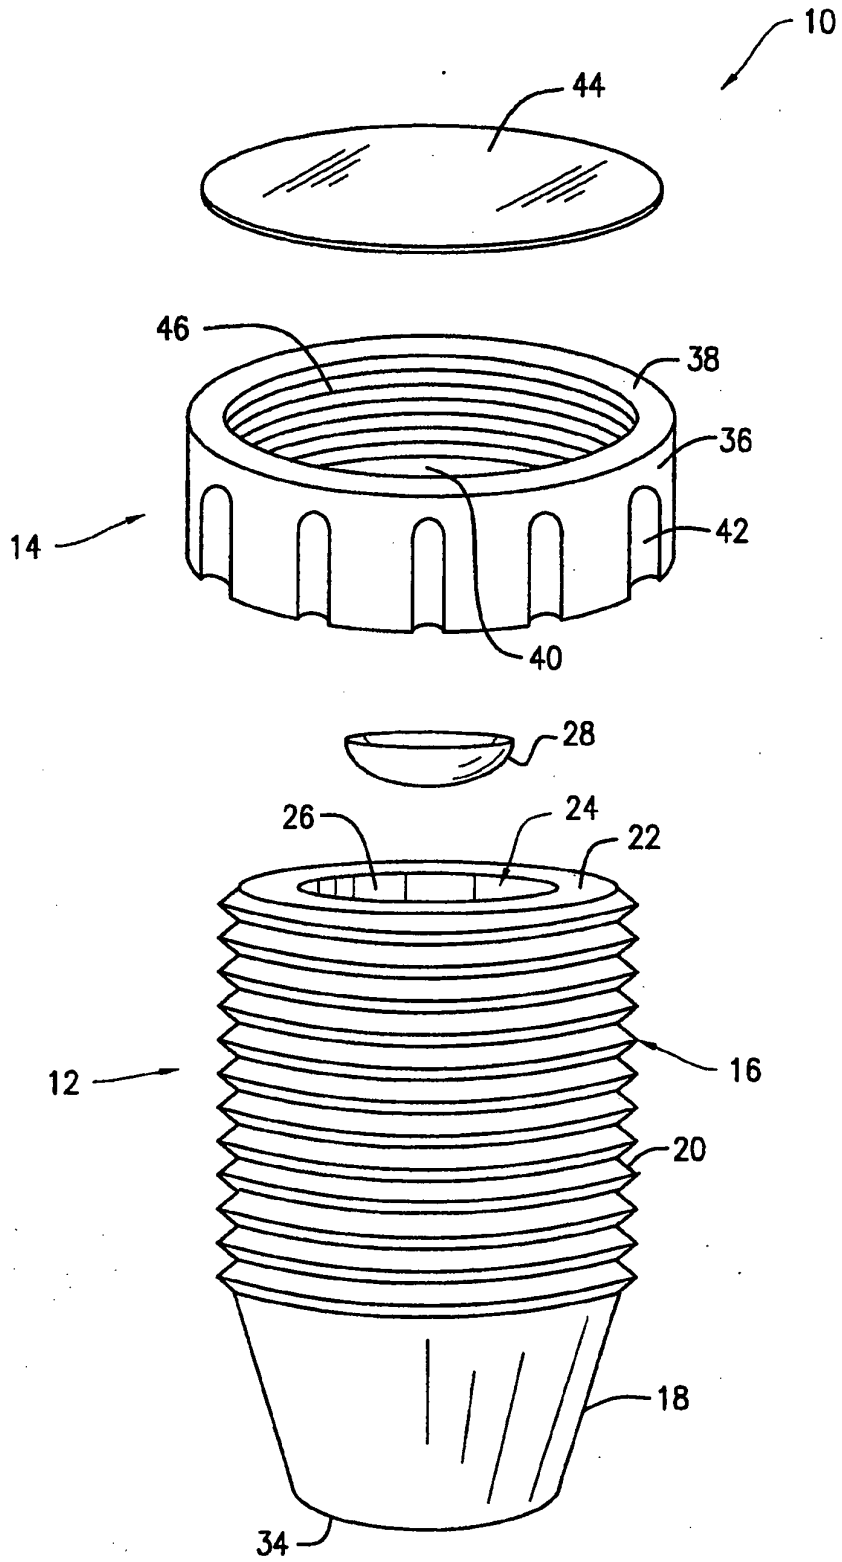


FIG. 3

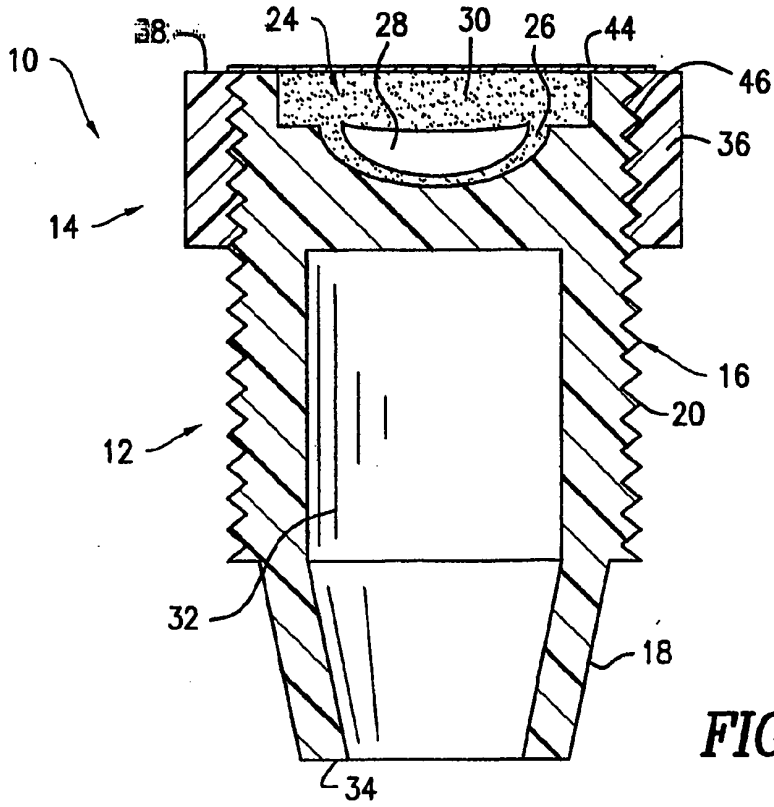


FIG. 4

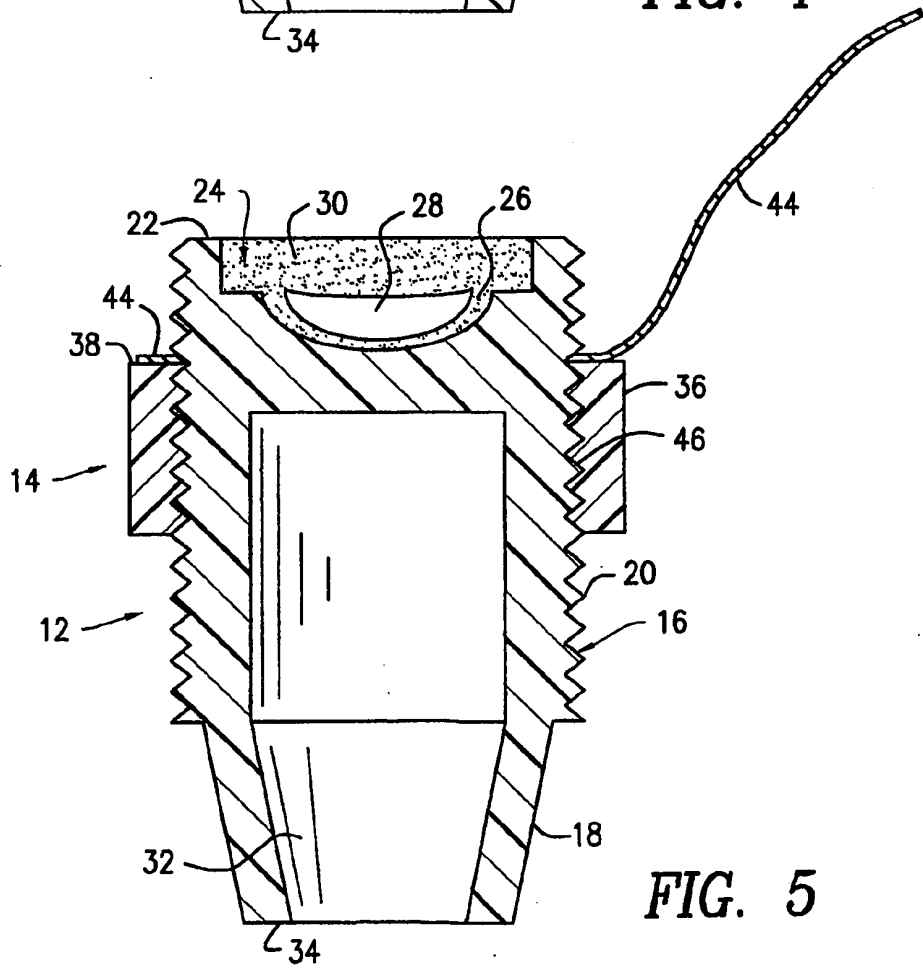


FIG. 5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 223581 A [0002]