



(11) **EP 2 048 427 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
06.10.2010 Bulletin 2010/40

(51) Int Cl.:
F17C 13/08^(2006.01)

(21) Application number: **07118395.8**

(22) Date of filing: **12.10.2007**

(54) **Compressed air reservoir**

Druckluftspeicher

Réservoir pour air comprimé

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE SI SK TR

(43) Date of publication of application:
15.04.2009 Bulletin 2009/16

(73) Proprietor: **IVECO MAGIRUS AG**
89079 Ulm (DE)

(72) Inventors:
• **Distelrath, Heinz-Peter**
89079 ULM/GOEGGLINGEN (DE)

• **Pohl, Harald**
89155 ERBACH (DE)

(74) Representative: **Borsano, Corrado et al**
Notarbartolo & Gervasi S.p.A.
Corso di Porta Vittoria, 9
20122 Milano (IT)

(56) References cited:
EP-A- 1 679 468 WO-A-2007/048953
DE-A1- 19 935 517 GB-A- 1 345 794
GB-A- 2 089 014 US-A- 4 345 789

EP 2 048 427 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention concerns a compressed air reservoir in the form of a cylindrical body with end caps at the ends.

[0002] The invention particularly refers to a compressed air reservoir as used for vehicles, especially lorries. Compressed air reservoirs are also used for stationary operation, for example for compressors, as described for example on EP 1679468 A1, considered as closest prior art, in which a compressed air reservoir is disclosed comprising a cylindrical body with ends caps and with attachment means provided on its external surface for an easy attachment of the reservoir on supporting wall or the like.

[0003] In vehicles, numerous functions are operated by compressed air, for example in activating brakes, for a pneumatic suspension or for ancillary consumers, such as the pneumatic suspension of the driver's cabin etc.

[0004] Thus, as a rule, one or more compressed air reservoirs are located on lorries.

[0005] In vehicle manufacturing, a low vehicle weight is generally aimed at, as, above all, fuel consumption is considerably dependent on the vehicle weight. Thus, in many applications, aluminium, for example, is used. Compressed air reservoirs of aluminium or magnesium are known.

[0006] Compressed air reservoirs are mostly attached to the main frame or chassis with the aid of suitable mounting arrangements. Supporting brackets, tightening straps and various mounting and connecting fittings have been used up until now for this purpose.

[0007] The underlying objective of the invention is to construct a compressed air reservoir in such a way as to facilitate both the attachment of supplementary elements to the compressed air reservoir as well as the attachment of the compressed air reservoir to the vehicle.

[0008] To achieve this objective, the compressed air reservoir according to the invention is in the form of a cylindrical body with a end cap at the end and with attachment means, **characterised in that** said attachment means comprise an extruded strip directly integrated in the casing in at least one straight line in wall area of said cylindrical body.

[0009] The attachment strip is preferably furnished with a slot, accessible from the outside. In this respect, the attachment strip does not appear as a physically separate part, as it is directly integrated in the extruded wall of the compressed air reservoir.

[0010] The end caps are generally welded to the cylindrical body.

[0011] The slot is preferably an undercut slot, e.g. one with a T-section, dove-tailed-section or any other shape. In this way, it is possible to attach supplementary elements to the compressed air reservoir with the aid of bolts, slide blocks or nuts within the slot, or to attach the compressed air reservoir itself to the vehicle. The cylindrical body is not necessarily a circular cylinder. Depend-

ing on the available space within the vehicle, something other than a circular cross-section can be desirable. It is often difficult to accommodate a circular cylindrical compressed air reservoir, especially in passenger cars with pneumatic suspensions, so that, for instance, flat, square-cut shaped compressed air reservoirs are considered in this area.

[0012] The attachment strip according to the invention can also be used to connect together two or more compressed air reservoirs.

[0013] The following explain in more detail, with the aid of the attached drawings, preferred examples of embodiments of the invention.

[0014] Fig. 1 shows the mounting of a compressed air reservoir according to the invention to a bracket;

[0015] Fig. 2 illustrates the mounting of two connected compressed air reservoirs;

[0016] Fig. 3 is a detailed view and illustrates the combination of two attachment strips to connect two reservoirs corresponding to Fig. 2;

[0017] Fig. 4 shows a compressed air reservoir with two attachment strips and correspondingly constructed bracket;

[0018] Fig. 5 corresponds to Fig. 2 and shows the mounting of two compressed air reservoirs with the aid of two attachment strips;

[0019] Fig. 6 is a detailed view to illustrate the type of connection of the compressed air reservoirs corresponding to Figs. 4 and 5.

[0020] In Fig. 1, a compressed air reservoir is denoted in its entirety by 10. It comprises a circular cylindrical body 12 and two end caps 14 which seal the cylinder at the front and rear ends.

[0021] The compressed air reservoir is attached to a horizontal flange of a bracket 20 with L-shaped cross-section with the aid of two bolts 16, 18.

[0022] Both bolts 16 and 18 are able to be slid within a slot, denoted by 22. The bolts are fastened to the aforementioned bracket 20, together with the complete reservoir, by means of nuts. The T-slot 22 forms an attachment strip which is used, according to Fig. 1, to mount the compressed air reservoir 10 to the bracket 20. The T-slot is manufactured, together with the cylindrical body 12, by extrusion, particularly out of aluminium or magnesium or their alloys. In this way, the attachment strip with the T-slot is directly integrated in the wall area of the cylindrical body.

[0023] It is also possible to design the attachment strip not as a slot, but as a raised rail with T-shaped cross-section, as shown in Fig. 3. Fig. 3 belongs to the view in Fig. 2 and shows the assembly of two compressed air reservoirs one above the other. The lower compressed air reservoir 24 basically corresponds to the compressed air reservoir 10 according to Fig. 1. An attachment strip which forms a T-slot 26 runs along the upper surface line. This T-slot 26 is extruded together with the cylindrical body and is therefore completely integrated in it. A raised rail 30 with T-shaped cross-section runs on the underside

of the upper compressed air reservoir and can be slid along the T-slot 26 provided on the lower reservoir. This raised T-shaped rail likewise produced by means of extrusion together with the cylindrical casing of the upper compressed air reservoir 28 (not shown).

[0024] This T-shaped rail 30 is flanked on both sides by flanges 32,34 which overlap the T-slot section of the lower reservoir on both sides and in this way provide for greater stability of the assembly. Depending upon the situation, the aforementioned flanges 32,34 can also be omitted.

[0025] Fig. 2 illustrates the mounting of both compressed air reservoirs 24 and 28 below the bracket 20.

[0026] The rail 30 with T-shaped cross-section together with both the side flanges 32 and 34 form an attachment rail according to the present invention.

[0027] Two parallel attachment strips can be provided for particularly heavy compressed air reservoirs or for other especially heavy loading of the mounting of the compressed air reservoir. This is illustrated in Fig. 4. On a bracket 36 is a compressed air reservoir 38 which has T-slots 40,42 on either side of the surface line and which, in this case, is also manufactured by extrusion together with the cylindrical body of the compressed air reservoir 38. These T-slots allow the attachment of the compressed air reservoir 38 to the horizontal flange of the bracket 36 with the aid of bolts 44,46,48,50.

[0028] How this presents itself in detail, emerges from Fig. 6. Here the T-slots 40,42 of the lower reservoir 52 are again shown, in which the raised T-section rails 54,56, located on the underside of the upper reservoir 52, engage, as already shown in principle in and explained in connection with Fig. 3.

[0029] In each case, both the undercut slots 40,42 as well as the raised T-section rails 54,56 of the upper compressed air reservoir together with its cylindrical casing are manufactured by extrusion. Thus, aluminium and magnesium can above all be considered as raw materials. Both the lower slots 40, 42 as well as the upper projecting rails 54,56 are considered attachment strips according to the present invention.

[0030] The embodiments shown and described here correspond to circular cylindrical compressed air reservoirs. However, it is also possible to manufacture compressed air reservoirs with other cross sections.

[0031] Other attachment strips can be used which are also extruded together with the cylindrical casing of the body, for example those which are raised with respect to the compressed air reservoir.

Claims

1. Compressed air reservoir in the form of a cylindrical body (12) with a end cap at the end (14) and with attachment means, **characterised in that** said attachment means comprise an extruded strip (22,26,30,40) directly integrated in the casing in at

least one straight line in wall area of said cylindrical body (1 2).

2. Compressed air reservoir according to Claim 1, **characterised in that** the attachment strip (22, 26, 30, 40) has a slotted-section.
3. Compressed air reservoir according to Claim 2, **characterised in that** the slot has a T-cross-section.
4. Compressed air reservoir according to Claim 2, **characterised in that** the slot is dove-tailed.
5. Use of an attachment strip according to claim 1, for connecting said cylindrical body (12) to a vehicle, especially a lorry.

Patentansprüche

1. Druckluft-Speicher in Form eines zylindrischen Körpers (12) mit einer EndKappe an dem Ende (14) und mit Befestigungseinrichtungen, **dadurch gekennzeichnet, dass** die Befestigungseinrichtungen einen extrudierten Streifen (22, 26, 30, 40) umfassen, der direkt in dem Gehäuse in wenigstens einer geraden Linie im Wandbereich des zylindrischen Körpers (12) integriert ist.
2. Druckluft-Speicher nach Anspruch 1, **dadurch gekennzeichnet, dass** der Befestigungsstreifen (22, 26, 30, 40) einen genuteten Abschnitt aufweist.
3. Druckluft-Speicher nach Anspruch 2, **dadurch gekennzeichnet, dass** die Nut einen T-Querschnitt aufweist.
4. Druckluft-Speicher nach Anspruch 2, **dadurch gekennzeichnet, dass** die Nut Schwalbenschwanzförmig ist.
5. Verwendung eines Befestigungsstreifens nach Anspruch 1 zum Verbinden des zylindrischen Körpers (12) mit einem Fahrzeug, insbesondere mit einem Lastwagen.

Revendications

1. Réservoir d'air comprimé sous forme de corps cylindrique (12) avec un bouchon d'extrémité à l'extrémité (14) et avec des moyens de fixation, **caractérisé en ce que** lesdits moyens de fixation comprennent une bande extrudée (22, 26, 30, 40) directement intégrée dans l'enveloppe dans au moins une ligne droite dans une zone de paroi dudit corps cylindrique (12).

2. Réservoir d'air comprimé selon la revendication 1, **caractérisé en ce que** la bande de fixation (22, 26, 30, 40) présente une section à fente.
3. Réservoir d'air comprimé selon la revendication 2, **caractérisé en ce que** la fente présente une section transversale en T. 5
4. Réservoir d'air comprimé selon la revendication 2, **caractérisé en ce que** la fente est en queue d'aronde. 10
5. Utilisation d'une bande de fixation selon la revendication 1, pour relier ledit corps cylindrique (12) à un véhicule, particulièrement un camion. 15

20

25

30

35

40

45

50

55

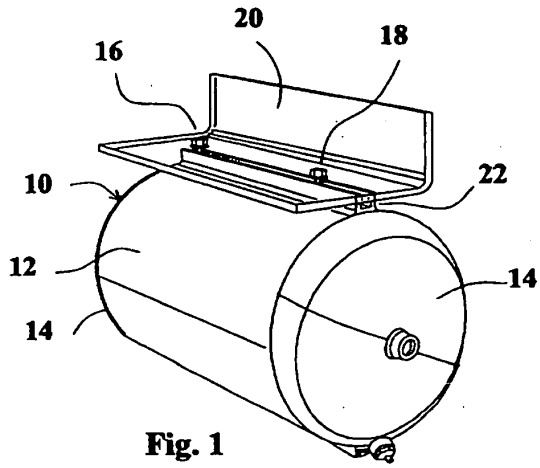


Fig. 1

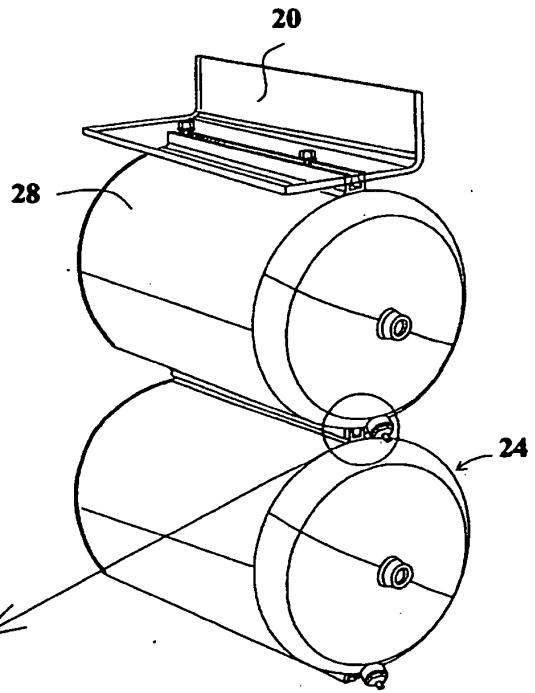


Fig. 2

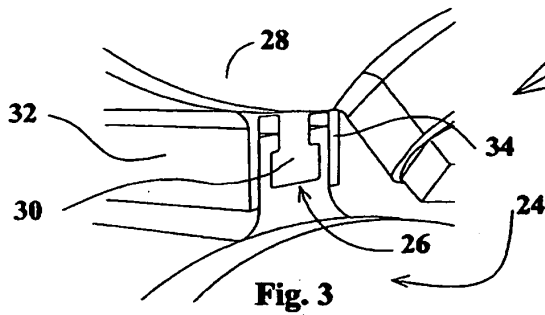


Fig. 3

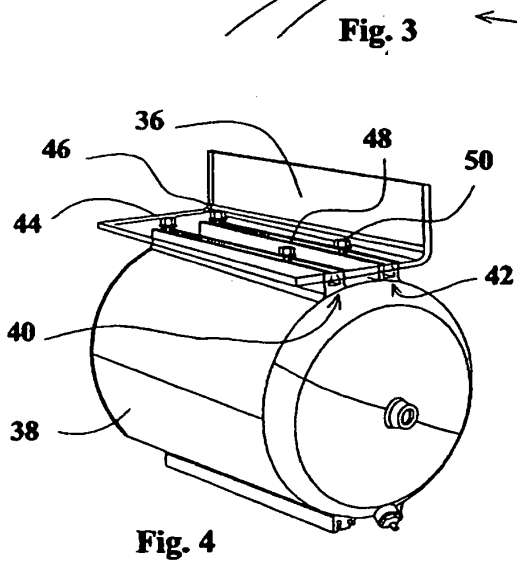


Fig. 4

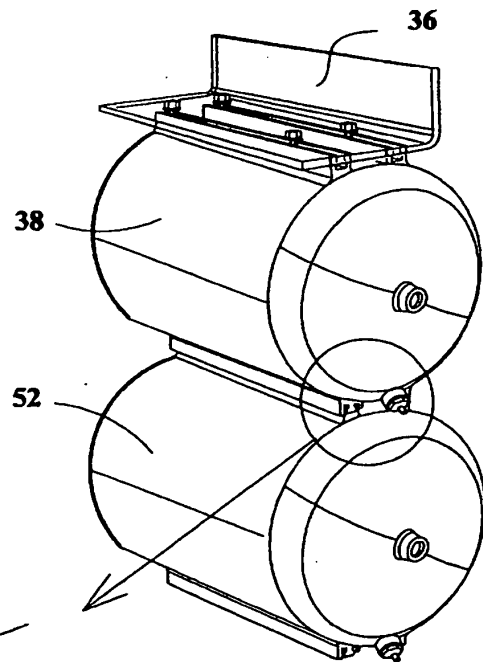


Fig. 5

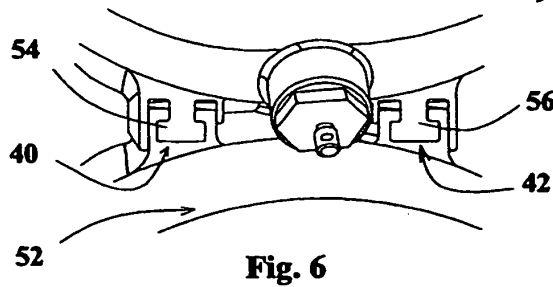


Fig. 6

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1679468 A1 [0002]