



(11) **EP 2 051 182 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 54

(51) Int Cl.:
G06F 21/24 ^(2006.01) **G01C 21/00** ^(2006.01)

(86) International application number:
PCT/JP2006/315594

(48) Corrigendum issued on:
07.10.2009 Bulletin 2009/41

(87) International publication number:
WO 2008/018115 (14.02.2008 Gazette 2008/07)

(43) Date of publication:
22.04.2009 Bulletin 2009/17

(21) Application number: **06782436.7**

(22) Date of filing: **07.08.2006**

(84) Designated Contracting States:
DE FR GB

(72) Inventor: **YAGIU, Riko**
Tokyo 100-8310 (JP)


(71) Applicant: **Mitsubishi Electric Corporation**
Chiyoda-ku
Tokyo 100-8310 (JP)

(74) Representative: **Pfenning, Meinig & Partner GbR**
Patent- und Rechtsanwälte
Theresienhöhe 13
80339 München (DE)

(54) **DATA TRANSFER DEVICE, MOBILE TERMINAL DEVICE, DATA TRANSFER METHOD, AND DATA TRANSFER PROGRAM**

(57) A communication apparatus 110 may automatically extract data items that a user wishes to protect from data items stored in a data storing section 102, and then automatically transfer extracted data items to a communication device 200. A data storing section 102 may store data 1020. A data managing section 101 may automatically extract a data item to be transferred to the communication device 200 from the data items of the data 1020, with reference to protected data definition information 1040, and generate an additional information list 1050, in which the data item to be transferred is included. The data managing section 101 may transfer the data item to be transferred to the communication device 200 with reference to the additional information list 1050, when a power supply managing section 104 detects a power OFF event.

Fig. 6

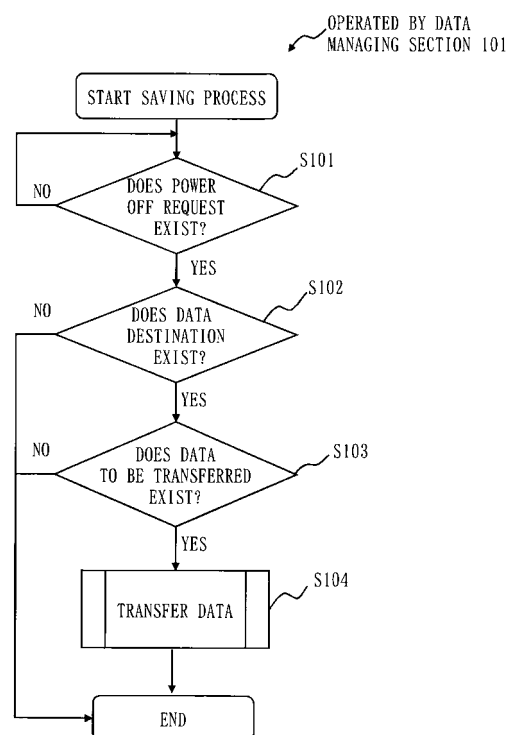

EP 2 051 182 A8