



(11) **EP 2 051 219 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
22.04.2009 Bulletin 2009/17

(51) Int Cl.:
G08B 13/24 (2006.01) **B65D 55/02** (2006.01)
B65D 23/14 (2006.01)

(21) Application number: **08253248.2**

(22) Date of filing: **07.10.2008**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT
RO SE SI SK TR**
Designated Extension States:
AL BA MK RS

(72) Inventor: **Gallo, Sidnei Dal
Valinhos
São Paulo (BR)**

(30) Priority: **08.10.2007 BR 705078**

(74) Representative: **Kirsch, Susan Edith et al
Carpmaels & Ransford
43-45 Bloomsbury Square
London WC1A 2RA (GB)**

(71) Applicant: **Johnson & Johnson Industrial Ltda
12230-990 Sao Jose Dos Campos - SP (BR)**

(54) **Article with theft-detering feature**

(57) An article formed to receive a security marker in a manner that reduces the likelihood of the security marker from being removed, either intentionally (such as to remove the article from a restricted area without authorization to do so) or inadvertently (such as by getting caught on another article). The security marker may additionally be concealed from view to further deter intentional removal of the security marker. Moreover, the se-

curity marker may be associated with the article such that it does not impact the appearance of the article to an observer, yet removal of the security marker would damage the article in a manner that is undesirable to a user of the article and/or readily noticeable by the establishment from which the article is being improperly removed.

EP 2 051 219 A1

Description

FIELD OF THE INVENTION

[0001] The present invention relates to an article equipped with a theft-detering feature and an associated method of forming an article to deter theft of the article. More particularly, the present invention relates to an article and associated method of modifying the article such that the article cannot be removed from a given area without signaling unauthorized removal from the area.

BACKGROUND OF THE INVENTION

[0002] In order to prevent unauthorized removal of an article from a given area (such as retail stores, libraries, video rental stores, etc.), it is common to affix, attach, secure, or otherwise associate a tag, label, marker, or the like ("security marker" for the sake of convenience) to or with the article to interact with an electronic article surveillance ("EAS") security system. The security system detects the presence of the security marker as the article with which it is associated passes through a security or surveillance zone or passes by or near a security checkpoint, interrogation zone, or surveillance station, or the like. An alarm may be actuated or another action may be initiated to prevent removal of the article from the given area.

[0003] Generally, electronic article surveillance security systems have an alarm system that alerts an appropriate individual of the removal of the article from the given area. Typically, such alarm system is arranged so that it must be deactivated by only an authorized individual. Any desired type of alarm or alert system may be used with the above-described EAS security systems. For instance, the alarm may be audible (e.g., beeping or buzzing or siren) and/or visual (e.g., flashing lights). The alarm may be detectable only within a given detection area, or throughout the entire establishment. Alternatively, a silent alarm having a remote indicator (audible, visual, or vibrating) may be used, generally detectable only by a designated operator, who may be at a designated remote location. The alarm signal may be continuous or intermittent, and it may persist for a predetermined period of time before ceasing to signal or sound, or it may continue indefinitely until it is turned off or deactivated by authorized personnel. Additionally, or alternatively, the alarm may activate a gate or other escape-blocking means. The alarm may be physically within the security system or it may be detached therefrom, but connected electronically or remotely by a wired or wireless connection.

[0004] The security marker associated with the article to be maintained within a given area may take on any of a variety of sizes, shapes, and forms, depending any of a variety of factors, such as the security system in use, the type and size of the article with which it is associated, etc. For instance, the security marker may be formed with

a resonant circuit that can be sensed by and interact with a radio-frequency electromagnetic field disturbance sensing electronic security system. The security system generally would establish an electromagnetic field in a controlled area through which the article with the security marker must pass when being removed from the controlled premises. An alarm is activated upon passing the article through the electromagnetic field, thereby alerting authorities of the unauthorized removal of the article.

[0005] Another type of EAS security system is referred to as a harmonic system because it is based on the principle that a magnetic material (e.g., a magnetomechanical or acoustomagnetic label) passing through a magnetic field having a selected frequency disturbs the field and produces harmonic perturbations of the selected frequency. The magnetic material may itself include a magnetic resonator that mechanically vibrates at a predetermined frequency when within the magnetic field. The detection system is tuned to recognize certain harmonic frequencies (such as the frequency of vibration from the magnetic resonator) which, if present, activate an alarm. Thus, if an article with a security marker that causes a disturbance in the magnetic field passes through such a harmonic system, an alarm or other signal is generated to indicate or to prevent removal of such article from the premises. Other types of harmonic electronic article surveillance systems are based on markers which include a thin strip or wire of magnetic material that responds to an alternating interrogation signal to activate an alarm.

[0006] Security markers may be associated with an article in any of a variety of manners. For instance, a security marker may be integrated with a price label attached to an article, or imbedded or incorporated in the packaging for the article, or placed in the article itself. Thus, the security marker may be attached external to the article to be protected, or internal to the product or its packaging. Depending on the article, placement on the exterior of the article may be simpler, particularly since such placement may be performed separately from and after the manufacture of the article.

[0007] One disadvantage of the placement of a security marker on the exterior of the article to be protected is that the security marker is susceptible to removal, thus facilitating unauthorized removal of the article from the secured area. An externally positioned security marker is also susceptible to accidental removal, such as by becoming caught on another object. Moreover, removal of an externally placed security marker by an authorized person also may have disadvantages. For instance, the material to which the security marker is attached may become torn or ripped upon removal of the security marker therefrom, thus marring the appearance of the article.

[0008] Because security markers may be removed from an article by an individual who intends to remove the article from a given area without authority, it is desirable to associate the security marker with the article such that it is not readily removable from the article. For instance, the security marker may be secured to the article

such that it may not easily be removed from the article without damaging the article. Such security markers include tags containing dyes that are released upon unauthorized removal of the tag from the article. Alternatively, or additionally, the security marker may be associated with the article in a manner that conceals the security marker from ready detection. For instance, a security marker may be embedded within a book cover, as disclosed in U.S. patents 6,094,137 and 7,233,246; within a bottle cap, as disclosed in U.S. patent 6,137,413; or incorporated within a media storage disk box, as disclosed in U.S. patent 6,619,079. It has also been known to hide a security marker on the bottom of a regular container and to cover the security marker by adding a second container bottom (considered a false bottom) over the security marker. Additional process steps, machinery, and material thus are required by such solution. Moreover, the external dimensions of the container are increased without increasing the volume capacity, and the false bottom is a visual cue for assisting in locating the security marker to remove it.

SUMMARY OF THE INVENTION

[0009] In accordance with the principles of the present invention, an article is formed to receive a security marker in a manner that permits ready concealment of the security marker. Additionally, or alternatively, an article is formed in accordance with the principles of the present invention such that a security marker may be associated therewith such that it does not impact the appearance of the article to an observer, yet removal of the security marker would damage the packaging in a manner that is undesirable to a user of the article and/or readily noticeable by the establishment from which the article is being improperly removed.

[0010] The article of the present invention may be formed to permit association of a security marker therewith in a manner that does not add manufacturing or assembly steps or components beyond those normally used.

[0011] The security marker and article may be formed and/or arranged such that the security marker is not readily visible to an individual and/or does not protrude. For instance, the security marker may be hidden such that the external appearance of the article is no different from the external appearance of a similar article without a security marker. As such, the security marker is less apt to be intentionally or unintentionally removed from the article.

[0012] These and other features and advantages of the present invention will be readily apparent from the following detailed description of the invention, the scope of the invention being set out in the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] The detailed description will be better under-

stood in conjunction with the accompanying drawings, wherein like reference characters represent like elements, as follows:

[0014] FIGURE 1 is a perspective view of an exemplary article formed to permit a security marker to be associated therewith in a manner that permits concealment of the security marker;

[0015] FIGURE 2 is a side elevational view of the article of FIGURE 1;

[0016] FIGURE 3 is a perspective view of an exemplary article with a security marker affixed thereto in accordance with the principles of the present invention;

[0017] FIGURE 4 is a side elevational view of an article, as in FIGURE 2, but with a security marker associated with the article and concealed from view; and

[0018] FIGURE 5 is a perspective view of another exemplary article formed to permit a security marker to be associated therewith in a manner that permits concealment of the security marker.

DETAILED DESCRIPTION OF THE INVENTION

[0019] In accordance with the principles of the present invention, a security marker is provided on article in a manner that deters or prevents removal of the article from a given area. The security marker may be in any desired form, such as an element that is detectable by a sensor at a detection point or zone in the given area. A detection point or zone may be created at every point of entry or exit ("doors" for the sake of convenience, regardless of whether or not an actual door is present to block the entrance or exit of individuals or articles) to the given area. The sensor may be a part of an electronic article surveillance ("EAS") security system, such security systems being well known in the art. An alarm or other appropriate action may be initiated upon passing the security marker past the detection point in the given area. It will be appreciated that the present invention is not limited to any particular security marker or security system or other detection system.

[0020] In accordance with the principles of the present invention, a security marker is provided on the exterior of an article in a manner such that the security marker does not protrude, or at least does not protrude significantly, beyond the external surface of the article. As such, the security marker is not evident to an individual and is less likely to be identified or located for deliberate removal from the article to remove the article from a restricted area without authorization. Moreover, because the security marker does not protrude, or at least does not significantly protrude, beyond the external surface of the article, it is less likely to be inadvertently removed (such as by getting caught on another object).

[0021] An exemplary article **100** incorporating the principles of the present invention is illustrated in FIGURE 1 in the form of a primary packaging (a packaging directly containing a product). More particularly, exemplary article **100** is in the form of a container, such as a bottle.

However, any other type of article can incorporate the principles of the present invention as well, such as a secondary packaging (a packaging containing another packaging, such as a primary packaging, for a product), as described in further detail below.

[0022] Exemplary article **100** preferably is formed such that a security marker may be associated therewith in a manner that deters removal therefrom. More particularly, article **100** may be shaped, configured, or formed such that a security marker may be associated therewith in a manner that does not allow ready accidental or deliberate removal of the security marker from article **100**. For instance, as illustrated in FIGURES 3 and 4, article **100** may be formed to receive a security marker **102** such that security marker **102** does not protrude from and is not otherwise offset from article **100**. More particularly, article **100** may be formed with a recessed area **104** configured to receive security marker **102** without allowing security marker **102** to protrude beyond wall **106** in which recessed area **104** is formed. As illustrated in FIGS. 2-4, recessed area **104** may be formed with a depth **D** (measured from bottom surface **110** of recessed area **104** to exterior surface **112** of wall **106**) that is preferably substantially equal to height **H** of security marker **102**, such that top surface **114** of security marker **102** does not extend past exterior surface **112** of wall **106** of article **100**, and is not too far below exterior surface **112** of wall **106** to permit a gap between top surface **114** of security marker **102** and a cover **120** applied over security marker **102** (which may result in undesirable effects such as the capture of air bubbles below cover **120**, causing expansion or contraction of cover **120** and resultant protuberances or depressions). However, it is within the scope of the invention to form recessed area **104** with a depth **D** slightly larger than height **H** of security marker **102**, alterations to a cover **120**, if used, being possible (such as increasing the thickness of cover **120**) to account for the gap between cover **120** and top surface **114** of security marker **102**. Thus, depth **D** of recessed area **104** can be from about 0% to about 50% greater than height

[0023] Recessed area **104** may be formed in any desired manner to receive security marker **102** or otherwise to permit association of security marker **102** therewith. For instance, recessed area **104** may be a depression of any shape in plan view (including, without limitation, circular, square, rectangular, or irregular) or cross-sectional view (including, without limitation, square or concave). If wall **106** of article **100** is contoured (e.g., convex or concave), bottom surface **110** of recessed area **104** may or may not follow the contour of external wall **106**. If desired, bottom surface **110** of recessed area **104** may be flat to accommodate a typical security marker **102** with a flat bottom surface that is normally associated with an article, regardless of the shape or contour of wall **106** in which recessed area **104** is formed. Although recessed area **104** may be configured to conform to the shape of a particular security marker **102**, it will be appreciated that a recessed area **104** larger than the security marker

102 contemplated for placement on article **100** may be formed instead. The provision of an approximately 2 mm gap between the perimeter of security marker **104** and the inner perimeter of recessed area **104** may be desirable to facilitate placement of security marker **102** within recessed area **104**, particularly if such placement is accomplished by automated equipment. A generically-shaped, larger-sized recessed area **104** may be preferred so that article **100** need not be changed if the shape or size of security marker **102** is changed. For instance, recessed area **104** may be approximately 0% to approximately 100% larger than the area of security marker **102** or have a perimeter approximately 0% to approximately 100% larger than the perimeter of security marker **102**.

[0024] Recessed area **104** may be formed in any desired manner in article **100**. For instance, if article **100** is formed by extrusion blow-molding or injection stretch blow-molding, the template of the article may simply be modified to create the desired recessed area **104** in the resulting article **100**. Similarly, if article **100** is molded, then the mold may be modified to build up an area where recessed area **104** is to be formed, thereby causing the finished molded product to have a recessed area **104**. However, it will be appreciated that article **100** may be formed from any desired material, and not necessarily a moldable material. For instance, article **100** may be made of glass or paperboard and formed in any desired manner to have a recessed area **104** in accordance with the principles of the present invention.

[0025] A benefit of forming article **100** such that security marker **102** may be associated therewith without protruding therefrom is that security marker **102** may be covered and hidden from view. The cover may be formed of any desired material, such as paper, paperboard, plastic, plastic film, of any desired thickness that would achieve the desired visual effect of the present invention. For instance, as illustrated in FIG. 4, a cover **120** such as a label may be positioned on wall **106** of article **100** over recessed area **104** such that the presence of security marker **102** cannot be readily detected. As such, theft or inadvertent removal of article **100** from a restricted area (such as a retail center) may be deterred because the presence of a security marker is not evident. Thus, an individual intending to remove article **100** from premises with doors equipped with EAS security systems likely will not know a security marker must be removed from the article. The individual thus will not know to remove a security marker from such article before improperly removing the article from the premises, and will actuate the EAS security system upon removal of the article from the premises. Accordingly, a consumer is less likely to be alerted to the need to tamper with article **100** to guarantee ease of unauthorized removal from the premises, and theft of article **100** is more readily prevented than if article **100** were provided with a security marker not formed in accordance with the principles of the present invention. Moreover, if security marker **102** is hidden below a cover **120**, then an individual would mar the appearance of ar-

ticle **100** by removing cover **120** to remove security marker **102**. Accordingly, an individual is unlikely to remove security marker **102** from article **100** when concealed by a cover **120** for this reason as well.

[0026] It will be appreciated that security marker **102** may be coupled to article **100** in any desired manner. For instance, adhesive may be applied on a surface of security marker **102** to facilitate attachment thereof to article **100**. Alternatively, if a cover **120** is to be placed over a recessed area **104** in which security marker **102** is placed, cover **120** may maintain security marker **102** within recessed area **104** without the need for an adhesive. Or, security marker **102** may be secured to cover **120** or formed as an integral part of cover **120** such that the securing of label **110** to article **100** results in securing of security marker **102** to article **100** as well. Securing of cover **120** to article **100** may be effected in any desired manner such as, without limitation, through the use of pressure-sensitive adhesive or the like. It will be appreciated that association of security marker **102** and/or cover **120** to article **100** may be effected manually or by machine.

[0027] As noted previously, the principles of the present invention may be applied to other types of articles as well. Another exemplary article **200** to which the principles of the present invention may be applied is illustrated in FIGURE 5. More particularly, exemplary article **200** is in the form of a container, such as a jar or tub **201**, that has a separate cap or lid **203**. Security marker **202** may be provided within a recessed area **204** formed within cap **203** and covered with cover **220**. It will be appreciated that, as with container **100** of FIGURES 1-4, recessed area **204** may be modified in any desired manner to achieve the desired effect, and security marker **202** may be secured therein in any desired manner to achieve the desired effect. Moreover, it will be appreciated that recessed area **204** may be formed in a side wall **206** or bottom wall **207** of jar **201** instead of in cap **203**.

[0028] Also as noted previously, the principles of the present invention need not be applied only to a primary packaging. For instance, a secondary packaging may be modified for association with a security marker in accordance with the principles of the present invention. Typical secondary packagings are formed from cardboard, paperboard, plastic (e.g., a clamshell), or a combination thereof (e.g., a blister package) to contain a primary packaging. Preferably, the standard external shape or configuration of the secondary packaging is altered in accordance with the principles of the present invention such that a security marker applied thereto does not protrude from the external surface of the secondary packaging so that the security marker is not readily removed therefrom. Preferably, a cover or other element may be provided over the security marker to conceal its presence, thereby further decreasing the chances that an individual will remove the security marker.

[0029] A security marker placed on an article in the manner of the present invention provides the unique ben-

efit that it is not readily visible and/or does not protrude from the article. Accordingly, the article does not lend itself to removal of the security marker therefrom either intentionally (as the location of the security marker is not readily discerned by an individual) or unintentionally (as the security marker does not protrude from the article and thus is not liable to become caught on another element and inadvertently separated from the article). Provision of a security marker in such manner on a consumer article is particularly desirable for manufacturers and/or retailers to reduce the likelihood of theft of the consumer article. Relatively small and/or expensive consumer articles that are more apt to be stolen are especially suited for application of the principles of the present invention thereto.

[0030] A further benefit of the present invention is that the security marker is readily placed on the article without requiring additional manipulation of the article or additional, non-standard components to be applied on the article. Materials in addition to those normally used in production and shipping of the article are not required, thus simplifying manufacturing and reducing complexity and costs (both labor and materials costs).

[0031] While the foregoing description and drawings represent exemplary embodiments of the present invention, it will be understood that various additions, modifications and substitutions may be made therein without departing from the spirit and scope of the present invention. In particular, it will be clear to those skilled in the art that the present invention may be embodied in other specific forms, structures, arrangements, proportions, and with other elements, materials, and components, without departing from the spirit or essential characteristics thereof. One skilled in the art will appreciate that the invention may be used with many modifications of structure, arrangement, proportions, materials, and components and otherwise, used in the practice of the invention, which are particularly adapted to specific environments and operative requirements without departing from the principles of the present invention. The presently disclosed embodiments are therefore to be considered in all respects as illustrative and not restrictive, the scope of the invention being indicated by the appended claims, and not limited to the foregoing description.

Claims

1. An article configured to receive a security marker that actuates a security system upon removal from a predetermined area, wherein said article has an exterior surface with an area modified to receive the security marker such that the top surface of the security marker does not extend past said exterior surface of said article.
2. An article as in claim 1, wherein said modified area of said exterior surface of said article is a recessed

area shaped and sized to receive a security marker therein.

3. A packaging configured to receive a security marker that actuates a security system upon removal from a predetermined area, said packaging comprising:
 - a packaging wall having an exterior surface; a recessed area formed within said exterior surface of said packaging wall and shaped and sized to receive a security marker therein; and a cover over said recessed area shaped to conceal said recessed area.
4. A packaging as in claim 3, wherein:
 - said recessed area has a bottom surface and a depth measured from said bottom surface to said exterior surface of said packaging wall; and said recessed area is shaped and said depth of said recessed area is selected to receive a security marker in said recessed area such that the security marker does not extend past said exterior surface of said packaging wall.
5. A packaging as in any one of claims 3 - 4, further comprising a security marker positioned within said recessed area and below said cover.
6. A packaging as in any one of claims 3 - 5, wherein said recessed area depth is about 0% to about 50% greater than the height of said security marker.
7. A packaging as in any one of claims 4 - 6, wherein said recessed area bottom surface is substantially flat.
8. A packaging as in any one of claims 3 - 7, wherein said cover is a label.
9. A packaging as in any one of claims 3 - 8, wherein said packaging is a primary packaging.
10. A packaging as in claims 9, wherein said primary packaging is a container.
11. A packaging as in claims 10, wherein said container is a molded container.
12. A method of deterring the unauthorized removal of an article from a location, said method comprising:
 - providing a security marker on the exterior surface of the article such that the top surface of the security marker does not extend beyond the exterior surface of the article.
13. The method of claim 12, further comprising covering

the security marker to conceal the security marker.

14. The method of claim 13, wherein covering the security marker comprising applying a label over the security marker to be flush with the exterior surface of the article.
15. The method of any one of claims 12 - 14, wherein:
 - the exterior of the article has a recessed area; and
 - providing a security marker on the exterior surface of the article comprises providing the security marker in said recessed area.
16. The method of claim 15, further comprising applying a label over the recessed area and the security marker to conceal the security marker.

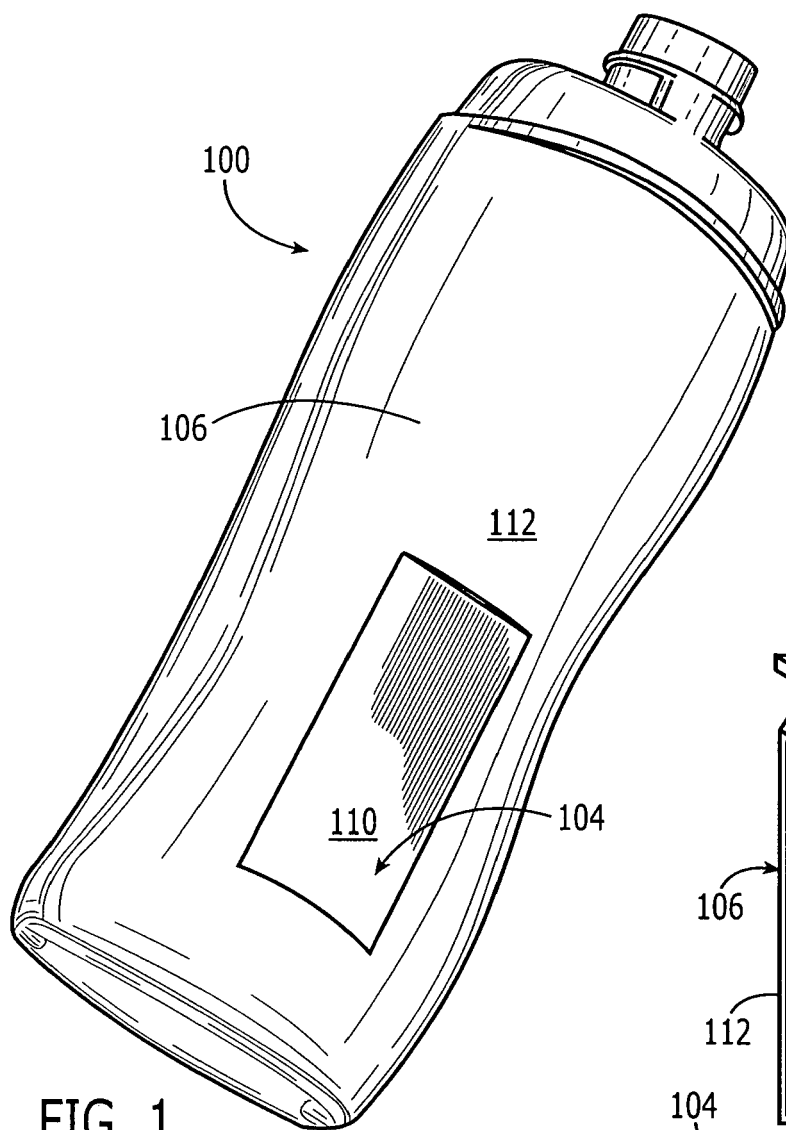


FIG. 1

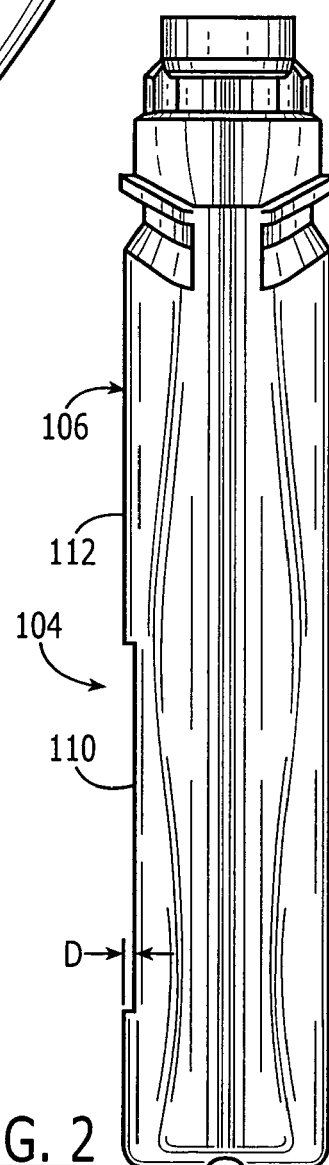
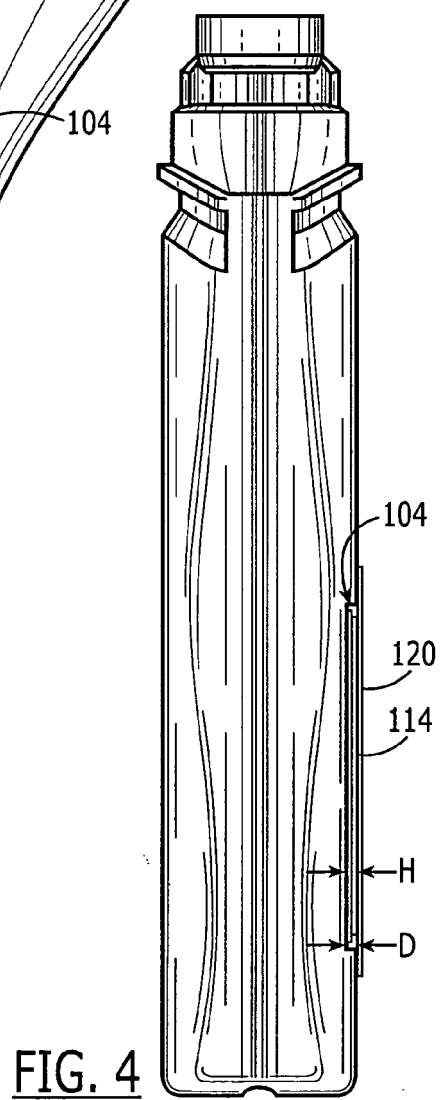
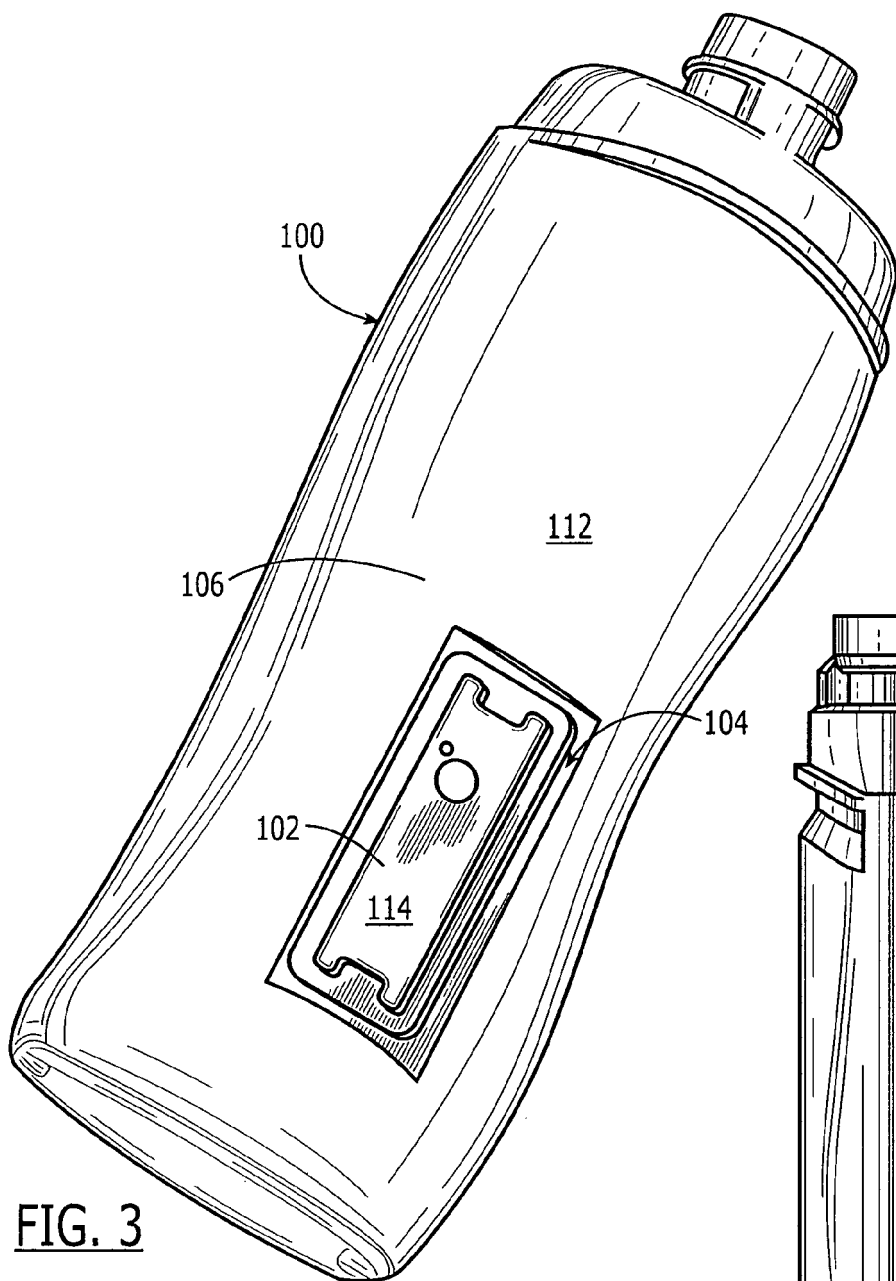


FIG. 2



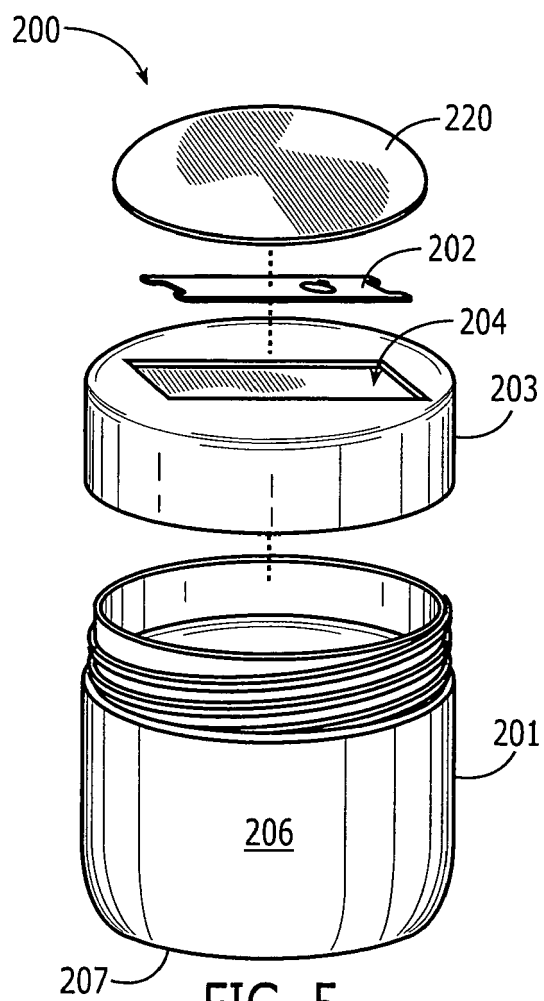


FIG. 5



EUROPEAN SEARCH REPORT

Application Number
EP 08 25 3248

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	GB 2 424 863 A (DAVIES NICHOLAS CHARLES [GB]) 11 October 2006 (2006-10-11) * page 2, line 13 - page 3, line 26 * * page 4, line 15 - line 34 * * page 6, line 1 - line 27 * * figures 3-5 *	1-16	INV. G08B13/24 B65D55/02 B65D23/14
X	US 2003/043039 A1 (SALEMI ROBERT D [US] ET AL) 6 March 2003 (2003-03-06) * paragraphs [0011] - [0013] * * figures 1-6 *	1-16	
X	WO 2007/074394 A (JAS HENNESSY ET CIE SOC [FR]; ANDREANI JEAN-CHARLES [FR]) 5 July 2007 (2007-07-05) * page 2, line 11 - page 3, line 23 * * page 5, line 30 - page 7, line 20 * * figures 1-5 *	1-16	
			TECHNICAL FIELDS SEARCHED (IPC)
			G08B B65D
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 12 March 2009	Examiner Dascalu, Aurel
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

 1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 08 25 3248

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-03-2009

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2424863	A	11-10-2006	NONE	
US 2003043039	A1	06-03-2003	NONE	
WO 2007074394	A	05-07-2007	US 2007158293 A1	12-07-2007

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6094137 A [0008]
- US 7233246 A [0008]
- US 6137413 A [0008]
- US 6619079 B [0008]