

(19)



(11)

EP 2 063 062 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
10.03.2010 Bulletin 2010/10

(51) Int Cl.:
E06B 9/17 (2006.01) **E06B 9/174** (2006.01)
E06B 9/62 (2006.01) **B25B 13/50** (2006.01)
B25B 13/46 (2006.01) **B25B 13/08** (2006.01)
B25B 13/18 (2006.01)

(21) Application number: **08157647.2**

(22) Date of filing: **15.09.2005**

(54) **Adjustment of spring tension**

Einstellung einer Federspannung

Réglage de tension de ressort

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**

(43) Date of publication of application:
27.05.2009 Bulletin 2009/22

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
05108497.8 / 1 764 472

(73) Proprietor: **Crawford Group AB
201 21 Malmö (SE)**

(72) Inventor: **Holmbom, Patrick
831 71 Östersund (SE)**

(74) Representative: **Haag, Malina Anna et al
AWAPATENT AB
Patent Department
P.O. Box 11394
404 28 Göteborg (SE)**

(56) References cited:
**WO-A-2004/091946 WO-A-2005/065890
US-A- 1 977 070 US-A1- 2002 170 688
US-A1- 2004 020 609**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 063 062 B1

Description

Field of the Invention

[0001] The invention relates to a method for adjusting tension in springs mounted upon rotatable shafts. Furthermore, the invention relates to a wrench suitable for utilizing the method. Moreover, the invention relates to a collar system adapted for receiving said wrench. Collar systems are known from US 2002/0170688 A1, WO 2005/06590 A1 and WO 2004/091946 A2.

Technical Background

[0002] The installation of industrial, residential and in particular overhead doors usually involves installing guides that support each side of a moveable door structure and upon which the sides of the door structure are freely slideable. As most moveable door structures are too heavy for a normal person to lift some sort of counterbalancing device is usually provided so that the full weight of the moveable door structure is not encountered when the moveable door structure is transferred between an opened and closed condition or vice versa. Even with power operated door opener devices a counter balance device is provided so as to be able to reduce the horsepower requirements of the drive motor. For safety reasons the counter balancing device is also necessary in the event of failure of the door openers.

[0003] A prevailing type of counter balancing device in wide use with such door openers, especially ones that have power operated motors to assist the opening and closing of the doors, is a coiled spring mounted upon a rotatable shaft. The shaft is usually located above the opening that is to be covered by the door and is transversely located across the path of the door. Upon this shaft is mounted a coiled spring in a somewhat concentric manner such that the longitudinal centerline of the spring approximately locates upon the longitudinal centerline of the shaft. One end of the spring is fixedly attached to a structure upon which the shaft is rotatably mounted and the other end of the spring is held releasably attached to the rotatable shaft.

[0004] The tensioning for the door takes the form of adjusting the tension exerted by the coiled spring upon the rotatable shaft that also holds a wound drag element usually attached to the lowermost end of the door. When properly adjusted the tension exerted by the spring is supposed to just about counterbalance the weight of the door that is being transferred during opening and closing movement.

[0005] The counterbalancing effect of the weight of the door may origin from the mid of the door for some roller door arrangements or arranged such that it origins from a fully opened condition. In original installation of the doors, when replacing broken springs, and even during periodic maintenance, it is necessary to adjust the tension of the springs to the desired degree so that the door

can close and counterbalance almost the entire weight of the door during the raising and lowering of the door. To adjust the tension of the spring it is necessary for one to loosen the releasably fixed end of the coil spring that is attached to the rotatable shaft and rotate the end of the spring relative to the shaft, either in a manner to lessen the tension or to tighten the tension.

[0006] The springs used in such installations are not insubstantial in the force and/or torque that they exert to accomplish their task and it is therefore considered by those skilled in the art a potentially dangerous operation. When the one end of the spring attached to the rotatable shaft is loosened it must be securely held so as not to freely uncoil back to a tension free state. Such an uncoiling while a workman or other person is in the area may produce some very severe injuries.

[0007] It is an object of the present invention to provide a safe and efficient method for the tensioning of coiled springs used in door installations. It is an object of the present invention to provide an improved tool for use in properly tensioning springs used in door installations. It is a further object of the present invention to provide a new attachment for coil springs that will ease the operation of adjusting the tension of coiled springs in door installations.

Summary of the Invention

[0008] These and other objects, which will be presented further on, are achieved by a method, a wrench assembly and a collar system according to independent claim 1. Preferred embodiments of the invention are presented in the respective dependent claims.

[0009] Now, according to the present invention it is disclosed a method for adjusting tension in springs mounted upon rotatable shafts, said method comprises the steps of, applying a first and a second wrench for splined engagement with a collar of said shaft so as to hold the collar against movement in an undesired direction, said collar being mechanically connected to at least one spring, positioning of an axial locking device, said axial locking device being provided on at least one of said wrenches, to said collar thereby forming an axial locking engagement of said wrenches to said collar, adjusting tension in said at least one spring by winding said collar with at least one of said wrenches until an appropriate tension of the spring is achieved. The collar comprises a locking device for fixing said collar to said shaft when the tension of the spring is properly adjusted.

[0010] Accordingly, during tension adjustment each wrench may be held in the axial direction at all times. This enables secure working conditions and support for finding correct position and a thorough splined engagement during holding or working against the resilient force from the spring. In addition the splined engagement allows for service work and installation work even where there is little room for such operations.

[0011] Preferably, the axial locking engagement is

maintained during a whole spring tension adjusting cycle, involving splined disengagement during alternation of said wrenches.

[0012] Advantageously, the axial locking engagement is enabled by a tongue and groove engagement in which said tongue propagates circumferentially and in the transverse direction (B) in relation to the axial direction (A). Accordingly, the axial locking device engagement comprises a tongue and groove locking relative to the axial direction (A) of the shaft.

[0013] More preferably, the axial locking device comprises a U-shaped retractable plate for complementary engagement with a recess in said collar. Alternatively, although not preferred, the collar comprises a U-shaped protruding portion for complementary engagement with a recess in said axial locking device.

[0014] Preferably, the splined engagement of the wrench and collar is accomplished with a wrench spline angle less than 90 degrees and preferably between 80 and 90 degrees. A complementary fit of the splines of the wrench and the splines of the collar reduces the risk for slipping. It has been discovered that an angle between the front edge of the wrench spline of slightly less than 90 degrees measured between the inner near surface of the jaw and said front edge provides for improved grip. Advantageously, the splined engagement involves engagement with splines propagating in the axial direction (A) of said shaft.

[0015] A further advantage is that the splined engagement is controllable by a latch function maneuverable from a latch operating handle of said wrench. Hence, the serviceman or installer do not have to change the grip of the wrench handle e.g when disengaging the splined engagement when adjusting tension.

[0016] According to a preferred embodiment of the invention the torque of said splined engagement is controllable and lockable by a torque locking mechanism being maneuverable from said wrench.

[0017] Preferably, each wrench having an open ended jaw, with a close fit around a substantial portion of said collar and said open ended jaw being provided for splined engagement with said collar.

[0018] The method of adjusting tension in springs is particularly well suited for a group consisting of overhead sliding doors, sliding doors and winding roller doors according to any one of the preceding claims. The skilled person knowing of the invention may however find other areas of interest.

[0019] According to a second aspect of the invention a wrench assembly which comprises, an elongate handle,

an open ended jaw formation located on one end of said handle for closely surrounding and engaging a majority of the perimeter of a splined shaft, a spring loaded spline latch mechanism mounted on said handle and having a latch that, in a first position, protrudes into a jaw engagement area for splined engagement on said shaft and, in a second position is retracted from the jaw engagement

area for splined disengagement, a latch operating device for moving said latch from one of said first position and said second position to the other of said first and second position, said open ended jaw formation being provided with a retractable tongue arranged on one side of the open ended jaw, said tongue being provided with a recess for closely surrounding at least part of a groove perimeter in proximity to said splined shaft.

[0020] Preferably, the wrench spline angle is less than 90 degrees and preferably between 80 and 90 degrees.

[0021] Advantageously, the splined engagement is controllable by a latch maneuverable from a latch operating handle of said wrench assembly.

[0022] As a further advantage and an important safety aspect the disengagement of said splined engagement is prevented by a spring loaded spline latch mechanism as long as the latch is subject to an external loading resulting from the splined engagement. The latch operating handle is operatively connected to the latch via a spring. If the loading on the latch exceeds the loading from the spring resulting from activating the latch operating handle the latch will remain in position for splined engagement, i.e. the force provided by the spring too the spring loaded latch mechanism is too low to disengage the splined engagement. Thus, if the installer or serviceman due to a mistake let go of both splined engagements at the same time at least one wrench when arranged properly will maintain the splined engagement.

[0023] The spring load in the spring loaded splined engagement is preferably provided by a push spring. The push spring is connected to a rod of the latch. The latch operating handle is operatively connected to the rod of the latch via a spring. The spring characteristics of the push spring is low. Since the wrench spline angle is less than 90 degrees and preferably between 80 and 90 degrees the external loading does not have to be substantial in order to provide enough resistance to disengagement. On the other hand when there is no external load on said latch and the latch operating handle is activated the latch is retracted by the pull force transferred from the latch operating handle to said push spring. When the latch operating handle is released the latch is pushed back in position for splined engagement in the jaw area by said push spring.

[0024] Moreover, the torque of said splined engagement is controllable and lockable by a torque locking mechanism being maneuverable from said wrench assembly. In order to allow smooth access and transfer the force from the wrench assembly efficiently to said spring via the collar the wrench assembly has an asymmetric opening of the open ended jaw.

[0025] Furthermore, the wrench assembly is provided with a hook for enabling hanging of said wrench assembly. It is realized that many doors requires such work on a substantial altitude and the hook facilitates for such situations.

[0026] According to a preferred embodiment of the invention the wrench assembly is provided with replacea-

ble handle portions in order to enable a wrench assembly with different lengths. The replaceable handle portion having the most suitable length may be screwed on to the elongate handle of the wrench assembly.

[0027] A further advantage is that the handle is provided with a knob on the end portion in order to facilitate picking up of said wrench assembly. Preferably, the knob extends from the handle portion to an extent such that if there is a risk for an operator's fingers to become pinched between a structural element, such as a wall, and the handle portion the knob will provide enough room there between to avoid serious finger pinching. A further object with the knob is to enable protection against slipping of the wrench in that it provides for support against loosening the grip during use in the axial direction of the elongate handle.

[0028] Now according to a third aspect of the invention a collar system for being rotatably mounted upon a shaft and thus enabling tensioning of springs mounted upon rotatable shafts is presented, which collar system comprises, a secondary attachment portion adapted for mechanical connection to one end of said spring mounted upon said shaft, a primary attachment portion on said collar having longitudinally (C) extending splines formed on the outer periphery of said primary attachment portion, and said primary attachment portion is provided with at least one groove propagating transverse (D) to said splines. The secondary attachment portion and the primary attachment portion may be mounted together on location. Preferably, the secondary attachment portion and the primary attachment portion form one unit.

[0029] The collar system comprises a locking device for fixing said collar to said shaft. During this step holding of one wrench against the spring tension is sufficient and allows for fixing the collar in relation to the shaft when the tension in the spring is properly adjusted.

[0030] According to an alternative embodiment of the third aspect of the invention said collar system comprises a body formed for attachment to at least said primary attachment portion, said body comprising complementary engagement means on its inside and holes propagating from the outside towards the inside of said body, said holes being arranged for receiving an alternative tension adjusting tool such as an iron bar. This body enables the use of a currently conventional method of adjusting springs, using bars, e.g. in case wrenches of the preferred type is not available

[0031] Preferably, said holes are arranged at given distances around a periphery of said body when following the periphery in the transverse (D) direction.

Brief description of the drawings

[0032] A preferred method together with currently preferred embodiments of the invention will now be disclosed by means of the appended drawings in which:

fig. 1a schematically discloses an overhead sliding

door or sectional door of conventional type, fig. 1b schematically discloses a winding roller door of conventional type,

fig. 2 discloses a wrench according to a preferred embodiment of the invention as seen in perspective, fig. 3 discloses a wrench according to a preferred embodiment of the invention as seen from the side in an opened up manner in order to more clearly illustrate the features of the wrench,

fig. 4 discloses a collar according to a preferred second aspect of the invention in a perspective view, fig. 5 discloses a preferred manner of applying the method according to a preferred method of the invention in a cut out perspective view,

fig. 6 discloses schematically a collar system body in an opened up condition taken in a perspective view,

fig. 7 discloses an alternative embodiment of the invention according to a second preferred embodiment,

figs. 8(1) and 8(2) discloses the initial step in adjusting tension according to the claimed method by means of the second preferred embodiment, and fig. 9 discloses a third alternative embodiment of the invention.

Detailed description of a preferred method and embodiments

[0033] In the following some non restricting embodiments will be described with support from the drawings and with reference to the numbering thereof in order to more clearly illustrate the functions and features. Referring now to figs. 4 and 5 the method will be disclosed in more detail.

[0034] A coiled spring 57 is arranged around a shaft and fixed arranged to the surrounding structure of the door in one end (not shown). This represents a more typical type of spring tensioned shafts for doors that are designed for being wound up today. A collar 50 is threaded onto the coiled spring 57 from the side such that a flange 55 follows the spiral path of the coiled spring 57. A connecting element 59 is provided on the collar for connection with the end portion of the coiled spring, which is normally cranked. When the cranked end portion connects with the connecting element 59 the collar 50 is fixed in relation to the coiled spring 57 which is held between the flange 55 and connecting element 59. The collar 50 is however rotatable in relation to said shaft. The rotatable collar will have a set of screws 56 that may be positioned so as to engage the shaft member and hold the collar non-rotatable with the shaft.

[0035] When the coil spring 57 is in its free state there is no danger to personnel in the area of the spring mechanism. However, when the rotatable collar 50 has been wound so that the end is in a tension position with respect to the end a dangerous condition exists. At that point the collar 50 must be held firmly in position so that it will not

suddenly uncoil.

[0036] Furthermore, the primary attachment portion 51 on said collar 50 has longitudinally (C) extending splines 52 formed on the outer periphery of said primary attachment portion 51, and said primary attachment portion (51) is provided with at least one groove 53 propagating transverse (D) to said splines 52. As will be seen in fig 4 the secondary attachment portion 54 and the primary attachment portion 51 form one unit. Thus it is possible to perform a safe and smooth tension adjustment with the wrenches 1,1' only by access to the primary attachment portion 51.

[0037] Now, also turning to fig 3 a wrench assembly 1 according to the present invention having an elongate handle 2 an engagement section in the form of an open ended jaw 3 is disclosed. The wrench is designed so that the area within the engagement section will form a close fit over the outer diameter of the splined section of the collar 50. When the latch operating device 5 is in normal condition the spline latch mechanism 4 is protruding upwardly so that the engaging splines of the wrench 15 is in the area of the engagement section 3. Initially a lever arm 10 activates the recessed tongue 7 for axial locking of the wrench 1.

[0038] A pull of the latch operating device 5 towards the elongate handle 2 allows the plunger member to travel inwardly pulling the spline latch mechanism 4 in to the elongate handle 2. In this manner the engagement section 3 may then be slid over the spline section of adapter. When the wrench splines 15 are engaged with the spline section the exerting of a force on handle 2 of wrench 1 will exert a force so as to tend to rotate the rotatable collar 50.

[0039] As it will become more clear two wrenches 1, 1' may engage the spline section of the collar 50. When two such wrenches 1, 1' engage the collar 50 the set screws 56 on the rotatable collar 50 may be loosened. When the rotatable collar 50 is loosened from its connection of the shaft wrenches 1, 1' may be used to hold collar 50 from rotating on the shaft. While holding one wrench 1 that has its spline latch mechanism 15 engaged with the splines 52 of the collar the second wrench may have the latch operating device 5 activated so as to disengage its wrench splines 15 from the spline section of collar 50. With the first wrench 1 holding the collar non rotatable with the shaft, the second wrench 1' may then be advanced pivotal around the splined section of the collar 50. When the second wrench 1' is in a new position the spline latch mechanism 4 may be released so that its wrench splines 15 engages the spline section of collar 50. When the second wrench 1' being held in such a position, the latch operating device 5 of the first wrench 1 may be activated so that spline latch mechanism 15 is disengaged from the splines of the collar. The second wrench 1' may now be rotated back until its elongated handle 2 is in alignment with the first wrench 1. Repeating the above procedure with the first wrench 1 and the second wrench 1' will allow one to properly adjust tension of

the coil spring 57 while maintaining an axial locking of the respective wrench 1,1' by means of the activated axial locking device 7. This describes the alternation of the wrenches in more detail.

[0040] As a further advantage and an important safety aspect the disengagement of said splined engagement is prevented by said spring loaded spline latch mechanism as long as the latch is subject to external loading. The spline latch mechanism 4 comprises a tensioned push spring 13 working against a rod 6 connecting said latch operating device 5 with said spline latch mechanism 4.

[0041] As a further advantage and an important safety aspect the disengagement of said splined engagement is prevented by a spring loaded spline latch mechanism 4 as long as the latch 15 is subject to an external loading resulting from the splined engagement. The latch operating handle 5 is operatively connected to the spline latch mechanism 4 via a spring 13. If the loading on the latch 15 exceeds the loading from the spring 13 resulting from activating the latch operating handle 5 the latch 15 will remain in position for splined engagement, i.e. the force provided by the spring 13 to the spring loaded latch mechanism 4 is too low to disengage the splined engagement. Thus, if the installer or serviceman due to a mistake activate the latch operating handles 5 of both wrenches at the same time at least one wrench when arranged properly will maintain the splined engagement due to the external loading from the coiled spring.

[0042] The spring load in the spring loaded splined engagement is preferably provided by a push spring. The push spring is connected to a rod of the latch. The latch operating handle is operatively connected to the rod of the latch via a spring. The spring characteristics of the push spring is low. Since the wrench spline angle is less than 90 degrees and preferably between 80 and 90 degrees the external loading does not have to be substantial in order to provide enough resistance to disengagement. On the other hand when there is no external load on said latch and the latch operating handle is activated the latch is retracted by the pull force transferred from the latch operating handle to said push spring. When the latch operating handle is released the latch is pushed back in position for splined engagement in the jaw area by said push spring.

[0043] Moreover, the torque resistance of said splined engagement is controllable and lockable by a torque locking mechanism 14 being maneuverable from said wrench assembly. The torque locking mechanism 14 consist of a screw or similar attached through the wall of the elongated handle 2. The screw may enter a pocket of the spline latch mechanism 4 from the side and support the bottom of the pocket. At the same time the pocket is stretched in the axial direction of the elongated handle 2 so as to allow for movement of the spline latch mechanism 4 if activated. Moreover, in order to allow smooth access and transfer of the force from the wrench assembly 1 efficiently to said spring 57 via the collar 50 the

wrench assembly 1 has an asymmetric opening of the open ended jaw 3.

[0044] The axial locking engagement is enabled by a tongue 7 and groove 53 engagement in which said tongue 7 propagates circumferentially and in the transverse direction (B) in relation to the axial direction (A). This is probably more clear in fig 2. The axial locking device 7 comprises a U-shaped retractable plate for complementary engagement with a recess 53 in said collar 50. Alternatively, although not shown, the collar may comprise a U-shaped protruding portion for complementary engagement with a recess in said axial locking device.

[0045] Furthermore, the wrench assembly 1 is provided with a hook 18 for enabling hanging of said wrench assembly 1. It is realized that many doors requires such work on a substantial altitude and the hook 18 facilitates for such situations since there is often not so much space for laying tools when not used.

[0046] According to a preferred embodiment of the invention the wrench assembly 1 is provided with replaceable handle portions 23 in order to enable a wrench assembly 1 with different lengths. The replaceable handle portion 23 having the most suitable length may be screwed on to the elongate handle of the wrench assembly (not shown).

[0047] A further feature of the invention is that the handle 23 is provided with a knob 24 on the end portion in order to facilitate picking up said wrench assembly. According to a preferred embodiment of the invention, the knob extends from the handle portion to an extent such that if there is a risk for an operator's fingers to become pinched between a structural element, such as a wall, and the handle portion the knob will provide enough room there between to avoid serious finger pinching. A further object with the knob is to enable protection against slipping of the wrench in that it provides for support against loosening the grip during use in the axial direction of the elongate handle.

[0048] Fig 6 discloses a further aspect of the invention in which said collar system 50 comprises a body 70 formed for attachment to at least said primary attachment portion 51. The body 70 comprises complementary engagement means 73 on its inside and holes 72 propagating from the outside towards the inside of said body 70. The holes 72 being arranged for receiving an alternative tension adjusting tool such as an iron bar.

The holes 72 are arranged at given distances around a periphery of said body 70 when following the periphery in the transverse (D) direction. Axial locking in relation to the shaft is enabled by a pin which may be applied in a hole 78 for further engagement with the groove 53 in the collar. It is appreciated that the various features for enabling improved tension adjustment described in the above given examples may readily be combined in various ways without departing from the scope of protection.

[0049] In fig 7 is depicted an alternative wrench for performing the claimed method. The wrench comprises

a closed jaw portion 128 for being arranged from the side to the shaft 158. A resilient member 115 is provided for splined engagement with a radially splined collar. Furthermore, a pivotal axial locking device 107 is provided for inner engagement with a hollow space of the collar extending circumferentially. In fig 8(1) it is disclosed how the wrench is applied to the shaft and in fig 8(2) it is disclosed how the axial locking device is arranged to the collar. A second wrench (not shown) of similar type may be arranged next to said first wrench. Suitably, said first wrench is "pumped" back and forth while the second wrench is used for holding the collar in position during disengagement and so forth of said first wrench.

[0050] A second alternative wrench is disclosed for enabling the claimed method on doors. The wrench comprises a closed jaw portion 228 for being arranged from the side to the shaft 258. A resilient member 215 is provided for splined engagement with a longitudinally (A) extending splines 252 on the inner side of a collar. Furthermore, a pivotal axial locking device 207 is provided for inner engagement with a hollow space 253 of the collar extending circumferentially.

In addition to the claims appended hereto, the present application also embodies the subject matter set out in the claims as originally filed with the European Patent Application from which the present application is derived, namely the aspects (and combinations thereof) set out in the following clauses.

Claims

1. A collar system (50) for being rotatably mounted upon a shaft and thus enabling tensioning of springs (57) mounted upon rotatable shafts, which collar system (50) comprises, a secondary attachment portion (54) adapted for mechanical connection to one end of said spring (57) mounted upon said shaft, **characterised in,** a primary attachment portion (51) on said collar (50) having longitudinally (C) extending splines (52) formed on the outer periphery of said primary attachment portion (51), and said primary attachment portion (51) is provided with at least one groove (53) propagating transverse (D) to said splines (52).
2. A collar system (50) according to claim 1, that collar system (50) the secondary attachment portion (54) and the primary attachment portion (51) form one unit.
3. A collar system (50) according to any one of claims 1-2, that said collar system (50) comprises a locking device (56) for fixing said collar (50) to said shaft.
4. A collar system (50) according to any one of claims 1-3, that said collar system (50) comprises a body (70) formed for attachment to at least said primary

attachment portion (51), said body (70) comprising complementary engagement means (73) on its inside and holes (72) propagating from the outside towards the inside of said body (70), said holes (72) being arranged for receiving an alternative tension adjusting tool such as an iron bar.

5. A collar system (50) according to claim 4, that said holes (72) are arranged at given distances around a periphery of said body (70) when following the periphery in the transverse (D) direction.

Patentansprüche

1. Kranzsystem (50) zum drehbaren Montieren an einer Welle, um so ein Spannen von Federn (57), die an drehbaren Wellen montiert sind, zu ermöglichen, wobei das Kranzsystem (50) Folgendes umfasst:

einen sekundären Befestigungsabschnitt (54), der für eine mechanische Verbindung mit einem Ende der auf der Welle montierten Feder (57) geeignet ist, **gekennzeichnet durch** einen primären Befestigungsabschnitt (51) an dem Kranz (50), der in Längsrichtung (C) verlaufende Keilprofile (52) aufweist, die am Außenumfang des primären Befestigungsabschnitts (51) ausgebildet sind, wobei der primäre Befestigungsabschnitt (51) mit mindestens einer Nut (53) versehen ist, die quer (D) zu den Keilprofilen verläuft.

2. Kranzsystem (50) nach Anspruch 1, **dadurch gekennzeichnet, dass** das Kranzsystem (50), der sekundäre Befestigungsabschnitt (54) und der primäre Befestigungsabschnitt (51) eine Einheit bilden.
3. Kranzsystem (50) nach einem der Ansprüche 1-2, **dadurch gekennzeichnet, dass** das Kranzsystem (50) eine Verriegelungsvorrichtung (56) zum Befestigen des Kranzes (50) an der Welle umfasst.
4. Kranzsystem (50) nach einem der Ansprüche 1-3, **dadurch gekennzeichnet, dass** das Kranzsystem (50) einen Körper (70) umfasst, der zum Anbringen an mindestens dem primären Befestigungsabschnitt (51) ausgebildet ist, wobei der Körper (70) komplementäre Eingriffnahmemittel (73) an seiner Innenseite und Löcher (72) umfasst, die von der Außenseite in Richtung der Innenseite des Körpers (70) verlaufen, wobei die Löcher (72) dafür vorgesehen sind, ein alternatives Spannungseinstellwerkzeug, wie zum Beispiel eine Eisenstange, aufzunehmen.
5. Kranzsystem (50) nach Anspruch 4, **dadurch gekennzeichnet, dass** die Löcher (72) in bestimmten Abständen entlang eines Umfangs des Körpers (70)

angeordnet sind, wenn dem Umfang in der Quer (D)-Richtung gefolgt wird.

5 Revendications



1. Système de collier (50) destiné à être monté rotativement sur un arbre et permettant ainsi un tensionnement de ressorts (57) montés sur des arbres rotatifs, lequel système de collier (50) comprend:


une portion de fixation secondaire (54) adaptée pour un raccordement mécanique à une extrémité dudit ressort (57) monté sur ledit arbre,

caractérisé par

une portion de fixation primaire (51) sur ledit collier (50) comportant des cannelures (52) s'étendant longitudinalement (C) formées sur la périphérie extérieure de ladite portion de fixation primaire (51), et ladite portion de fixation primaire (51) est pourvue d'au moins une gorge (53) se propageant transversalement (D) auxdites cannelures (52).

2. Système de collier (50) selon la revendication 1, **caractérisé en ce que** dans le système de collier (50) la portion de fixation secondaire (54) et la portion de fixation primaire (51) forment une unité.
3. Système de collier (50) selon une quelconque des revendications 1 à 2, **caractérisé en ce que** ledit système de collier (50) comprend un dispositif de verrouillage (56) pour fixer ledit collier (50) audit arbre.
4. Système de collier (50) selon une quelconque des revendications 1 à 3, **caractérisé en ce que** ledit système de collier (50) comprend un corps (70) formé à des fins de fixation à au moins ladite portion de fixation primaire (51), ledit corps (70) comprenant un moyen de mise en prise complémentaire (73) sur son intérieur et des trous (72) se propageant depuis l'extérieur vers l'intérieur dudit corps (70), lesdits trous (72) étant agencés afin de recevoir un outil d'ajustage de tension alternative comme une barre de fer.
5. Système de collier (50) selon la revendication 4, **caractérisé en ce que** lesdits trous (72) sont disposés à des distances données autour d'une périphérie dudit corps (70) quand on suit la périphérie dans la direction transversale (D).

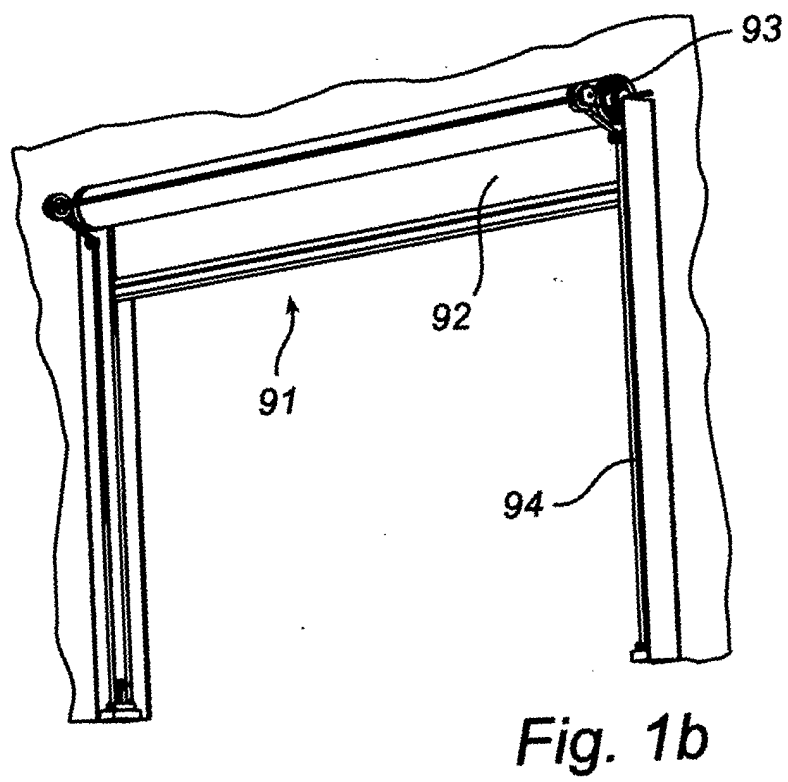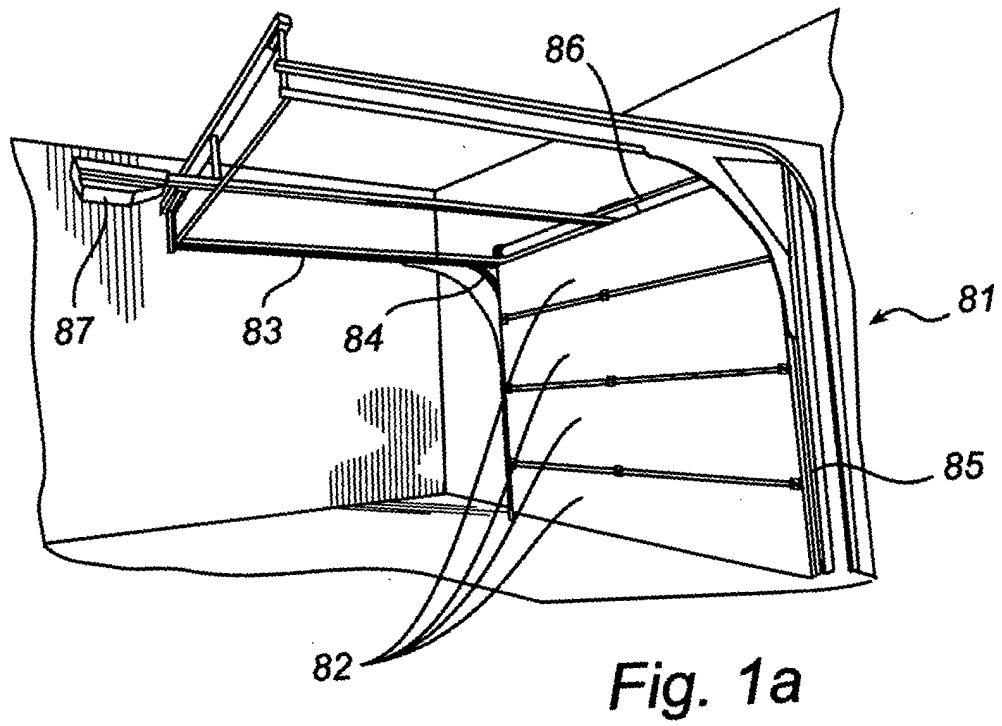

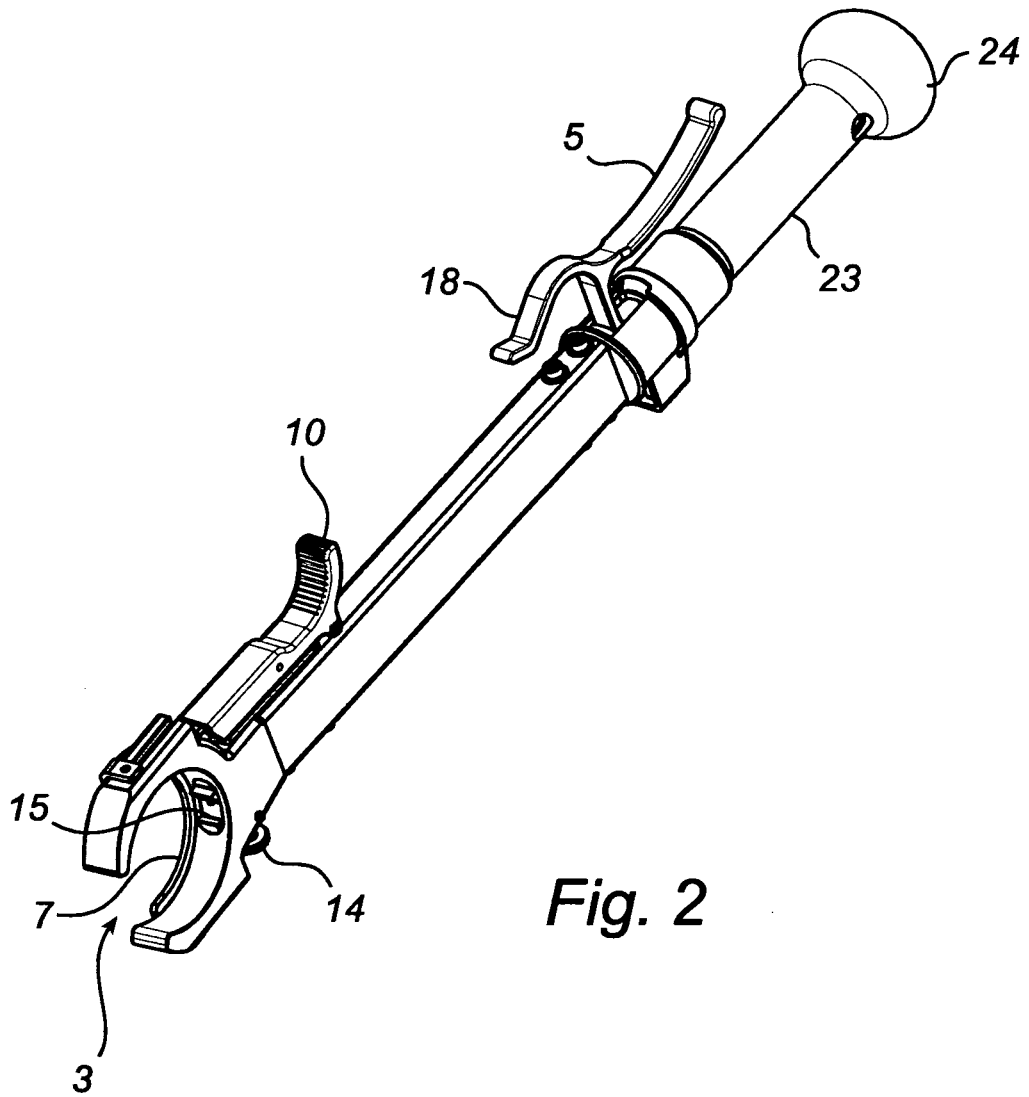

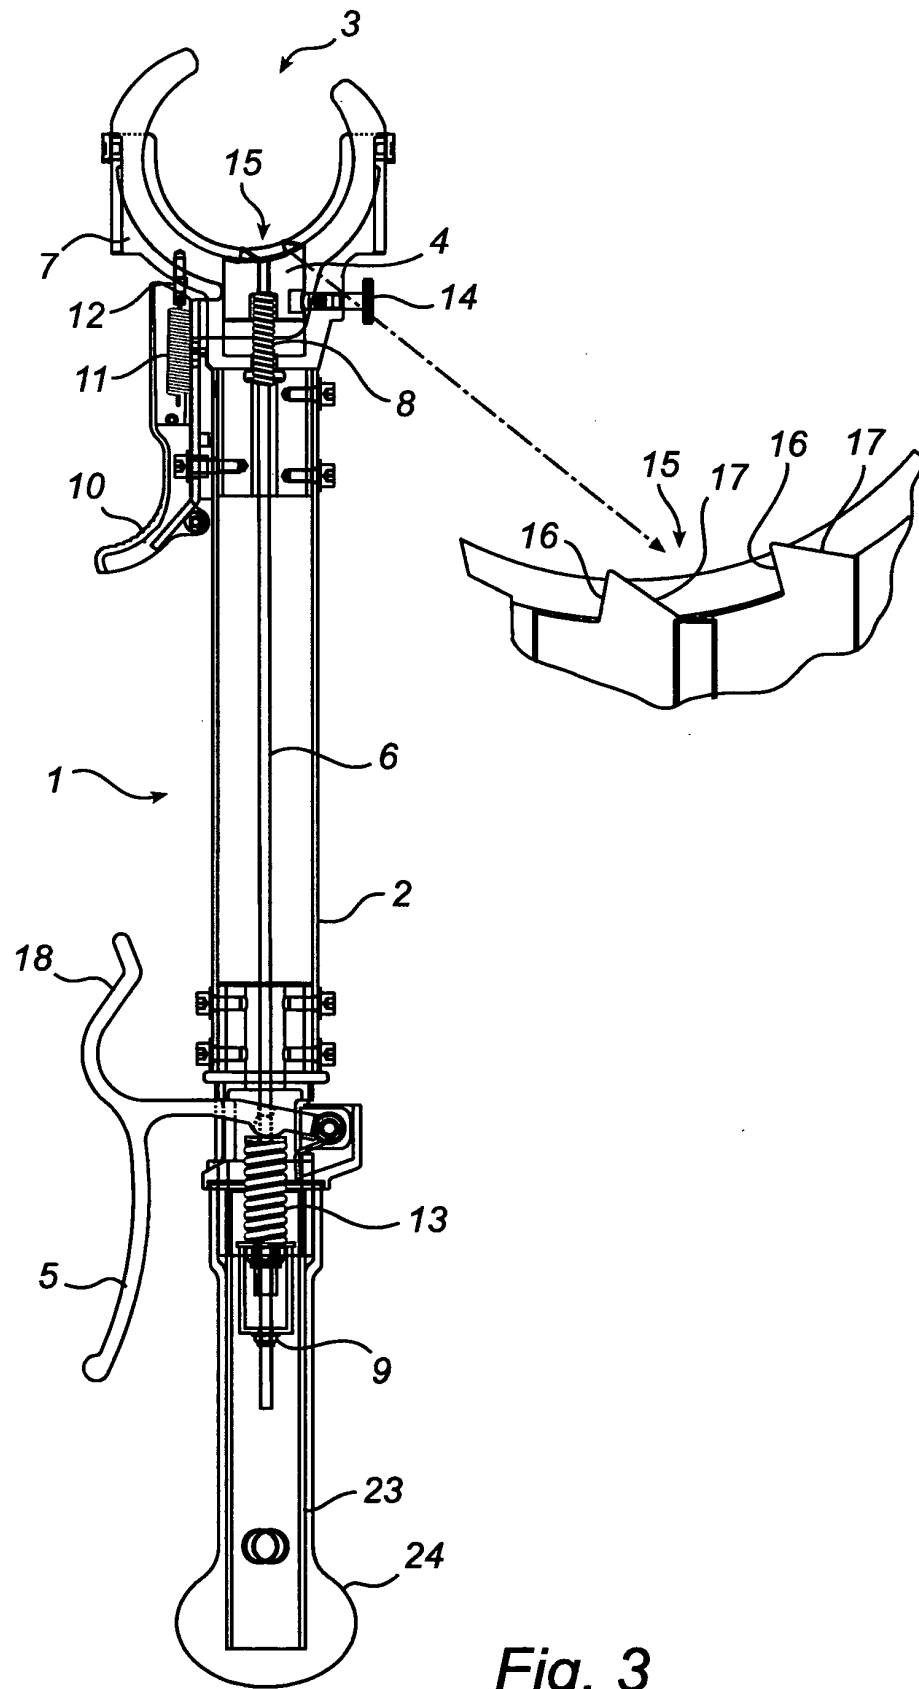


Fig. 3

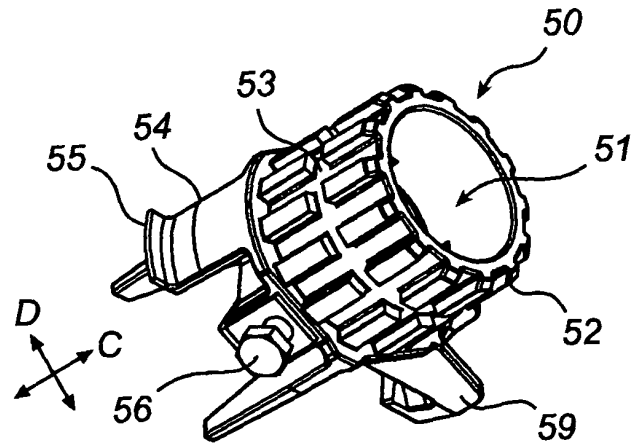


Fig. 4

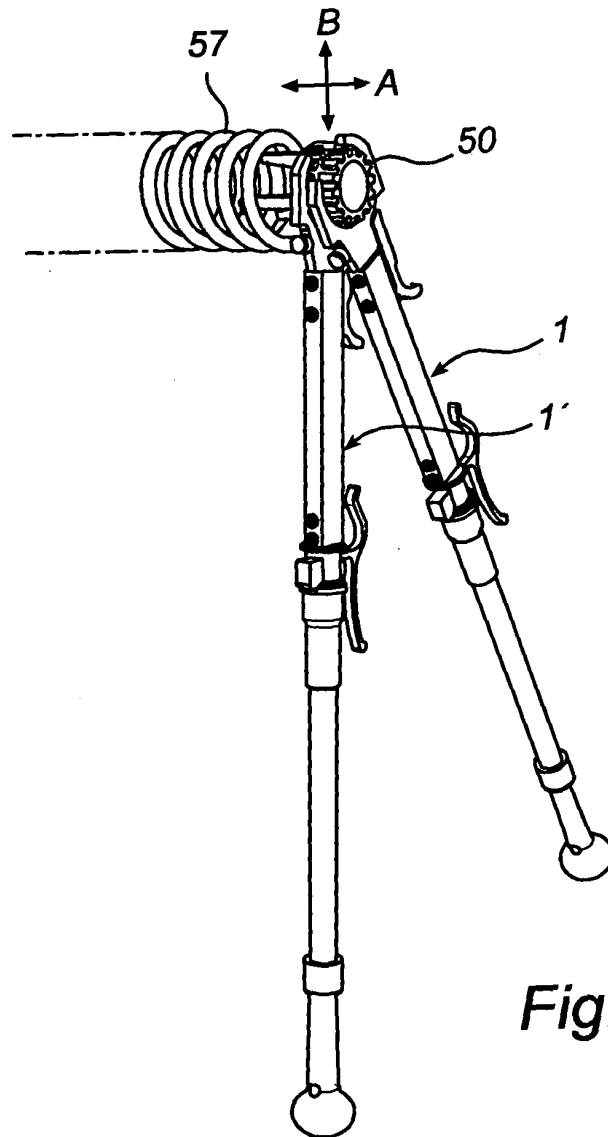


Fig. 5

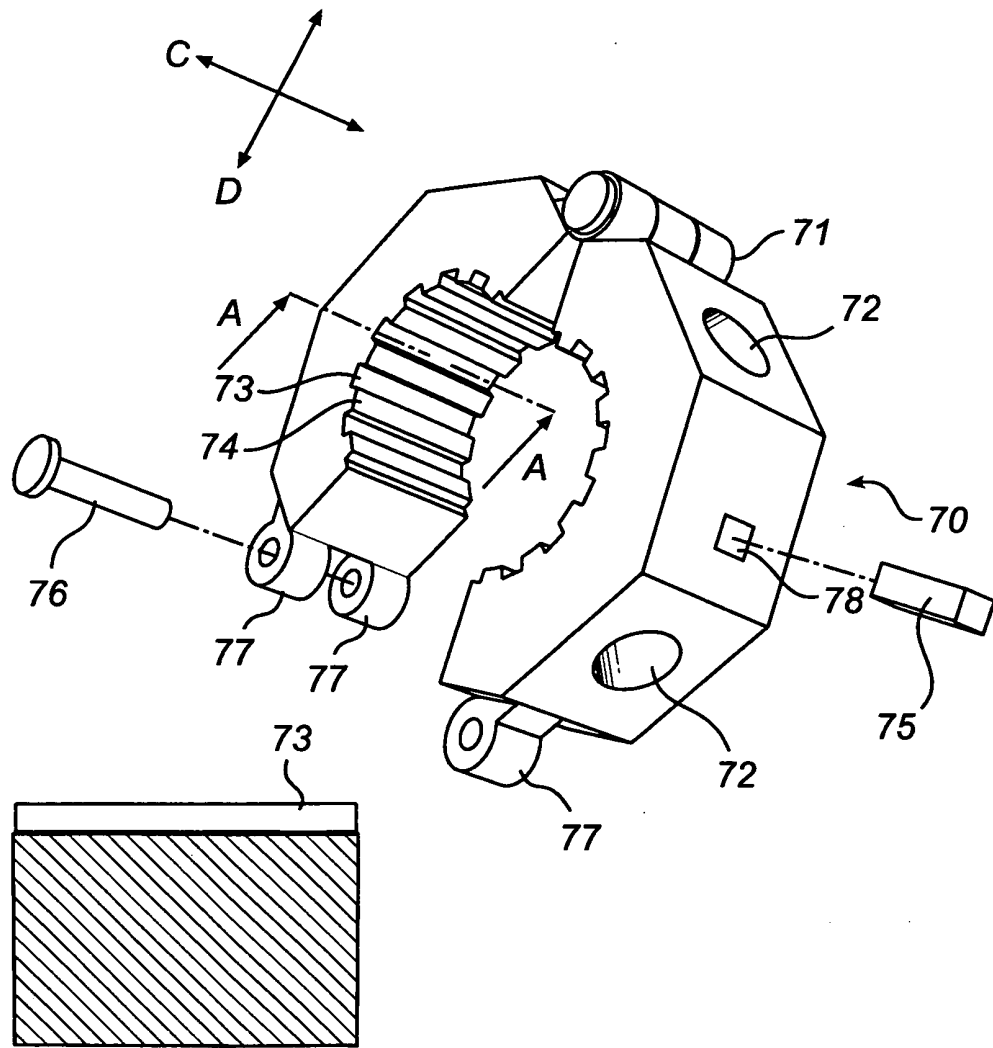


Fig. 6

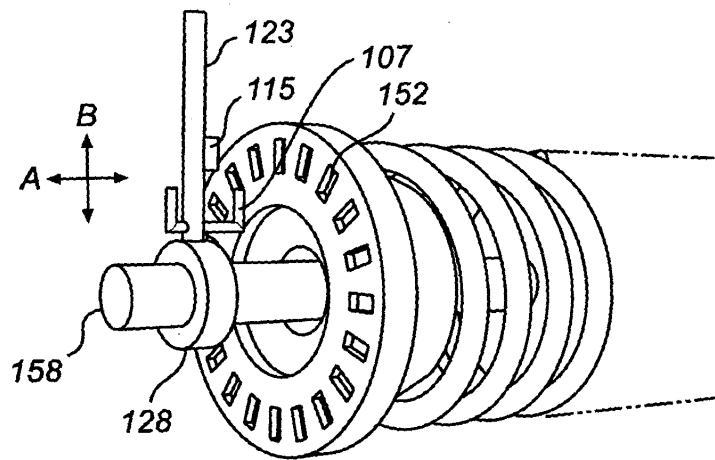


Fig. 7

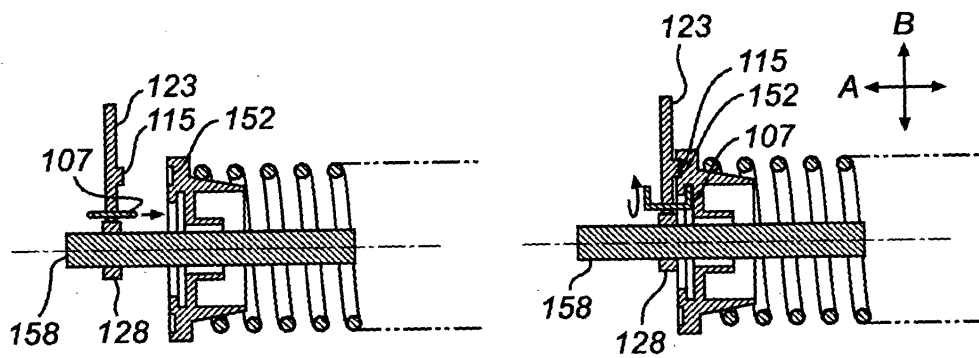


Fig. 8(1)

Fig. 8(2)

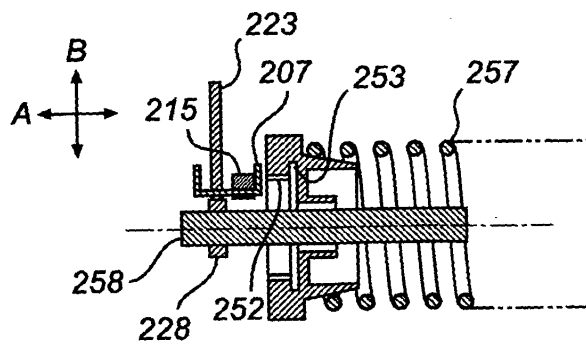


Fig. 9

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20020170688 A1 [0001]
- WO 200506590 A1 [0001]
- WO 2004091946 A2 [0001]