



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
03.06.2009 Bulletin 2009/23

(51) Int Cl.:
B61F 5/30 (2006.01) B61F 5/38 (2006.01)

(21) Application number: **08253768.9**

(22) Date of filing: **19.11.2008**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT RO SE SI SK TR
Designated Extension States:
AL BA MK RS

- **Taylor, David**
Cellardyke
Anstruther
Fife KY10 3AR (GB)
- **Jamieson, Wayne**
Leven
Fife KY8 4FH (GB)

(30) Priority: **27.11.2007 GB 0723150**
27.11.2007 US 4355 P

(71) Applicant: **SCT Europe Limited**
Kirkcaldy
Fife KY1 3UF (GB)

(72) Inventors:
• **Aitken, Alan**
Leven
Fife KY8 5PS (GB)

(74) Representative: **Dunlop, Brian Kenneth Charles et al**
Wynne-Jones, Lainé & James LLP
Essex Place
22 Rodney Road
Cheltenham
Gloucestershire GL50 1JJ (GB)

(54) **Steering links for railway bogies**

(57) This invention relates to steering links (19) for bogies (11) and to wagons (10) incorporating such bogies, a variable length steering link (19) assembly for a bogie including an elongate link (22) having a generally T-shaped head (23) at each end and an anchor (24) for

each end, wherein each anchor defines an axially extending chamber (30) for slidably receiving a respective head an a compression spring (31) wherein in one chamber the spring acts on the end face of its associated head and in the other chamber the spring acts on the back face of its associated head.

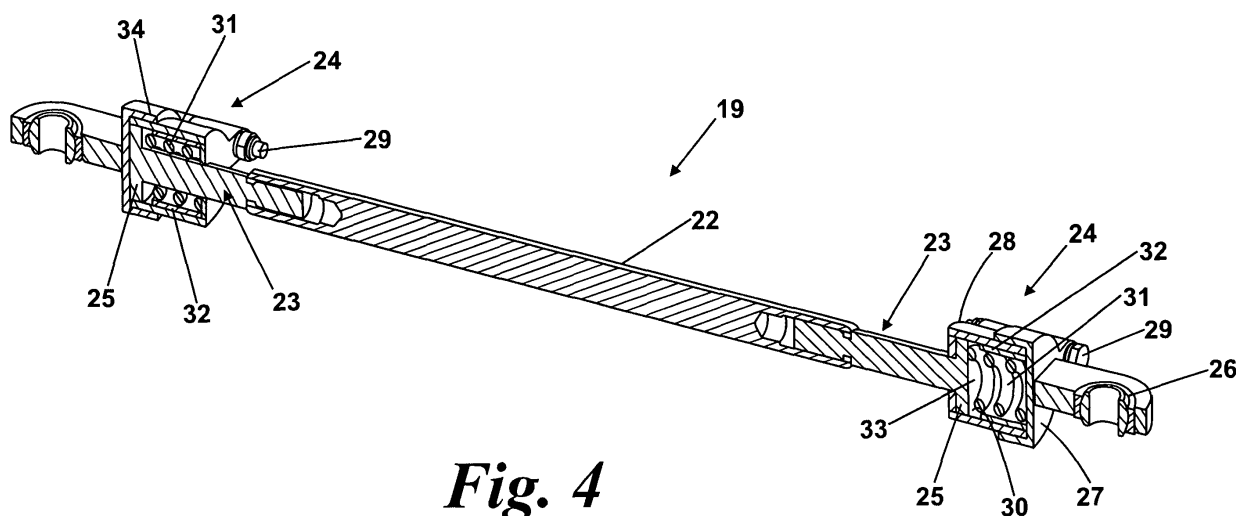


Fig. 4

Description

[0001] This invention relates to steering links for bogies and to wagons incorporating such bogies.

[0002] There is a significant need for wagons which can carry containers throughout the rail network in the United Kingdom. For historical reasons many of the bridges and structures extending over the rail in the network are too low to receive containers on wagons with beds at the normal wagon height. The initial approach was to form the rail equivalent of a low loader with a low bed spanning between the bogies of the wagon. This however rendered a significant length of any set of wagons completely redundant. Proposals have been made to overcome this problem by reducing the wheel diameter and hence allowing for a lower bed or deck height which can still extend over the bogies and overcome the redundant length problem. However, these new wheel sets are much more sensitive to cornering forces and the current arrangements experience significant wheel wobble. Self-steering bogies are known, but these tend to be quite expensive to configure. Bogies have been provided with yaw dampers and traction rods incorporating rubber bushings for taking out vibration and other distortion forces.

[0003] From one aspect the invention consists in a variable length steering link assembly including an elongate link having a generally T-shaped head at each end and an anchor for each end, wherein each anchor defines an axially extending chamber for slidably receiving a respective head and a compression spring, wherein in one chamber the spring acts on the end face of its associated head and in the other chamber the spring acts on the back face of its associated head.

[0004] It will be seen that in this way the first mentioned chamber arrangement allows for telescopic contraction along an axial direction, whilst the second mentioned chamber allows for telescopic extension of the link assembly. In all cases the link assembly is always acting to compress a spring.

[0005] The arrangement is particularly economic to manufacture and assemble, because the anchor portions and springs can be identical and only a single spring has to be manipulated in the assembly of each anchor.

[0006] Even more conveniently the link may have a central element and two head elements, the head elements being identical and therefore requiring a small inventory of easy to manufacture parts.

[0007] The link assembly may include hard stops for limiting extension or contraction of the assembly. These conveniently can be provided by rigid cylinders circumjacent respective springs.

[0008] From another aspect the invention consists in a container wagon having at least a pair of bogies having wheels of diameters of less than 600mm characterised in that each bogie has a steering link, extending from its frame to a wheel set, for each wheel set.

[0009] Preferably there are a pair of steering links for

each wheel set, one on each side of the bogie.

[0010] It will be understood that in the terms of this specification a steering link is a device which reactively responds to forces moving the wheel sets relative to the frame to control and limit that movement.

[0011] Each link may be extendable and may include a pair of compression springs, one of which is compressed on extension of the link and one of which is compressed on contraction of the link.

[0012] The or each link may be constituted by a steering link assembly as defined above.

[0013] Although the invention has been defined above, it is to be understood it includes any inventive combination of the features set out above or in the following description.

[0014] The invention may be performed in various ways and specific embodiments will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a side view of a low deck wagon;

Figure 2 is an enlarged side view of a bogie of Figure 1;

Figure 3 is a perspective view of a steering link; and

Figure 4 is a cross-sectional view through the steering link of Figure 3.

[0015] A wagon for containers is generally indicated at 10. It includes a pair of bogies 11, having 577mm diameter wheels 12, and a deck 13 which is carried on side bearers 14 of the bogies 11. The deck height is 730mm above the rail level.

[0016] Referring particularly to Figure 2, the bogie 11 includes a frame 15, which is suspended on wheel sets 16, by respective suspensions 17. The frame is cranked at 18 to allow for a low position of the side bearers 14.

[0017] Steering links 19 are provided to extend respective fixed points 20 on the frame 15 and the respective axle boxes of respective wheel sets 16.

[0018] Each steering link 19 can be extended and contracted in a controlled manner in response to longitudinal displacement of the associated wheel 12 so as to simultaneously allow a degree of movement, but in a controlled fashion.

[0019] Thus, whilst a bogie is going round a curve on a rail, those wheels which are travelling on the inner part of the curve will tend to move in a sense to contract the link 19, whilst those on the outer side of the curve will move in a sense to extend their associated link 19. It will be understood that there are links on each side of the bogie.

[0020] This arrangement enables the disadvantages that arise from using the smaller wheels, i.e. wheels of less than 600mm diameter, whilst avoiding the significant cost of fully steerable or self-steerable wheel sets.

[0021] A particularly economic form of steering link 19 is illustrated in Figures 3 and 4. The steering link 19 comprises a central elongate link element 22 having T-

shaped heads 23 fixed to its respective ends, and anchor portions 24, which telescopically house the heads 25 of the members 23.

[0022] As can be clearly seen in Figure 4, each anchor member 24 comprises a ball joint 26 which is integrally connected to a first housing member 27, which can be joined with a second housing member 28, by means of bolts 29 to form a chamber 30 in which a head 25 is received. Each chamber 30 also contains a compression spring 31 and a rigid cylinder 32 which is circumjacent the spring 31.

[0023] At the right hand end, the compression spring 30 is mounted to act between the first housing member 27 and the end face 33 of the head 25, whereas at the left hand end the spring 31 is located to act between the second housing member 28 annular rear face 34 of the head 25.

[0024] It will readily be appreciated that on compression of the link 19 telescopic contraction will take place in the right hand anchor member 24, whilst on extension of the link telescopic extension will take place in the left hand anchor member 24. At all times these movements will take place by compressing the respective spring 31 and so they can be controlled.

[0025] It will be understood that the design is such that it has a very low component count and is very easy to assemble. Further springs of different rating can easily be put into their respective chambers 30 so that tuning can take place as necessary.

[0026] The sleeves 32 provide "hard stops" for the respective heads 25 so as to limit the degree of longitudinal movement that can occur for the wheels 12, for example under heavy braking.

Claims

1. A variable length steering link assembly for a bogie including an elongate link having a generally T-shaped head at each end and an anchor for each end, wherein each anchor defines an axially extending chamber for slidably receiving a respective head and a compression spring wherein in one chamber the spring acts on the end face of its associated head and in the other chamber the spring acts on the back face of its associated head.
2. A link as claimed in claim 1, wherein at least one anchor includes a ball joint for connecting to a part of the bogie.
3. An assembly as claimed in claim 1 wherein the link has a central element and two head elements.
4. An assembly as claimed in claim 1 wherein the anchors are identical.
5. An assembly as claimed in claim 1 including hard

stops for limiting the extension or contraction of the assembly.

6. A variable length steering link assembly for a bogie including an elongate link having a generally T-shaped head at each end and an anchor for each end, wherein each anchor defines an axially extending chamber for slidably receiving a respective head and a compression spring wherein in one chamber the spring acts on the end face of its associated head and in the other chamber the spring acts on the back face of its associated head wherein at least one anchor includes a ball joint for connecting to a part of the bogie and wherein the link has a central element and two head elements.
7. An assembly as claimed in claim 6 wherein the anchors are identical.
8. An assembly as claimed in any one of the preceding claims including hard stops for limiting the extension or contraction of the assembly
9. A container wagon having at least a pair of bogies having wheels of diameters of less than 600mm **characterised in that** each bogie has a steering link extending from its frame to a wheel set, for each wheel set.
10. A wagon as claimed in claim 9 wherein there are a pair of steering links for each wheel set, one on each side of the bogie.
11. A wagon as claimed in claim 9 wherein each link is extendable and includes a pair of compression springs, one of which is compressed on extension of the link and one of which is compressed on contraction of the link.
12. A wagon as claimed in claim 9 wherein the link is a steering link assembly as claimed in claim 1.

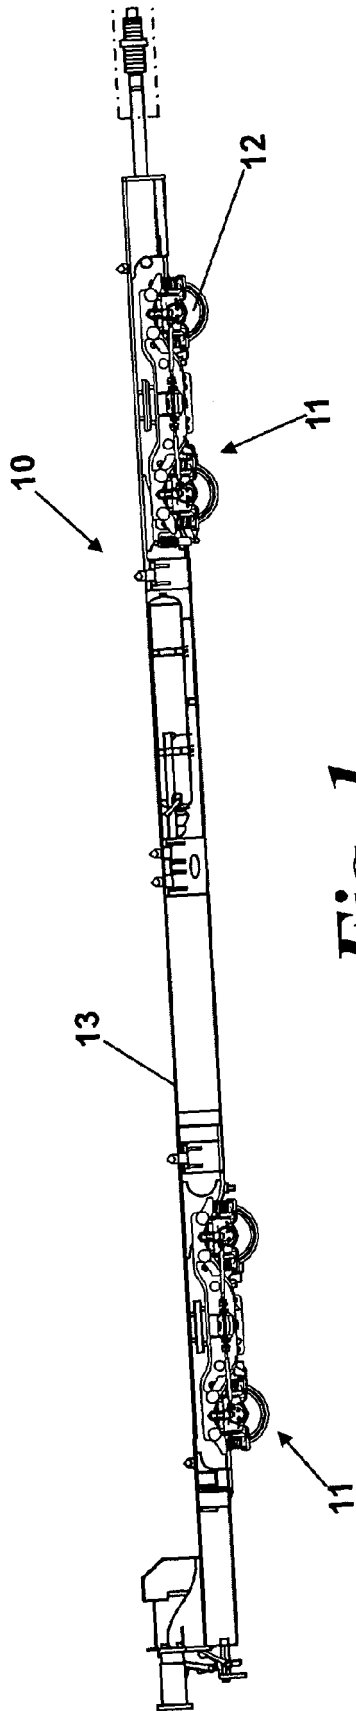


Fig. 1

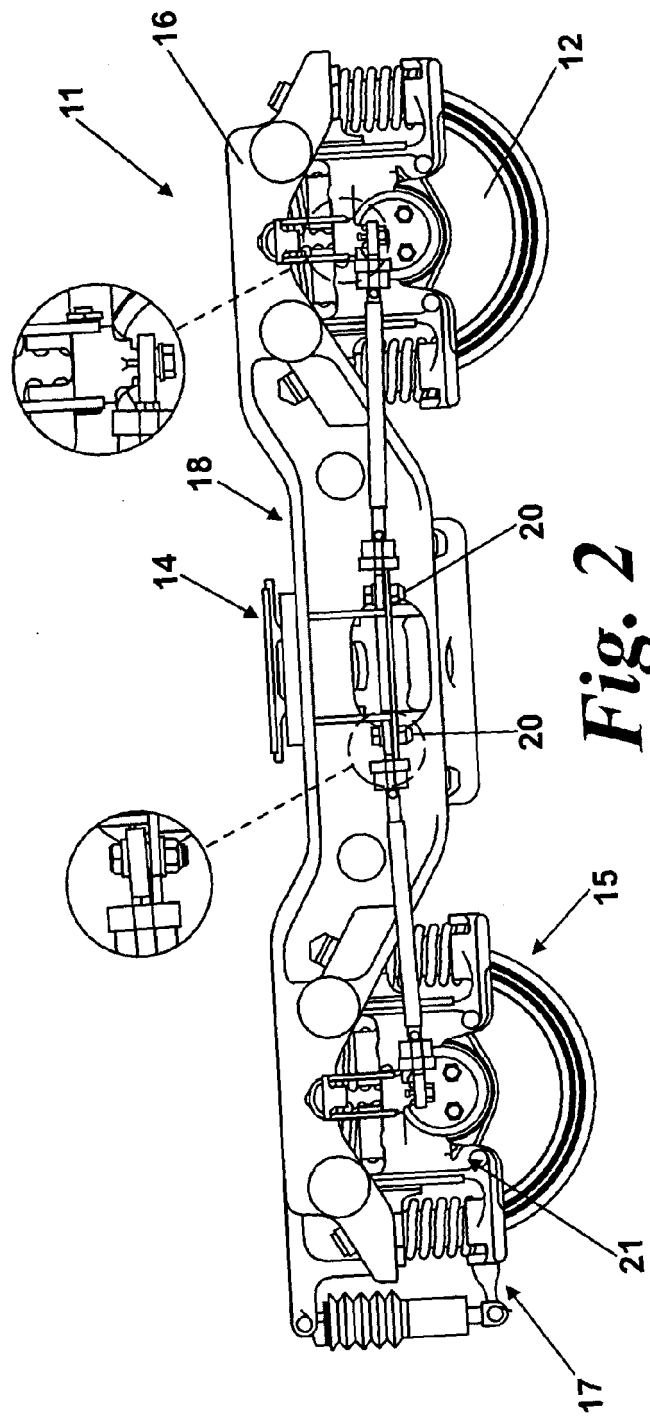


Fig. 2

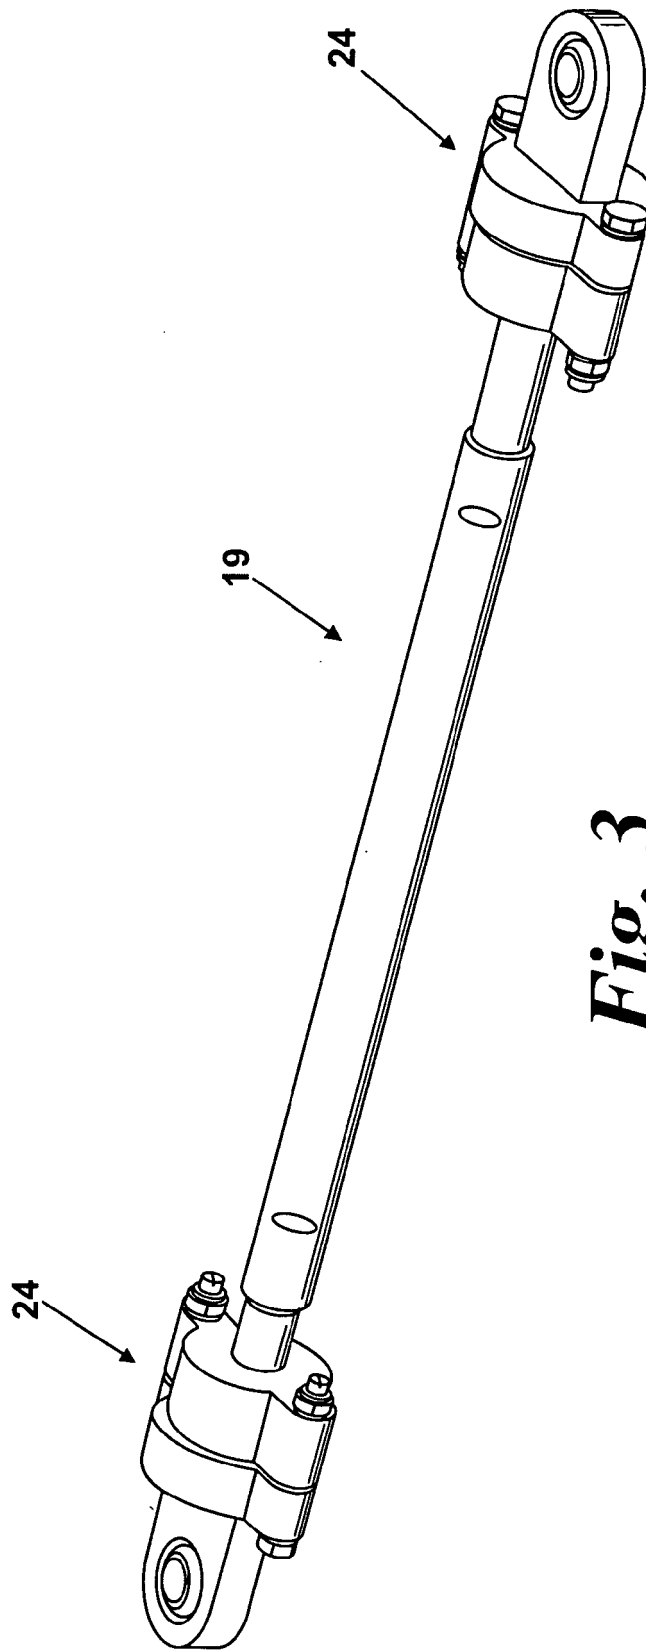


Fig. 3

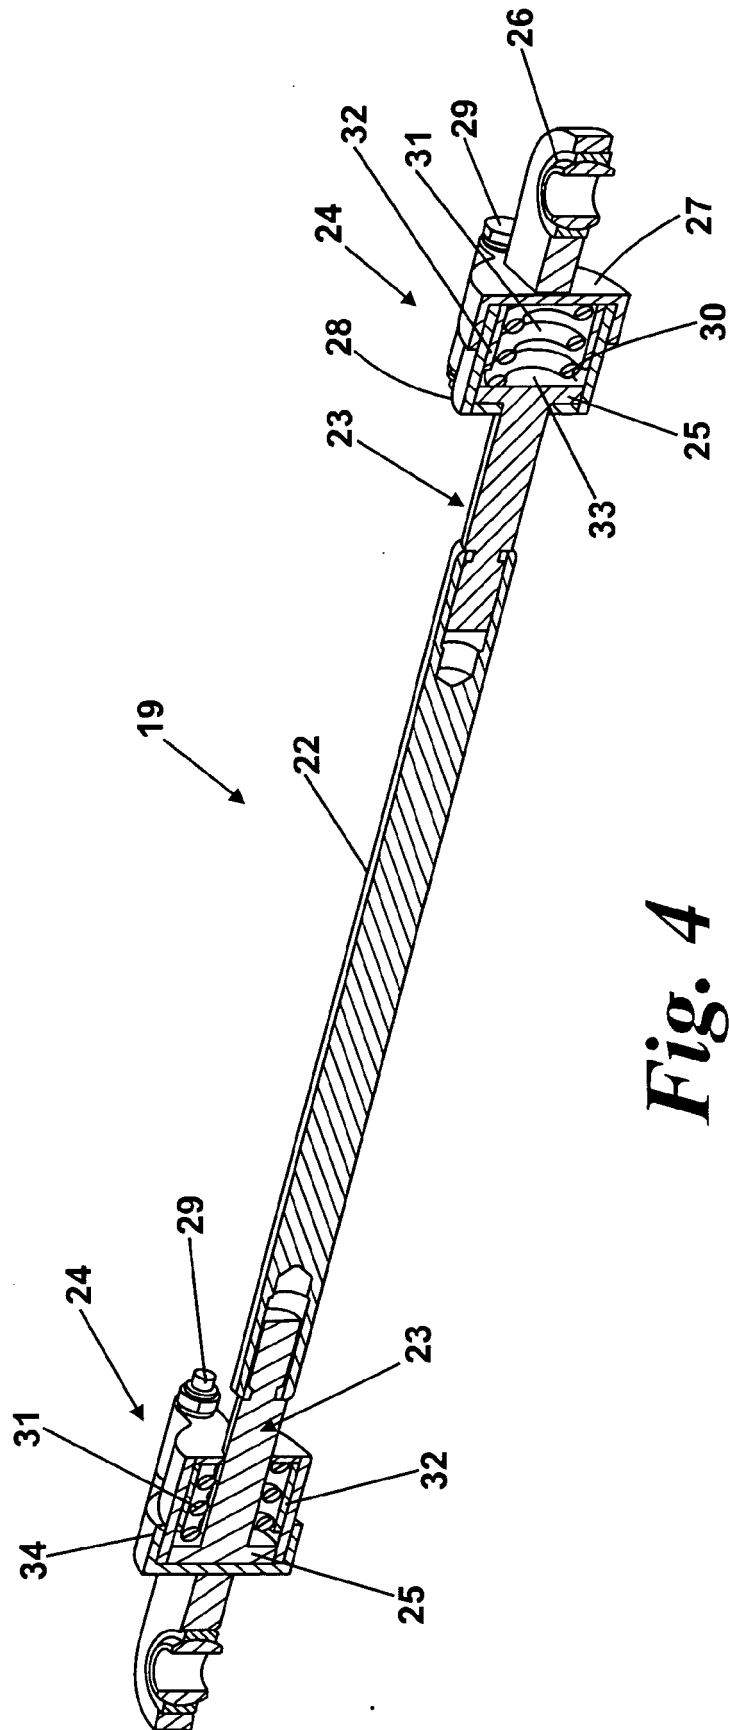


Fig. 4