

(19)



(11)

EP 2 085 528 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
07.10.2015 Bulletin 2015/41

(51) Int Cl.:
E03F 5/04 ^(2006.01) **A47K 3/00** ^(2006.01)
A47K 3/40 ^(2006.01)

(21) Application number: **09151373.9**

(22) Date of filing: **26.01.2009**

(54) **Shower drain**

Duschabfluss

Drainage de douche

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK TR**

(30) Priority: **01.02.2008 NL 1034985**

(43) Date of publication of application:
05.08.2009 Bulletin 2009/32

(73) Proprietor: **Easy Sanitary Solutions B.V.
7581 EZ Losser (NL)**

(72) Inventor: **Keizers, Jurgen Hendrik Peter Jozeph
7582 GH, Losser (NL)**

(74) Representative: **'t Jong, Bastiaan Jacob
Inaday
Hengelsestraat 141
NL-7521 AA Enschede (NL)**

(56) References cited:
**EP-A1- 1 865 117 DE-U1-202006 012 825
DE-U1-202007 003 376 US-A- 5 159 723**

EP 2 085 528 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention relates to a shower drain, comprising:

- a tray with a bottom surface and an upright edge along the bottom surface, wherein a draining opening is arranged in the bottom surface;
- at least one flexible sheet arranged on the outside of the tray along a part of the upright edge.

[0002] DE-U-202007003376 discloses a drain according to the preamble of claim 1.

[0003] The term "shower drain" is a generally used term in the prior art, and is used for drains used in for instance bathrooms. Such a shower drain is often elongate but can also be square, round or triangular.

[0004] When a shower drain is arranged in a floor of for instance a shower space or bathroom, it is then necessary that the connection of the floor to the drain be watertight and that this watertightness also remains guaranteed over a long period. For this purpose it is usual to arrange in the floor a flexible sheet which is adhered fixedly to the shower drain. A tile layer for instance is then arranged on this flexible sheet. In order to attach the sheet to the tray of a shower drain it is usual for such a tray to be provided all around with wide flanges which provide an adhesive surface and onto which the flexible sheet can be fixedly adhered.

[0005] During installing of the shower drain the fitter must glue the flexible sheet on-site. The drawback is that the conditions during fitting of a shower drain are not normally ideal for glueing. The glue layer can be adversely affected by the large amount of dust, whereby the adhesion of the glue to the flexible sheet leaves something to be desired. This can result in leakage in the longer term.

[0006] When a shower drain is fitted close to a wall, the usual flange to which the flexible sheet is adhered then forms an obstacle. This flange has a determined width, whereby the shower drain always comes to lie at a distance from the wall. It is possible to shorten the flange at this position, although the glueing area is hereby reduced in size, which can likewise have an adverse effect on the quality of the adhesion of the flexible sheet to the flange.

[0007] It is now an object of the invention to provide a shower drain wherein the above stated drawbacks are alleviated or even obviated.

[0008] This object is achieved with a shower drain according to the preamble which is characterized in that the part of the upright edge is a folded edge, wherein the at least one flexible sheet is clamped between the folded edge. Because the sheet is now clamped fixedly by a folded edge, there can now be proper quality control of the attachment of the flexible sheet during manufacture of the shower drain, and a good seal can be guaranteed. In addition, the use of a flange to which the flexible sheet

is glued in the prior art becomes unnecessary, whereby a shower drain according to the invention can be arranged against a wall and is therefore no longer limited by the width of flange. An additional advantage is that the depth of the shower drain in the floor can also no longer be limited by the protruding horizontal flange. In the prior art this horizontal flange must lie under the tile layer. When thick tiles were used, it was possible in the prior art that the shower drain came to lie below the upper surface of the finished tile floor. In a shower drain according to the invention the flexible sheet can be arranged such that the thickness of the tiles no longer affects the height of the shower drain in the floor.

[0009] In a preferred embodiment of the shower drain according to the invention the tray is manufactured from steel plate, in particular stainless steel plate.

[0010] In another embodiment of the shower drain according to the invention the flexible sheet is a watertight fabric. Such watertight fabric is used universally in the manufacture of bathroom floors and shower floors, and is particularly suitable for a watertight finishing of the floor. Lead or bitumen can for instance also be clamped.

[0011] In a preferred embodiment the folded edge is an outward bent edge. The bent edge moreover has the advantage of improving the finishing of the tray. Bending of the edge creates a rounded upper edge.

[0012] The bent part preferably lies against the upright edge. The flexible sheet is hereby clamped along the whole width of the bent edge, and because the bent edge abuts along a large area a firm connection of the flexible part to the tray is obtained.

[0013] In yet another embodiment of the shower drain according to the invention the bent edge comprises an outward directed horizontal flange. This horizontal flange is preferably only a few millimetres wide and provides protection for the flexible fabric running thereunder. When a shower drain is arranged in a tiled floor, the transition between the tiles and the shower drain must be provided with a silicone seal. This silicone seal must be replaced every few years, and this normally takes place by cutting away the silicone edge. By now providing a small horizontal flange, the knife with which the silicone edge is cut away is prevented from damaging the flexible sheet.

[0014] In yet another embodiment of the shower drain according to the invention the bottom surface is rectangular. At least two flexible sheets are here preferably arranged on two adjacent sides of the tray, wherein each flexible sheet is clamped by the associated folded edge and at least one flexible sheet is partially clamped by an adjacent folded edge. A good seal is hereby obtained at the position of the corners of a rectangular shower drain.

[0015] This drain can optionally also be applied as industrial drain.

[0016] These and other features of the invention are further elucidated with reference to the accompanying drawings.

[0017] Figure 1 shows a perspective view of a first em-

bodiment of a shower drain according to the invention.

[0018] Figure 2 shows a cross-sectional view of a second embodiment of the shower drain according to the invention.

[0019] Figure 3 shows a cross-sectional view of a third variant of the shower drain according to the invention.

[0020] Figure 4 is a perspective view of a fourth embodiment of a shower drain according to the invention.

[0021] Figure 5 is a cross-sectional view of a fifth variant of the shower drain according to the invention.

[0022] Figure 1 shows a shower drain 1 according to the invention. This shower drain 1 has a bottom surface 2 and an upright wall 3 along the periphery of bottom surface 2. On one side of surface 2 the upright edge 3 has a folded part 4 between which a flexible sheet 5 is clamped. This clamping of the flexible sheet is already carried out during manufacture of shower drain 1, whereby the flexible sheet no longer need be glued during fitting of the shower drain. During manufacture of shower drain 1 the flexible sheet can optionally be glued against upright wall 3, after which it is clamped fixedly by bent edge 4.

[0023] Figure 2 shows a second embodiment 10 of the shower drain according to the invention. This shower drain 10 has a bottom surface 11 with an upright edge 12. Upright edge 12 has a bent edge 13 between which is clamped a flexible fabric 14. A horizontal flange 15 is arranged on the end of bent edge 13. When shower drain 11 is arranged on a sub-floor 16 and tiles 17 are arranged against shower drain 10, it is essential that the space between tile 17 and bent edge 13 is filled with a silicone mastic. This mastic must be replaced every few years and is then cut out of this space. Flange 15 now ensures that the flexible fabric 14, which here runs under the flange, cannot be damaged by means of a knife.

[0024] Figure 3 shows a third embodiment 20 of a shower drain according to the invention. Here also the shower drain 20 has a bottom surface 21 with an upright edge 22. This upright edge 22 is specially designed so that shower drain 20 can be arranged against wall 23. Tiles 24 are placed on the horizontal part 25 of upright edge 22.

[0025] Also provided here on upright edge 22 is a bent part 26 between which a flexible sheet 27 is clamped. This flexible sheet provides for a good sealing of shower drain 20 relative to wall 23 and floor 28.

[0026] Figure 4 shows a fourth embodiment of a shower drain 30 according to the invention. This shower drain 30 has a bottom surface 31 which is rectangular. Upright edges 32, 33 and 34 are arranged along bottom surface 31. Each upright edge has an associated folded edge part 35, 36 and 37 respectively.

[0027] A flexible sheet 38, 39, 40 is arranged under each bent edge part 35, 36, 37. Flexible sheet 39 is not only clamped under bent edge 36 but also under bent edges 35 and 37 of the adjacent upright edges 32, 34. A good seal is hereby obtained at the position of the corners of rectangular tray 30.

[0028] Figure 5 shows a fifth embodiment of a shower

drain 45 according to the invention. This shower drain 45 also has a bottom surface 46, an upright edge 47 and a folded edge 48. A flexible sheet 49 is clamped between upright edge 47 and folded edge 48.

[0029] In this embodiment shower drain 45 is placed on a sub-floor 50 on which relatively thick tiles 51 are placed. The thickness of tiles 51 is here greater than the height of shower drain 45. Because a flexible sheet 49 has now been arranged, it is possible to have the top side of shower drain 45 lie flush with the top surface of tile 51. For this purpose the flexible sheet 49 first runs downward along the side of tile 51 and then horizontally under tile 51.

Claims

1. Shower drain (1, 10, 20, 30, 45), comprising:

- a tray with a bottom surface (2, 11, 21, 31, 46) and an upright edge (3, 12, 22, 32-34, 47) along the bottom surface (2, 11, 21, 31, 46), wherein a draining opening is arranged in the bottom surface (2, 11, 21, 31, 46);
- at least one flexible sheet (5, 14, 27, 38-40, 49) arranged on the outside of the tray along a part of the upright edge (3, 12, 22, 32-34, 47);

characterized in that the part of the upright edge (3, 12, 22, 32-34, 47) is a folded edge (4, 13, 26, 35-37, 48), wherein the at least one flexible sheet (5, 14, 27, 38-40, 49) is clamped between the folded edge (4, 13, 26, 35-37, 47).

2. Shower drain as claimed in claim 1, wherein the tray is manufactured from steel plate, in particular stainless steel plate.
3. Shower drain as claimed in claim 1 or 2, wherein the flexible sheet is a watertight fabric.
4. Shower drain as claimed in any of the foregoing claims, wherein the folded edge is an outward bent edge.
5. Shower drain as claimed in claim 4, wherein the bent part lies against the upright edge.
6. Shower drain as claimed in claim 4 or 5, wherein the bent edge comprises an outward directed horizontal flange.
7. Shower drain as claimed in any of the foregoing claims, wherein the flexible sheet is glued to the upright edge.
8. Shower drain as claimed in any of the foregoing claims, wherein the bottom surface is rectangular.

9. Shower drain as claimed in claim 8, wherein at least two flexible sheets are arranged on two adjacent sides of the tray, wherein each flexible sheet is clamped by the associated folded edge, and wherein at least one flexible sheet is partially clamped by an adjacent folded edge.

jede biegsame Folie durch die zugehörige gefaltete Kante eingeklemmt ist, und wobei zumindest eine biegsame Folie teilweise durch eine benachbarte, gefaltete Kante eingeklemmt ist.

Patentansprüche

1. Duschabfluss (1, 10, 20, 30, 45) mit:

- einer Wanne mit einer Bodenoberfläche (2, 11, 21, 31, 46) und einer aufrechten Kante (3, 12, 22, 32-34, 47) entlang der Bodenoberfläche (2, 11, 21, 31, 46), wobei eine Abflussöffnung in der Bodenoberfläche (2, 11, 21, 31, 46) ausgebildet ist;
- zumindest einer biegsamen Folie (5, 14, 27, 38-40, 49), die außerhalb der Wanne entlang eines Teils der aufrechten Kante (3, 12, 22, 32-34, 47) angeordnet ist;

dadurch gekennzeichnet, dass das Teil der aufrechten Kante (3, 12, 22, 32-34, 47) eine gefaltete Kante (4, 13, 26, 35-37, 48) ist, wobei die zumindest eine biegsame Folie (5, 14, 27, 38-40, 49) zwischen der gefalteten Kante (4, 13, 26, 35-37, 47) eingeklemmt ist.

2. Duschabfluss nach Anspruch 1, wobei die Wanne aus einer Stahlplatte, insbesondere einer rostfreien Stahlplatte, hergestellt ist.
3. Duschabfluss nach Anspruch 1 oder 2, wobei die biegsame Folie ein wasserfester Stoff ist.
4. Duschabfluss nach einem der vorhergehenden Ansprüche, wobei die gefaltete Kante eine auswärts gebogene Kante ist.
5. Duschabfluss nach Anspruch 4, wobei das gebogene Teil an der aufrechten Kante anliegt.
6. Duschabfluss nach Anspruch 4 oder 5, wobei die gebogene Kante einen auswärtsgerichteten, horizontalen Flansch aufweist.
7. Duschabfluss nach einem der vorhergehenden Ansprüche, wobei die biegsame Folie an die aufrechte Kante angeklebt ist.
8. Duschabfluss nach einem der vorhergehenden Ansprüche, wobei die Bodenoberfläche rechtwinklig ist.
9. Duschabfluss nach Anspruch 8, wobei zumindest zwei biegsame Folien an zwei nebeneinander liegenden Seiten der Wanne angeordnet sind, wobei

Revendications

1. Drainage de douche (1, 10, 20, 30, 45), comprenant :

- un plateau avec une surface inférieure (2, 11, 21, 31, 46) et un bord vertical (3, 12, 22, 32 à 34, 47) le long de la surface inférieure (2, 11, 21, 31, 46), dans lequel une ouverture de drainage est ménagée dans la surface inférieure (2, 11, 21, 31, 46) ;
- au moins une feuille flexible (5, 14, 27, 38 à 40, 49) aménagée sur la partie externe du plateau le long d'une partie du bord vertical (3, 12, 22, 32 à 34, 47) ;

caractérisé en ce que la partie du bord vertical (3, 12, 22, 32 à 34, 47) est un bord replié (4, 13, 26, 35 à 37, 48), dans lequel la au moins une feuille flexible (5, 14, 27, 38 à 40, 49) est bloquée entre le bord replié (4, 13, 26, 35 à 37, 47).

2. Drainage de douche selon la revendication 1, dans lequel le plateau est constitué d'une plaque d'acier, en particulier d'une plaque d'acier inoxydable.
3. Drainage de douche selon la revendication 1 ou la revendication 2, dans lequel la feuille flexible est un tissu étanche à l'eau.
4. Drainage de douche selon l'une quelconque des revendications précédentes, dans lequel le bord replié est un bord cintré vers l'extérieur.
5. Drainage de douche selon la revendication 4, dans lequel la partie cintrée repose contre le bord vertical.
6. Drainage de douche selon la revendication 4 ou la revendication 5, dans lequel le bord cintré comprend un rebord horizontal dirigé vers l'extérieur.
7. Drainage de douche selon l'une quelconque des revendications précédentes, dans lequel la feuille flexible est collée au bord vertical.
8. Drainage de douche selon l'une quelconque des revendications précédentes, dans lequel la surface inférieure est rectangulaire.
9. Drainage de douche selon la revendication 8, dans lequel au moins deux feuilles flexibles sont aménagées sur deux côtés adjacents du plateau, dans lequel chaque feuille flexible est bloquée par le bord

replié associé et dans lequel au moins une feuille flexible est partiellement bloquée par un bord replié adjacent.

5

10

15

20

25

30




35

40

45

50

55

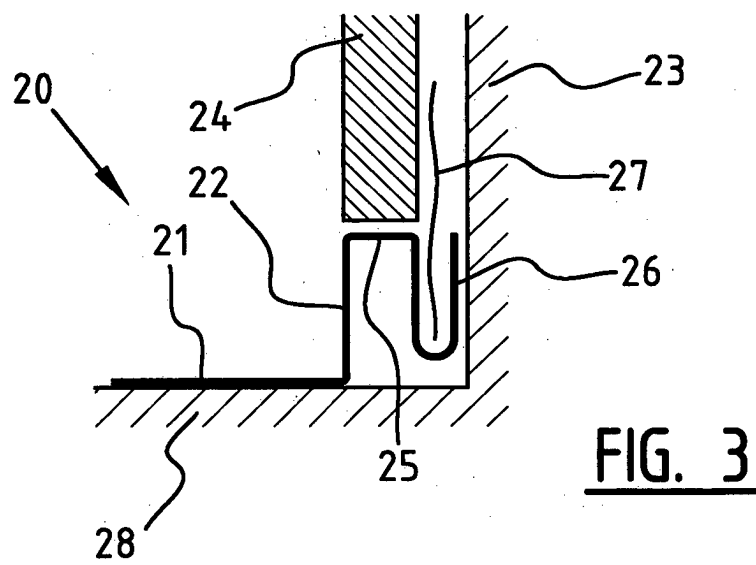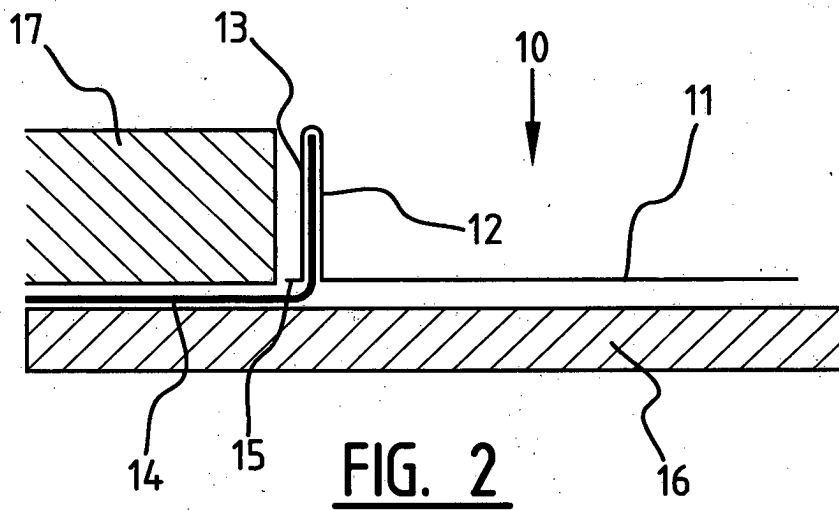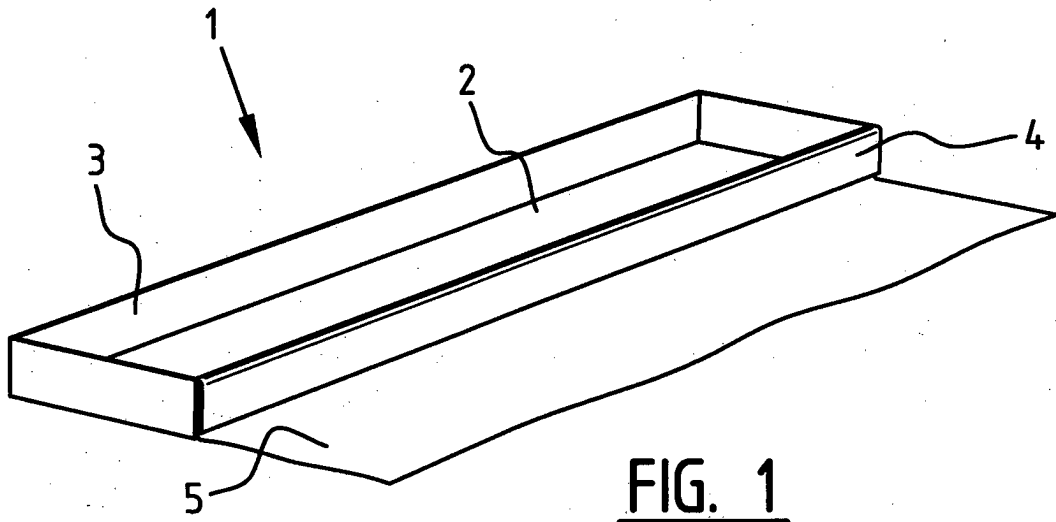

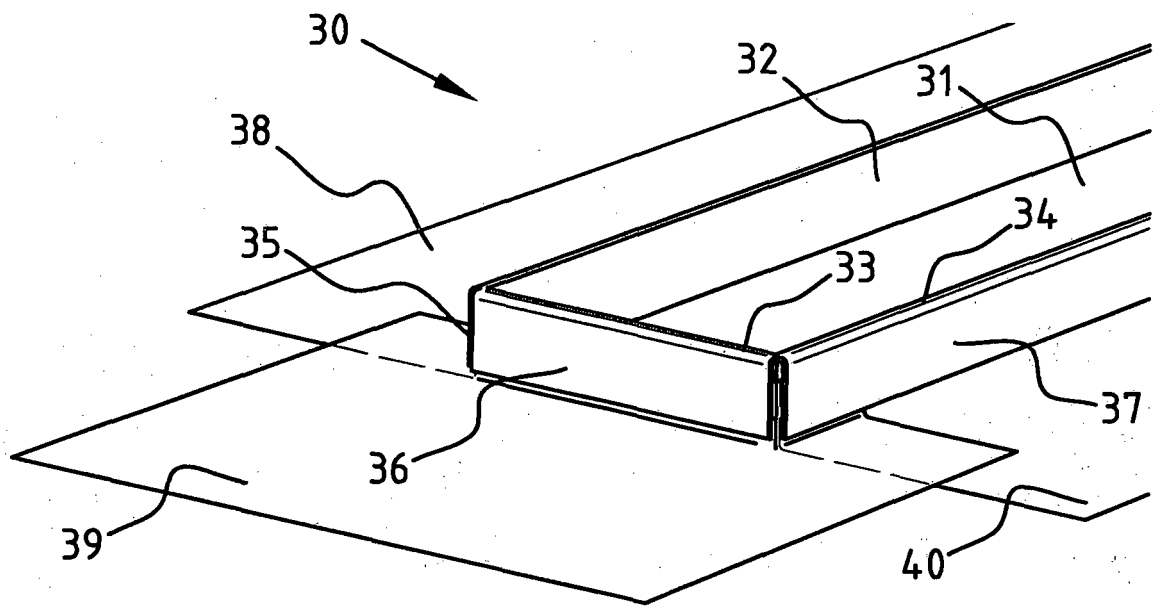


FIG. 4

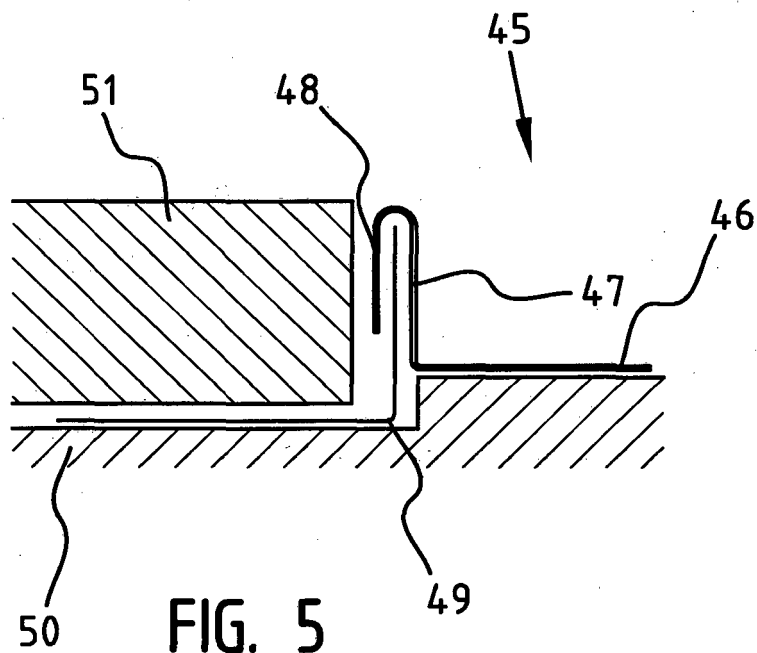


FIG. 5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 202007003376 U [0002]