



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
19.08.2009 Bulletin 2009/34

(51) Int Cl.:
B23K 20/12 ^(2006.01) **B23K 101/00** ^(2006.01)

(21) Application number: **09250262.4**

(22) Date of filing: **30.01.2009**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK TR
Designated Extension States:
AL BA RS

• **Lin, Wangen**
South Glastonbury, CT 06073 (US)
• **Alexander, David G.**
Manchester, CT 06042 (US)

(30) Priority: **12.02.2008 US 69714**

(71) Applicant: **United Technologies Corporation**
Hartford, CT 06101 (US)

(74) Representative: **Leckey, David Herbert**
Frank B. Dehn & Co.
St Bride's House
10 Salisbury Square
London
EC4Y 8JD (GB)

(72) Inventors:
• **Twelves, Wendell V., Jr.**
Glastonbury, CT 06033 (US)

(54) **System for solid state depositing of metals**

(57) A process for solid state deposition of a material onto a workpiece (40) includes the steps of providing a rod (24) of metallic deposition material, exerting pressure at one end of the rod (24) to move the metallic deposition material into a deposition zone (28), rotating the rod (24) while the pressure is being exerted to generate frictional heat when the rod (24) contacts a surface of the workpiece (40), and raising the temperature of the metallic deposition material to reduce the amount of frictional heat which needs to be generated during the rotating step and to produce a microstructure which is substantially free of porosity and which has a fine grain size.

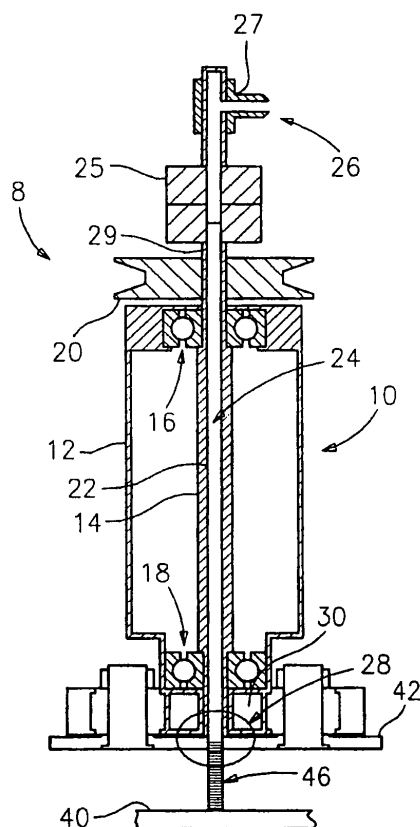


FIG. 1

Description**BACKGROUND**

[0001] The present disclosure relates to a system and a process for depositing a metallic material on a substrate.

[0002] Additive manufacturing processes are able to deposit metallic materials to add features on existing work pieces for repair operations and to create near net shape work pieces through solid free form fabrication. The current additive manufacturing systems employ a variety of technologies including lasers, electron beams, wire feed stock, powder delivery systems, and powder beds. These systems all share the common characteristic of a molten melt pool to effect deposition of new material on a substrate. The microstructure of a weld deposited metal mass frequently has inherent defects in the form of thermally induced residual stress, fusion bond line flaws, micro cracking, and epitaxial growth of grains. The material properties of such weld deposited metal mass nominally exceed those of castings, but typically fall short of wrought material.

SUMMARY

[0003] There is described herein an additive manufacturing process and system which overcomes the material properties limitations inherent in melt pool deposition processes.

[0004] In accordance with the present disclosure, there is described a system for depositing material onto a workpiece. The system broadly comprises a rod of metallic deposition material, means for exerting pressure at one end of said rod to move said metallic deposition material into a deposition zone, means for rotating said rod while said pressure is being exerted to generate frictional heat when said rod contacts a surface of said workpiece, and means for raising the temperature of the metallic deposition material.

[0005] Further in accordance with the present disclosure, there is described a process for depositing material onto a workpiece. The process broadly comprises the steps of providing a rod of metallic deposition material, exerting pressure at one end of said rod to move said metallic deposition material into a deposition zone, rotating said rod while said pressure is being exerted to generate frictional heat when said rod contacts a surface of said workpiece, and raising the temperature of said metallic deposition material while an end of said rod is in said deposition zone.

[0006] Other details of the solid state additive manufacturing system, as well as other objects and advantages attendant thereto, are set forth in the following detailed description and the accompanying drawings wherein like reference numerals depict like elements.

BRIEF DESCRIPTION OF THE DRAWINGS**[0007]**

FIG. 1 is a sectional view of a solid state additive deposition system; and

FIG. 2 is an enlarged view of the deposition zone formed by the system of FIG. 1

[0008] DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

[0008] The deposition process and system described herein performs deposition of metallic material in a solid plastic state. This results in defect free material with a grain structure that will provide full wrought properties following heat treatment.

[0009] Instead of a non-consumable rotating friction pin used in stir welding processes, the process and system described herein use a consumable rotating rod of metallic material. The consumable, rotating rod of metallic material can be progressively fed into the workpiece or substrate, which may comprise a part or a turbine engine component undergoing repair. This can be done using a pneumatic, hydraulic or mechanical feed mechanism. Localized heat may be added to the rod stock just above the deposition point. The heat may be added using an induction coil, a laser, acetylene torch flame, etc. The temperature of the metallic material forming the rod may be raised to reduce the amount of heat needed to be produced by friction. By preheating the deposition rod to a near plastic state, the energy needed to spin the rod to generate frictional heat and the vertical force of the rod on the work piece may be reduced to a practical level.

[0010] Lateral confinement of the deposited metal may be progressively achieved by shaped cam followers spaced at a desired wall thickness. Upper confinement of the deposited metal may be provided by the solid feed rod. The lower surface confinement may be provided by the substrate. Recently deposited material will provide the aft confinement. The forward face of the deposition zone is unconfined and may be characterized by a bow wave of plastic material.

[0011] The plastic nature of the metallic material in the deposition zone along with the stirring motion insures that the microstructure will be substantially free of porosity and have a fine grain size.

[0012] Referring now to the drawings, FIG. 1 illustrates a solid state deposition system 8 which includes a spindle 10. The spindle 10 has a housing 12 which may be formed from any suitable material. Located within the housing 12 is a rotatable hollow shaft 14 supported for rotation by bearings 16 and 18. Attached to the shaft 14 may be a drive pulley 20 or other suitable device for rotating the shaft. When used, the drive pulley 20 may be connected to a motor (not shown) via a belt or chain (not shown) for rotating the pulley 20 and thus, the shaft 14.

[0013] Positioned within the core 22 of the hollow shaft

14 is a solid feed rod 24 of consumable metallic deposition material. Suitable materials for the feed rod 24 include: Aerospace Grades of Aluminum, Titanium, Low Alloy Steel and Nickel Based Super Alloys such as Inconel 625 and 718. Attached to the upper end 29 of the shaft 14 is a feed mechanism 26 for exerting pressure on an upper end of the feed rod 24 and for thus feeding the consumable deposition material into the deposition zone 28. In one embodiment, the feed mechanism 26 may comprise a fitting 27 for introducing a high pressure fluid, such as air, into the hollow core 22 of the shaft 14 and into contact with the upper end of the solid feed rod 24. A rotating pressure union 25 may be provided to join the fitting 27 to the upper end 29 of the shaft 14. The high pressure fluid may be used to feed the consumable deposition material in the rod 24 into the deposition zone 28.

[0014] As an alternative to the fitting 27 and the use of high pressure air to feed the deposition material into the deposition zone 28, the feed mechanism 26 may comprise a hydraulic or mechanical feed mechanism positioned adjacent the upper end 29 of the shaft 14 to apply a pressure force to the upper end of the solid feed rod 24. The hydraulic or mechanical feed mechanism may be any suitable device.

[0015] A heating element 30 may be positioned adjacent the deposition zone 28 at a location just above the deposition point 31. The heating element 30 may be positioned within the housing 12 or external to the housing 12. The heating element 30 may be an induction coil, a laser, or an acetylene torch, flame. The heating element 30 may be used to raise the temperature of the metallic deposition material forming the rod 24 to approximately 0.8 of the deposition material melt temperature. The temperature of the material forming the rod 24 is raised to reduce the amount of heat needed to be produced by friction. By preheating the feed rod 24 in this manner to a near plastic state, the energy needed to spin the feed rod 24 to generate frictional heat and the vertical force of the rod on a workpiece 40 is reduced to a practical level. By heating the material forming the feed rod 24 and applying pressure at the opposite end by the feed mechanism 26, metal may be deposited on a surface of the workpiece 40 for a desired purpose such as effecting a repair.

[0016] As shown in FIG. 2, lateral confinement of the deposited metal may be progressively achieved by shaped cam followers 42 spaced at a desired wall thickness for the deposited material. The shaped cam followers 42 may be conical rollers whose outer diameter surface insures that the rollers only contact relatively soft material 43 in the current deposition layer. Upper confinement of the deposited metal may be provided by the solid feed rod 24. The substrate or target plate 40 provides lower confinement. Aft confinement is provided by the recently deposited material.

[0017] As can be seen from FIG. 2, metallic material may be deposited in layers 46 on a surface of the workpiece 40. The forward face of the deposition zone may

be unconfined and may be characterized by a bow wave of plastic deposition material. The plastic state of the deposited material in the deposition zone, along with the stirring motion caused by rotation of the feed rod 24, leads to the microstructure being substantially free of porosity and having a fine grain size. The porosity and grain size are equivalent to what is seen in a forging for any given material.

[0018] The process of the present invention may be used to add features to bosses, flanges and stiffening blades to a diffuser case. The process described herein may also be used to free form fabricate diffuser cases, turbine exhaust cases, and intermediate cases.

[0019] The solid state additive manufacturing system and process disclosed herein overcomes the material properties limitations inherent in melt pool deposition processes. The approach described herein enables full wrought properties to be realized directly from an additive manufacturing process.

[0020] It is apparent that there has been provided in accordance with the present disclosure a solid state additive manufacturing system which fully satisfies the objects, means, and advantages set forth hereinbefore. While the present disclosure has set forth particular embodiments, other alternatives, modifications, and variations may become apparent to those skilled in the art having read the foregoing description. Accordingly, it is intended to embrace those alternatives, modifications, and variations as fall within the broad scope of the appended claims.

Claims

1. A system (8) for depositing material onto a workpiece (40), said system comprising:

a rod (24) of metallic deposition material;
means for exerting pressure at one end of said rod (24) to move said metallic deposition material into a deposition zone (28);
means (20) for rotating said rod (24) while said pressure is being exerted to generate frictional heat when said rod (24) contacts a surface of said workpiece; and
means (30) for raising the temperature of said metallic deposition material.

2. The system according to claim 1, wherein said rod (24) comprises a solid rod of consumable deposition material.

3. The system according to claim 1 or 2, further comprising:

said rotating means comprising a hollow rotatable shaft (14);
said rod (24) being positioned within said hollow

- shaft (14); and
said pressure exerting means comprising a feed mechanism attached to an upper end (29) of said shaft (14).
4. The system of claim 3, wherein said feed mechanism comprises a fitting (27) for a high pressure gas.
5. The system of claim 3, wherein said feed mechanism comprises a hydraulic feed mechanism or a mechanical feed mechanism.
6. The system of any preceding claim, further comprising means (42) for laterally confining the deposited metal, said lateral confining means comprising, for example, shaped cam followers (42) spaced at a desired wall thickness.
7. The system of any preceding claim, wherein said temperature raising means (30) comprises a source of heat located adjacent said deposition zone (28).
8. A process for depositing a material onto a workpiece (40) using a solid state process comprising the steps of:
- providing a rod (24) of metallic deposition material; exerting pressure at one end of said rod (24) to move said metallic deposition material into a deposition zone (28);
rotating said rod (24) while said pressure is being exerted to generate frictional heat when said rod (24) contacts a surface of said workpiece (40); and
raising the temperature of said metallic deposition material while an end of said rod (24) is in said deposition zone (28).
9. The process according to claim 8, wherein said rod providing step comprises providing a solid rod (24) of consumable deposition material and further comprising providing said solid rod (24) within a hollow rotatable shaft (14) and said rotating step comprises rotating said hollow shaft (14).
10. The process of claim 9, wherein said pressure exerting step comprises providing a feed mechanism attached to an upper end (29) of said shaft (14) and using said feed mechanism to exert said pressure to an end of said solid rod (24).
11. The process of claim 10, wherein said feed mechanism providing step comprises providing a fitting (27) for a high pressure gas and applying said gas under pressure to said end (29) of said solid rod (24).
12. The process of any of claims 8 to 11, wherein said temperature raising step comprises providing a source of heat (30) located adjacent said deposition zone (28) and heating said deposition material adjacent a deposition point so as to reduce the frictional heat which needs to be generated during said rotating step.
13. The process according to claim 16 or the system according to claim 8, wherein said heat source (30) comprises an induction coil, a laser or an acetylene torch flame.
14. The process of any of claims 8 to 13, further comprising laterally confining the deposited metal, for example using shaped cam followers (42) spaced at a desired wall thickness.
15. The process according to any of claims 8 to 14, wherein said temperature raising step comprises:
- raising the temperature of said metallic deposition material to reduce the amount of frictional heat needed to be generated during said rotating step so as to form a microstructure in the deposited material which is substantially free of porosity and which has a fine grain size.

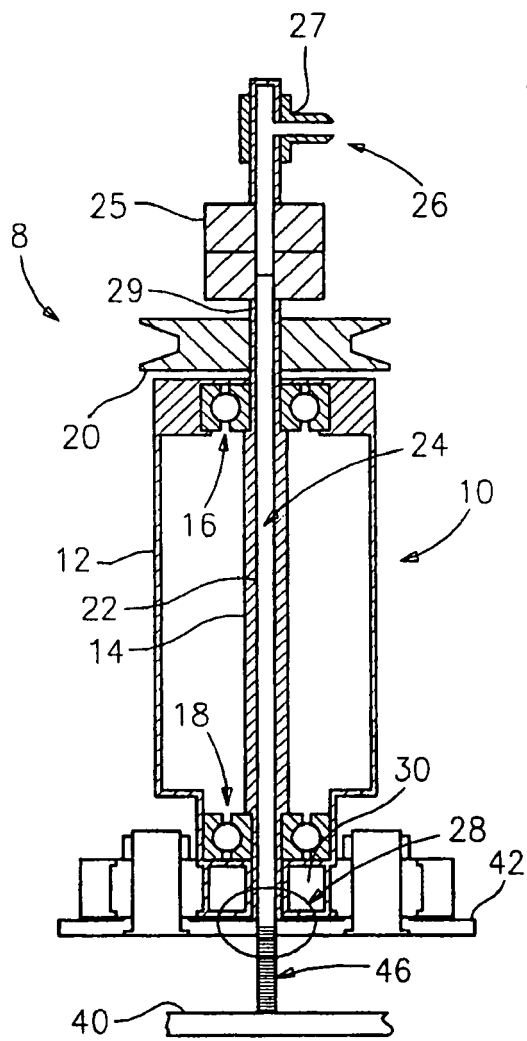


FIG. 1

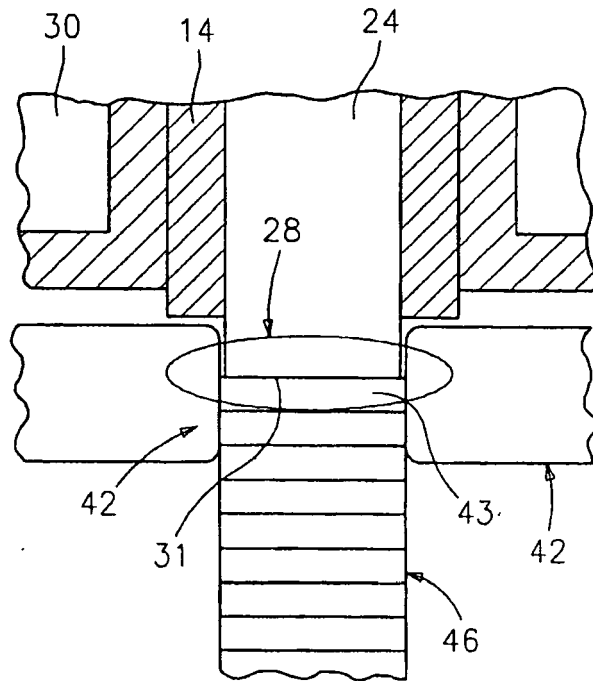


FIG. 2