



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
26.08.2009 Bulletin 2009/35

(51) Int Cl.:
B67D 5/37 (2006.01)

(21) Application number: **08250589.2**

(22) Date of filing: **20.02.2008**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT RO SE SI SK TR
Designated Extension States:
AL BA MK RS

(72) Inventor: **Farthing, Howard John**
Welwyn Garden City
Hertfordshire AL7 1EW (GB)

(74) Representative: **Roberts, Gwilym Vaughan et al**
Kilburn & Strode LLP
20 Red Lion Street
London WC1R 4PJ (GB)

(71) Applicant: **Nozzad (UK) Limited**
Welwyn Garden City
Hertfordshire AL7 1EW (GB)

(54) **Hood for fuel nozzle**

(57) The invention relates to an improved device for fitting over at least a portion of the housing of a fuel delivery nozzle, in particular a display device for displaying information. The device incorporates a body, a display surface for displaying information, a transparent lid which

is hinged to the body, a splashguard and a securing clip. The clip is slideably located in a channel in the body, the channel being angled with respect to the display surface. The securing clip and channel arrangement is thereby suitable for securing to both 'standard' and 'vapour recovery' types of fuel delivery nozzles.

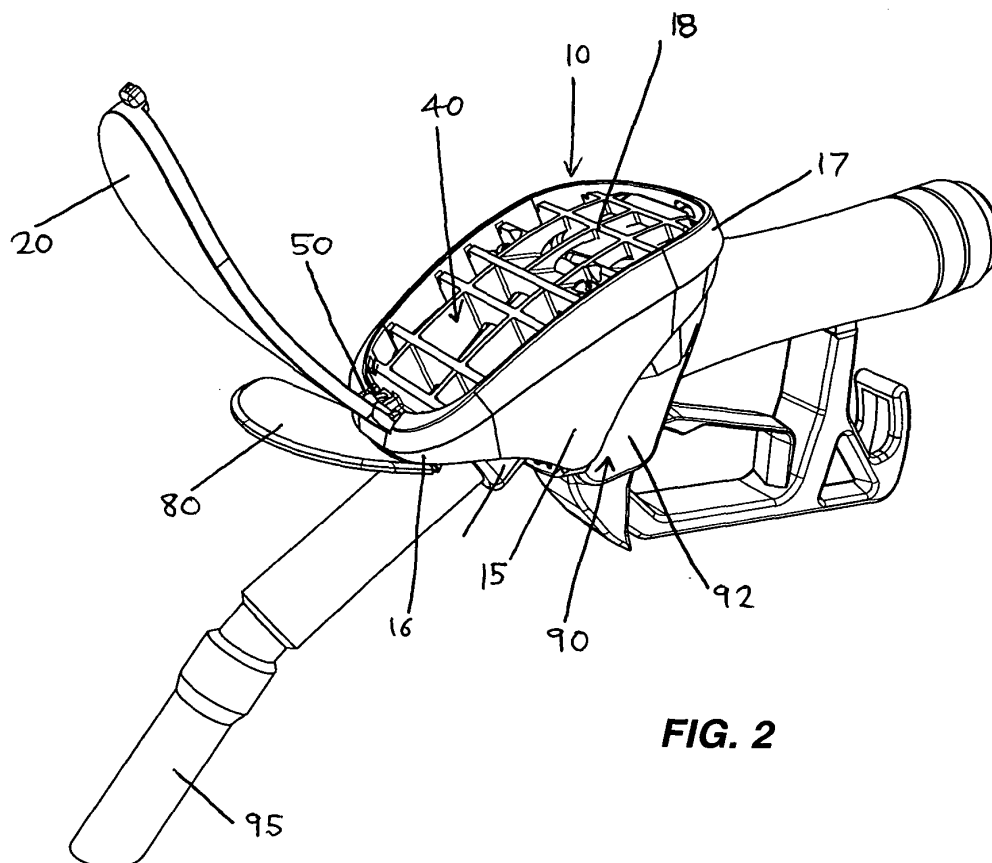


FIG. 2

Description

[0001] The present invention relates to a device for fitting over at least a portion of the housing of a fuel delivery nozzle.

Background of invention

[0002] Devices for displaying information on a fuel delivery nozzle, for example a petrol pump nozzle, are known. Such devices are often subjected to rough treatment in use, for example being dropped or run over by the wheels of automotive vehicles, and it is relatively common for such devices to be damaged or dislodged in use.

[0003] The environment in which such devices are used also commonly leads to the devices coming into contact with volatile and potentially damaging chemicals. The display window common to such devices, through which information is displayed to an operator, is therefore commonly subject to degradation or breakage, requiring replacement of the display window when the device is in service, while allowing the display window to remain attached in use. There is also a need for the display window to be removable so that the information displayed on the device can be updated in use.

[0004] Furthermore, such devices are often assembled and attached to the fuel delivery nozzle by persons who lack mechanical assembly skills, therefore there is a risk of incorrect assembly when such persons assemble the display device to the fuel delivery nozzle. Such incorrect assembly can often lead to parts falling off in use and being damaged or lost.

[0005] Finally, at least two types of fuel delivery nozzle exist, 'standard' and 'vapour recovery', these having differing physical dimensions and shape. Known types of display devices for attaching to a fuel delivery nozzle use different attachment methods and/or components for attaching to different types of fuel delivery nozzles. Problems exist with the known display devices whereby incorrect components for attachment may be used which leads to insecure fitment, loss and/or breakage of the display device. Additionally, the correct components for fixing the display device to the fuel delivery nozzle may not be immediately available, thereby causing undue inconvenience to the user of the display device.

[0006] The invention is set out in the claims.

[0007] An improved display device with a more intuitive method of assembly is thus provided, in terms of both how the individual parts making up the display device are assembled to each other, and how the complete display device is assembled to the fuel delivery nozzle. An improved display device is further provided, requiring less assembly by users in the field, and less disassembly and subsequent re-assembly in the field. An improved display device which is suitable for fixing to both types ('standard' and 'vapour recovery') of fuel delivery nozzle is thus provided.

[0008] Embodiments of the invention will now be de-

scribed by way of example with reference to the Figures:

Fig. 1 - Perspective view of the underside of the device.

5 Fig. 2 - View of the display device in position, on fuel delivery nozzle.

Fig. 3 - Exploded view of the display device.

Fig. 4 - Perspective detail view showing the display device hinged lid.

10 Fig. 5 - Underside view of the display device secured to a fuel delivery nozzle.

Fig. 6 - Perspective detail view showing the clip located in the body.

Fig. 7 - Perspective view showing details of the hinge.

15 Fig. 7a - View from underneath the body, showing body hinge stubs.

Detailed description

20 **[0009]** As shown in Fig. 1, in an embodiment, the present invention incorporates a body (10), also referred to herein as a hood. As shown in Fig. 2, the hood (10) is constructed with an internal lattice structure (18) which is both relatively strong and lightweight, and defines a display surface (40). The display surface (40) can accommodate information for display, which may be carried on a card or other suitable media, and which is viewable through a transparent lid or cover (20). The lid (20) is hingeably attached to the hood (10) by a hinge (50). The hinge (50) is arranged so that the lid (20) can be detached from the hood (10) if necessary, this being necessary, for example, if the lid (20) has become degraded or damaged. A splashguard (80) is optionally fitted to the hood (10).

35 **[0010]** As shown in Figs. 1 and 2, the reverse side of the hood (10) from that having the display surface (40) is shaped so as to be compatible with the shape of common types of fuel delivery nozzle (90), including particularly those commonly known as 'standard' and 'vapour recovery' types, both of which include a pipe (95) projecting from a housing or boot (92) moulded or otherwise formed thereon. The pipe (95) diameter and housing (92) size of the 'vapour recovery' type of fuel delivery device is relatively larger than the corresponding diameter of the 'standard' or 'slimline' type of fuel delivery device nozzle (90). The front of the fuel delivery nozzle (90) is herein defined as a point closest to the pipe (95) opening. It will be appreciated that a substantial match between the shape of the hood (10) and the shape of the fuel delivery nozzle housing (92) is all that is required for effective attachment of the hood (10) to the fuel delivery nozzle housing (92), an exact match being unnecessary. As shown in Fig. 5, the hood (10) is secured to the fuel delivery nozzle (90) by securing means or element (30), in this embodiment, a generally U-shaped, rigid clip (30).

50 **[0011]** Referring to Fig. 3, the hood (10) includes an upper surface, also referred to as a display surface (40), which is generally oval in shape and downwardly gently

curved when viewed from the side. A skirt (60) descends from the upper surface (40) defining parallel sidewalls (15) and curved front and rear end walls (16, 17). As shown in Fig. 6, the inner face of each sidewall (15) incorporates one of a pair of parallel passageways or channels (35) in which the distal ends (32) of the clip (30) slideably locate. The channels (35) in the hood (10) are parallel to each other and oblique relative to the general direction of the upper surface (40) of the hood (10), and thereby the length of the channels able to be accommodated in the hood is increased relative to that which would be achievable if the channels (35) were aligned in a normal direction to the general direction of the upper surface (40). Thereby the range of adjustment of the clip (30) is extended such that it is suitable for encompassing attachment of both 'standard' and 'vapour recovery' types of fuel delivery nozzle to the hood (10). The clip (30) includes a central portion (31) for engaging against the nozzle housing (92) and end arms (33) each receivable in the channel. The angle of the channels (35) also causes the clip (30) to be located at an angle such that the central portion (31) of the 'U' section of the clip (30) is located around a forward portion of the fuel delivery nozzle housing (92). The point where the clip (30) is secured or attaches to the hood (10) is located substantially centrally between the front (16) and rear (17) end walls of the hood (10). Thereby, the security of attachment of the hood (10) to the fuel delivery nozzle (90) is increased. The clip (30) incorporates screw receiving holes (73) at each distal end (32). The hood (10) incorporates corresponding screw locating holes (71) through which screws (72) can be inserted. The shafts of said screws (72) engage in screw receiving holes (73) of the clip (30) in order to retain the clip (30) in position in the hood (10).

[0012] Turning to the hinge arrangement, as shown in Figs. 3 and 4, the lid (20) is hinged to the hood (10) by a hinge (50). The hinge (50) allows the lid (20) to be opened sufficiently far that access to the screws (72) can be gained without the necessity to detach the lid (20) from the body (10). In particular, as shown in Figs. 7 and 7a, the lid (20) includes opposing claws (22) which define a concentric cylindrical space therebetween, and are slideably received around corresponding cylindrical stubs (12) of the body (10), to a position where they are retained by a detent from which they can be forced to remove the lid. In the detent position the claws (22) are rotatable around the stubs (12) providing the hinging action. The lid (20) incorporates a clip (25) on its end opposite to the hinge (50), the clip (25) being receivable into a locating hole (19) on the body (10) and suitable for retaining the lid (20) in the closed position when the display device is in use.

[0013] The splashguard (80) optionally locates in the hood (10) and is retained in position between the fuel delivery nozzle (90) and the hood (10).

[0014] The hood (10) optionally comprises an overhanging lip (60) aligned with the position where multiple parts of a mould come together. This reduces the prom-

inence of the appearance of 'flashing' which is a problematic feature of injection moulding.

[0015] In operation, the hood (10) is positioned to at least partially cover the fuel delivery nozzle (90) and is attached thereto by means of the clip (30) which is slideably located in the angled channel (35) incorporated in the hood (10). The 'U' portion of the clip (30) locates around the fuel delivery nozzle (90) and the ends of the 'U' shaped clip (30) are attached to the hood (10) by screws (72) inserted through the top of the hood (10) until the hood (10) is firmly fastened and can accommodate both 'standard' and 'vapour recovery' types of fuel delivery nozzle (90). The general direction of the display surface (40) is ideally close to the general direction of the pipe (95) of the fuel delivery nozzle (90) so that the height or thickness of the body (10) is minimised. The obliqueness of the channel (35) in which the clip (30) is slideable, relative to the pipe of the fuel delivery nozzle, allows the range of adjustment of the clip (30) to be greater than if a clip adjustable in a substantially normal direction to the pipe of the fuel delivery nozzle was employed. The increase in adjustment range is achieved without necessitating an increase in the thickness of the body (10) relative to the display surface (40) area. The thickness or height of the body (10) is thereby able to be minimised while still allowing a relatively wide range of adjustment of the clip (30).

[0016] This advantageously avoids problems with the incorrect type of clip (30) being ordered, reduces problems of leftover stock, and thereby reduces waste and stock storage costs, reduces the number of parts to be manufactured and associated tooling costs, reduces problems with incorrect assembly due to the wrong clip being used by an operator, and reduces associated problems of insecure attachment leading to display devices becoming detached from the fuel delivery nozzle (90) and possibly then becoming damaged.

[0017] In operation, the lid (20) is removably hinged to the body (10) and arranged to hold in place an information card upon which is placed information. The information on the information card is viewable through the lid (20) which is transparent. The lid (20) can be supplied pre-assembled to the body (10). The hinged arrangement of the lid (20) to the body (10) allows the lid (20) to be hinged open so as to gain access to both the information card and to the screws (72) which secure the clip (30) to the body (10), without the need to separate the lid (20) from the body (10). The possibility of incorrect user assembly of lid (20) to body (10) is thereby obviated, which advantageously reduces the risk of detachment of lid (20) in use, and subsequent loss or damage. The lid (20) is removable by the use of force greater than that normally encountered when merely hinging the lid (20) open. The facility to replace damaged or degraded lids in service easily and efficiently is therefore provided, with reduced risk of losing the lid by inadvertent detachment.

[0018] It will be appreciated that further variations on the described embodiments are possible. For example,

the clip can incorporate barbs on its ends which locate in receiving indentations in the body, rather than being secured by screws. Alternatively, the clip could be a flexible securing means such as a tie wrap. The clip may secure to itself in order to provide securing tension, or may be secured to the body in order to provide securing tension. The channels in the body can be open sided channels or closed sided channels or passageways. The channels or passageways can be closed at the display surface end (for example if the clip is secured by barbs) or can be open at the display surface end (for example if the clip is secured by screws secured into the ends of the clip). The channel may be perpendicular rather than oblique if the height of the hood permits. The display surface may be an upper surface that is user viewable, opposed to a nozzle engagement surface.

[0019] Suitable materials for construction of the hood (10) are plastic, rubber or similar materials. The lid (20) is constructed from a transparent plastic, nylon, or similar material. The hood (10) and lid (20) can be formed by a process of injection moulding or other suitable process for forming such materials. The clip (30) is constructed from a suitable rigid material such as plastic or metal, which may be injection moulded or formed by a bending process, or by die casting, or by other suitable processes. The splashguard (80) can be constructed from a compliant rubber material, or other similar material, by a process of injection moulding or other similar process.

[0020] While the invention has been described in terms of specific features and embodiments, it will be appreciated that numerous variations of the features of the invention are possible and the specific embodiments described are not intended to limit the invention.

Claims

1. A device for fitting over at least a portion of the housing of a fuel delivery nozzle, the device having a body, and a channel in the body for slideably receiving at least a portion of a securing element to allow adjustable securement.
2. A device according to claim 1 wherein the body includes a display surface and the channel is disposed with respect to the body in a direction oblique to the display surface.
3. A device according to claim 2 wherein the display surface includes a portion suitable for receiving an information display insert.
4. A device according to any preceding claim further comprising a securing element.
5. A device according to claim 4 in which the securing element includes a central portion for engaging

against the nozzle housing and end arms each receivable in a respective channel.

6. A device according to claim 4 or claim 5 wherein the securing element is secured to the body at a position which is substantially central between front and rear end walls of the body.
7. A device according to any preceding claim further incorporating a cover.
8. A device according to claim 7 where the cover is attached to the body by a hinge.
9. A device according to claim 8 where the cover has a hinge portion removably attachable to the body.
10. A fuel delivery nozzle display device having a body and a securing element, the body having a formation adapted to accept the securing element when secured to a housing of a fuel delivery nozzle having pipe of a first dimension and a housing of a fuel delivery nozzle having a pipe of a second dimension, wherein the second dimension is different to the first dimension.
11. A device substantially as described herein with reference to the drawings.

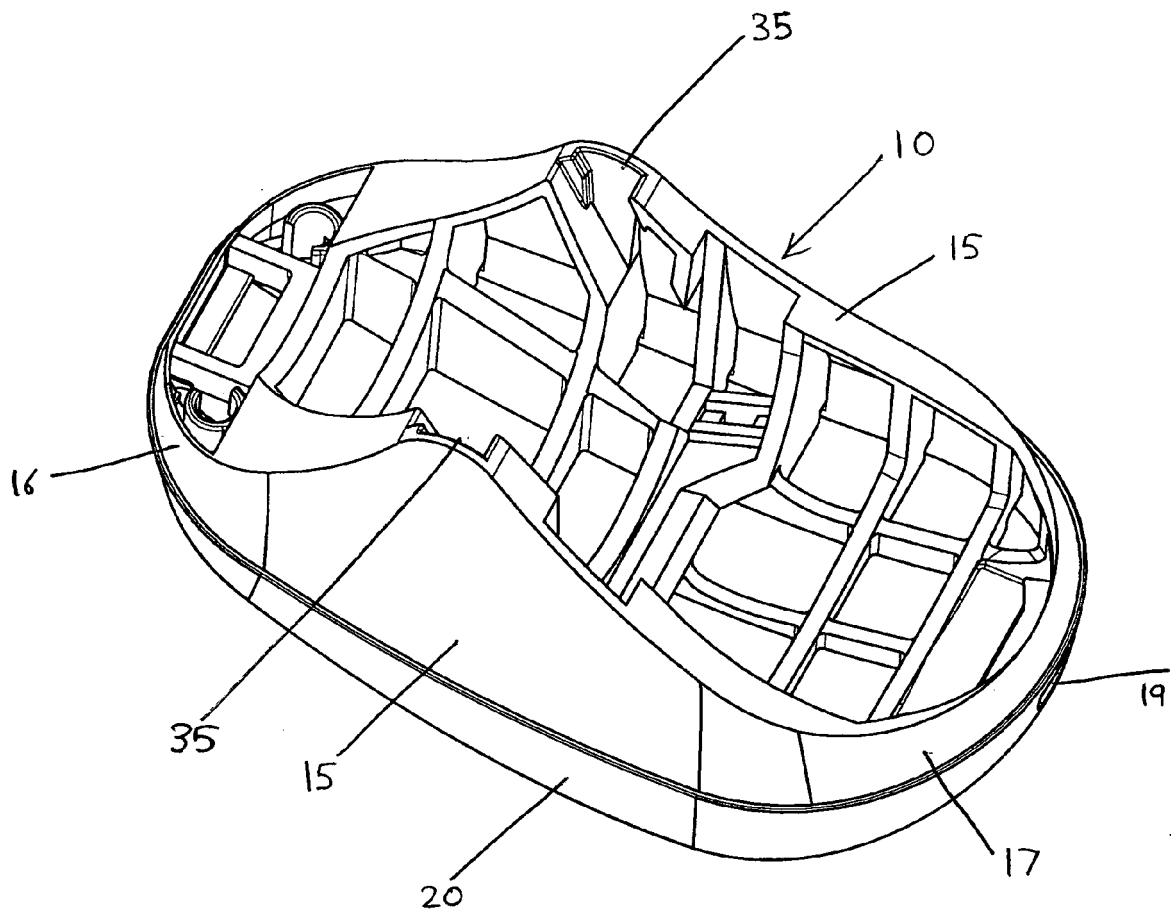


FIG. 1

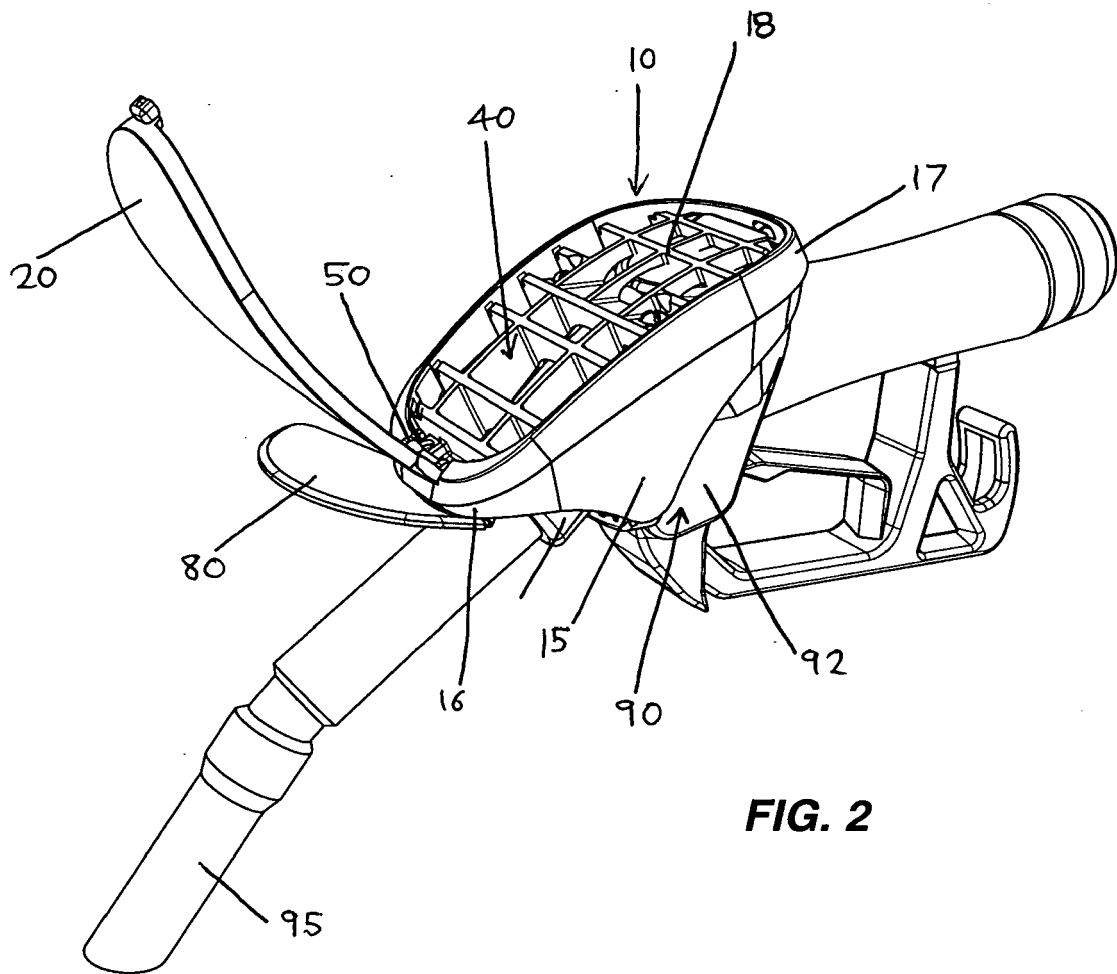
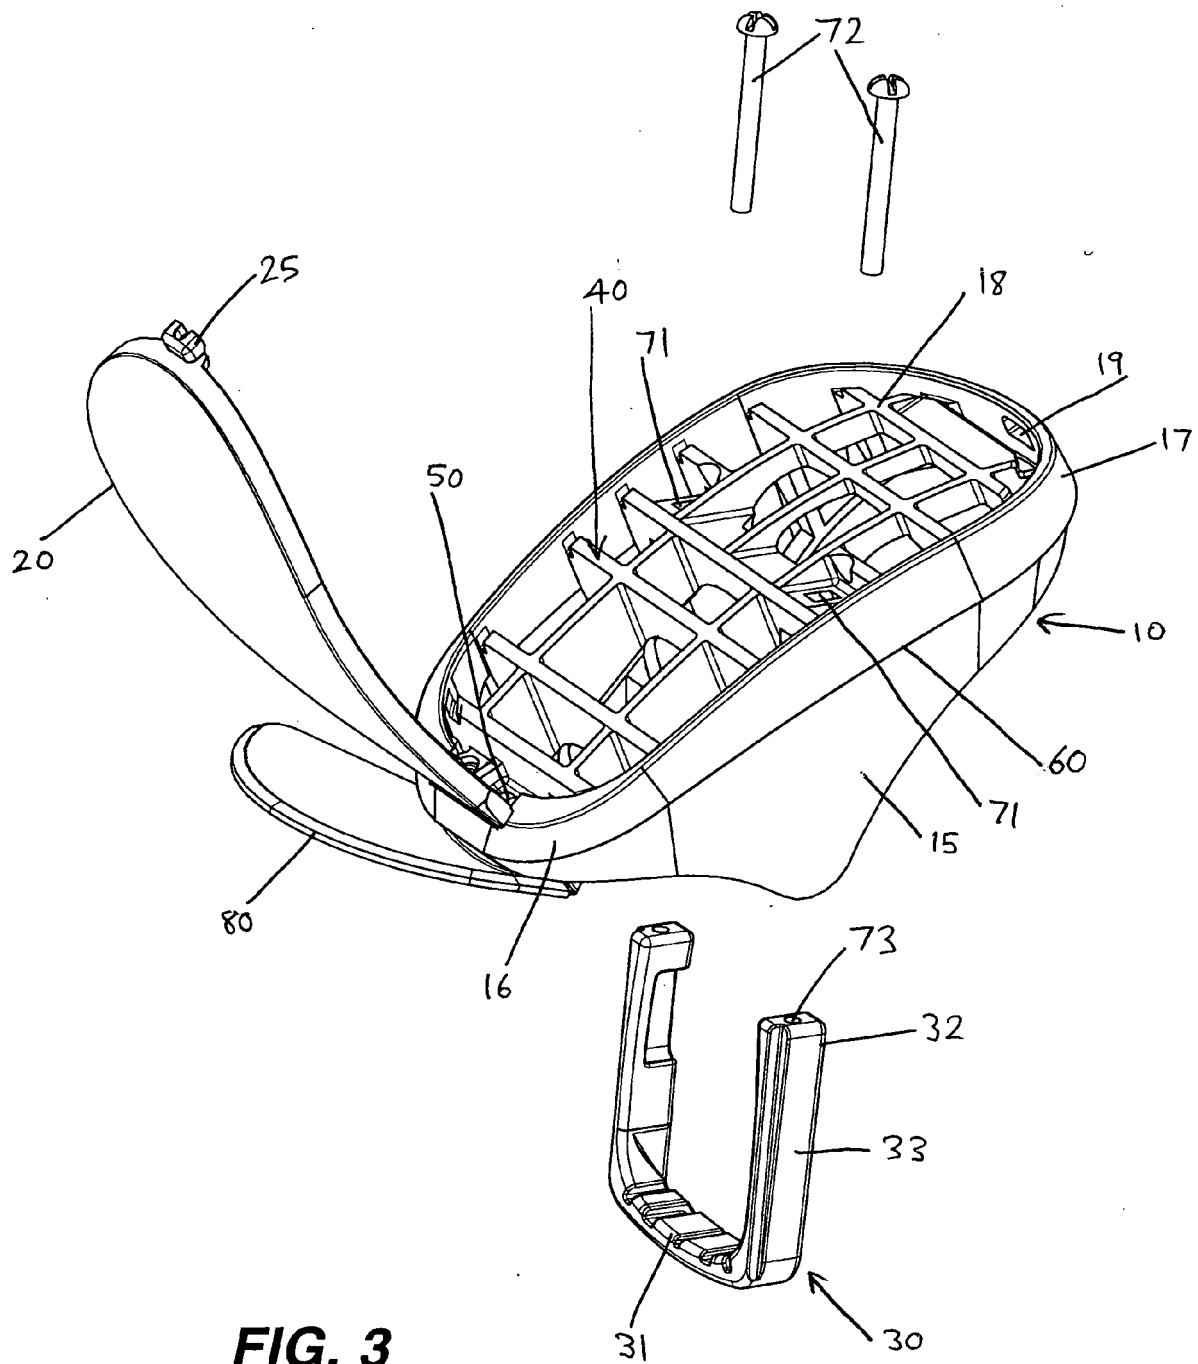


FIG. 2



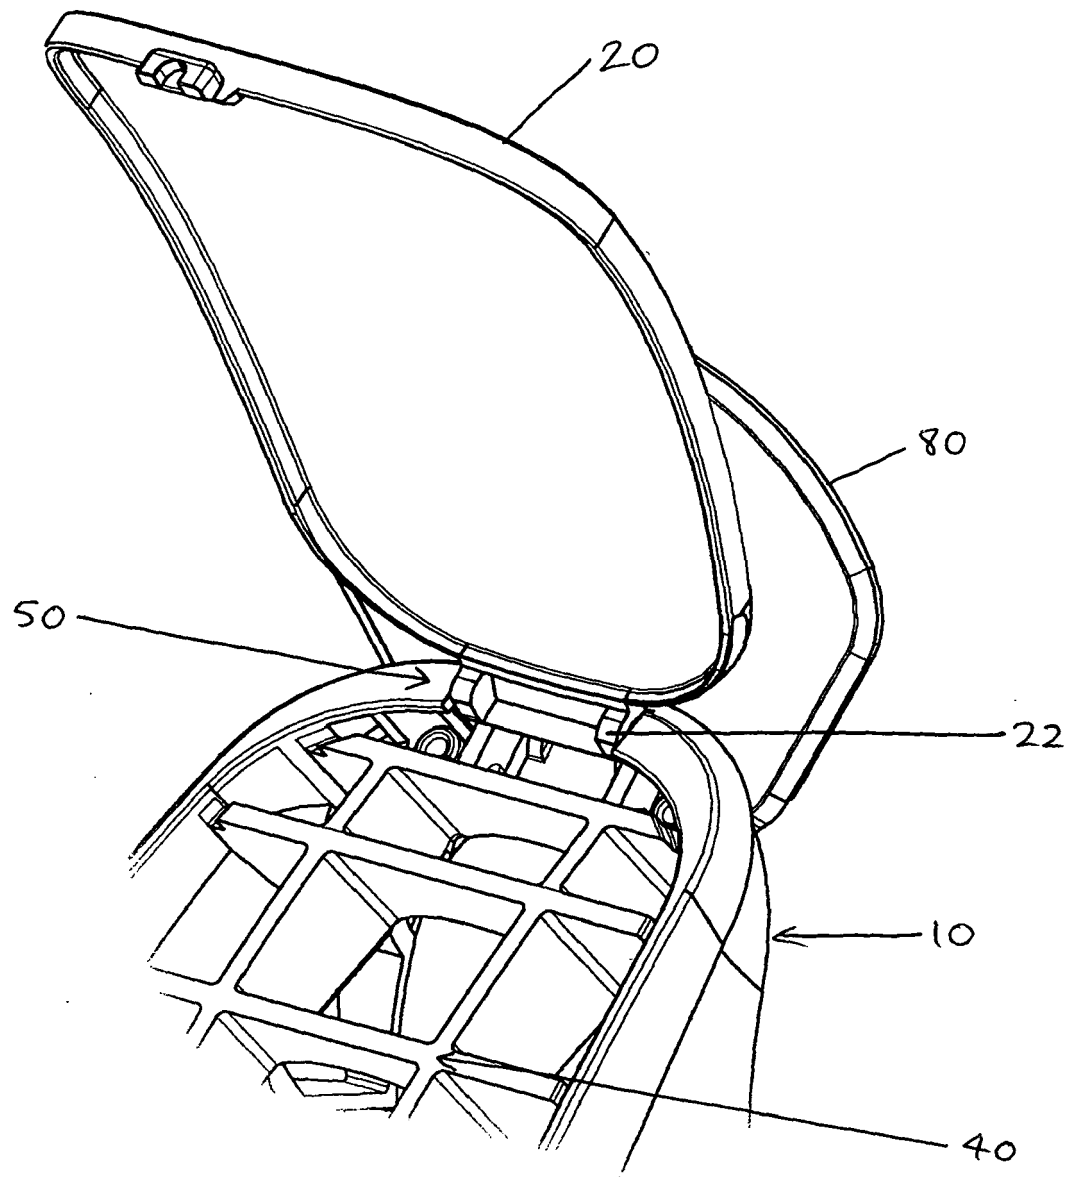


FIG. 4

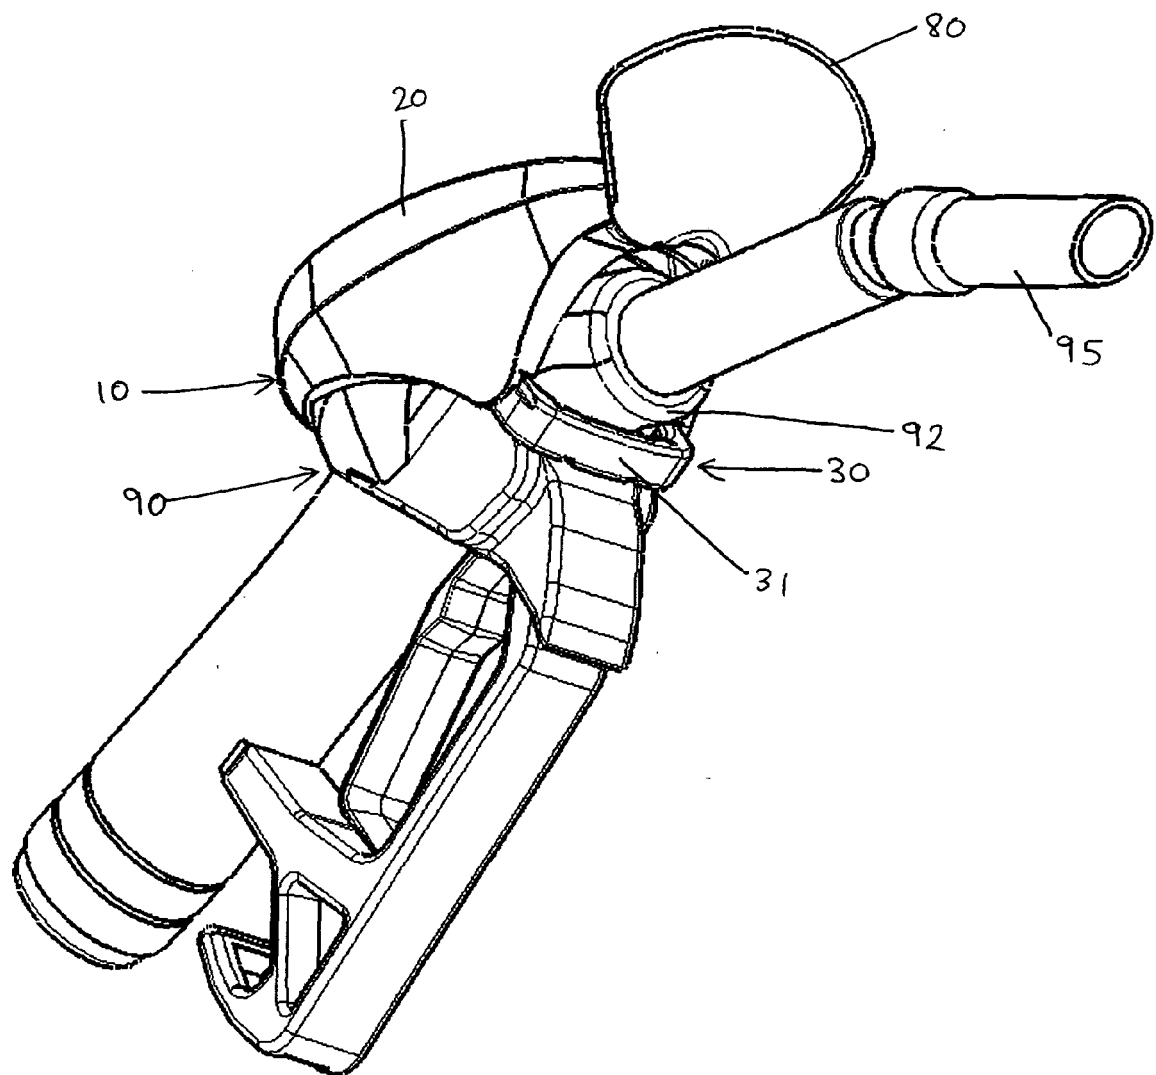


FIG. 5

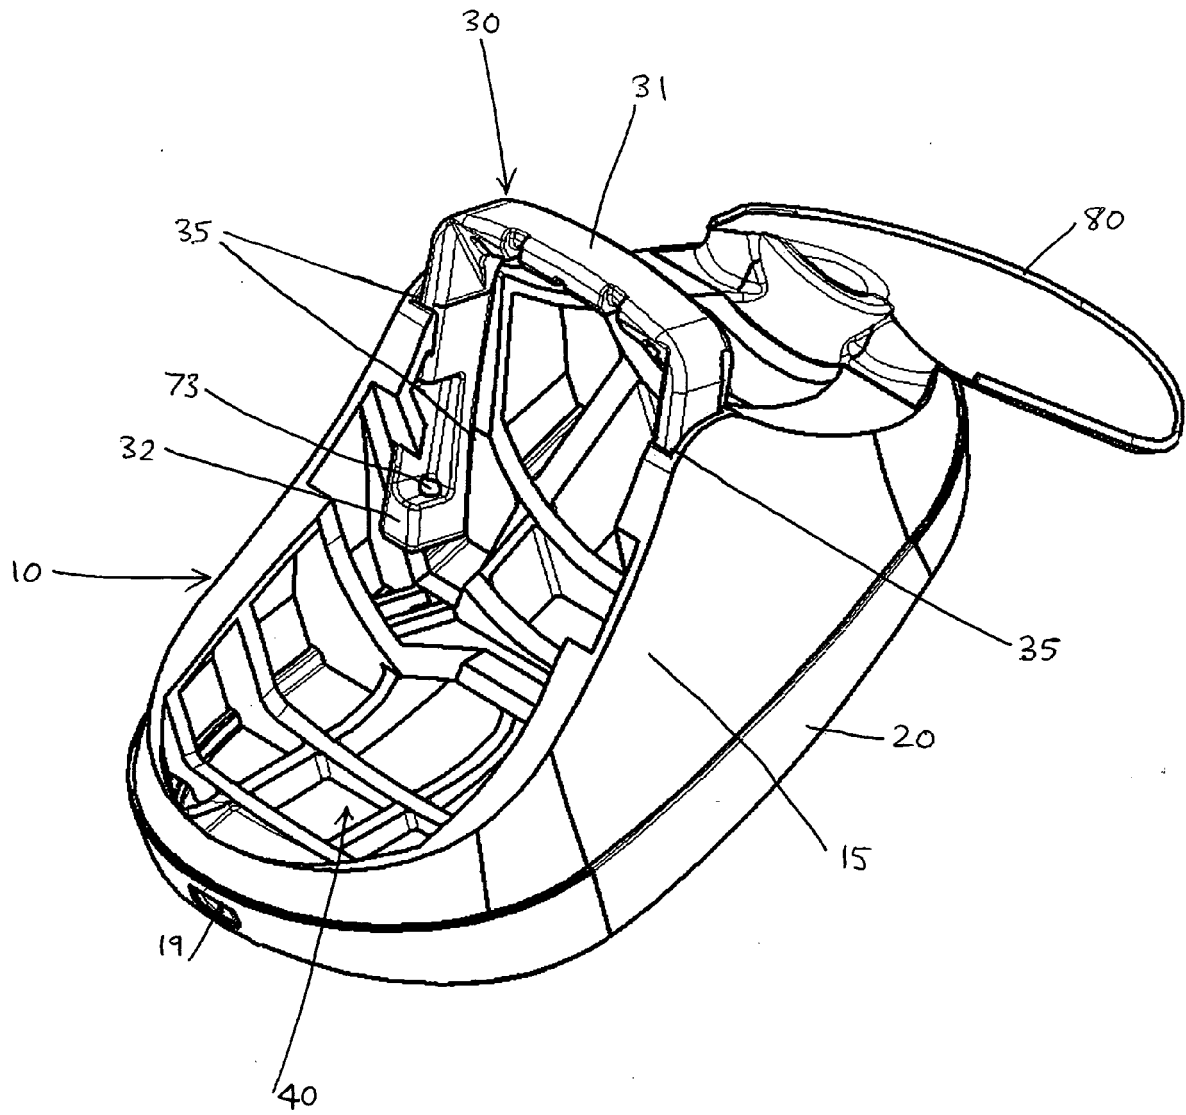


FIG. 6

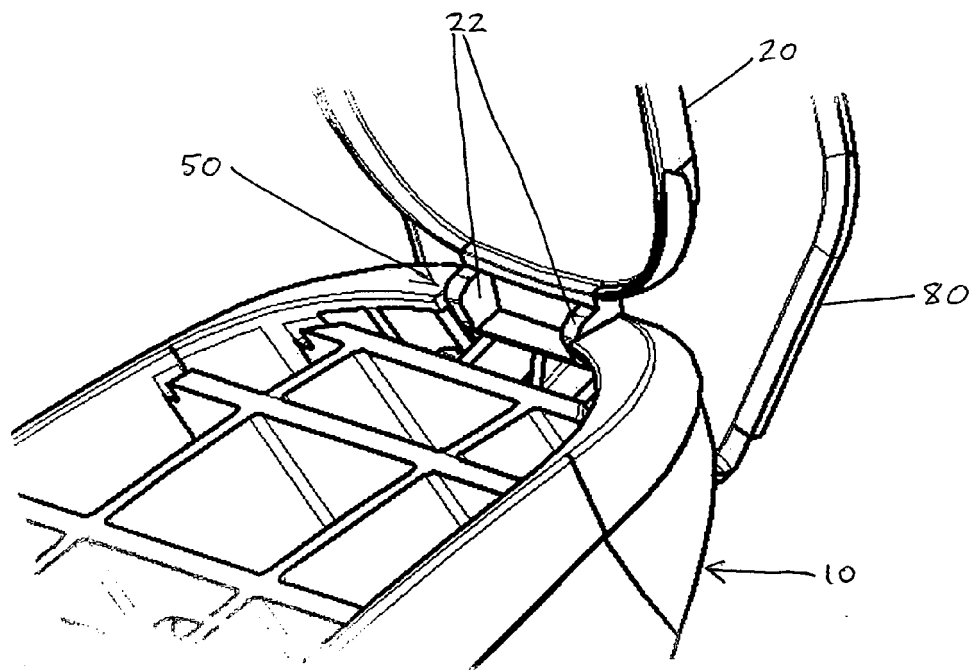


FIG. 7

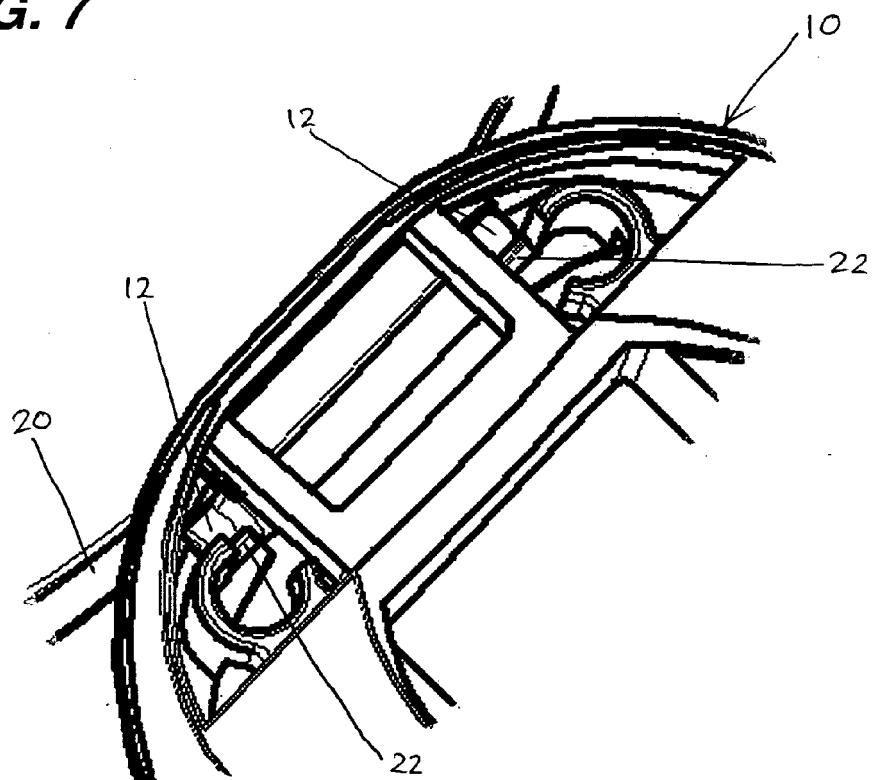


FIG. 7a



European Patent
Office

PARTIAL EUROPEAN SEARCH REPORT

Application Number

which under Rule 63 of the European Patent Convention EP 08 25 0589 shall be considered, for the purposes of subsequent proceedings, as the European search report

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	WO 97/49633 A (ALVERN NORWAY ASA [NO]; ALVERN STEIN [US]; ALVERN OEYVIND [NO]) 31 December 1997 (1997-12-31) * page 6, lines 22-28 * * page 7, line 28 - page 8, line 3 * * page 9, lines 15-22; figures * -----	1,4-6	INV. B67D5/37
			TECHNICAL FIELDS SEARCHED (IPC)
			B67D
INCOMPLETE SEARCH			
<p>The Search Division considers that the present application, or one or more of its claims, does/do not comply with the EPC to such an extent that a meaningful search into the state of the art cannot be carried out, or can only be carried out partially, for these claims.</p> <p>Claims searched completely :</p> <p>Claims searched incompletely :</p> <p>Claims not searched :</p> <p>Reason for the limitation of the search:</p> <p>see sheet C</p>			
Place of search		Date of completion of the search	Examiner
Munich		12 June 2008	Müller, Claus
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

3
EPO FORM 1503 03.82 (PC4E07)



European Patent
Office

**INCOMPLETE SEARCH
SHEET C**

Application Number
EP 08 25 0589

Claim(s) searched completely:
1-9

Claim(s) not searched:
11

Reason for the limitation of the search (non-patentable invention(s)):

.

Further limitation of the search

Claim(s) searched completely:
1-9

Claim(s) not searched:
11

Reason for the limitation of the search:

Rule 43(6) EPC



European Patent
Office

Application Number
EP 08 25 0589

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing claims for which payment was due.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for those claims for which no payment was due and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for those claims for which no payment was due.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☐ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☒ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:
- 1-9
- ☐ The present supplementary European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims (Rule 164 (1) EPC).



European Patent
Office

**LACK OF UNITY OF INVENTION
SHEET B**

Application Number
EP 08 25 0589

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. claims: 1-9

A device for fitting over the housing of a fuel nozzle

2. claim: 10

A fuel nozzle display

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 08 25 0589

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on

The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-06-2008

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9749633 A	31-12-1997	AU 730442 B2	08-03-2001
		AU 3278097 A	14-01-1998
		CA 2259192 A1	31-12-1997
		EP 0918732 A1	02-06-1999
		JP 2001513055 T	28-08-2001
		NO 986077 A	18-02-1999

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82