



(11) **EP 2 100 471 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

(15) Correction information:  
**Corrected version no 1 (W1 B1)**  
**Corrections, see**  
**Claims EN 13**

(51) Int Cl.:  
**H04L 1/00** <sup>(2006.01)</sup> **H04W 72/04** <sup>(2009.01)</sup>  
**H04W 4/00** <sup>(2018.01)</sup>

(48) Corrigendum issued on:  
**24.04.2019 Bulletin 2019/17**

(86) International application number:  
**PCT/EP2008/000026**

(45) Date of publication and mention  
of the grant of the patent:  
**31.10.2018 Bulletin 2018/44**

(87) International publication number:  
**WO 2008/081004 (10.07.2008 Gazette 2008/28)**

(21) Application number: **08700978.3**

(22) Date of filing: **03.01.2008**

---

(54) **SHARED CONTROL CHANNEL STRUCTURE**

STRUKTUR GEMEINSAM GENUTZTER STEUERKANÄLE

STRUCTURE À CANAL DE COMMANDE PARTAGÉ

---

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR**  
**HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT**  
**RO SE SI SK TR**

- **FREDERIKSEN, Frank**  
**DK-9270 Klarup (DK)**
- **KOLDING, Troels**  
**DK-9270 Klarup (DK)**
- **VISURI, Samuli**  
**FI-00200 Helsinki (FI)**

(30) Priority: **03.01.2007 US 878079 P**  
**09.01.2007 US 651012**

(74) Representative: **Ruuskanen, Juha-Pekka**  
**Page White & Farrer**  
**Bedford House**  
**John Street**  
**London WC1N 2BF (GB)**

(43) Date of publication of application:  
**16.09.2009 Bulletin 2009/38**

(60) Divisional application:  
**18196054.3 / 3 435 573**

(56) References cited:  
**WO-A-2006/022876 WO-A-2006/121302**  
**WO-A1-2004/102839**

(73) Proprietor: **Nokia Technologies Oy**  
**02610 Espoo (FI)**

(72) Inventors:  
• **RINNE, Mika**  
**FIN-02320 Espoo (FI)**

---

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

---

**EP 2 100 471 B9**

## Description

### REFERENCE RELATED APPLICATION

**[0001]** This Application hereby claim the benefit under 35 USC 119(e) of United States provisional patent application serial number (not yet assigned), entitled "Control Channel with Unified Signalling Entries" filed January 3, 2007, and naming the same four inventors.

### FIELD OF THE INVENTION

**[0002]** The invention, according to various embodiments, relates to shared control channel structure including at least one control channel to be allocated at least to a user for at least one of uplink and downlink directions in a network, a method for creating at least one control channel, an apparatus comprising a transmitter for creating at least one control channel, a receiver apparatus for receiving at least one control channel and a user equipment comprising a receiver for receiving at least one control channel.

### BACKGROUND OF THE INVENTION

**[0003]** In wireless communication systems, such as the long term evolution (LTE) of the Universal Mobile Telecommunications System (UMTS) Terrestrial Access Network (UTRAN) in 3<sup>rd</sup> Generation Partnership Project (3GPP), new functionalities or features for data channels, such as fast link adaptation, hybrid automatic repeat request, or fast scheduling in case of high speed downlink packet access (HSDPA), rely on rapid adaptation to changing radio conditions. To implement these features, a control channel is used to carry control information relevant for those terminal devices (or user equipments (UEs) in 3G terminology) for which data is available on the respective channel.

**[0004]** In particular, the LTE technology defines a packet radio system, where all channel allocations are expected to happen in short periods of sub-frames. This is motivated both by the packet radio technology but also by the availability of wide transmission band and high symbol rate transmission techniques, which enable high signaling channel to satisfy the worst-case terminal often results in inefficient use of the system resources allocated for the signaling channel.

**[0005]** There is therefore a need in the art for techniques to more efficiently transmit signaling in a multiple-access communication system.

International patent application publication number WO 2004/102839 A1 relates to a downlink control channel structure in a code division multiple access mobile communication system. Especially, a downlink control channel structure suitable or using a physical shared channel for a control channel, and a time-code allocating method using the same are disclosed.

## SUMMARY

**[0006]** In one aspect, a shared signaling channel capable of efficiently carrying various types of signaling for terminals in a multiple-access communication system is described. The shared signaling channel has multiple "segments", which may also be called subchannels. Parameters for the shared signaling channel may or may not be sent to the users in advance. For example, the number of segments, the size of each segment, the rate for each segment, and so on may be broadcast to the users via a separate broadcast/overhead channel. The transmit power for each segment is not broadcast to the users and can range from zero to the total transmit power available for transmission. Signaling for each terminal is sent on one or more segments, which may be dynamically selected based on the channel conditions of the terminal, the operating points of the segments, and so on. The signaling for the terminals may comprise resource assignment messages, acknowledgments (ACKs), access grant messages, power control commands, and so on.

**[0007]** In another aspect, to send signaling on the shared signaling channel, a base station obtains signaling for all terminals within its coverage and maps the signaling for each terminal to one or more segments used for the terminal. The base station then processes the signaling mapped to each segment to generate output data for the segment. For a segment with jointly encoded signaling, an error detection code value (e.g., a CRC value) is generated for all signaling mapped to the segment, and the signaling and CRC value are then encoded, modulated, and scaled to generate an output packet for the segment. For a segment with individually encoded signaling, the signaling for each terminal is mapped to a codeword, and the codeword is mapped to a transmission span (e.g., a set of frequency subbands or a time interval) assigned to the terminal. In any case, the output data for each segment is multiplexed onto the system resources allocated for the segment and is transmitted at a power level selected for the segment.

**[0008]** When decoding the control channel, the receiving end will have to know the size and/or length of the control symbol block (consisting of control information bits coded with the selected channel code rate) being decoded (in order to do channel decoding and error checks) prior to the actual interpretation of the information bits (i.e. content decoding). To illustrate, a situation is assumed where downlink allocation uses 80 bits. In the upper case of a single user and a channel size of 360 channel bits, an effective code rate of about 0.2 (i.e.  $80/360=0.22$ ), while in the lower case the effective code rate is increased to about 0.4, by reducing the channel size to 180 bits and still keeping the downlink allocation size to 80 bits. Now, if there are two formats available for the control signaling, the amount of users for downlink using format #1 and format #2, respectively, must be determined in order to know the size of each. The same

applies to the allocations for the uplink direction. This information could be forwarded for example as separate category 0 (Cat0) information (control information for the control channel).

**[0009]** In particular in the enhanced universal terrestrial radio access (E-UTRA) air interface and B3G technologies, all data carrying resource allocations are signalled in downlink control channels, which are present in the first multi-carrier symbols of the sub-frame preceding the multi-carrier symbols of the data channels (of downlink and of uplink), wherein the control channels are separately coded.

**[0010]** In the prior art, the signalling channels may be received by following known channelization code sequences having a fixed spreading factor in a direct sequence spread spectrum system. These channelization code resources form a channel, which is time multiplexed for different UEs. Each UE following the known channelization code sequence may filter, by its UE specific identifier, for a match to find its time multiplexed activity periods.

**[0011]** Alternatively in the prior art, a control channel is provided, which is divided to consist of common signalling entries of UE groups so that the physical resource allocations are commonly announced for all these UEs and the UEs occupying each physical resource block (PRB) are indexed by short identifiers among that group.

#### SUMMARY OF SOME EXEMPLARY EMBODIMENTS

**[0012]** There is a need to provide an improved control signalling scheme, in particular by efficiently creating a control channel structure and signalling entries for allocations, which are provided for short sub-frame periods.

**[0013]** In accordance with a first aspect of the present invention, there is provided a control channel structure including at least one control channel to be allocated at least to a user for at least one of uplink and downlink directions in a network, which the at least one control channel is arranged as a modular structure comprising modular code blocks of at least two different sizes.

**[0014]** Preferably, the modular structure forms a tree, where each of the modular code blocks defines one node of the tree, respectively.

**[0015]** In accordance with a second aspect of the present invention, there is provided a method for creating at least one control channel to be allocated at least to a user for at least one of uplink and downlink directions in a network, wherein the at least one control channel is arranged as a modular structure comprising modular code blocks of at least two different sizes.

**[0016]** In accordance with a third aspect of the present invention, there is provided an apparatus comprising a transmitter for creating at least one control channel to be allocated at least to a user for at least one of uplink and downlink directions in a network, so that the at least one control channel is arranged as a modular structure comprising modular code blocks of at least two different sizes.

**[0017]** In accordance with a fourth aspect of the present invention, there is provided a receiver apparatus for receiving at least one control channel allocated at least to a user for at least one of uplink and downlink directions in a network, which the at least one control channel is arranged as a modular structure comprising modular code blocks of at least two different sizes, comprising a searcher for searching for an appropriate code block in the modular structure of at least one control channel

**[0018]** In accordance with a fifth aspect of the present invention, there is provided a user equipment comprising a receiver for receiving at least one control channel allocated to the user equipment for at least one of uplink and downlink directions, which the at least one control channel is arranged as a modular structure comprising modular code blocks of at least two different sizes, and further comprising a searcher for searching for a user equipment specific identifier in the modular structure of the at least one control channel.

**[0019]** Further advantageous embodiments are defined in the dependent claims.

**[0020]** According to an embodiment of the present invention, there may be provided an apparatus creating a signalling channel structure of separately coded blocks forming a modular structure, e.g. a coding tree, and a receiver apparatus to search for control channels in the mentioned modular structure i.e. a tree by its receiver specific radio network identifier and search algorithms.

**[0021]** Further, there may be provided means (in the transmitter) to create and (in the receiver) to receive unified signalling entry formats for correct operation of transmission and reception.

**[0022]** According to another embodiment of the present invention, the control channel forms a modular structure e.g. a coding tree of variable channel code rates. The nodes of the tree may consist of signalling entries coded by a given code rate. The signalling entries (of information bits) may be of different types and may have different Information Block Length (IBL). Each signalling entry type may follow a unified entry format. Each Information Block of a signalling entry may be coded, rate matched and modulated exactly to the sub-carrier symbols forming a coded node of the tree.

**[0023]** The receiver may include means to search for a UE specific MAC ID in the nodes of the control channel, e.g. a tree. This allows UE specific separate coded control channels with limited and optimized number of searches, due to the modular structure of the control channels.

**[0024]** The eNB (E-UTRAN Node B) may comprise means to allocate the sub-carrier resources of multi-carrier transmissions flexibly between the control channels in a modular structure.

**[0025]** In accordance with the present invention, the control channel is implemented as a tree, where each node of the tree consists of exactly known sub-carrier resources, which may comprise of a modulated code

block, wherein however the system bandwidth is essentially not changed. The tree structure allows efficient search of a matching control channel, since it has been found that a search result at a given node of the tree allows deduction of candidate searches in the next higher level of the tree. This is not feasible with other arbitrary but systematic mapping schemes. Without the modular structure e.g. a tree i.e. having an arbitrary and systematic mapping of control channels to the sub-carrier resources, the number of required searches becomes large, which is not the case with the present invention.

**[0026]** The modular structure of the control channel(s) according to the present invention is advantageous in enabling searching and decoding processes by the user. In particular, the modular structure according to the present invention allows for a parallelization of the searching and decoding processes (i.e. decoding simultaneously from multiple candidate places of channels, in particular physical downlink control channels, before knowing the results of decoding tests on other candidate channels. Moreover, the modular structure according to the present invention renders it possible to search and decode in the control channels in any favoured order, in particular from the largest control channel to the smallest control channel, from the smallest control channel to the largest control channel, and from the control channel, whose SINR (signal-to-noise ratio with the noise including both formal noise and interference) is closest to the expected SINR value at the receiver (as the transmitter is expected to power control respectively), to the SINR deviating more from the expected SINR. Further, the present invention renders it possible to limit per each user the number of the searching and decoding processes. The modular structure further allows for efficient usage of all sub-carrier resources available in the downlink control signalling part of a sub-frame. A maximum number of users allocated per sub-frame may be provided depending on the transmission resources required by their signalling. Moreover, a discrete structure of control channels is created, despite of their variable information block length and (IBL) and effective code rate (ECR). Moreover, the modular structure according to the present invention allows for a transport of each control channel, in particular physical downlink control channel, by a defined modulation, by an effective code rate selected from a defined effective code rate set, by power balancing of sub-carriers between the other control channels, by power addition of the control channel from un-used sub-carriers, and/or by a large amount of frequency diversity. Finally, the present invention may result in reasonable limitation per user to the configurability of the control channels which each user is mandated to code.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0027]** The present invention will now be described based on embodiments with reference to the accompanying drawings in which:

Fig. 1 schematically shows a principle example of a control channel design using variable coding schemes;

Fig. 2 shows a schematic diagram indicating channels used for communication in an enhanced wireless network;

Figure 3 is a schematic diagram showing the time multiplexing of downlink control signalling and shared data transmission resources of one sub-frame according to an embodiment;

Fig. 4 shows a schematic diagram of an arrangement of a plurality of physical downlink control channels in a modular structure according to an embodiment;

Fig. 5 shows a schematic diagram of a physical downlink control channel in a tree of code blocks arrangement according to an embodiment;

Fig. 6 shows a schematic diagram of a physical downlink control channel in a tree of code blocks arrangement with three allocated nodes in different levels of the tree according to an embodiment;

Fig. 7 shows an example of a tree with three allocated nodes mapped to sub-carrier resources in a distributed manner according to an embodiment;

Fig. 8 shows a schematic diagram of the distribution of control channels over the system bandwidth to one, two or more OFDM (orthogonal frequency division multiplexing) symbols in a sub-frame according to an embodiment;

Fig. 9 shows a schematic diagram of the distribution of control channels over the system bandwidth to three OFDM symbols in a sub-frame according to another embodiment;

Figure 10 is a schematic diagram showing that the system bandwidth is divided to an integer number of modular PDCCHs according to an embodiment;

Figure 11 schematically shows an example of the modular structure of PDCCHs of figure 10;

Figure 12 schematically shows a more general example of the modular structure of PDCCHs represented as a tree according to another embodiment;

Fig. 13 shows a schematic diagram of a physical downlink control channel in a tree of code blocks arrangement in case of a wide system bandwidth wherein the allocated three levels of the tree are higher in the tree (from the root of the tree) compared to a tree on a narrow system bandwidth according

another embodiment;

Figure 14 shows a schematic diagram of rate matching of signalling entries to a modular structure of PD-CCHs according to an embodiment; and

Fig. 15 shows a schematic block diagram of a computer-based implementation according to an embodiment.

## DESCRIPTION OF PREFERRED EMBODIMENTS

**[0028]** In the following, various embodiments of the invention will be described based on a wireless transmission system, such as evolved UTRA (E-UTRA). The embodiments of this invention are not limited for use with only this one particular type of wireless communication system, and that they may be used to advantage in other wireless communication systems such as wireless ad hoc networks, cognitive radios, beyond third generation (B3G) systems and fourth generation (4G) systems, as non-limiting examples.

**[0029]** As a non-limiting example, mathematical transforms may be used to create multi-carrier symbols. As non-limiting examples of such mathematical transforms, an OFDM multicarrier signal may be generated by discrete Fourier transforms or by fast Fourier transforms. Other non-limiting, exemplary transforms that may be used to generate multicarrier signals include cosine transforms, sine transforms, filter-bank transforms and bi-orthogonal transforms. The properties of these transforms differ from the properties of OFDM, but they may be applied similarly to create a multicarrier transmission. Even blocked transforms or interleaved transforms (IFDMA) may be used to create similar transmission schemes, where a block of symbols is available on a number of frequency bins at a time. In reference to E-UTRA technology, the terms "multicarrier symbol" and "OFDM symbol" are used interchangeably. For other B3G technologies, the term "multicarrier symbol" may be considered more generic.

**[0030]** Fig. 2 shows a schematic diagram of a general network and channel architecture in which the invention, in an exemplary embodiment, can be implemented. A radio access network provides access to a UE 10 via an access device 20, e.g., a base station device, a node B, or an access point, having a scheduler functionality for scheduling resources by allocating physical resource blocks to users which have connectivity to the access network. Data and control signalling is performed using specific channels indicated in Fig. 2.

**[0031]** A DL shared channel (DSCH) 100 is provided as a shared transport channel, which means that the available bandwidth is flexibly and dynamically shared among the served active users. Fast scheduling in frequency shares the DSCH 100 for a period of a sub-frame among the users, scheduled in time, from the set of all served users. This exploits multi-user diversity and allo-

cates more bandwidth to users with more demand and allocates more bandwidth with more favourable radio conditions to each user. A scheduler can base its decisions for example on predicted channel quality (in time and in frequency), the current load of the cell and the traffic priority class (real-time or non-real-time services). Additionally, a physical downlink shared channel (PD-SCH) 120 is provided as a physical channel for carrying high-speed bursty data to users. Similarly, a uplink shared channel (USCH) 200 is provided as a shared transport channel, and a physical uplink shared channel (PUSCH) 220 is provided as a physical channel for carrying high-speed bursty data from users. Feedback information (e.g. acknowledgements, channel information etc.) in the uplink (UL) direction from the UE 10 to the access device 20 is signalled via a physical uplink control channel (PUCCH) 300.

**[0032]** Additionally, a physical downlink control channel (PDCCH) 400 is provided as a physical signalling channel to convey control information related to at least one of the PDSCHs 120 in downlink and PUSCH in uplink directions or to perform hybrid automatic repeat request (HARQ) signalling.

**[0033]** The transmissions on downlink and uplink may apply a frequency division duplex or time division duplex arrangement.

**[0034]** Fast link adaptation enables the use of more spectrally efficient modulation when channel conditions permit. With favourable channel conditions 16 quadrature amplitude modulation (QAM) or even 64 QAM may be used for example, while QPSK may be used when unfavourable or less favourable channel conditions or large penetration loss are faced, or when a wide area coverage is expected.

**[0035]** Additionally, the coding rate may be adapted, wherein a coding rate of 1/4 means that error correction and detection takes 75 percent of the bandwidth and the user data rate is only 25 percent of the coded symbol rate. Likewise, a coding rate of 4/4 means that the user achieves the maximum data rate, but there is no error correction, and therefore many errors are expected in the received data, which decreases the throughput due to error recovery retransmissions.

**[0036]** As an additional measure, adaptive modulation and coding (AMC) schemes may be used for link adaptation. These schemes enable the system to change the coding and modulation schemes. The channel condition has to be measured or estimated based on the feedback of the receiving end. Links with better transmission conditions can be assigned a higher order modulation scheme and higher coding rates. The benefits of AMC include availability of instantaneously high data throughput and high efficiency with low interference variation because it is based on modulation and coding adaptation instead of e.g. variations in transmit power.

**[0037]** Link adaptation is the process of modifying transmission parameters to adapt to the experienced channel parameters. Higher order modulation, in con-

junction with channel coding, optimizes the use of a fading radio channel. By transmitting at constant power, the modulation and coding schemes (MCS) can be selected to maximize throughput. A media access control (MAC) layer functionality at the access device selects the MCS that matches the instantaneous radio conditions depending on a short transmission time interval (TTI) and depending on the selected frequency resources selected for the payload. This applies similarly for downlink and uplink transmissions, even in case their MCS choices are independent. The MCS selection may depend on for example channel quality indication, instantaneous power of the physical channel, quality of service (QoS) demands of the requested service, or experienced buffering queue sizes.

**[0038]** In an embodiment, a limit is put on the MCS format settings for the physical downlink control channel PDCCH 300 such that it is only possible to fit an integer number of allocations within a fixed number of sub-carriers (in the system bandwidth) on a given number of multicarrier symbols (in time dimension). That is, basically, a known set of sub-carriers are reserved for each allocation for a downlink signalling, for an uplink signalling or for signalling both of them in the same PDCCH. Then, if a user being allocated is in a poor channel condition, the MCS will be set such that all sub-carriers will be used for this user. That is, the mother control channel is fully allocated to this user. If e.g. the channel conditions for other users are such that two or more users will fit within the mother control channel (i.e. set of sub-carriers), it will be split into a multiple of child control channels, so that these users will share the allocation set of sub-carriers of the mother control channel, while separate coding may still be used for each user so that they use a less robust MCS for their resource allocation information present in one of the child control channels.

**[0039]** Hence, a full downlink signalling resource available as a number of sub-carrier symbols (up to all sub-carrier symbols available in the system bandwidth) on a defined multicarrier symbols of the sub-frame (up to all multicarrier symbols of the sub-frame) can be split into a plurality of control channels. These downlink signalling resources will consist an integer number of mother control channels and a respective larger integer number of child control channels.

**[0040]** These structures will allow several possible alternatives of allocations. E.g., in the sub-carrier resources where a mother control channel is allocated, there are no feasible allocations on the child control channels. Similarly, in the sub-carrier resources where mother control channels are not allocated, it is possible to have a larger number of allocations on the respective child control channels. A single mother control channel can then individually be split into child control channels. Thus, any mixture of allocations consisting of a number of mother control channels and a number of child control channels may be feasible as long as each of the sub-carrier symbols are modulated by a unique symbol content. There

exists a versatile number of allocations possible in the modular control channel structure consisting of large number of sub-carrier resources. Even for a smaller number of sub-carrier resources available (e.g. due to limited system bandwidth), a more limited number of allocations will be possible, but still their versatile arrangement is feasible according to the modular control channel structure.

**[0041]** Every downlink sub-frame is time multiplexed to consist of downlink control signalling resources and the physical downlink shared channel (PDSCH). The downlink control signalling precedes the shared data transmission resources of the downlink and the uplink, as shown in figure 3. These downlink control signalling resources actually may carry multiple Physical Downlink Control Channels (PDCCH), each of which carries information for one MAC ID. This means that for each UE the signalling blocks are separately coded.

**[0042]** The multiple control channels are proposed to be arranged as a modular structure of code blocks of different sizes in terms of used physical channel bits, as shown in Figure 4, such that a control channel of the largest code block may be replaced by up to two control channels of half the size. Further, one control channel of half the size may be replaced by up to two control channels of quarter the size of the largest code block. Due to the arrangement as a modular structure, the UE is able to find the candidate PDCCHs efficiently from a possible set of alternatives. As different signalling entry types (e.g. a downlink allocation, an uplink allocation, etc.) are of different information block length (IBL) and they are possibly encoded with a different channel code rate for different UEs, their usage of sub-carrier symbol resources varies a lot.

**[0043]** The structure is alternatively presented as a tree as shown in Figure 5 wherein the largest code block is named "CB1", the control block of half the size of CB1 is named "CB2", and the code block of quarter the size of CB1 is named "CB3". Each code block is called a control channel as it carries information for one MAC ID. The MAC ID is used by a UE or by a group of UEs to detect the channel. At each level of the tree, each node represents a single control channel of a code block, which may consist of an information block of given length (information block length IBL) coded with an effective code rate (ECR). The number of the control channels at the lowest level of the tree is determined by the system bandwidth and number of OFDM symbols (n) available for the largest code blocks. Any node of the tree, which is not occupied by a control channel in this level, is available for the next level of the tree as two control channels, each of which are half of the size of the control channel at the parent node.

**[0044]** The system bandwidth consisting of a given number of sub-carrier resources may be divided into an integer multiple of control channels. In the embodiment of Figure 5, a given node of the tree, i.e. a set of sub-carriers, can consist of one control channel of the largest

code block, of up to two control channels of the second largest code blocks or up to four control channels of the smallest code blocks. Here, it is assumed that each code block of the lower level in the tree is double the size of the code block in the previous higher level in the tree. Rate matching is used to adjust the IBL with the selected code rate exactly to the sub-carrier resources forming a node of the tree. In case some nodes do not contain any control channel, the sub-carriers are thus not modulated with data and do not consume transmission power.

**[0045]** Figure 6 schematically shows an example of a tree with three allocated nodes (one defined by CB1, another one defined by CB2, and yet another one defined by CB3) in different levels of the tree.

**[0046]** Figure 7 schematically shows an example of a tree with three allocated nodes (one defined by CB1, another one defined by CB2, and yet another one defined by CB3) mapped to the sub-carrier resources in a distributed manner. The PDCCH is distributed over the system bandwidth. Each code block on the PDCCH is distributed to a set of sub-carriers. E.g. CB1 consists of CB11, CB12, CB13, CB14; CB2 consists of CB21, CB22, CB23, CB24; and CB3 consists of CB31, CB32, CB33, CB34. In figure 7, "RS (A1)" and "RS (A2)" show the presence of reference symbols for two antennas in the first OFDM symbol of the sub-frame.

**[0047]** Each control channel extends entirely over the first  $n$  OFDM symbols, which are available for the control channels, as shown in Figure 8. The PDCCHs are entirely frequency multiplexed to the sub-carriers on all of the OFDM symbol resources available for control signalling, as also shown in figure 8. This enables efficient power balancing between the PDCCHs so that each of them meets the expected SINR at the intended UE receiver.

**[0048]** As frequency diversity is known to provide gains, every PDCCH may actually be proposed to be modulated to a distributed set of sub-carriers as shown in figure 7, instead of constitutive ones as shown in figure 8.

**[0049]** Actually the control channels are distributed over the system bandwidth to the sub-carriers on one, two or three OFDM symbols in that sub-frame, to maximize the frequency diversity so that there are e.g. four distributed sets of sub-carrier resources allocated per each code-block. This is illustrated in Figure 9.

**[0050]** Figure 10 is a schematic diagram showing an embodiment wherein the system bandwidth is divided to an integer number of modular PDCCHs. Figure 11 gives an example of a tree representation of the structure shown in figure 10, wherein each node of the tree corresponds to a defined set of sub-carriers. A more generic representation of a tree structure, which is compatible to that of figure 4 (with  $n=3$ ), is given in figure 12, wherein again each node of the tree consists of an exactly defined set of sub-carriers.

**[0051]** Figure 13 schematically shows a further example of a tree on a wide system bandwidth wherein the allocated three levels of the tree are much higher in the

tree compared to a tree of a narrow system bandwidth as e.g. shown in Figures 5 to 8 and 10 to 12.

**[0052]** As each control channel has to be uniquely identified by a MAC ID, it can be combined to the CRC by partly masking the CRC bits with the MAC-ID. As the MAC ID is used for addressing both UE specific control channels and common control channels, it is reasonable to define the MAC ID in a compatible way. MAC IDs are reserved from the C-RNTI address space. Thus, reception of any control channel is possible by filtering control channels with the respective MAC ID. An error detection is available from the MAC ID masked CRC. The length of the MAC ID is matched to the C-RNTI length of 16 bits, but the CRC may be selected to be 16 or 24 bits.

**[0053]** The identification of an individual UE in a cell is based on the C-RNTI, which is signalled to the UE when changing from a LTE idle state to a LTE active state or when making a handover to a new cell. Thus, the C-RNTI can be directly used as the MAC ID of a control channel for an individual UE.

**[0054]** For paging signalling, a commonly available MAC ID is assigned (called PG-RNTI). This may be informed in the system information. Thus, any UE may filter possible paging allocations in sub-frames belonging to its DRX (discontinuous reception) active cycle by the commonly known MAC ID available for the PCH (paging control channel). The PCH itself is modulated to the data part of the sub-frame.

**[0055]** The identification of a control channel for a RACH (random access channel) response is derived from the resources used for the RACH burst creation by the UE. Thus, the RACH sub-frame, the RACH frequency resource and the RACH preamble index can together be applied to determine the MAC-ID (called RA-ID for the case of RACH response) to let the UE receive the RACH response in any one of the downlink sub-frames following that RACH transmission.

**[0056]** The identification of a group of UEs in a cell is based on assigning group IDs from the C-RNTI address space. Thus, a UE may have both its individual C-RNTI and a group ID valid simultaneously and may filter the MAC ID for the reception of a control channel with either the C-RNTI, with the group ID or with both of them.

**[0057]** There exist different types of signalling entries on the control channels. Each entry type follows a given bit exact format and has a defined relation to the other formats. It will be possible to provide future signalling entries or modify the existing ones. This may require changes to the known rate matching factors to fit them to the modular control channel structure e.g. to the nodes of the tree.

**[0058]** So, as different signalling entry types need to be defined (e.g. for a downlink allocation, an uplink allocation etc.), their IBL may not be equal since each of them is minimized in bits as much as feasible. In order to keep the coded PDCCH structure modular, any given signalling entry has to be rate matched to the exact set of sub-carrier resources selected for that PDCCH. Rate

matching guarantees that the symbol resources of the PDCCH are exact and modular as shown in figure 14, wherein the largest signalling entries for the lowest ECR are met to the largest PDCCH (PDCCH#k). Those coded ones with a higher ECR are mapped to the PDCCHs of half the size of the largest PDCCH (as PDCCH#k1). The smallest signalling entries with the highest code rate are mapped to the smallest PDCCHs (as PDCCH#k11). If they apply to a lower code rate, they are mapped to the double size PDCCH (as PDCCH#k2).

**[0059]** The flexibility of rate matching is a large benefit, because the signalling entry types anyway need to be standardised exactly. Now, any future update to the signalling fields would cause problems in the legacy decoders searching for PDCCHs of presumed size. However, due to the modular structure, the code block sizes are kept constant even with the future updates and just new rate matching factors have to be standardized respectively. Thus, the modular structure is possible to be searched through consistently both by the previously defined rate matching factors and newly defined rate matching factors. All the code blocks realizing the previously defined (legacy) rate matching factors can be found normally despite of possible presence of entries with the new rate matching definitions. Vice versa, the code blocks realizing new rate matching factors can be found normally despite of possible presence of entries with the old rate matching definitions.

**[0060]** Types of signalling entries may at least be

- downlink signalling entry,
- uplink signalling entry,
- paging signalling entry,
- RACH response signalling entry,
- uplink acknowledgement signalling entry, and/or
- Cat0 signalling entry.

**[0061]** Further types of signalling entries may at least be

- downlink group signalling entry wherein VoIP (voice over IP (internet protocol)) is the main driver,
- uplink group signalling entry wherein VoIP is the main driver, and/or
- downlink signalling entry for two code word MIMO (multiple input multiple output).

**[0062]** The proposed bit-fields for downlink signalling entry may include

- UE dedicated MAC ID (identification by the C-RNTI [16 bit]),
- CRC [8 bit] (in addition to UE ID masked CRC of 16 bits) wherein for narrowband CRC [0 bit] is sufficient,
- indicator of the allocated physical resource [DLA<sub>bw</sub> bit] depending on the bandwidth wherein any PRBs can be flexibly allocated and F-FDM-various optimization schemes are proposed,

- transport format of the allocation [5 bit],
- HARQ control information [5 bit] wherein the asynchronous HARQ may comprise a 3-bit HARQ process number and/or 2-bit redundancy version (a bit combination acts as a new data indicator), and/or
- other information, MIMO etc..

**[0063]** The proposed bit-fields for uplink signalling entry may include

- UE dedicated MAC ID (identification by the C-RNTI [16 bit]),
- CRC [8 bit] (in addition to UE ID masked CRC of 16 bits) wherein for narrowband CRC [0 bit] is sufficient,
- indicator of the allocated physical resource [ULA<sub>bw</sub> bit] depending on the bandwidth wherein only adjacent resource units can be allocated to one UE, wherein indexes of the first and the last resource units are signalled and/or an actually index of the first RU and the number of allocated RUs would be shorter or equally short than the above, but result in variable fields,
- duration of allocation [2 bit] which can be embedded to the other bit fields, e.g. TFI in this case, and may be needed specially for the RRC\_Connection\_Request message in coverage critical situations (as segmentation is not allowed),
- transport format of the allocation [5 bit],
- HARQ control information [2 bit] wherein the synchronous HARQ may comprise a 2-bit redundancy version (a bit combination acts as a new data indicator),
- power control [5 bit] every  $k_{PC}$  sub-frames,
- timing advance [4 bit] - every  $k_{TA}$  sub-frames, and/or
- other information, MIMO etc..

**[0064]** The proposed bit-fields for paging signalling entry may include

- paging dedicated MAC ID, PG-RNTI [16 bit]
- CRC [0 bit] (UE ID masked CRC of 16 bits)
- indicator of the allocated physical resource [PGA<sub>bw</sub> bit] depending on the bandwidth with a diversity transmission of PRBs over the system bandwidth up to 600 sub-carriers, and/or
- transport format of the allocation [5 bit].

**[0065]** The proposed bit-fields for RACH response signalling entry may include

- RACH response specific MAC ID, RA-ID [16 bit] wherein the RA-ID include a preamble index part for the time, frequency and sequence index of the RACH burst
- CRC [0 bit] (RA-ID masked CRC of 16 bits)
- timing Advance Long [10 bit], and/or
- power setting [5 bit].



**[0066]** The proposed bit-fields for uplink acknowledgement (ACK) signalling entry may include

- a HARQ ACK/NAK (negative acknowledge character) list in the order of the previous uplink allocations [max number of ACK/NAKs] with 1 bit per previous allocation.

**[0067]** The previous uplink allocations of a sub-frame ( $k-\Delta k$ ) are acknowledged in a given downlink sub-frame ( $k$ ) after a fixed delay ( $\sim 1.5$  or  $2.5$  ms to be defined) in a list format. For decoding an AN (ACK/NAK) bit in the sub-frame ( $k$ ), it is sufficient for a UE to know in which node the allocation was given (in sub-frame  $k-\Delta k$ ).

**[0068]** It is to be noted that many of the bit-fields are bandwidth dependent, e.g. the UE-identification and CRC in total may consist of 16 bits for narrowband and up to 24 bits for wideband. Also allocation indication depends largely on the bandwidth, as maximum of 6 bits are sufficient for 1.25 MHz bandwidth, but 100 bits were needed in maximum for 20 MHz. This is why the number of bits required to signal the allocation in a bandwidth dependent way is noted here as  $DLA_{bw}$  of downlink allocation as a function of the system bandwidth,  $ULA_{bw}$  of uplink allocation as a function of the bandwidth and  $PGA_{bw}$  of paging allocation as a function of the system bandwidth.

**[0069]** An entry ID may be necessary, unless the entry type can uniquely be recognised from its IBL and/or type of the MAC ID. Paging entry may be uniquely recognized from its MAC ID wherein PG-RNTI does not match with any UE specific C-RNTI. The RACH response entry may be uniquely recognised from its MAC ID wherein RA-ID does not match with any UE specific C-RNTI. Thus, the downlink signalling entry, the uplink signalling entry, the downlink group signalling entry, the uplink group signalling entry may require an entry ID.

**[0070]** The tree is dimensioned so that the lowest level of the tree contains enough nodes to support the required maximum number of most robust code blocks on the deployed system bandwidth. These code blocks determine the maximum number of 'cell edge' users per sub-frame. On the other hand, the tree must contain enough nodes to enable allocations up to the maximum number of users per sub-frame. The depth of the tree is determined by the product of the number of IBLs and number of code rates available.

**[0071]** In a preferred embodiment there are at least two clearly different IBLs and at least two different code rates so that the depth of the tree is at least 3. All the other IBL tunings can be satisfied by rate matching as explained below.

**[0072]** Once the maximum size of the tree is known, it is calculated to how many OFDM symbols (in maximum) it is mapped onto. This depends on the system bandwidth, as the sub-carrier resources are largely different for different bandwidths.

**[0073]** The tree may be pruned so that all the nodes

are not possible to be allocated in all the levels of the tree. Still, all the sub-carriers available are possible to be allocated. The pruned tree can be signalled easily by indicating, which nodes at which level of the tree are actually available for allocations. (this is a common information for the transmission and may be statically signalled e.g. in the system information messages.) Pruning will just reduce the number of possible allocation combinations so that the search complexity for the UEs is reduced. Despite of the pruning, there will remain a sufficient and even overwhelming number of PDCCH combinations available. The opportunities and also the needs of pruning appear more for a wideband system than for a narrower bandwidth.

**[0074]** As searching in the tree, even the pruned one, takes UE processing time, it may be feasible to decide a sub-set of nodes, which each UE is expected to decode for detecting any of its allocation. This UE specific set of nodes of the tree may be signalled to the UE in advance by the radio resource control (RRC) signalling e.g. during the initial access. The number of nodes (control channels) to decode may partly depend on the UE capability. Any UE however has to be able to decode the possible code blocks of the paging entry, the AN entry and a given number of alternative nodes for downlink and uplink signalling entries. The number of control channel positions for downlink and uplink signalling entries have still to include several alternatives at different levels of the tree (effective code rates), so that the flexibility of the signalling channels does not bind the signalling choices for the decisions made by the PDSCH scheduler. It is proposed that at least four code block positions will be searched by all the UEs.

**[0075]** As described above with reference to the figures 3 to 13, the control channels are dimensioned so that they form a binary tree i.e. the most robust channel coding format for the longest information block length (IBL) is divisible to  $2^x$  multiple code blocks depending on the depth of the tree.

**[0076]** The longest IBL is the downlink signalling entry, because it needs to allow flexible frequency multiplexing (F-FDM) scheme and asynchronous HARQ processing, which consume more bits than signalling for any other type of allocation. Thus, the downlink signalling entry coded with the lowest ECR will be designed to occupy one mother PDCCH. If the IBL of the uplink entry is close to the downlink entry, it will also occupy a mother PDCCH. If uplink entry is significantly smaller, e.g. close to  $0.5 * IBL_{DL}$ , the uplink entry will be rate matched to one of the child PDCCHs. If downlink and uplink allocations, however, are designed to be possible to be placed to the same PDCCH, those will occupy a mother PDCCH instead. In this case, independent downlink signalling entries and uplink signalling entries will occupy one of the child PDCCHs each.

**[0077]** The most robust coding is selected from a set of  $2^x$  code block sizes {ECR0, ECR1}, e.g. of order  $\{1/6, 1/3\}$  or  $\{1/8, 1/4\}$  or  $\{1/8, 1/2\}$ . By increasing the depth of

the tree, also more code rate options are available, but this significantly increases the expected search process in the tree. Some choices may favour even more code rates as  $\{1/6, 1/3, 2/3\}$  or  $\{1/8, 1/4, 1/2\}$ .

**[0078]** The uplink signalling entry contains an IBL being about half of the size of the downlink signalling entry. This is because in uplink only adjacent frequency multiplexing (A-FDM) allocation scheme is allowed. Further, the synchronous HARQ processes of uplink require less signalling. On the other hand, power control and timing advance may change the IBL to be close to equal to the downlink entry. An uplink entry may use ECR0 or ECR1 per UE.

**[0079]** The paging code block always requires a distributed transmission format to maximize its frequency diversity. Further, it does not include HARQ processes so that its signalling entry IBL is shorter than that of a downlink entry. The paging code block may be rate matched to the size of the most robust downlink code block, so that ECR0 is selected, but due to rate matching a slightly lower code rate will result. Alternatively, the paging code block may be rate matched to the size of the less robust downlink code block, so that ECR1 is selected, but due to rate matching a slightly higher code rate than ECR0 but a lower code rate than ECR1 will result. There is at maximum one paging signalling entry needed per sub-frame, because there is at maximum one PCH (paging channel) transport channel per sub-frame, which carries the paging messages of all the paged UEs.

**[0080]** The IBL of the RACH response signalling entry is close to equal size of the IBL of the other smallest entries. The RACH response may apply ECR0 or ECR1 respectively, because the RACH preamble is expected to indicate the rough CQI (channel quality indicator) level for the downlink transmission. There may be more than one RACH response signalling entries per sub-frame.

**[0081]** The downlink signalling entry of the uplink acknowledgements (AN code block) is a list format of positive or negative acknowledgements per UE allocation in the uplink sub-frame in a past sub-frame  $(k - \Delta k)$  preceding the current sub-frame  $(k)$ . Each UE that had an allocation in sub-frame  $(k - \Delta k)$  will need to decode the common AN code block in sub-frame  $k$ . The position of the acknowledgement bit of each UE in the AN list field is determined by the position of that signalling entry in the tree, which has signalled the uplink allocation for the UE in sub-frame  $(k - \Delta k)$ . As the tree is common, each UE will uniquely know the position of its allocation in the tree.

**[0082]** If the IBL sizes of the downlink and uplink allocations do not efficiently fit to the same binary tree, i.e. the  $IBL_{DL} \sim 2 * IBL_{UL}$  or  $IBL_{DL} \sim IBL_{UL}$  does not hold, it may become reasonable to construct separate trees for the downlink and uplink allocations, respectively.

**[0083]** It is proposed here that even if the IBL of different signalling entries does not exactly match to the  $2^x$  structure of the tree, the tree is constructed by rate matching. Thus, every signalling entry coded with ECR0 or ECR1 will be rate matched to force an exact fit to a control

channel in the node of the tree. Regarding the rate matching, the same holds for other possible modular choices of a control channel structure than a tree.

**[0084]** As the tree structure requires the control channels to be  $2^x$  structured, there are preferably three ways of achieving this:

- The bit-field design of the signalling entries is such that the IBL of each entry is dimensioned properly to follow the  $2^x$  structure.
- Some extra RFU (reserved for future use) bits are added to the signalling entries to properly fulfil the  $2^x$  structure.
- The IBLs are of arbitrary but known length and do not follow the  $2^x$  structure directly, but still the code blocks do. This is achievable by rate matching the IBL with a given code rate to the  $2^x$  structure. The penalty of this is that the rate matching factor also has to be blindly detected by the receiver. However, as the signalling entries and their IBL are known, there is also a known limited set of rate matching factors to search for. Another advantage is that the rate matching has to be done at limited nodes of the tree only.

**[0085]** It is possible to provide future signalling entries or modify the existing ones due to the modular structure of the PDCCHs. The possible changes to the signalling entries may require introduction of new rate matching factors, but that is considered a small effort. Compatibility to the earlier implementations is well preserved, as the modular control channel structure is possible to be searched through - both by the previously defined rate matching factors and by the newly added rate matching factors. All the code blocks realizing the previously defined rate matching factors can be found normally despite of the presence of entries with new rate matching definitions. Vice versa, the code blocks realizing new rate matching factors can be found normally despite of the presence of entries with old rate matching definitions.

**[0086]** Any code block may have any required power boosting, if the mean transmission power per OFDM symbol is kept constant. Power boosting may happen by exploiting the power available from the non-used symbol resources or between different code blocks of control channels assigned to different UEs. Demodulation of the control channel by QPSK and decoding of the control channel by a convolutional code are feasible operations without knowing the signal amplitude relative to the pilot symbols. Thus, power boosting is a practical solution, which does not require any specific signalling in this case. Any un-used sub-carrier symbol resources do not create any inter-cell interference to their co-channel symbols in the neighbouring cells.

**[0087]** The UE receiver is configured to search for allocation information from the PDCCHs mandated for it. However, there are many dependencies that do not require the UE search for all the signalling entries all the

time. Such dependencies may include the UE state, the UE capability or knowledge of UE's active traffic flows.

**[0088]** In the LTE idle state, the UE only searches for paging signalling entries and does not need to apply other rate matching factors in its search.

**[0089]** If the UE created a RACH burst, it will search for RACH response and need not apply other rate matching factors in its search.

**[0090]** In a typical LTE active state operation, the UE does not need to search for rate matching factors of the paging entry nor the rate matching factors of the RACH response entry. The UE just needs to search for rate matching factors of the downlink entry and uplink entry.

**[0091]** It may be feasible that also downlink group entry and uplink group entry are defined for VoIP usage. Thus, if the UE has a VoIP session active, it will have to search rate matching factors both for downlink and downlink group entries and rate matching factors for uplink and uplink group entries.

**[0092]** Further, if the UE is dual codeword MIMO capable, it needs to search rate matching factors for the downlink MIMO signalling entry, if this is separately defined. However, in this case it is proposed that all signalling for this UE follows the MIMO entry format, and thus it would not need to search for regular downlink signalling entries at all.

**[0093]** Despite there are many different rate matching factors feasible in the nodes of the tree, the tree will be so defined that each UE will only need to search for those rate matching factors relevant for its expected signalling entry formats.

**[0094]** Fig. 15 shows a schematic block diagram of a software-based implementation of the proposed advanced decoding procedure. Here, the UE 10 of Figure 2 comprises a processing unit 210, which may be any processor or computer device with a control unit which performs control based on software routines of a control program stored in a memory 212. Program code instructions are fetched from the memory 212 and are loaded to the control unit of the processing unit 210 in order to perform the processing steps of the functionalities as described above. These processing steps may be performed on the basis of input data DI and may generate output data DO, wherein the input data DI may correspond to the received control information of the PDCCH 300 and the output data DO may correspond to the decoded allocation information. Consequently, the invention may be implemented as a computer program product comprising code means for generating each individual step of the decoding procedure according to the embodiment when run on a computer device or data processor.

**[0095]** In summary, a control channel structure includes at least one control channel to be allocated to a user for at least one of uplink and downlink directions in a network, which the at least one control channel is arranged as a modular structure comprising of modular code blocks on at least two different sizes. One of such modular structures may be represented as a tree struc-

ture in particular, where each of the modular code blocks define one node of the tree, respectively.

**[0096]** It is apparent that the invention can easily be extended to any kind of control channel where adaptive coding or modulation or other types of formats are used. Any pattern or sequence may be used for selecting and testing available types of formats. The described embodiments are related to control signaling via wireless channels. However, the invention, according to various embodiments, can be applied to control signaling via wired channels as well. Additionally, the invention can be applied to any device, apparatus, module or integrated chip where a control information is to be decoded. Exemplary embodiments may thus vary within the scope of the attached claims.

## Claims

1. A method comprising:

allocating at least one control channel to a user for at least one of uplink and downlink directions in a network; and  
arranging the at least one control channel as at least a part of a modular structure comprising modular code blocks of at least two different sizes, wherein the modular structure is formed as a tree where each code block defines one node of the tree **characterized in that** the nodes comprise signalling entries coded by a given code rate, the signalling entries include information blocks, and each information block of a signalling entry is rate matched to a node of the tree.

2. The method according to claim 1, further comprising allocating a plurality of control channels to users for at least one of uplink and downlink directions in a network, which the control channels are arranged as a tree comprising nodes of modular code blocks on at least two different levels with each code block defining one control channel at a node of the tree.

3. The method according to claim 2, wherein the code blocks of different levels are provided with different sizes.

4. The method according to claim 1, wherein a code block in a level of higher order has a smaller size than a code block in a level of lower order.

5. The method according to claim 1, wherein power from a resource for a code block which is currently not used is provided for at least another code block currently used.

6. The method according to claim 1, wherein at least a part of transmission power from a code block re-

source on sub-carriers in a node of the tree is provided to sub-carriers in another node of the tree.

7. An apparatus comprising a transmitter configured to allocate at least one control channel to a user for at least one of uplink and downlink directions in a network, so that the at least one control channel is arranged as at least a part of a modular structure comprising modular code blocks of at least two different sizes, wherein the modular structure is formed as a tree where each code block defines one node of the tree, **characterized in that** the nodes comprise signalling entries coded by a given code rate, the signalling entries include information blocks, and each information block of a signalling entry is rate matched to a node of the tree. 5
8. The apparatus according to claim 7, wherein the transmitter is further configured to allocate a plurality of control channels to users for at least one of uplink and downlink directions in a network so that the control channels are arranged as a tree comprising nodes of modular code blocks on at least two different levels with each code block defining one control channel at a node of the tree. 10 20 25
9. The apparatus according to claim 8, wherein the code blocks of different levels have different sizes. 30
10. The apparatus according to claim 7, wherein a code block in a level of higher order has a smaller size than a code block in a level of lower order. 35
11. The apparatus according to claim 7, wherein power from a resource provided for a code block which is currently not used is available for at least another code block currently used. 40
12. A computer program product comprising a code means for generating the steps of a method according to any of claims 1 to 6. 45
13. A system, comprising:
  - a transmitter configured to allocate at least one control channel to a user for at least one of uplink and downlink directions in a network, so that the at least one control channel is arranged as at least a part of a modular structure comprising modular code blocks of at least two different sizes, wherein the modular structure is formed as a tree where each code block defines one node of the tree, wherein the nodes comprise signalling entries coded by a given code rate, the signalling entries include information blocks, and each information block of a signalling entry is rate matched to a node of the tree; 50
  - a user equipment comprising a receiver config-

ured to receive the at least one control channel to be allocated to the user for at least one of uplink and downlink directions, and a searcher for searching for a user equipment specific identifier in the modular structure of the at least one control channel.

## Patentansprüche

### 1. Verfahren, umfassend:

Zuweisen mindestens eines Steuerkanals zu einem Benutzer für mindestens eine einer Uplink- und einer Downlink-Richtung in einem Netzwerk; und  
Anordnen des mindestens einen Steuerkanals als mindestens ein Teil einer modularen Struktur mit modularen Codeblöcken mit mindestens zwei verschiedenen Größen, wobei die modulare Struktur als ein Baum gebildet ist, wobei jeder Codeblock einen Knoten des Baums definiert, **dadurch gekennzeichnet, dass** die Knoten mit einer vorgegebenen Coderate codierte Signalisierungseingaben umfassen, wobei die Signalisierungseingaben Informationsblöcke umfassen und jeder Informationsblock einer Signalisierungseingabe in der Rate an einen Knoten des Baums angepasst ist.

2. Verfahren nach Anspruch 1, das ferner das Zuweisen mehrerer Steuerkanäle zu Benutzern für mindestens eine der Uplink- und der Downlink-Richtung in einem Netzwerk umfasst, wobei die Steuerkanäle als ein Baum angeordnet sind, der Knoten von modularen Codeblöcken auf mindestens zwei verschiedenen Ebenen umfasst, wobei jeder Codeblock einen Steuerkanal an einem Knoten des Baums definiert.

3. Verfahren nach Anspruch 2, wobei die Codeblöcke verschiedener Ebenen in unterschiedlichen Größen bereitgestellt sind.

4. Verfahren nach Anspruch 1, wobei ein Codeblock in einer Ebene höherer Ordnung eine kleinere Größe hat als ein Codeblock in einer Ebene niedrigerer Ordnung.

5. Verfahren nach Anspruch 1, wobei Leistung von einer Ressource für einen gegenwärtig nicht verwendeten Codeblock für mindestens einen anderen gegenwärtig verwendeten Codeblock bereitgestellt wird.

6. Verfahren nach Anspruch 1, wobei mindestens ein Teil der Sendeleistung von einer Codeblockressource auf Unterträgern in einem Knoten des Baums an

Unterträger in einem anderen Knoten des Baums geliefert wird.

7. Vorrichtung mit einem Sender, der dazu ausgelegt ist, einem Benutzer mindestens einen Steuerkanal für mindestens eine einer Uplink- und einer Downlink-Richtung in einem Netzwerk zuzuweisen, so dass der mindestens eine Steuerkanal als mindestens ein Teil einer modularen Struktur mit modularen Codeblöcken mit mindestens zwei verschiedenen Größen angeordnet ist, wobei die modulare Struktur als ein Baum gebildet ist, wobei jeder Codeblock einen Knoten des Baums definiert, **dadurch gekennzeichnet, dass** die Knoten mit einer vorgegebenen Coderate codierte Signalisierungseingaben umfassen, wobei die Signalisierungseingaben Informationsblöcke umfassen und jeder Informationsblock einer Signalisierungseingabe in der Rate an einen Knoten des Baums angepasst ist.
 

5  
10  
15  
20
8. Vorrichtung nach Anspruch 7, wobei der Sender ferner dazu ausgelegt ist, Benutzern mehrere Steuerkanäle für mindestens eine der Uplink- und der Downlink-Richtung in einem Netzwerk zuzuweisen, so dass die Steuerkanäle als ein Baum angeordnet sind, der Knoten von modularen Codeblöcken auf mindestens zwei verschiedenen Ebenen umfasst, wobei jeder Codeblock einen Steuerkanal an einem Knoten des Baums definiert.
 

25  
30
9. Vorrichtung nach Anspruch 8, wobei die Codeblöcke verschiedener Ebenen unterschiedliche Größen haben.
 

35
10. Vorrichtung nach Anspruch 7, wobei ein Codeblock in einer Ebene höherer Ordnung eine kleinere Größe hat als ein Codeblock in einer Ebene niedrigerer Ordnung.
 

40
11. Vorrichtung nach Anspruch 7, wobei Leistung von einer Ressource, die für einen gegenwärtig nicht verwendeten Codeblock bereitgestellt wird, für mindestens einen anderen gegenwärtig verwendeten Codeblock verfügbar ist.
 

45
12. Computerprogrammprodukt mit einem Codemittel zum Erzeugen der Schritte eines Verfahrens nach einem der Ansprüche 1 bis 6.
 

50
13. System, umfassend:
 

55

einen Sender, der dazu ausgelegt ist, einem Benutzer mindestens einen Steuerkanal für mindestens eine einer Uplink- und einer Downlink-Richtung in einem Netzwerk zuzuweisen, so dass der mindestens eine Steuerkanal als mindestens ein Teil einer modularen Struktur mit modularen Codeblöcken mit mindestens zwei

verschiedenen Größen angeordnet ist, wobei die modulare Struktur als ein Baum gebildet ist, wobei jeder Codeblock einen Knoten des Baums definiert, wobei die Knoten mit einer vorgegebenen Coderate codierte Signalisierungseingaben umfassen, wobei die Signalisierungseingaben Informationsblöcke umfassen und jeder Informationsblock einer Signalisierungseingabe in der Rate an einen Knoten des Baums angepasst ist; ein Endgerät mit einem Empfänger, der dazu ausgelegt ist, den mindestens einen Steuerkanal zu empfangen, der dem Benutzer für mindestens eine der Uplink- und der Downlink-Richtung zuzuweisen ist, und einen Sucher zum Suchen nach einer endgerätspezifischen Kennung in der modularen Struktur des mindestens einen Steuerkanals.

## Revendications

### 1. Procédé comprenant :

l'allocation d'au moins un canal de commande à un utilisateur pour au moins une des directions de liaison montante et de liaison descendante dans un réseau ; et  
l'agencement du canal ou des canaux de commande en tant qu'au moins une partie d'une structure modulaire comprenant des blocs de code modulaires d'au moins deux tailles différentes, la structure modulaire étant réalisée sous forme d'arborescence où chaque bloc de code définit un nœud de l'arborescence, **caractérisé en ce que** les nœuds comprennent des entrées de signalisation codées par un débit de code donné, les entrées de signalisation comprennent des blocs d'informations et chaque bloc d'informations d'une entrée de signalisation est adapté à un nœud de l'arborescence.

2. Procédé selon la revendication 1, comprenant en outre l'allocation d'une pluralité de canaux de commande aux utilisateurs pour au moins l'une des directions de liaison montante et de liaison descendante dans un réseau, les canaux de commande étant agencés comme une arborescence comprenant des nœuds de blocs de code modulaires sur au moins deux niveaux différents où chaque bloc de code définit un canal de contrôle en un nœud de l'arborescence.

3. Procédé selon la revendication 2, dans lequel les blocs de code de différents niveaux sont fournis avec des tailles différentes.


4. Procédé selon la revendication 1, dans lequel un

bloc de code d'un niveau supérieur a une taille inférieure à celle d'un bloc de code d'un niveau inférieur.


5. Procédé selon la revendication 1, dans lequel l'énergie provenant d'une ressource pour un bloc de code qui n'est actuellement pas utilisé est fournie à au moins un autre bloc de code actuellement utilisé. 5
6. Procédé selon la revendication 1, dans lequel au moins une partie de l'énergie de transmission provenant d'une ressource de bloc de code sur des sous-porteuses dans un nœud de l'arborescence est fournie à des sous-porteuses dans un autre nœud de l'arborescence. 10
7. Appareil comprenant un émetteur configuré pour allouer à au moins un utilisateur de canal de commande au moins l'une des directions de liaison montante et de liaison descendante dans un réseau, de sorte que le canal ou les canaux de commande soient agencés en au moins une partie d'une structure modulaire comprenant des blocs de code modulaires d'au moins deux tailles différentes, dans lequel la structure modulaire est formée comme une arborescence où chaque bloc de code définit un nœud de l'arborescence, **caractérisé en ce que** les nœuds comprennent des entrées de signalisation codées par un débit de code donné, les entrées de signalisation comprennent des blocs d'informations et chaque bloc d'informations d'une entrée de signalisation est adapté à un nœud de l'arborescence. 15 20 25 30
8. Appareil selon la revendication 7, dans lequel l'émetteur est en outre configuré pour allouer une pluralité de canaux de commande aux utilisateurs pour au moins l'une des directions de liaison montante et de liaison descendante dans un réseau de sorte que les canaux de commande sont agencés sous la forme d'une arborescence comprenant des nœuds de blocs de code modulaires sur au moins deux niveaux différents, chaque bloc de code définissant un canal de contrôle au niveau d'un nœud de l'arborescence. 35 40
9. Appareil selon la revendication 8, dans lequel les blocs de code de différents niveaux ont des tailles différentes. 45
10. Appareil selon la revendication 7, dans lequel un bloc de code d'un niveau supérieur a une taille inférieure à celle d'un bloc de code d'un niveau inférieur. 50
11. Appareil selon la revendication 7, dans lequel l'énergie provenant d'une ressource pour un bloc de code qui n'est actuellement pas utilisé est disponible à au moins un autre bloc de code actuellement utilisé. 55
12. Progiciel informatique comprenant un moyen de code pour générer les étapes d'un procédé selon l'une

quelconque des revendications 1 à 6.

13. Système comprenant :  
un émetteur configuré pour allouer au moins un canal de commande à un utilisateur pour au moins l'une des directions de liaison montante et de liaison descendante dans un réseau, de sorte que ledit canal ou lesdits canaux de commande soient agencés en au moins une partie d'une structure modulaire comprenant des blocs de code modulaires d'au moins deux tailles différentes, dans lequel la structure modulaire est formée comme une arborescence où chaque bloc de code définit un nœud de l'arborescence, dans lequel les nœuds comprennent des entrées de signalisation codées par un débit de code donné, les entrées de signalisation comprennent des blocs d'informations et chaque bloc d'informations d'une entrée de signalisation est adapté à un nœud de l'arborescence :  
un équipement d'utilisateur comprenant un récepteur configuré pour recevoir le canal ou les canaux de commande à allouer à l'utilisateur pour au moins l'une des directions de liaison montante et de liaison descendante, et un système de recherche pour chercher un identifiant spécifique d'équipement d'utilisateur dans la structure modulaire du canal ou des canaux de contrôle.

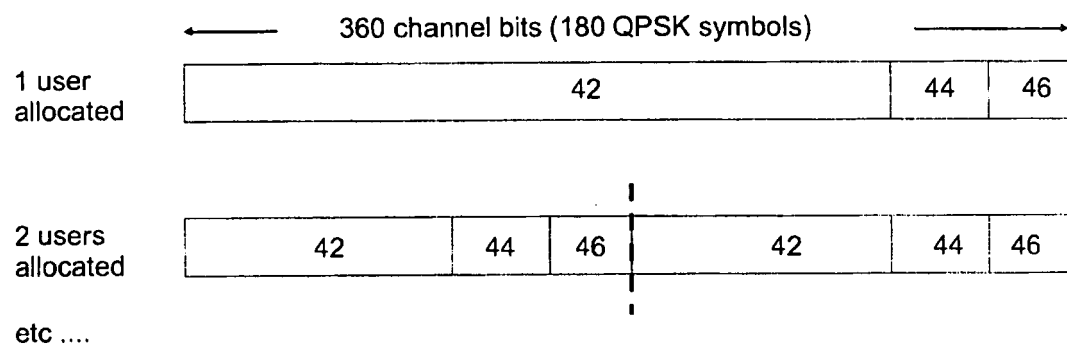


**Fig. 1**

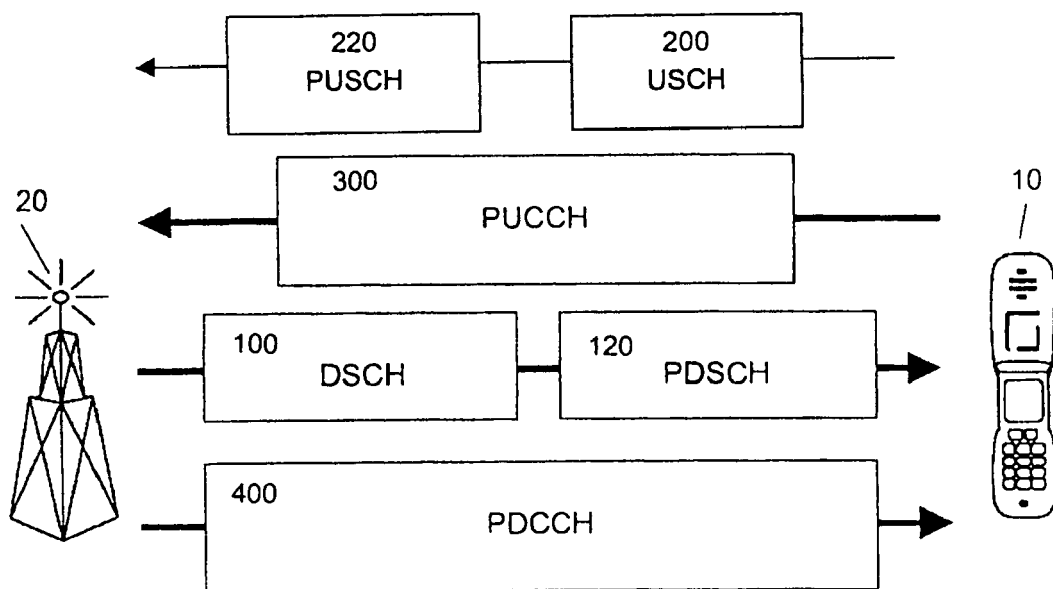


**Fig. 2**




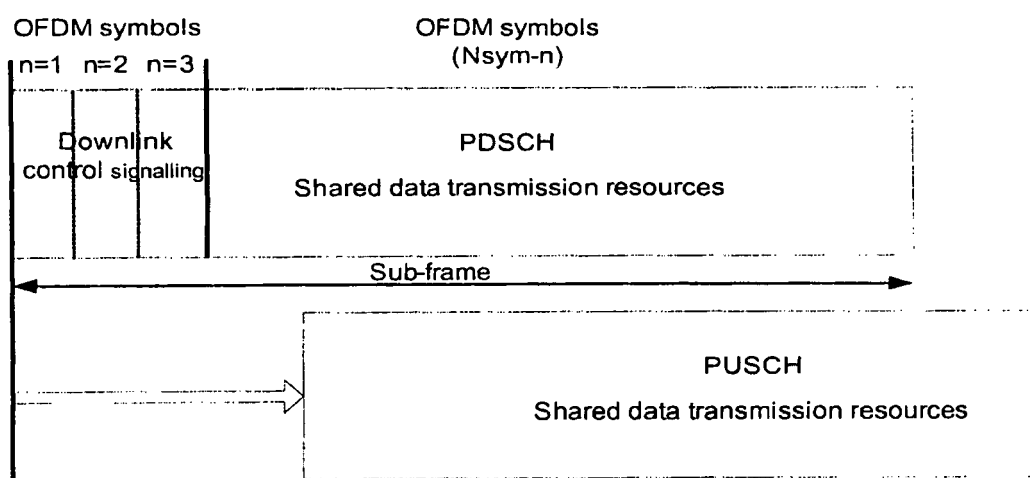


**Fig. 3**

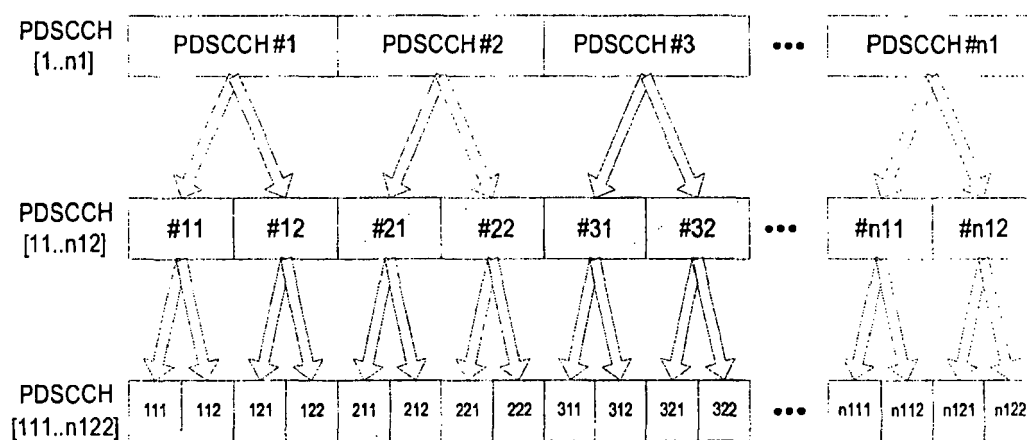


**Fig. 4**

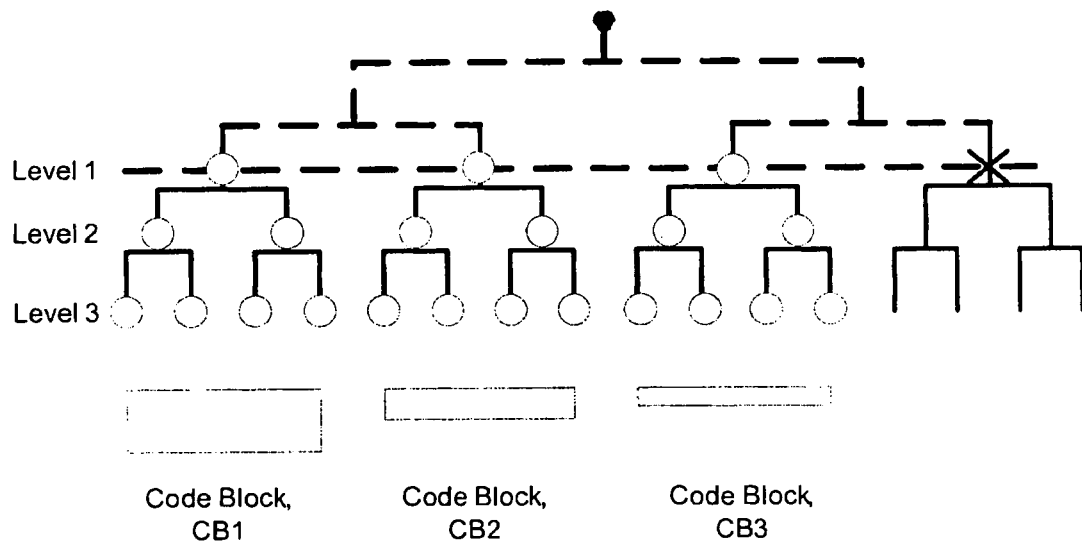


**Fig. 5**

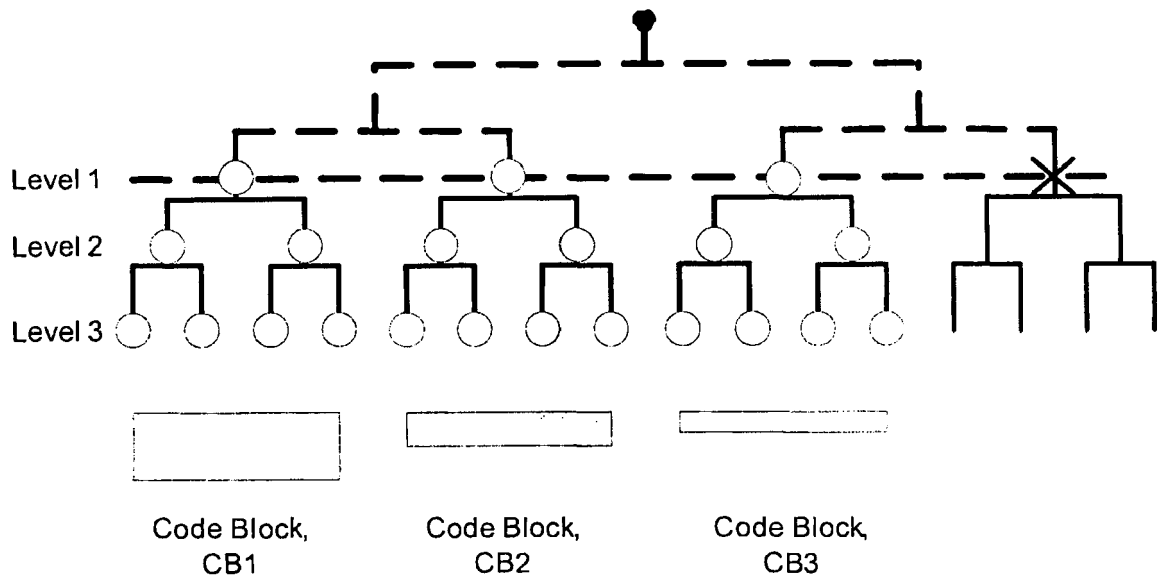


**Fig. 6**

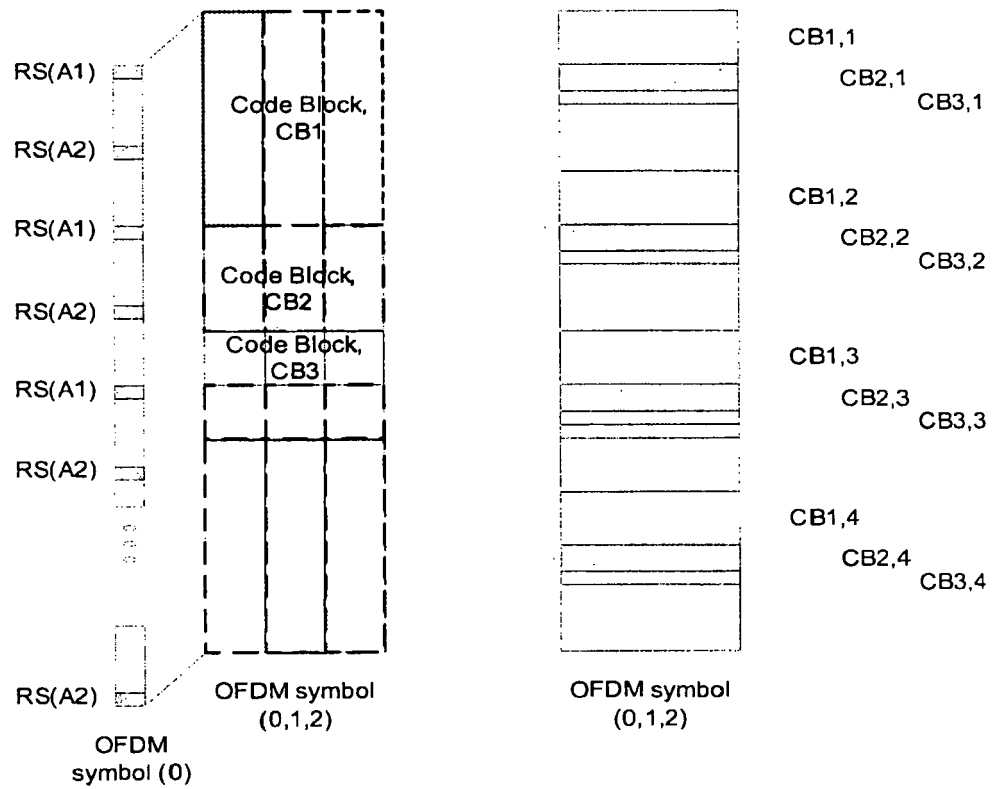


**Fig. 7**

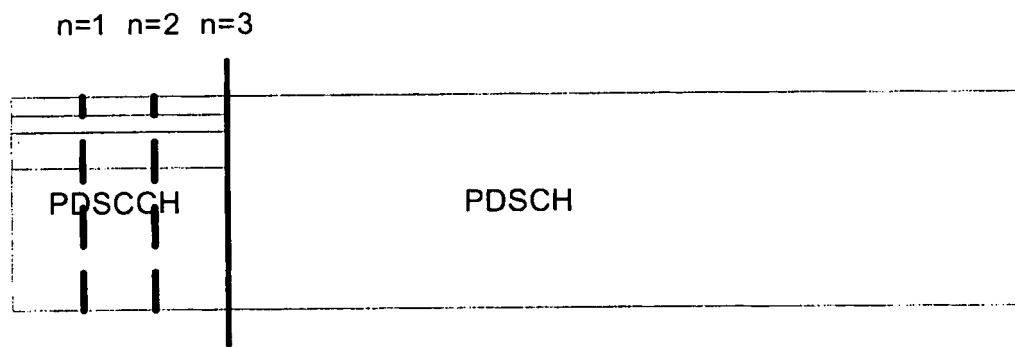


**Fig. 8**

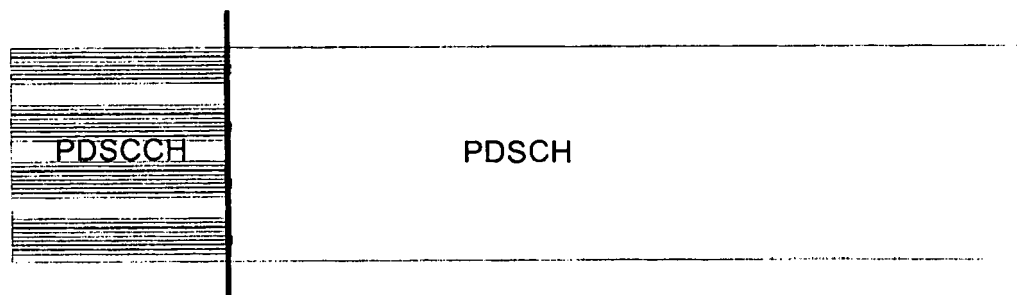

**Fig. 9**

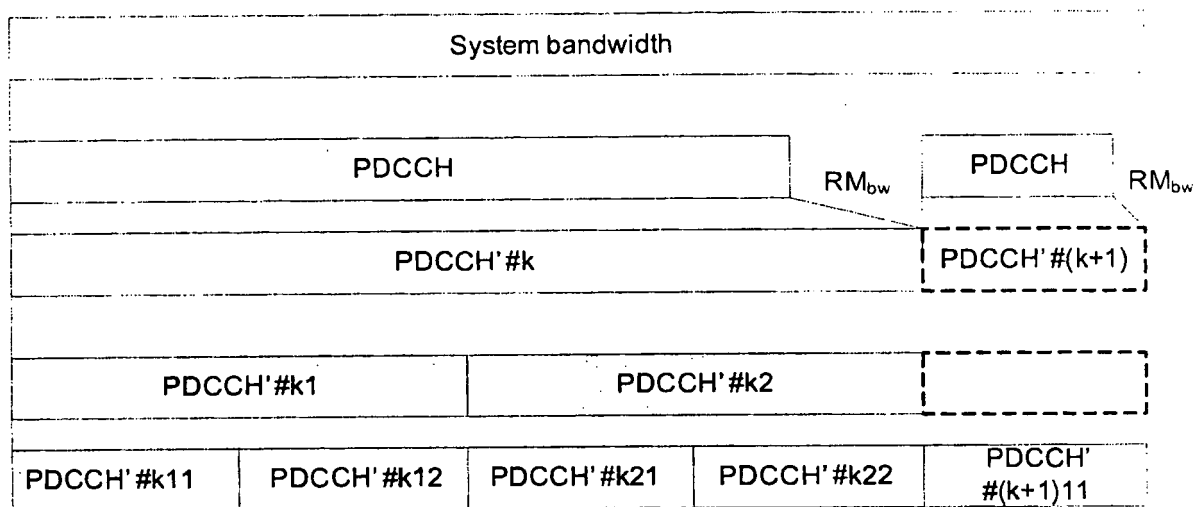


**Fig. 10**

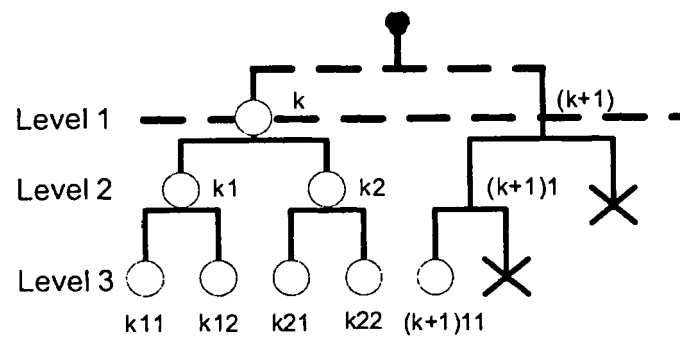


**Fig. 11**




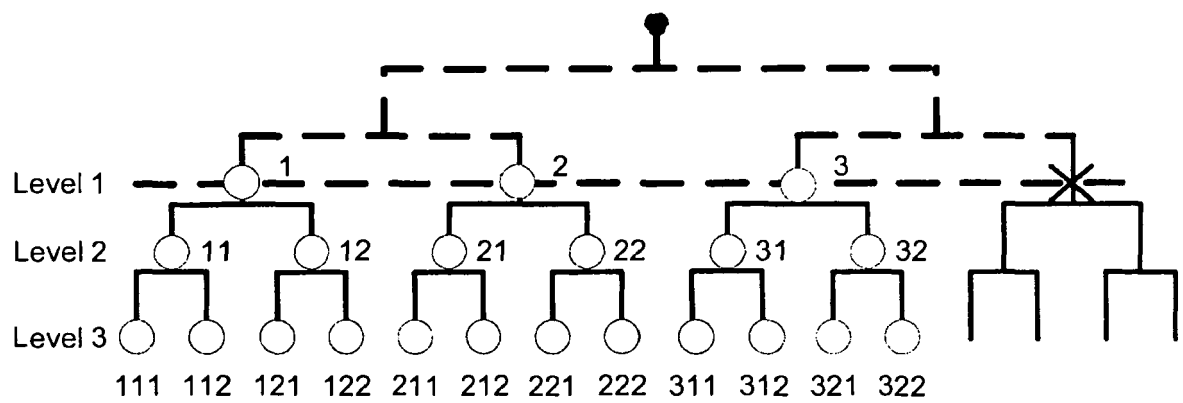


**Fig. 12**

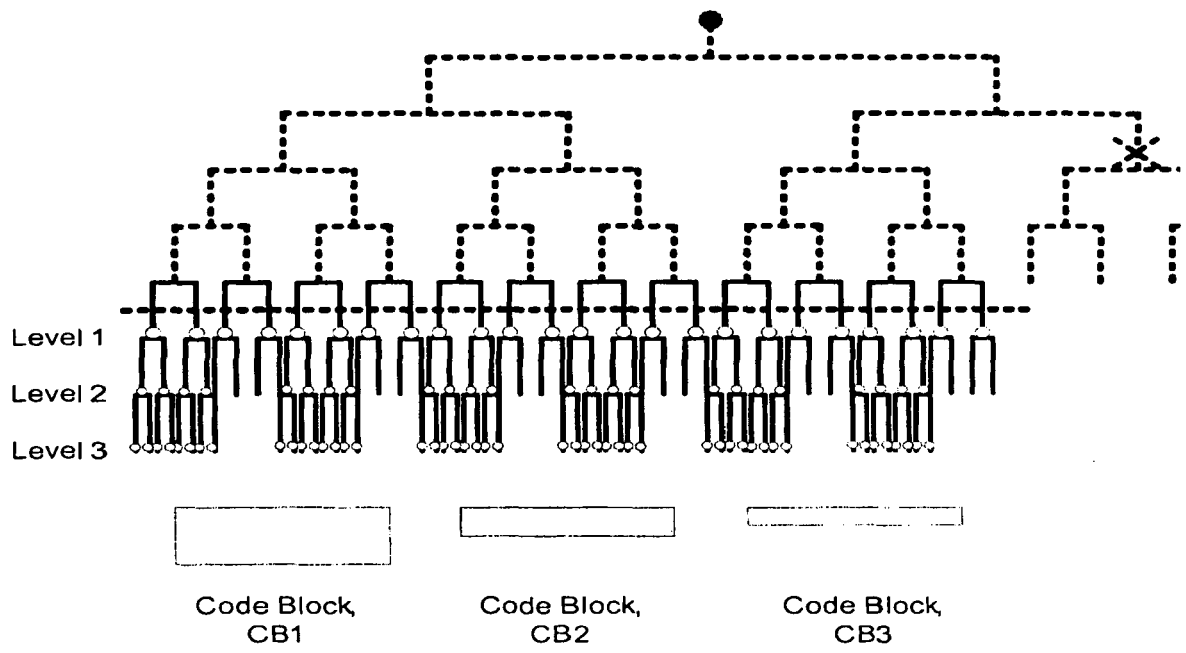

**Fig. 13**

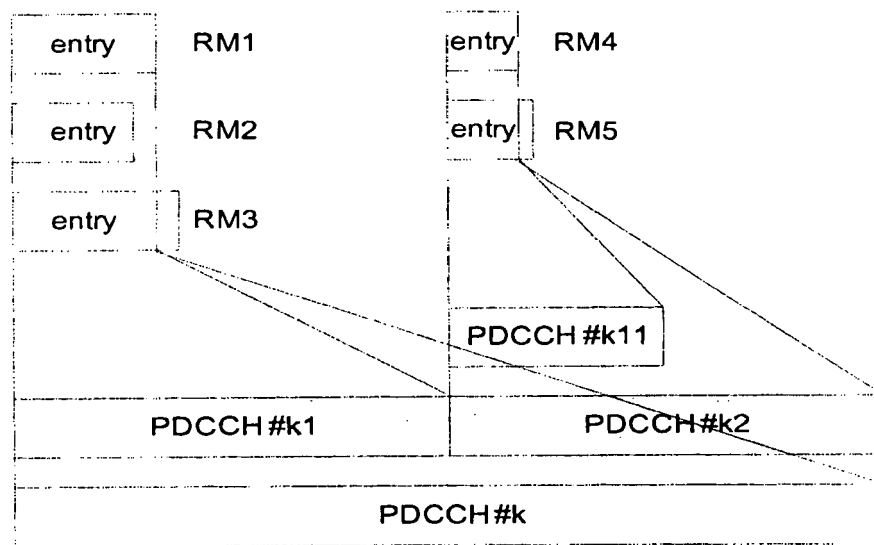

**Fig. 14**

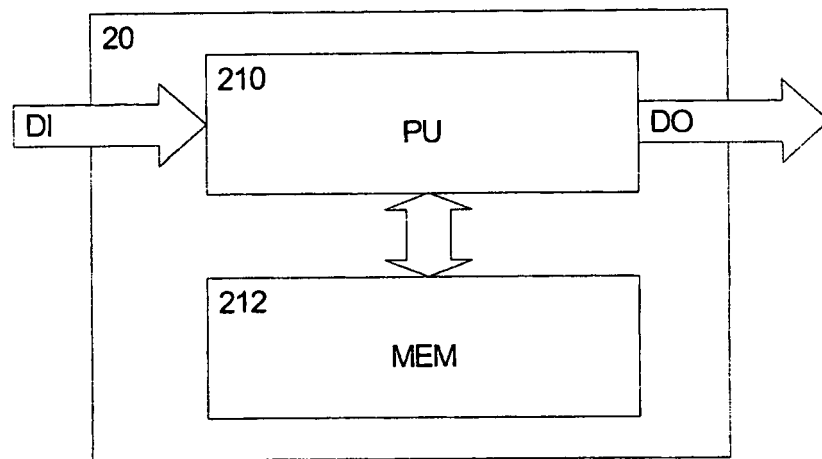

**Fig. 15**

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- WO 2004102839 A1 [0005]