



(11) **EP 2 108 593 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**23.06.2010 Bulletin 2010/25**

(51) Int Cl.:  
**B65D 1/48 (2006.01)** **B65D 21/02 (2006.01)**  
**B65D 81/38 (2006.01)**

(21) Application number: **08007017.0**

(22) Date of filing: **09.04.2008**

(54) **Container for storage and transport**

Behälter zum Lagern und Transport

Réceptier pour le transport et le stockage

(84) Designated Contracting States:  
**ES FR TR**

(43) Date of publication of application:  
**14.10.2009 Bulletin 2009/42**

(73) Proprietor: **Storopack Hans Reichenecker GmbH**  
**72555 Metzingen (DE)**

(72) Inventor: **Torrents, Xavier**  
**08440 Cardedeu, Barcelona (ES)**

(74) Representative: **Dreiss**  
**Patentanwälte**  
**Postfach 10 37 62**  
**70032 Stuttgart (DE)**

(56) References cited:  
**DE-A1- 19 932 068 DE-B1- 1 486 302**  
**US-A- 3 489 314**

**EP 2 108 593 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

**[0001]** The present invention refers to a container for storage and/or transport of food, preferably fish or meat, comprising an essentially cuboidal box made of foamed plastic material, this box comprising vertical side walls connected to each other at vertical edges.

**[0002]** In order to use storage space efficiently, multiple containers are arranged in one or multiple piles and bundled to a pallet. Due to the weight of the goods that reside within the containers, the containers are exposed to quite large vertical forces. In order to avoid the containers be deformed or even destroyed when put together to a pallet, each container comprises reinforcement elements to absorb at least a part of the vertical forces.

**[0003]** This problem is critical in view of the fact that the framed plastic material, of which the containers are made, can only withstand rather limited loads without damage.

**[0004]** Thus, only a relatively small load can be applied to the foam material of the container.

**[0005]** The patent application DE 199 32 068 A1 discloses a solid foam container for storage and transport comprising reinforcement elements made of plastic. However, manufacturing of this solid foam container is complex because special retention means are required to fixate the reinforcement elements while molding the solid foam container.

**[0006]** Object of the present invention is to provide a solid foam container which does not have these disadvantages and which can be easily arranged in piles on pallets and which can be easily and cost-efficiently manufactured as well.

**[0007]** According to the present invention, this object is achieved by a container of the above-mentioned kind, wherein the box is provided at least at one of its vertical edges with a vertical hole, in which a wood stick is inserted.

**[0008]** According to the present invention, the box of the container can be produced independently from the wood stick, i.e. without special retention means. In addition, the box and the wood stick can be shipped separately to a user. The user can insert the wood stick into the hole of the box on-site i. e. at the places where it is used before filling the container with goods - such as fish, meat, or other kinds of food - and combining multiple containers to a pallet. In case that only a small pallets or even no pallet is built, the wood stick sometimes may not be needed. Then, the user may omit inserting the wood stick or sticks. Consequently, the present invention provides a solid foam container which can be easily and cost-efficiently manufactured and can be reinforced by means of the wood stick on-site if required.

**[0009]** According to a preferred embodiment of the present invention, it is suggested that the vertical hole extend completely from an upper side of the box to a lower side of the box. Thus, the hole may have two openings at the two opposite ends of the vertical edge. The

wood stick and the hole may be cylindrical. When arranging multiple containers in a vertical pile, the vertically extending wood sticks are positioned directly adjacent to each other. Consequently, the load put on the box is reduced and pallets can be built without damaging the containers.

**[0010]** The box preferably consists of expandable polystyrene (EPS) or expanded polypropylene.

**[0011]** A preferred embodiment and further advantages of the present invention are shown in the figure and described in detail hereinafter.

**[0012]** The only figure shows a perspective view of a container 11 for storage and transport according to the present invention. The container 11 comprises a box 13 the shape of which corresponds essentially to a cuboidal tray. The box 13 consists of expanded polystyrene (EPS).

**[0013]** The box 13 comprises a base plate 15. In a top view, the base plate 15 is rectangular. The corners 17 of the base plate 15 are rounded off. The box 13 of the container 11 has four sidewalls 19 each of them extending from a horizontal edge 21 of the base plate 15 and orthogonally oriented with respect to the base plate 15. Each pair of adjacent sidewalls 19 is connected by a vertical edge 23. All parts of the box 13 of the container 11, i.e. the base plate 15, the sidewalls 19, and the vertical edges 23 are built in one solid foam piece.

**[0014]** Each vertical edge 23 comprises a cylindrical hole 25 that extends vertically and therefore is oriented orthogonally with respect to the base plate 15 of the box 13 and runs in parallel with the sidewalls 19. The hole 25 runs through the whole vertical edge 23, i.e., the hole 25 extends from an upper side 26 of the box 13 to a lower side 28 of the box 13. Thus, the hole 25 is delimited by two opposing circular openings 27 of each vertical edge 23. For illustration purposes, a wood stick 29 is positioned in only one hole 25. However, the container according to the preferred embodiment comprises four wood sticks 29 positioned in each of the four holes 25 of the four vertical edges 23. In the shown embodiment, the wood stick 29 is cylindrical. The shape of the hole 25 also being cylindrical, the shape of the wood stick 29 is adapted to the shape of the hole 25.

**[0015]** The diameter of the wood stick 29 is adapted to the diameter of the hole 25. As a consequence, an outer surface of the wood stick 29 comes into contact with an inner surface of the hole 25. Due to the comparatively high surface roughness of the surface of the wood stick 29 there is a rather high static friction between the wood stick 29 and the hole 25 preventing the wood stick 29 from being accidentally removed from the hole 25.

**[0016]** In the shown embodiment, the length of the wood stick 29 corresponds to a height h of the vertical edge 23, i.e., the height of the box 13. The wood stick 29 can be inserted into the hole 25 such that it is vertically offset with respect to the hole 25, a part of the wood stick 29 vertically projecting out of one of the sides 26, 28 of the box 13. When stacking up multiple containers 11, the part of the wood stick 29 of a certain container 11 will be

inserted in the hole 25 of another container 11 preventing the stacked containers 11 from being laterally displaced from each other.

**[0017]** As described above, the box 13 and the wood stick 29 of the container 11 are separate parts, which are held together by static friction. Therefore, the box 13 and the wood stick 29 can be manufactured in separate production steps. As an alternative, the wood stick 29 and the box 13 can be put together in an additional production step separate from the production of the box 13 and the wood stick 29.

**[0018]** The wood stick 29 serves to absorb vertical forces which typically occur when the containers are arranged to a vertical pile. Thus, the solid foam box 13 is subjected to a comparatively small vertical load.

**[0019]** In the shown embodiment, a width  $w$  of the container 11 is 300 mm - 700 mm, preferably  $w = 500$  mm, a depth of the container 11 is 200 mm - 400 mm, preferably  $d = 300$  mm, and the height  $h$  is 100 mm - 200 mm, preferably  $h = 150$  mm. A diameter of the wood stick 29 is about 9 mm and a diameter of the hole 25 is about 10 mm. The thickness of the sidewalls 29 and the base plate 15 is about 18 mm. However, the present invention can also be applied in conjunction with containers 11 that have different dimensions or even have a different shape. In addition, in different embodiments, the shape of the hole 25 and the wood stick 29 differs from the cylindrical shape applied in the shown embodiment. Furthermore, the number of holes 25 or wood sticks 29 can be varied according to various requirements such as the shape and the dimensions of the container 11.

## Claims

1. Container (11) for storage and/or transport of food, preferably fish or meat, comprising an essentially cuboidal box (13) made of foamed plastic material, this box (13) comprising vertical side walls (19) connected to each other at vertical edges (23), **characterised in that** the box (13) is provided at least at one of its vertical edges (23) with a vertical hole (25), in which a wood stick (29) is inserted.
2. Container (11) in accordance to claim 1, **characterised in that** the vertical hole (25) extends completely from an upper side (26) of the box (13) to a lower side (28) of the box (13).
3. Container (11) in accordance to claim 1 or 2, **characterized in that** the box (13) consists of expanded polystyrene or expanded polypropylene.

## Patentansprüche


1. Ein Behälter (11) zum Lagern und/oder Transportieren von Lebensmitteln, vorzugsweise Fisch oder

Fleisch, eine im Wesentlichen quaderförmige Kiste (13) aufweisend, die aus geschäumtem Kunststoffmaterial hergestellt ist, wobei diese Kiste (13) senkrechte Seitenwände (19) aufweist, die an senkrechten Kanten (23) miteinander verbunden sind, **dadurch gekennzeichnet, dass** die Kiste (13) mindestens an einer ihrer senkrechten Kanten (23) mit einem senkrechten Loch (25) versehen ist, in das ein Holzstock (29) gesteckt wird.

2. Behälter (11) gemäß Anspruch 1, **dadurch gekennzeichnet, dass** das senkrechte Loch (25) sich vollständig von einer oberen Seite (26) der Kiste (13) zu einer unteren Seite (28) der Kiste (13) erstreckt.
3. Behälter (11) gemäß Anspruch 1 oder 2, **dadurch gekennzeichnet, dass** die Kiste (13) aus geschäumtem Polystyrol oder geschäumtem Polypropylen besteht.

## Revendications

1. Récipient (11) de stockage et/ou de transport d'aliments, de préférence de poisson ou de viande, comprenant une boîte (13) essentiellement cuboïdale réalisée en matière plastique alvéolaire, cette boîte (13) comprenant des parois latérales verticales (19) reliées entre elles au niveau de coins verticaux (23), **caractérisé en ce que** la boîte (13) est pourvue, dans au moins un de ses coins verticaux (23), d'un orifice vertical (25) dans lequel est inséré un bâton en bois (29).
2. Récipient (11) selon la revendication 1, **caractérisé en ce que** l'orifice vertical (25) s'étend de bout en bout depuis une face supérieure (26) de la boîte (13) jusqu'à une face inférieure (28) de la boîte (13).
3. Récipient (11) selon la revendication 1 ou 2, **caractérisé en ce que** la boîte (13) est constituée de polystyrène expansé ou de polypropylène expansé.

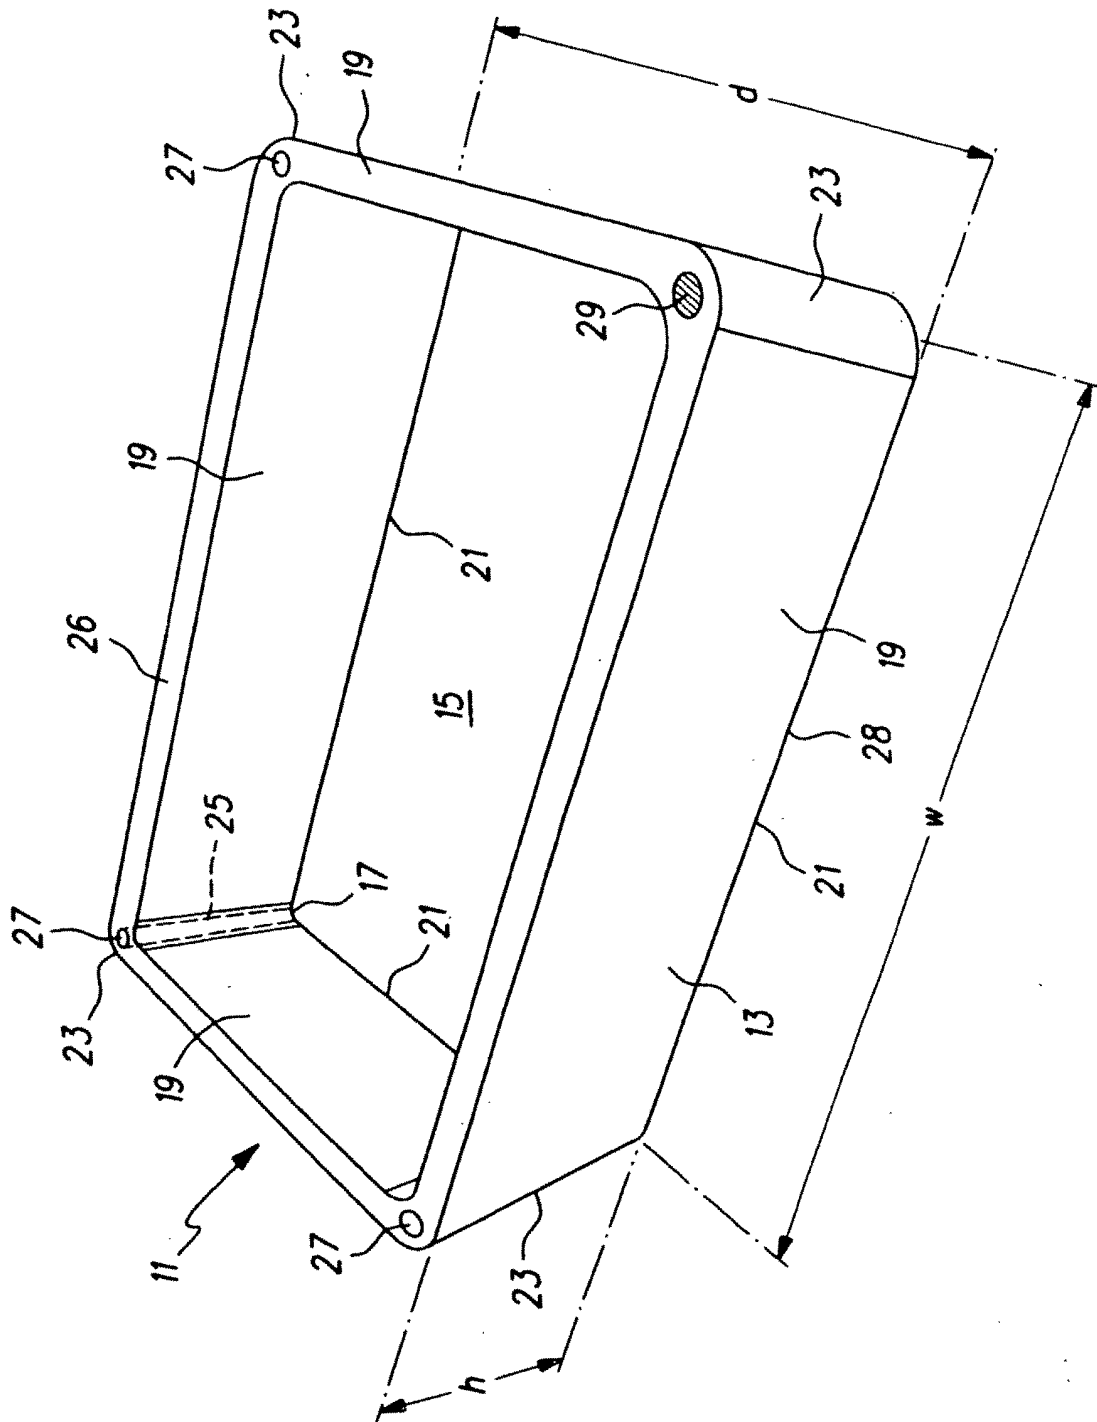

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- DE 19932068 A1 [0005]