

(19)



(11)

EP 2 112 244 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

28.10.2009 Bulletin 2009/44

(51) Int Cl.:

C22C 21/10 (2006.01)**C22F 1/053** (2006.01)(21) Application number: **09251028.8**(22) Date of filing: **31.03.2009**

(84) Designated Contracting States:


**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK TR**

Designated Extension States:

AL BA RS(30) Priority: **18.04.2008 US 148387**(71) Applicant: **United Technologies Corporation
Hartford, CT 06101 (US)**(72) Inventor: **Pandey, Awadh B.****Jupiter
Florida 33458 (US)**(74) Representative: **Hall, Matthew Benjamin****Frank B. Dehn & Co.
St Bride's House
10 Salisbury Square
London
EC4Y 8JD (GB)**(54) **High strength L12 aluminium alloys**

(57) High temperature heat treatable aluminum alloys that can be used at temperatures from about -420°F (-251°C) up to about 650°F (343°C) are described. The alloys are strengthened by dispersion of particles based on the L₁₂ intermetallic compound Al₃X. These alloys

comprise aluminum, zinc, magnesium, at least one of scandium, erbium, thulium, ytterbium, and lutetium; and at least one of gadolinium, yttrium, zirconium, titanium, hafnium, and niobium. Copper is an optional alloying element.

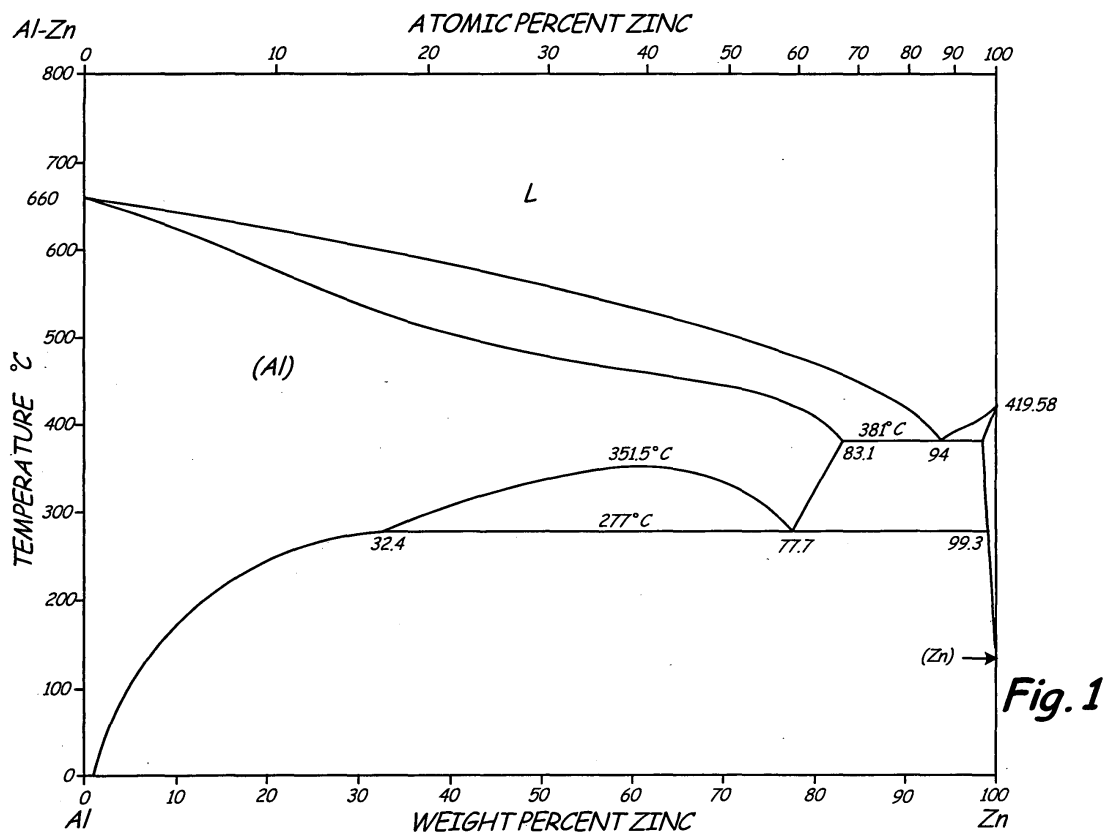**EP 2 112 244 A1**

Description

[0001] The present invention relates generally to aluminum alloys and more specifically to heat treatable aluminum alloys produced by melt processing and strengthened by L_{12} phase dispersions.

[0002] The combination of high strength, ductility, and fracture toughness, as well as low density, make aluminum alloys natural candidates for aerospace and space applications. However, their use is typically limited to temperatures below about 300°F (149°C) since most aluminum alloys start to lose strength in that temperature range as a result of coarsening of strengthening precipitates.

[0003] The development of aluminum alloys with improved elevated temperature mechanical properties is a continuing process. Some attempts have included aluminum-iron and aluminum-chromium based alloys such as Al-Fe-Ce, Al-Fe-V-Si, Al-Fe-Ce-W, and Al-Cr-Zr-Mn that contain incoherent dispersoids. These alloys, however, also lose strength at elevated temperatures due to particle coarsening. In addition, these alloys exhibit ductility and fracture toughness values lower than other commercially available aluminum alloys.

[0004] Other attempts have included the development of mechanically alloyed Al-Mg and Al-Ti alloys containing ceramic dispersoids. These alloys exhibit improved high temperature strength due to the particle dispersion, but the ductility and fracture toughness are not improved.

[0005] US-A-6,248,453 discloses aluminum alloys strengthened by dispersed Al_3X L_{12} intermetallic phases where X is selected from the group consisting of Sc, Er, Lu, Yb, Tm, and U. The Al_3X particles are coherent with the aluminum alloy matrix and are resistant to coarsening at elevated temperatures. The improved mechanical properties of the disclosed dispersion strengthened L_{12} aluminum alloys are stable up to 572°F (300°C). In order to create aluminum alloys containing fine dispersions of Al_3X L_{12} particles, the alloys need to be manufactured by expensive rapid solidification processes with cooling rates in excess of 1.8×10^3 F/sec (10^3 C/sec). US-A-2006/0269437 discloses an aluminum alloy that contains scandium and other elements. While the alloy is effective at high temperatures, it is not capable of being heat treated using a conventional age hardening mechanism.

[0006] Heat treatable aluminum alloys strengthened by coherent L_{12} intermetallic phases produced by standard, inexpensive melt processing techniques would be useful.

[0007] The present invention is heat treatable aluminum alloys that can be cast, wrought, or formed by rapid solidification, and thereafter heat treated. The alloys can achieve high temperature performance and can be used at temperatures up to about 650°F (343°C).

[0008] These alloys comprise zinc, magnesium, and an Al_3X L_{12} dispersoid where X is at least one first element selected from scandium, erbium, thulium, ytterbium, and lutetium, and at least one second element se-

lected from gadolinium, yttrium, zirconium, titanium, hafnium, and niobium. The balance is substantially aluminum. The alloys may also include copper.

[0009] The alloys may have less than 1.0 weight percent total impurities.

[0010] The alloys may be formed by a process selected from casting, deformation processing and rapid solidification. The alloys may then be heat treated at a temperature of from about 800°F (426°C) to about 1100°F (593°C) for between about 30 minutes and four hours, followed by quenching in water, and thereafter aged at a temperature from about 200°F (93°C) to about 600°F (260°C) for about two to about forty-eight hours.

[0011] Certain preferred embodiments of the present invention will now be described in greater detail by way of example only and with reference to the accompanying drawings, in which:

FIG. 1 is an aluminum zinc phase diagram;

FIG. 2 is an aluminum copper phase diagram;

FIG. 3 is an aluminum magnesium phase diagram;

FIG. 4 is an aluminum scandium phase diagram;

FIG. 5 is an aluminum erbium phase diagram;

FIG. 6 is an aluminum thulium phase diagram;

FIG. 7 is an aluminum ytterbium phase diagram; and

FIG. 8 is an aluminum lutetium phase diagram.

[0012] The alloys of this invention are based on the aluminum, zinc, magnesium system. The amount of zinc in these alloys ranges from about 3.0 to about 12.0 weight percent, more preferably about 4.0 to about 10.0 weight percent, and even more preferably about 5.0 to about 9.0 weight percent. The amount of magnesium in these alloys ranges from about 0.5 to about 3.5 weight percent, more preferably about 1.0 to about 3.0 weight percent, and even more preferably about 1.5 to about 3.0 weight percent. The amount of copper in these alloys ranges from about 0.2 to about 3.0 weight percent, more preferably about 0.5 to about 2.5 weight percent, and even more preferably about 1.0 to about 2.5 weight percent.

[0013] The aluminum zinc phase diagram is shown in FIG. 1. The aluminum zinc binary system is a eutectic alloy system involving a monotectoid reaction and a miscibility gap in the solid state. There is a eutectic reaction at 94 weight percent zinc at 717.8°F (381°C). Zinc has maximum solid solubility of 83.1 weight percent in aluminum at 717.8°F (381°C) which can be extended by rapid solidification processing. The solubility of zinc in aluminum decreases with a decrease in temperature. Zinc provides significant amount of precipitation strengthening in aluminum by precipitation of fine second phases. The present invention is focused on hypoeutectic alloy composition ranges. Decomposition of the supersaturated solid solution of zinc in aluminum gives rise to spherical and ellipsoidal GP zones; precipitates with rhombohedral structure which are coherent with aluminum matrix and an incoherent (α' Al).

[0014] The aluminum copper phase diagram is shown

in FIG. 2. The aluminum copper binary system is a eutectic alloy system with a eutectic reaction at 31.2 weight percent magnesium and 1018°F (548.2°C). Copper has maximum solid solubility of 6 weight percent in aluminum at 1018°F (548.2°C) which can be extended further by rapid solidification processing. Copper provides considerable amounts of precipitation strengthening in aluminum by precipitation of fine second phases. The present invention is focused on hypoeutectic alloy composition ranges.

[0015] The aluminum magnesium phase diagram is shown in FIG. 3. The binary system is a eutectic alloy system with a eutectic reaction at 36 weight percent magnesium and 842°F (450°C). Magnesium has maximum solid solubility of 16 weight percent in aluminum at 842°F (450°C) which can be extended further by rapid solidification processing. Magnesium provides substantial solid solution strengthening in aluminum. In addition, magnesium provides precipitation strengthening through precipitation of Zn_2Mg (η') and Al_2CuMg (S') phases.

[0016] The alloys of this invention contain aluminum solid solutions containing at least one element selected from zinc, copper and magnesium. These alloys also contain precipitates consisting of fine dispersions of Zn_2Mg (η') and Al_2CuMg (S') phases by decomposition of supersaturated solid solutions. In the solid solutions are dispersions of Al_3X having an $L1_2$ structure where X is at least one element selected from scandium, erbium, thulium, ytterbium, and lutetium and at least one element selected from gadolinium, yttrium, zirconium, titanium, hafnium, and niobium.

[0017] Exemplary aluminum alloys of this invention include, but are not limited to (in weight percent):

about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-0.5)Sc-(0.1-4.0)Gd;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-6)Er-(0.1-4.0)Gd;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-10)Tm-(0.1-4.0)Gd;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-15)Yb-(0.1-4.0)Gd;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-12)Lu-(0.1-4.0)Gd;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-0.5)Sc-(0.1-4.0)Y;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-6)Er-(0.1-4.0)Y;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-10)Tm-(0.1-4.0)Y;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-15)Yb-(0.1-4.0)Y;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-12)Lu-(0.1-4.0)Y;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-0.5)Sc-(0.05-1.0)Zr;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-6)Er-(0.05-1.0)Zr;

about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-10)Tm-(0.05-1.0)Zr;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-15)Yb-(0.05-1.0)Zr;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-12)Lu-(0.05-1.0)Zr;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-0.5)Sc-(0.05-2.0)Ti;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-6)Er-(0.05-2.0)Ti;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-10)Tm-(0.05-2.0)Ti;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-15)Yb-(0.05-2.0)Ti;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-12)Lu-(0.05-2.0)Ti;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-0.5)Sc-(0.05-2.0)Hf;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-6)Er-(0.05-2.0)Hf;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-10)Tm-(0.05-2.0)Hf;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-15)Yb-(0.05-2.0)Hf;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-12)Lu-(0.05-2.0)Hf;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-0.5)Sc-(0.05-1.0)Nb;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-6)Er-(0.05-1.0)Nb;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-10)Tm-(0.05-1.0)Nb;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-15)Yb-(0.05-1.0)Nb;
 about Al-(3-12)Zn-(0.5-3.5)Mg-(0.1-12)Lu-(0.05-1.0)Nb;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-0.5)Sc-(0.1-4.0)Gd;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-6)Er-(0.1-4.0)Gd;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-10)Tm-(0.1-4.0)Gd;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-15)Yb-(0.1-4.0)Gd;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-12)Lu-(0.1-4.0)Gd;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-0.5)Sc-(0.1-4.0)Y;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-6)Er-(0.1-4.0)Y;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-10)Tm-(0.1-4.0)Y;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-15)Yb-(0.1-4.0)Y;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-12)Lu-(0.1-4.0)Y;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-0.5)Sc-(0.05-1.0)Zr;

about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-6)Er-(0.05-1.0)Zr;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-10)Tm-(0.05-1.0)Zr;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-15)Yb-(0.05-1.0)Zr;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-12)Lu-(0.05-1.0)Zr;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-0.5)Sc-(0.05-2.0)Ti;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-6)Er-(0.05-2.0)Ti;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-10)Tm-(0.05-2.0)Ti;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-15)Yb-(0.05-2.0)Ti;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-12)-Lu-(0.05-2.0)Ti;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-0.5)Sc-(0.05-2.0)Hf;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-6)Er-(0.05-2.0)Hf;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-10)Tm-(0.05-2.0)Hf;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-15)Yb-(0.05-2.0)Hf;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-12)Lu-(0.05-2.0)Hf;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-0.5)Sc-(0.05-1.0)Nb;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-6)Er-(0.05-1.0)Nb;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-10)Tm-(0.05-1.0)Nb;
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-15)Yb-(0.05-1.0)Nb; and
 about Al-(3-12)Zn-(0.2-3)Cu-(0.5-3.5)Mg-(0.1-12)Lu-(0.05-1.0)Nb.

[0018] In the inventive aluminum based alloys disclosed herein, scandium, erbium, thulium, ytterbium, and lutetium are potent strengtheners that have low diffusivity and low solubility in aluminum. All these elements form equilibrium Al_3X intermetallic dispersoids where X is at least one of scandium, erbium, ytterbium, lutetium, that have an $L1_2$ structure that is an ordered face centered cubic structure with the X atoms located at the corners and aluminum atoms located on the cube faces of the unit cell.

[0019] Scandium forms Al_3Sc dispersoids that are fine and coherent with the aluminum matrix. Lattice parameters of aluminum and Al_3Sc are very close (0.405nm and 0.410nm respectively), indicating that there is minimal or no driving force for causing growth of the Al_3Sc dispersoids. This low interfacial energy makes the Al_3Sc dispersoids thermally stable and resistant to coarsening up to temperatures as high as about 840°F (450°C). In the alloys of this invention these Al_3Sc dispersoids are made

stronger and more resistant to coarsening at elevated temperatures by adding suitable alloying elements such as gadolinium, yttrium, zirconium, titanium, hafnium, niobium, or combinations thereof, that enter Al_3Sc in solution.

[0020] Erbium forms Al_3Er dispersoids in the aluminum matrix that are fine and coherent with the aluminum matrix. The lattice parameters of aluminum and Al_3Er are close (0.405 nm and 0.417 nm respectively), indicating there is minimal driving force for causing growth of the Al_3Er dispersoids. This low interfacial energy makes the Al_3Er dispersoids thermally stable and resistant to coarsening up to temperatures as high as about 842°F (450°C). Addition of magnesium in solid solution in aluminum increases the lattice parameter of the aluminum matrix, and decreases the lattice parameter mismatch further increasing the resistance of the Al_3Er to coarsening. Additions of zinc and copper in aluminum provide significant precipitation strengthening through precipitation of fine second phases Zn_2Mg (η') and Al_2CuMg (S'). In the alloys of this invention, these Al_3Er dispersoids are made stronger and more resistant to coarsening at elevated temperatures by adding suitable alloying elements such as gadolinium, yttrium, zirconium, titanium, hafnium, niobium, or combinations thereof that enter Al_3Er in solution.

[0021] Thulium forms metastable Al_3Tm dispersoids in the aluminum matrix that are fine and coherent with the aluminum matrix. The lattice parameters of aluminum and Al_3Tm are close (0.405 nm and 420 nm respectively), indicating there is minimal driving force for causing growth of the Al_3Tm dispersoids. This low interfacial energy makes the Al_3Tm dispersoids thermally stable and resistant to coarsening up to temperatures as high as about 842°F (450°C). Addition of magnesium in solid solution in aluminum increases the lattice parameter of the aluminum matrix and decreases the lattice parameter mismatch further increasing the resistance to coarsening of the dispersoid. Additions of zinc and copper in aluminum provide significant precipitation strengthening through precipitation of fine second phases Zn_2Mg (η') and Al_2CuMg (S'). In the alloys of this invention these Al_3Tm dispersoids are made stronger and more resistant to coarsening at elevated temperatures by adding suitable alloying elements such as gadolinium, yttrium, zirconium, titanium, hafnium, niobium, or combinations thereof that enter Al_3Tm in solution.

[0022] Ytterbium forms Al_3Yb dispersoids in the aluminum matrix that are fine and coherent with the aluminum matrix. The lattice parameters of Al and Al_3Yb are close (0.405 nm and 0.420 nm respectively), indicating there is minimal driving force for causing growth of the Al_3Yb dispersoids. This low interfacial energy makes the Al_3Yb dispersoids thermally stable and resistant to coarsening up to temperatures as high as about 842°F (450°C). Addition of magnesium in solid solution in aluminum increases the lattice parameter of the aluminum matrix and decreases the lattice parameter mismatch fur-

ther increasing the resistance to coarsening of the Al_3Yb . Additions of zinc and copper in aluminum provide significant precipitation strengthening through precipitation of fine second phases Zn_2Mg (η') and Al_2CuMg (S'). In the alloys of this invention, these Al_3Yb dispersoids are made stronger and more resistant to coarsening at elevated temperatures by adding suitable alloying elements such as gadolinium, yttrium, zirconium, titanium, hafnium, niobium, or combinations thereof that enter Al_3Yb in solution.

[0023] Lutetium forms Al_3Lu dispersoids in the aluminum matrix that are fine and coherent with the aluminum matrix. The lattice parameters of Al and Al_3Lu are close (0.405 nm and 0.419 nm respectively), indicating there is minimal driving force for causing growth of the Al_3Lu dispersoids. This low interfacial energy makes the Al_3Lu dispersoids thermally stable and resistant to coarsening up to temperatures as high as about 842°F (450°C). Addition of magnesium in solid solution in aluminum increases the lattice parameter of the aluminum matrix and decreases the lattice parameter mismatch further increasing the resistance to coarsening of Al_3Lu . Additions of zinc and copper in aluminum provide significant precipitation strengthening through precipitation of fine second phases Zn_2Mg (η') and Al_2CuMg (S'). In the alloys of this invention, these Al_3Lu dispersoids are made stronger and more resistant to coarsening at elevated temperatures by adding suitable alloying elements such as gadolinium, yttrium, zirconium, titanium, hafnium, niobium, or mixtures thereof that enter Al_3Lu in solution.

[0024] Gadolinium forms metastable Al_3Gd dispersoids in the aluminum matrix that are stable up to temperatures as high as about 842°F (450°C) due to their low diffusivity in aluminum. The Al_3Gd dispersoids have a D0_{19} structure in the equilibrium condition. Despite its large atomic size, gadolinium has fairly high solubility in the Al_3X intermetallic dispersoids (where X is scandium, erbium, thulium, ytterbium or lutetium). Gadolinium can substitute for the X atoms in Al_3X intermetallic, thereby forming an ordered L1_2 phase which results in improved thermal and structural stability.

[0025] Yttrium forms metastable Al_3Y dispersoids in the aluminum matrix that have an L1_2 structure in the metastable condition and a D0_{19} structure in the equilibrium condition. The metastable Al_3Y dispersoids have a low diffusion coefficient which makes them thermally stable and highly resistant to coarsening. Yttrium has a high solubility in the Al_3X intermetallic dispersoids allowing large amounts of yttrium to substitute for X in the Al_3X L1_2 dispersoids which results in improved thermal and structural stability.

[0026] Zirconium forms Al_3Zr dispersoids in the aluminum matrix that have an L1_2 structure in the metastable condition and D0_{23} structure in the equilibrium condition. The metastable Al_3Zr dispersoids have a low diffusion coefficient which makes them thermally stable and highly resistant to coarsening. Zirconium has a high solubility in the Al_3X dispersoids allowing large amounts of zirco-

nium to substitute for X in the Al_3X dispersoids, which results in improved thermal and structural stability.

[0027] Titanium forms Al_3Ti dispersoids in the aluminum matrix that have an L1_2 structure in the metastable condition and D0_{22} structure in the equilibrium condition. The metastable Al_3Ti dispersoids have a low diffusion coefficient which makes them thermally stable and highly resistant to coarsening. Titanium has a high solubility in the Al_3X dispersoids allowing large amounts of titanium to substitute for X in the Al_3X dispersoids, which results in improved thermal and structural stability.

[0028] Hafnium forms metastable Al_3Hf dispersoids in the aluminum matrix that have an L1_2 structure in the metastable condition and a D0_{23} structure in the equilibrium condition. The Al_3Hf dispersoids have a low diffusion coefficient, which makes them thermally stable and highly resistant to coarsening. Hafnium has a high solubility in the Al_3X dispersoids allowing large amounts of hafnium to substitute for scandium, erbium, thulium, ytterbium, and lutetium in the above mentioned Al_3X dispersoids, which results in stronger and more thermally stable dispersoids.

[0029] Niobium forms metastable Al_3Nb dispersoids in the aluminum matrix that have an L1_2 structure in the metastable condition and a D0_{22} structure in the equilibrium condition. Niobium has a lower solubility in the Al_3X dispersoids than hafnium or yttrium, allowing relatively lower amounts of niobium than hafnium or yttrium to substitute for X in the Al_3X dispersoids. Nonetheless, niobium can be very effective in slowing down the coarsening kinetics of the Al_3X dispersoids because the Al_3Nb dispersoids are thermally stable. The substitution of niobium for X in the above mentioned Al_3X dispersoids results in stronger and more thermally stable dispersoids.

[0030] Al_3X L1_2 precipitates improve elevated temperature mechanical properties in aluminum alloys for two reasons. First, the precipitates are ordered intermetallic compounds. As a result, when the particles are sheared by glide dislocations during deformation, the dislocations separate into two partial dislocations separated by an anti-phase boundary on the glide plane. The energy to create the anti-phase boundary is the origin of the strengthening. Second, the cubic L1_2 crystal structure and lattice parameter of the precipitates are closely matched to the aluminum solid solution matrix. This results in a lattice coherency at the precipitate/matrix boundary that resists coarsening. The lack of an inter-phase boundary results in a low driving force for particle growth and resulting elevated temperature stability. Alloying elements in solid solution in the dispersed strengthening particles and in the aluminum matrix that tend to decrease the lattice mismatch between the matrix and particles will tend to increase the strengthening and elevated temperature stability of the alloy.

[0031] The alloys are based on aluminum zinc copper magnesium systems. Addition of magnesium in solid solution in aluminum increases the lattice parameter of the aluminum matrix and decreases the lattice parameter

mismatch further increasing the resistance to coarsening of the $L1_2$ Al_3X phases where X is at least one element selected from scandium, erbium, thulium, ytterbium, and lutetium and at least one element selected from gadolinium, yttrium, zirconium, titanium, hafnium, and niobium. Additions of zinc and copper in aluminum provide significant precipitation strengthening through precipitation of fine second phases Zn_2Mg (η') and Al_2CuMg (S'). The amount of zinc in these alloys ranges from about 3.0 to about 12.0 weight percent, more preferably about 4.0 to about 10.0 weight percent, and even more preferably about 5.0 to about 9.0 weight percent. The amount of magnesium in these alloys ranges from about 0.5 to about 3.5 weight percent, more preferably about 1.0 to about 3.0 weight percent, and even more preferably about 1.5 to about 3.0 weight percent. The amount of copper in these alloys ranges from about 0.2 to about 3.0 weight percent, more preferably about 0.5 to about 2.5 weight percent, and even more preferably about 1.0 to about 2.5 weight percent.

[0032] The amount of scandium present in the alloys of this invention, if any, may vary from about 0.1 to about 0.5 weight percent, more preferably from about 0.1 to about 0.35 weight percent, and even more preferably from about 0.1 to about 0.25 weight percent. The Al-Sc phase diagram shown in FIG. 4 indicates a eutectic reaction at about 0.5 weight percent scandium at about 1219°F (659°C) resulting in a solid solution of scandium and aluminum and Al_3Sc dispersoids. Aluminum alloys with less than 0.5 weight percent scandium can be quenched from the melt to retain scandium in solid solution that may precipitate as dispersed $L1_2$ intermetallic Al_3Sc following an aging treatment. Alloys with scandium in excess of the eutectic composition (hypereutectic alloys) can only retain scandium in solid solution by rapid solidification processing (RSP) where cooling rates are in excess of about 10^3 °C/second. Alloys with scandium in excess of the eutectic composition cooled normally will have a microstructure consisting of relatively large Al_3Sc grains in a finely divided aluminum- Al_3Sc eutectic phase matrix.

[0033] The amount of erbium present in the alloys of this invention, if any, may vary from about 0.1 to about 6.0 weight percent, more preferably from about 0.1 to about 4.0 weight percent, and even more preferably from about 0.2 to about 2.0 weight percent. The Al-Er phase diagram shown in FIG. 5 indicates a eutectic reaction at about 6 weight percent erbium at about 1211°F (655°C). Aluminum alloys with less than about 6 weight percent erbium can be quenched from the melt to retain erbium in solid solutions that may precipitate as dispersed $L1_2$ intermetallic Al_3Er following an aging treatment. Alloys with erbium in excess of the eutectic composition can only retain erbium in solid solution by rapid solidification processing (RSP) where cooling rates are in excess of about 10^3 °C/second. Alloys with erbium in excess of the eutectic composition (hypereutectic alloys) cooled normally will have a microstructure consisting of relatively

large Al_3Er dispersoids in a finely divided aluminum- Al_3Er eutectic phase matrix.

[0034] The amount of thulium present in the alloys of this invention, if any, may vary from about 0.1 to about 10.0 weight percent, more preferably from about 0.2 to about 6.0 weight percent, and even more preferably from about 0.2 to about 4.0 weight percent. The Al-Tm phase diagram shown in FIG. 6 indicates a eutectic reaction at about 10 weight percent thulium at about 1193°F (645°C). Thulium forms metastable Al_3Tm dispersoids in the aluminum matrix that have an $L1_2$ structure in the equilibrium condition. The Al_3Tm dispersoids have a low diffusion coefficient which makes them thermally stable and highly resistant to coarsening. Aluminum alloys with less than 10 weight percent thulium can be quenched from the melt to retain thulium in solid solution that may precipitate as dispersed metastable $L1_2$ intermetallic Al_3Tm following an aging treatment. Alloys with thulium in excess of the eutectic composition can only retain Tm in solid solution by rapid solidification processing (RSP) where cooling rates are in excess of about 10^3 °C/second.

[0035] The amount of ytterbium present in the alloys of this invention, if any, may vary from about 0.1 to about 15.0 weight percent, more preferably from about 0.2 to about 8.0 weight percent, and even more preferably from about 0.2 to about 4.0 weight percent. The Al-Yb phase diagram shown in FIG. 7 indicates a eutectic reaction at about 21 weight percent ytterbium at about 1157°F (625°C). Aluminum alloys with less than about 21 weight percent ytterbium can be quenched from the melt to retain ytterbium in solid solution that may precipitate as dispersed $L1_2$ intermetallic Al_3Yb following an aging treatment. Alloys with ytterbium in excess of the eutectic composition can only retain ytterbium in solid solution by rapid solidification processing (RSP) where cooling rates are in excess of about 10^3 °C/second. Alloys with ytterbium in excess of the eutectic composition cooled normally will have a microstructure consisting of relatively large Al_3Yb grains in a finely divided aluminum- Al_3Yb eutectic phase matrix.

[0036] The amount of lutetium present in the alloys of this invention, if any, may vary from about 0.1 to about 12.0 weight percent, more preferably from about 0.2 to about 8.0 weight percent, and even more preferably from about 0.2 to about 4.0 weight percent. The Al-Lu phase diagram shown in FIG. 8 indicates a eutectic reaction at about 11.7 weight percent Lu at about 1202°F (650°C). Aluminum alloys with less than about 11.7 weight percent lutetium can be quenched from the melt to retain Lu in solid solution that may precipitate as dispersed $L1_2$ intermetallic Al_3Lu following an aging treatment. Alloys with Lu in excess of the eutectic composition can only retain Lu in solid solution by rapid solidification processing (RSP) where cooling rates are in excess of about 10^3 °C/second. Alloys with lutetium in excess of the eutectic composition cooled normally will have a microstructure consisting of relatively large Al_3Lu grains in a finely divided aluminum- Al_3Lu eutectic phase matrix.

[0037] The amount of gadolinium present in the alloys of this invention, if any, may vary from about 0.1 to about 4 weight percent, more preferably from 0.2 to about 2 weight percent, and even more preferably from about 0.5 to about 2 weight percent.

[0038] The amount of yttrium present in the alloys of this invention, if any, may vary from about 0.1 to about 4 weight percent, more preferably from 0.2 to about 2 weight percent, and even more preferably from about 0.5 to about 2 weight percent.

[0039] The amount of zirconium present in the alloys of this invention, if any, may vary from about 0.05 to about 1 weight percent, more preferably from 0.1 to about 0.75 weight percent, and even more preferably from about 0.1 to about 0.5 weight percent.

[0040] The amount of titanium present in the alloys of this invention, if any, may vary from about 0.05 to about 2 weight percent, more preferably from 0.1 to about 1 weight percent, and even more preferably from about 0.1 to about 0.5 weight percent.

[0041] The amount of hafnium present in the alloys of this invention, if any, may vary from about 0.05 to about 2 weight percent, more preferably from 0.1 to about 1 weight percent, and even more preferably from about 0.1 to about 0.5 weight percent.

[0042] The amount of niobium present in the alloys of this invention, if any, may vary from about 0.05 to about 1 weight percent, more preferably from 0.1 to about 0.75 weight percent, and even more preferably from about 0.1 to about 0.5 weight percent.

[0043] In order to have the best properties for the alloys of this invention, it is desirable to limit the amount of other elements. Specific elements that should be reduced or eliminated include no more than about 0.1 weight percent iron, about 0.1 weight percent chromium, about 0.1 weight percent manganese, about 0.1 weight percent vanadium, about 0.1 weight percent cobalt, and about 0.1 weight percent nickel. The total quantity of additional elements should not exceed about 1% by weight, including the above listed impurities and other elements.

[0044] Other additions in the alloys of this invention may include at least one of about 0.001 weight percent to about 0.10 weight percent sodium, about 0.001 weight percent to about 0.10 weight percent calcium, about 0.001 weight percent to about 0.10 weight percent strontium, about 0.001 weight percent to about 0.10 weight percent antimony, about 0.001 weight percent to about 0.10 weight percent barium and about 0.001 weight percent to about 0.10 weight percent phosphorus. These are added to refine the microstructure of the eutectic phase and the primary magnesium or lithium morphology and size.

[0045] These aluminum alloys may be made by any and all consolidation and fabrication processes known to those in the art such as casting (without further deformation), deformation processing (wrought processing), rapid solidification processing, forging, extrusion, rolling, die forging, powder metallurgy and others. The rapid solidification process should have a cooling rate greater

that about $10^{3^{\circ}\text{C}}/\text{second}$ including but not limited to powder processing, atomization, melt spinning, splat quenching, spray deposition, cold spray, plasma spray, laser melting and deposition, ball milling and cryomilling.

[0046] More preferred examples of similar alloys to these are alloys with about 1.0 to about 3.0 weight percent magnesium, alloys with about 4.0 to about 10.0 weight percent zinc, and alloys with about 0.5 to about 2.5 weight percent copper, and include, but are not limited to (in weight percent):

about Al-(4-10)Zn-(1-3)Mg-(0.1-0.35)Sc-(0.2-2.0)Gd;
 about Al-(4-10)Zn-(1-3)Mg-(0.1-4)Er-(0.2-2.0)Gd;
 about Al-(4-10)Zn-(1-3)Mg-(0.2-6)Tm-(0.2-2.0)Gd;
 about Al-(4-10)Zn-(1-3)Mg-(0.2-8)Yb-(0.2-2.0)Gd;
 about Al-(4-10)Zn-(1-3)Mg-(0.2-8)Lu-(0.2-2.0)Gd;
 about Al-(4-10)Zn-(1-3)Mg-(0.1-0.35)Sc-(0.2-2.0)Y;
 about Al-(4-10)Zn-(1-3)Mg-(0.1-4)Er-(0.2-2.0)Y;
 about Al-(4-10)Zn-(1-3)Mg-(0.2-6)Tm-(0.2-2.0)Y;
 about Al-(4-10)Zn-(1-3)Mg-(0.2-8)Yb-(0.2-2.0)Y;
 about Al-(4-10)Zn-(1-3)Mg-(0.2-8)Lu-(0.2-2.0)Y;
 about Al-(4-10)Zn-(1-3)Mg-(0.1-0.35)Sc-(0.1-0.75)Zr;
 about Al-(4-10)Zn-(1-3)Mg-(0.1-4)Er-(0.1-0.75)Zr;
 about Al-(4-10)Zn-(1-3)Mg-(0.2-6)Tm-(0.1-0.75)Zr;
 about Al-(4-10)Zn-(1-3)Mg-(0.2-8)Yb-(0.1-0.75)Zr;
 about Al-(4-10)Zn-(1-3)Mg-(0.2-8)Lu-(0.1-0.75)Zr;
 about Al-(4-10)Zn-(1-3)Mg-(0.1-0.35)Sc-(0.1-1.0)Ti;
 about Al-(4-10)Zn-(1-3)Mg-(0.1-4)Er-(0.1-1.0)Ti;
 about Al-(4-10)Zn-(1-3)Mg-(0.2-6)Tm-(0.1-1.0)Ti;
 about Al-(4-10)Zn-(1-3)Mg-(0.2-8)Yb-(0.1-1.0)Ti;
 about Al-(4-10)Zn-(1-3)Mg-(0.2-8)Lu-(0.1-1.0)Ti;
 about Al-(4-10)Zn-(1-3)Mg-(0.1-0.35)Sc-(0.1-1.0)Hf;
 about Al-(4-10)Zn-(1-3)Mg-(0.1-4)Er-(0.1-1.0)Hf;
 about Al-(4-10)Zn-(1-3)Mg-(0.2-6)Tb-(0.1-1.0)Hf;
 about Al-(4-10)Zn-(1-3)Mg-(0.2-8)Yb-(0.1-1.0)Hf;
 about Al-(4-10)Zn-(1-3)Mg-(0.2-8)Lu-(0.1-1.0)Hf;
 about Al-(4-10)Zn-(1-3)Mg-(0.1-0.35)Sc-(0.1-0.75)Nb;
 about Al-(4-10)Zn-(1-3)Mg-(0.1-4)Er-(0.1-0.75)Nb;
 about Al-(4-10)Zn-(1-3)Mg-(0.2-6)Tm-(0.1-0.75)Nb;
 about Al-(4-10)Zn-(1-3)Mg-(0.2-8)Yb-(0.1-0.75)Nb;
 about Al-(4-10)Zn-(1-3)Mg-(0.2-8)Lu-(0.1-0.75)Nb;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.1-0.35)Sc-(0.2-2.0)Gd;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.1-4)Er-(0.2-2.0)Gd;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.2-6)Tm-(0.2-2.0)Gd;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.2-8)Yb-(0.2-2.0)Gd;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.2-8)Lu-(0.2-2.0)Gd;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.1-0.35)Sc-(0.2-2.0)Y;

about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.1-4)Er-(0.2-2.0)Y;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.2-6)-Tm-(0.2-2.0)Y;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.2-8)Yb- 5
 (0.2-2.0)Y;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.2-8)Lu-(0.2-2.0)Y;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.1-0.35) 10
 Sc-(0.1-0.75)Zr;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.1-4)Er-(0.1-0.75)Zr;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.2-6)Tm-(0.1-0.75)Zr;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.2-8)Yb- 15
 (0.1-0.75)Zr;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.2-8)Lu-(0.1-0.75)Zr;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.1-0.35) 20
 Sc-(0.1-1.0)Ti;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.1-4)Er-(0.1-1.0)Ti;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.2-6)Tm-(0.1-1.0)Ti;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.2-8)Yb- 25
 (0.1-1.0)Ti;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.2-8)Lu-(0.1-1.0)Ti;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.1-0.35) 30
 Sc-(0.1-1.0)Hf;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.1-4)Er-(0.1-1.0)Hf;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.2-6)Tb-(0.1-1.0)Hf;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.2-8)Yb- 35
 (0.1-1.0)Hf;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.2-8)Lu-(0.1-1.0)Hf;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.1-0.35) 40
 Sc-(0.1-0.75)Nb;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.1-4)Er-(0.1-0.75)Nb;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.2-6)Tm-(0.1-0.75)Nb;
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.2-8)Yb- 45
 (0.1-0.75)Nb; and
 about Al-(4-10)Zn-(0.5-2.5)Cu-(1-3)Mg-(0.2-8)Lu-(0.1-0.75)Nb.

[0047] Even more preferred examples of similar alloys 50
 to these are alloys with about 1.5 to about 3.0 weight percent magnesium, alloys with about 5.0 to about 9.0 weight percent zinc, and alloys with about 1.0 to about 2.5 weight percent copper, and include, but are not limited to (in weight percent):

about Al-(5-9)Zn-(1.5-3)Mg-(0.1-0.25)Sc-(0.5-2.0)Gd;
 Gd;

about Al-(5-9)Zn-(1.5-3)Mg-(0.2-2)Er-(0.5-2.0)Gd;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-4)Tm-(0.5-2.0)Gd;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-4)Yb-(0.5-2.0)Gd;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-4)Lu-(0.5-2.0)Gd;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.1-0.25)Sc-(0.5-2.0)Y;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-2)Er-(0.5-2.0)Y;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-4)Tm-(0.5-2.0)Y;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-4)Yb-(0.5-2.0)Y;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-4)Lu-(0.5-2.0)Y;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.1-0.25)Sc-(0.1-0.5)Zr;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-2)Er-(0.1-0.5)Zr;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-4)Tm-(0.1-0.5)Zr;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-4)Yb-(0.1-0.5)Zr;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-4)Lu-(0.1-0.5)Zr;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.1-0.25)Sc-(0.1-0.5)Ti;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-2)Er-(0.1-0.5)Ti;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-4)Tm-(0.1-0.5)Ti;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-4)Yb-(0.1-0.5)Ti;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-4)Lu-(0.1-0.5)Ti;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.1-0.25)Sc-(0.1-0.5)Hf;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-2)Er-(0.1-0.5)Hf;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-4)Tm-(0.1-0.5)Hf;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-4)Yb-(0.1-0.5)Hf;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-4)Lu-(0.1-0.5)Hf;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.1-0.25)Sc-(0.1-0.5)Nb;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-2)Er-(0.1-0.5)Nb;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-4)Tm-(0.1-0.5)Nb;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-4)Yb-(0.1-0.5)Nb;
 about Al-(5-9)Zn-(1.5-3)Mg-(0.2-4)Lu-(0.1-0.5)Nb;
 about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.1-0.25)Sc-(0.2-2.0)Gd;
 about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-2)Er-(0.2-2.0)Gd;
 about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-4)Tm-(0.2-2.0)Gd;
 about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-4)Yb-(0.2-2.0)Gd;
 about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-4)Lu-(0.2-2.0)Gd;
 about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.1-0.25)Sc-(0.5-2.0)Y;
 about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-2)Er-(0.5-2.0)Y;
 about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-4)Tm-(0.5-2.0)Y;
 about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-4)Yb-(0.5-2.0)Y;
 about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-4)Lu-(0.5-2.0)Y;
 about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.1-0.25)Sc-(0.1-0.5)Zr;
 about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-2)Er-(0.1-0.5)Zr;

about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-4)Tm-
(0.1-0.5)Zr;
about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-4)Yb-
(0.1-0.5)Zr;
about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-4)Lu- 5
(0.1-0.5)Zr;
about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.1-0.25)Sc-
(0.1-0.5)Ti;
about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-2)Er- 10
(0.1-0.5)Ti;
about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-4)Tm-
(0.1-0.5)Ti;
about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-4)Yb-
(0.1-0.5)Ti;
about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-4)Lu- 15
(0.1-0.5)Ti;
about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.1-0.25)Sc-
(0.1-0.5)Hf;
about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-2)Er- 20
(0.1-0.5)Hf;
about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-4)Tm-
(0.1-0.5)Hf;
about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-4)Yb-
(0.1-0.5)Hf;
about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-4)Lu- 25
(0.1-0.5)Hf;
about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.1-0.25)Sc-
(0.1-0.5)Nb;
about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-2)Er- 30
(0.1-0.5)Nb;
about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-4)Tm-
(0.1-0.5)Nb;
about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-4)Yb-
(0.1-0.5)Nb; and
about Al-(5-9)Zn-(1-2.5)Cu-(1.5-3)Mg-(0.2-4)Lu- 35
(0.1-0.5)Nb.

[0048] Although the present invention has been described with reference to preferred embodiments, workers skilled in the art will recognize that changes may be made in form and detail without departing from the scope of the invention. 40

Claims

1. A heat treatable aluminum alloy comprising:

about 3.0 to about 12.0 weight percent zinc;
about 0.5 to about 3.5 weight percent magnesium;
at least one first element selected from the group comprising about 0.1 to about 0.5 weight percent scandium, about 0.1 to about 6.0 weight percent erbium, about 0.1 to about 10.0 weight percent thulium, about 0.1 to about 15.0 weight percent ytterbium, and about 0.1 to about 12.0 weight percent lutetium; 50 55

at least one second element selected from the group comprising about 0.1 to about 4.0 weight percent gadolinium, about 0.1 to about 4.0 weight percent yttrium, about 0.05 to about 1.0 weight percent zirconium, about 0.05 to about 2.0 weight percent titanium, about 0.05 to about 2.0 weight percent hafnium, and about 0.05 to about 1.0 weight percent niobium; and the balance substantially aluminum.

2. The alloy of claim 1, wherein the alloy comprises an aluminum solid solution matrix containing a plurality of dispersed Al_3X second phases having $L1_2$ structures, wherein X includes at least one first element and at least one second element.

3. The alloy of claim 1 or 2, further comprising about 0.2 to 3.0 weight percent copper.

4. The alloy of claim 1, 2 or 3, further comprising at least one of about 0.001 weight percent to about 0.1 weight percent sodium, about 0.001 weight percent to about 0.1 weight percent calcium, about 0.001 weight percent to about 0.1 weight percent strontium, about 0.001 weight percent to about 0.1 weight percent antimony, about 0.001 weight percent to about 0.1 weight percent barium and about 0.001 weight percent to about 0.1 weight percent phosphorus.

5. The alloy of any preceding claim, comprising no more than about 1.0 weight percent total other elements including impurities.

6. The alloy of any preceding claim, comprising no more than about 0.1 weight percent iron, about 0.1 weight percent chromium, about 0.1 weight percent manganese, about 0.1 weight percent vanadium, about 0.1 weight percent cobalt, and about 0.1 weight percent nickel.

7. The heat treatable aluminum alloy of any preceding claim, wherein the alloy is capable of being used at temperatures from about -420°F (-251°C) up to about 650°F (343°C).

8. A heat treatable aluminum alloy comprising:

about 3.0 to about 12.0 weight percent zinc;
about 0.5 to about 3.5 weight percent magnesium;
an aluminum solid solution matrix containing a plurality of dispersed Al_3X second phases having $L1_2$ structures where X comprises at least one of scandium, erbium, thulium, ytterbium and lutetium, and at least one of gadolinium, yttrium, zirconium, titanium, hafnium and niobium; and the balance substantially aluminum.

9. The alloy of claim 8 further comprising about 0.2 to about 3.0 weight percent copper.

10. The alloy of claim 8 or 9, wherein the alloy comprises at least one of: about 0.1 to about 0.5 weight percent scandium, about 0.1 to about 6.0 weight percent erbium, about 0.1 to about 10.0 weight percent thulium, about 0.1 to about 15.0 weight percent ytterbium, about 0.1 to about 12.0 weight percent lutetium, about 0.1 to about 4.0 weight percent gadolinium, about 0.1 to about 4.0 weight percent yttrium, about 0.05 to about 1.0 weight percent zirconium, about 0.05 to about 2.0 weight percent titanium, about 0.05 to about 2.0 weight percent hafnium, and about 0.05 to about 1.0 weight percent niobium.

11. A method of forming a heat treatable aluminum alloy, the method comprising:

(a) forming a melt comprising:

about 3.0 to about 12.0 weight percent zinc;
about 0.5 to about 3.5 weight percent magnesium;

at least one first element selected from the group comprising about 0.1 to about 0.5 weight percent scandium, about 0.1 to about 6.0 weight percent erbium, about 0.1 to about 10.0 weight percent thulium, about 0.1 to about 15.0 weight percent ytterbium, and about 0.1 to about 12.0 weight percent lutetium;

at least one second element selected from the group comprising about 0.1 to about 4.0 weight percent gadolinium, about 0.1 to about 4.0 weight percent yttrium, about 0.05 to about 1.0 weight percent zirconium, about 0.05 to about 2.0 weight percent titanium, about 0.05 to about 2.0 weight percent hafnium, and about 0.05 to about 1.0 weight percent niobium;

and the balance substantially aluminum;

(b) solidifying the melt to form a solid body; and

(c) heat treating the solid body.

12. The method of claim 11, wherein the melt further comprises about 0.2 to about 3.0 weight percent copper.

13. The method of claim 11 or 12, further comprising:


refining the structure of the solid body by deformation processing comprising at least one of: extrusion, forging and rolling.


14. The method of any of claims 11 to 13, wherein solidifying comprises a rapid solidification process in


which the cooling rate is greater than about 10^3 °C/second and comprising at least one of: powder processing, atomization, melt spinning, splat quenching, spray deposition, cold spray, plasma spray, laser melting, laser deposition, ball milling and cryomilling.

15. The method of any of claims 11 to 14, wherein the heat treating comprises:

solution heat treatment at about 800°F (426°C) to about 1100°F (593°C) for about thirty minutes to four hours;
quenching; and
aging at about 200°F (93°C) to about 600°F (316°C) for about two to forty-eight hours.

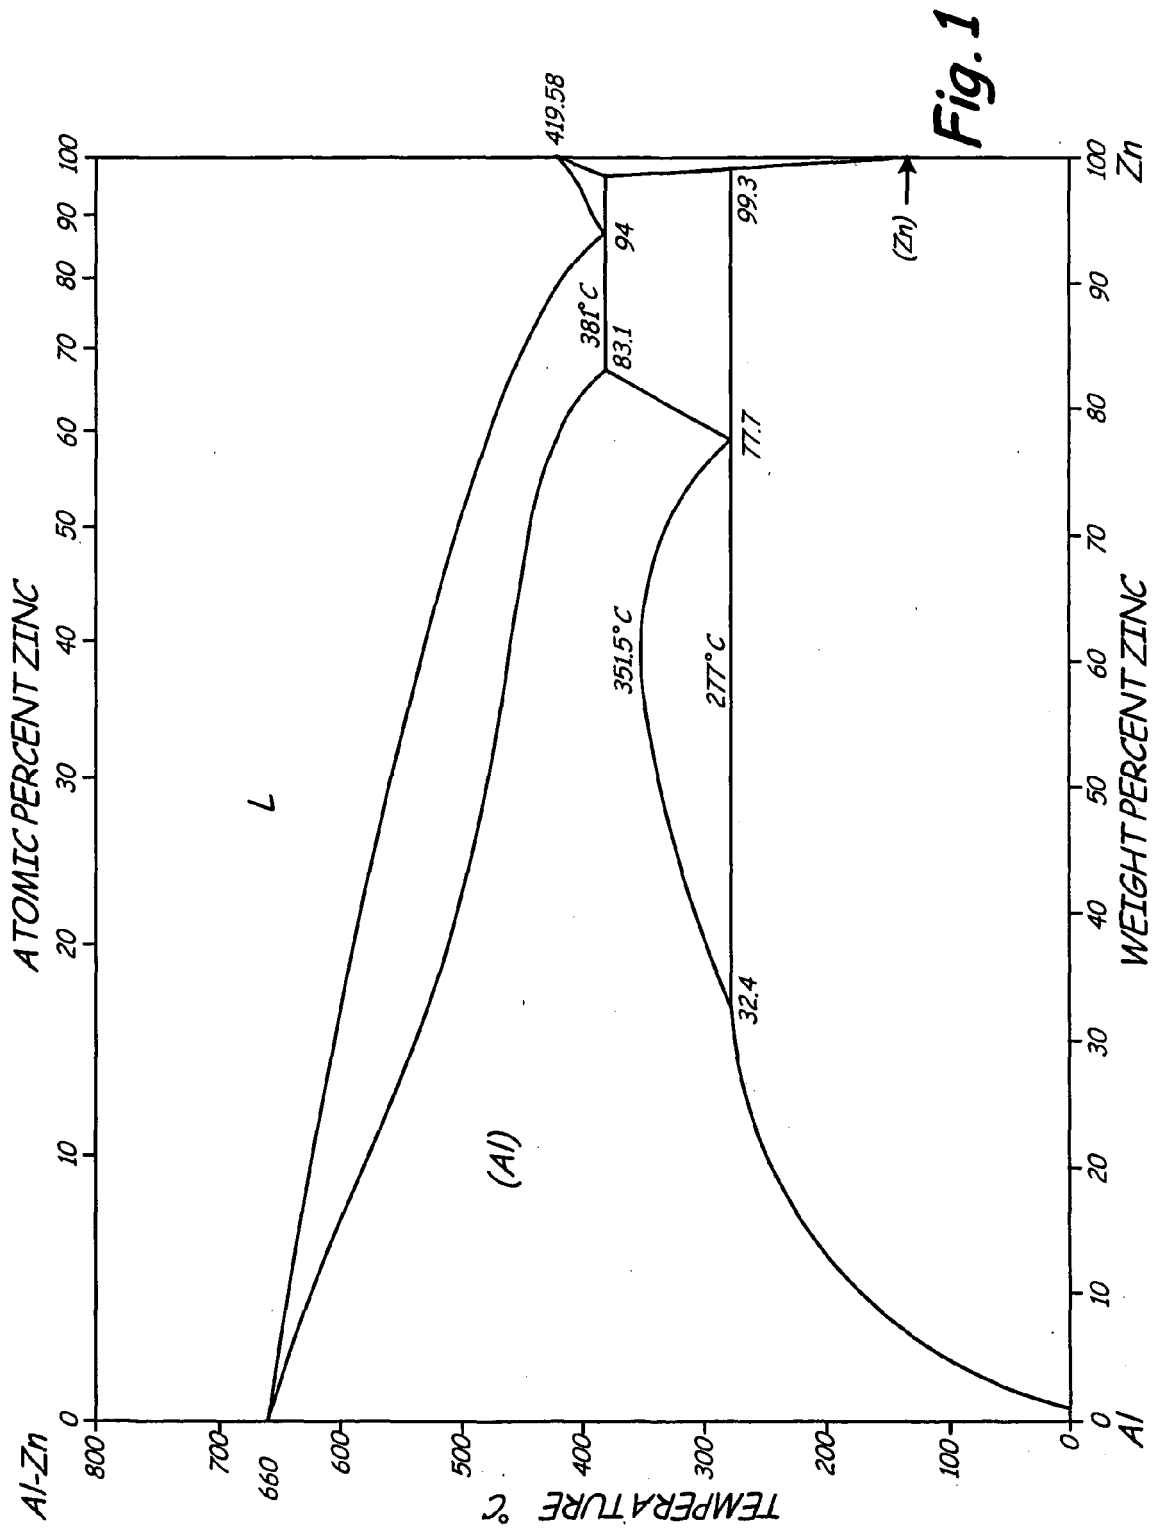

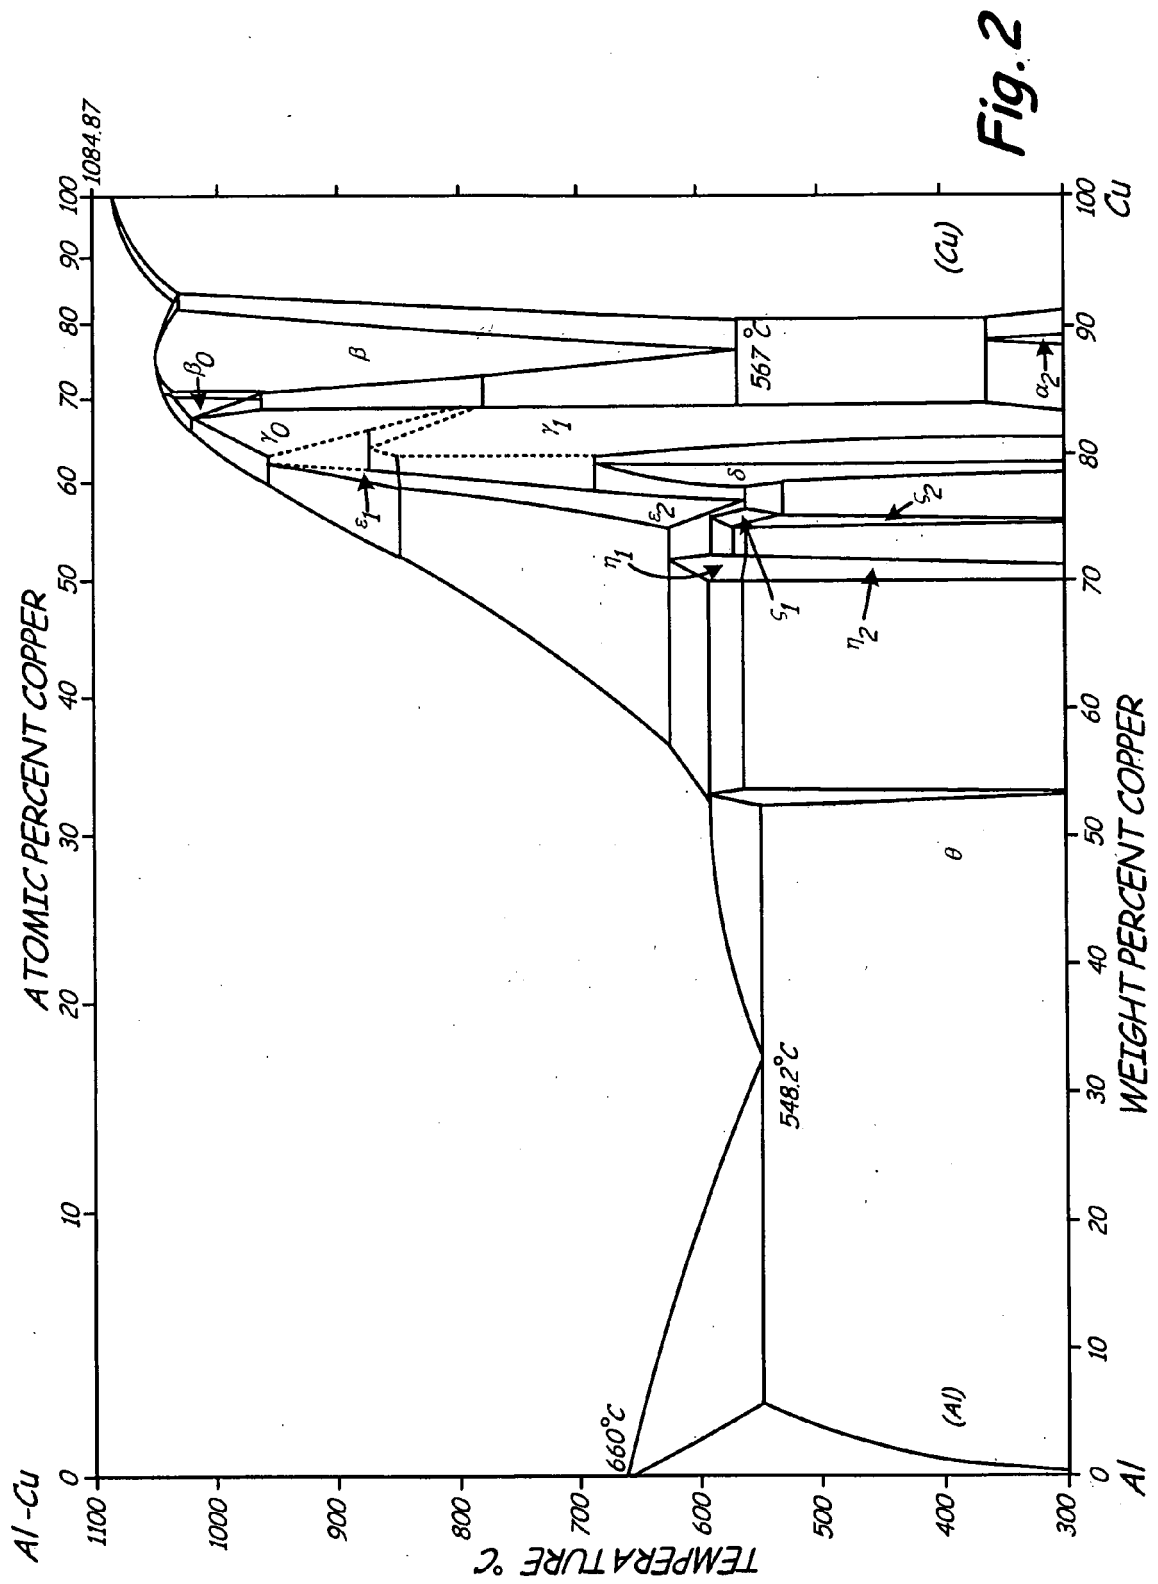

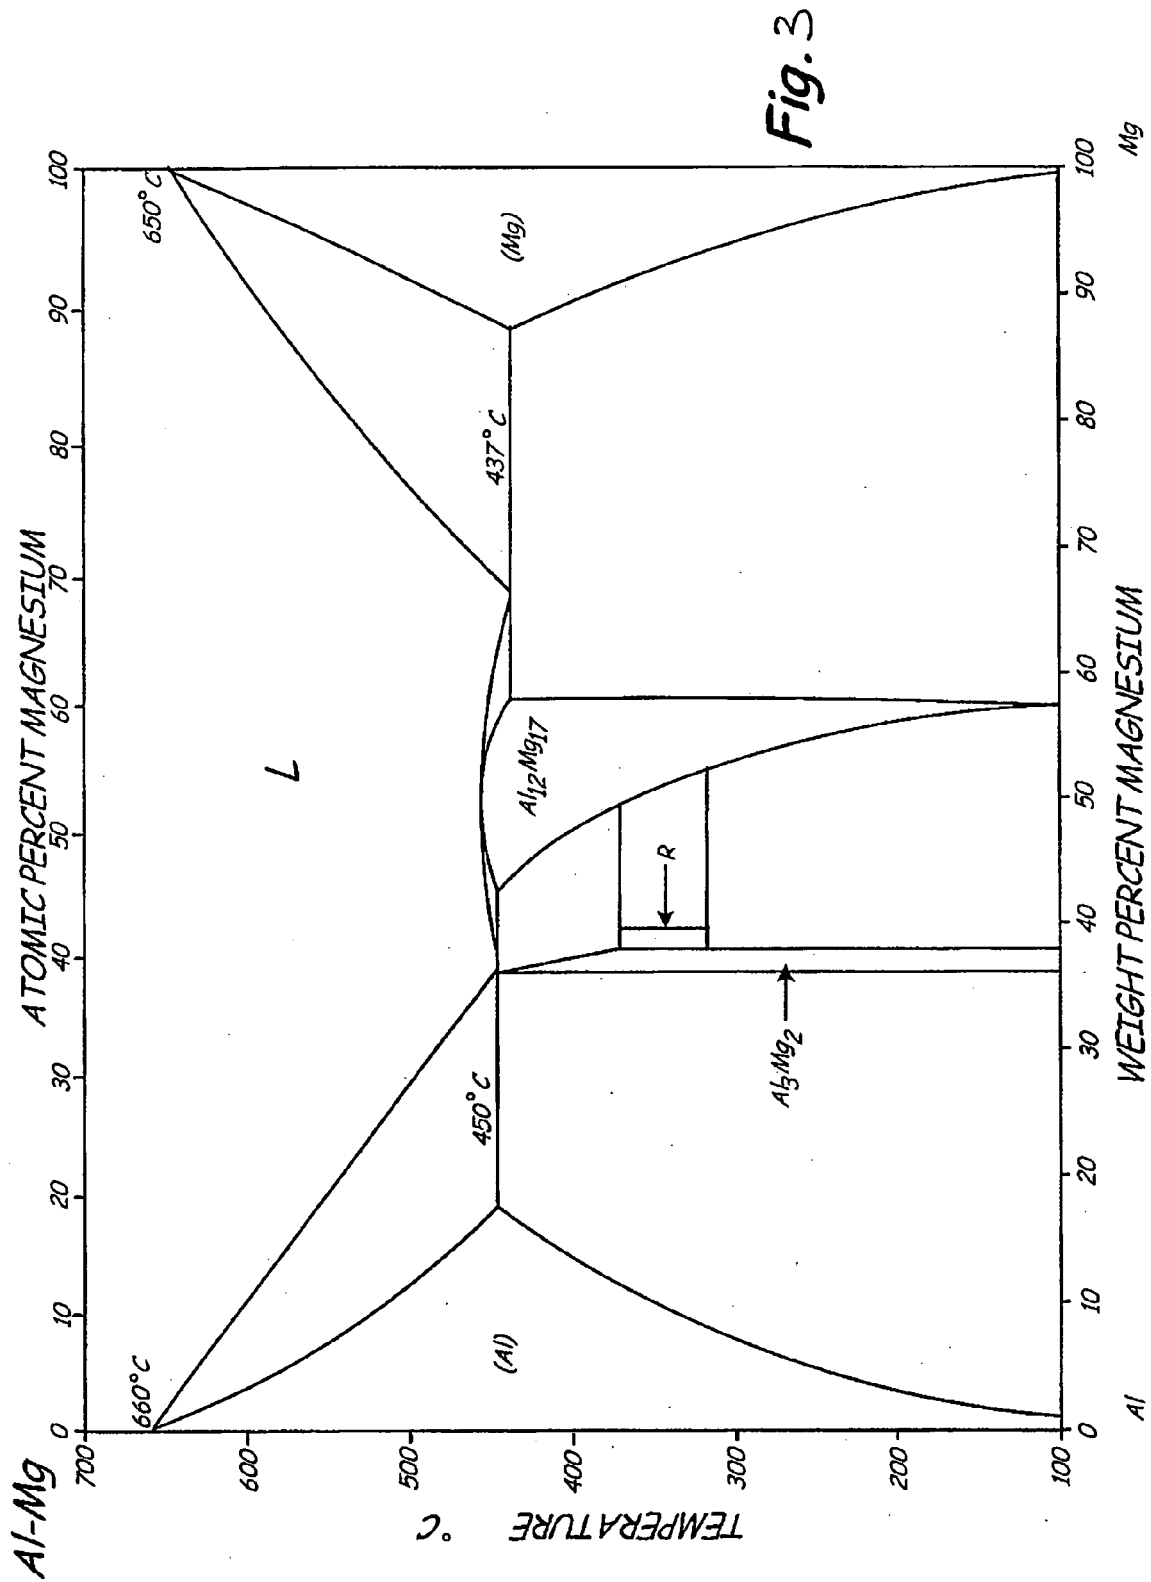

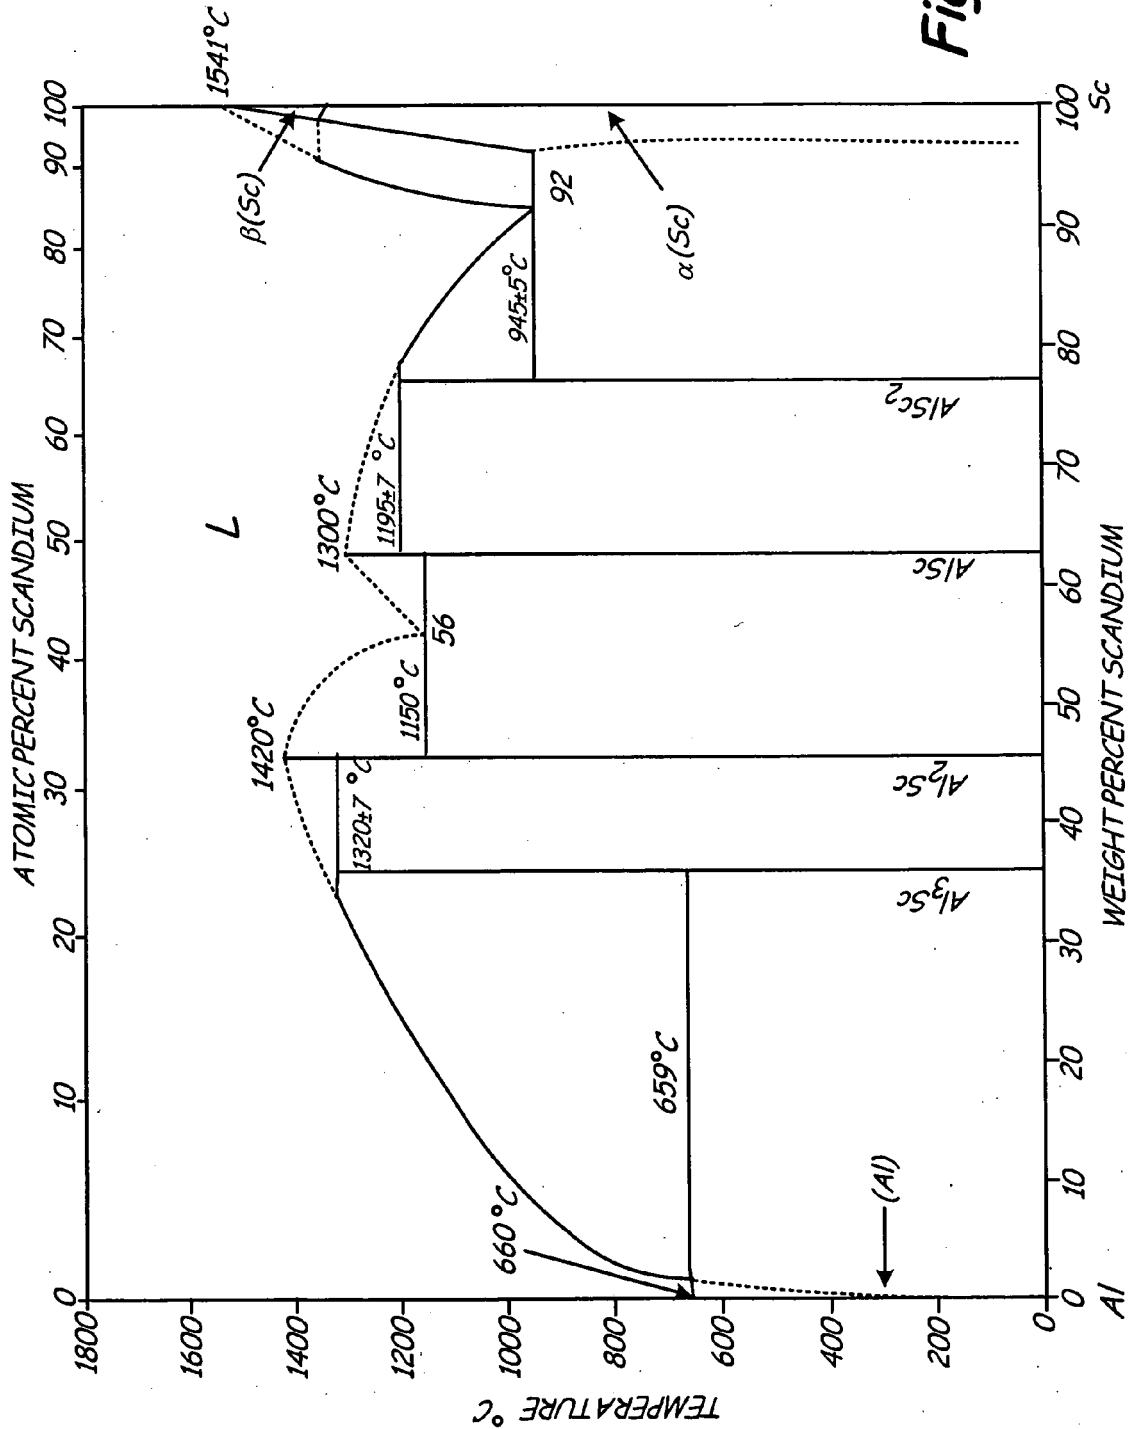


Fig. 4

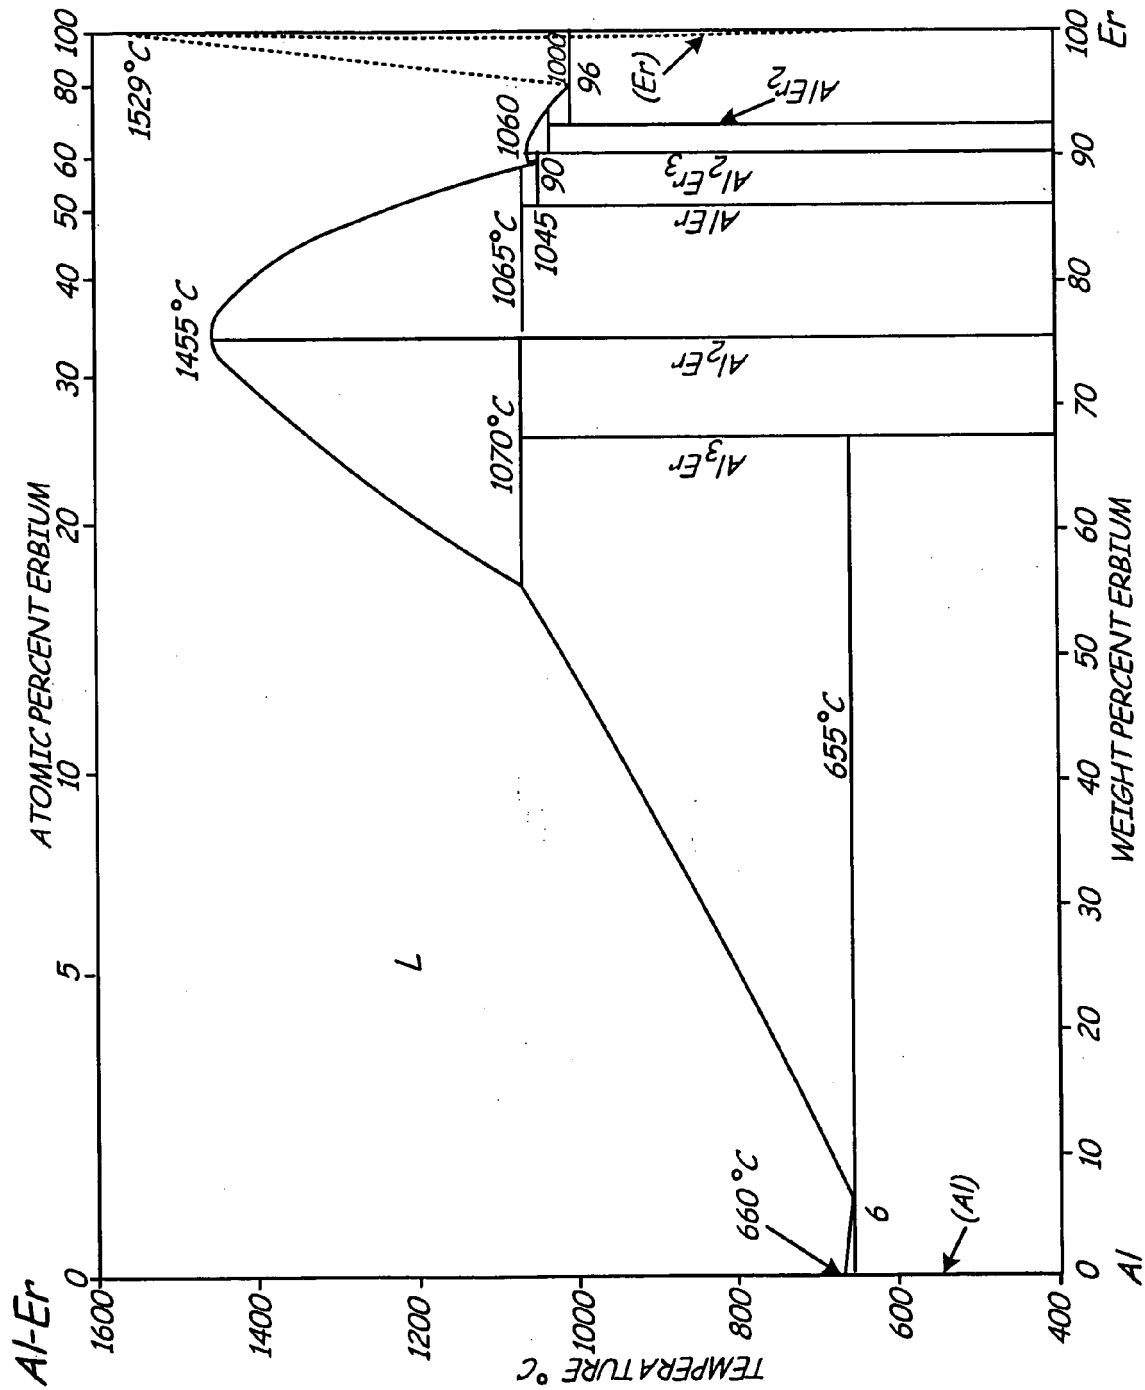
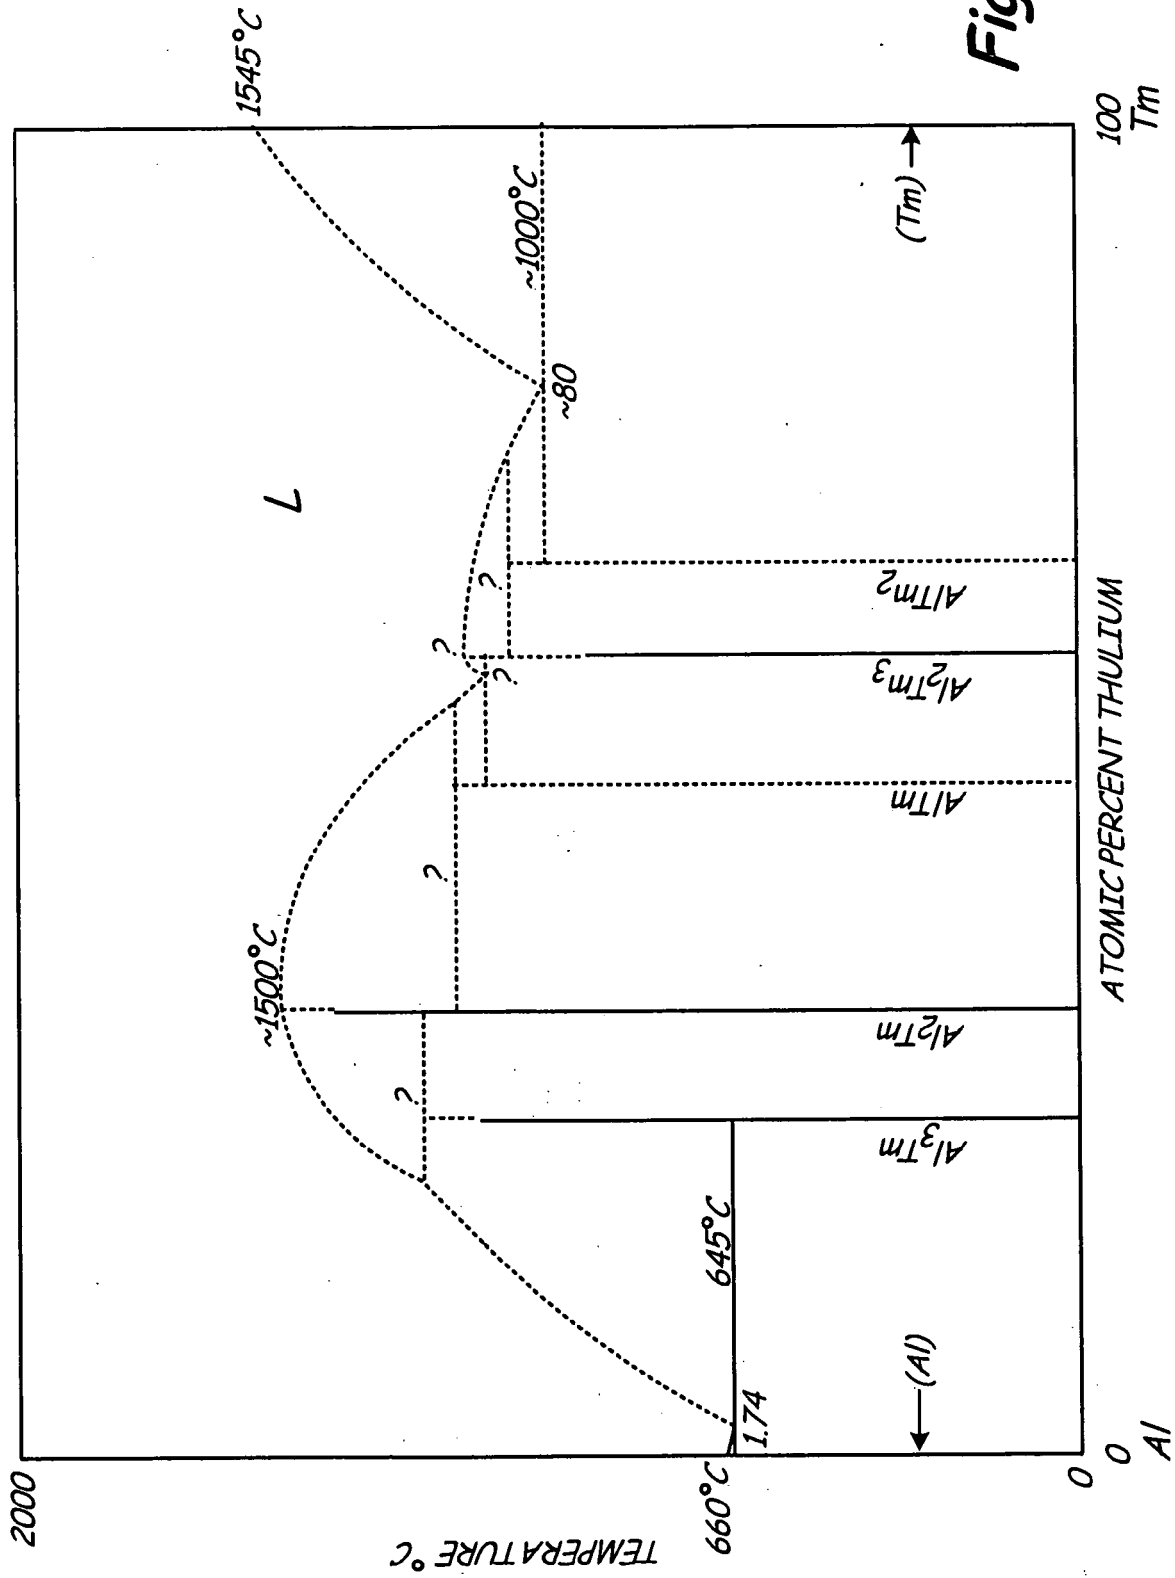


Fig. 5




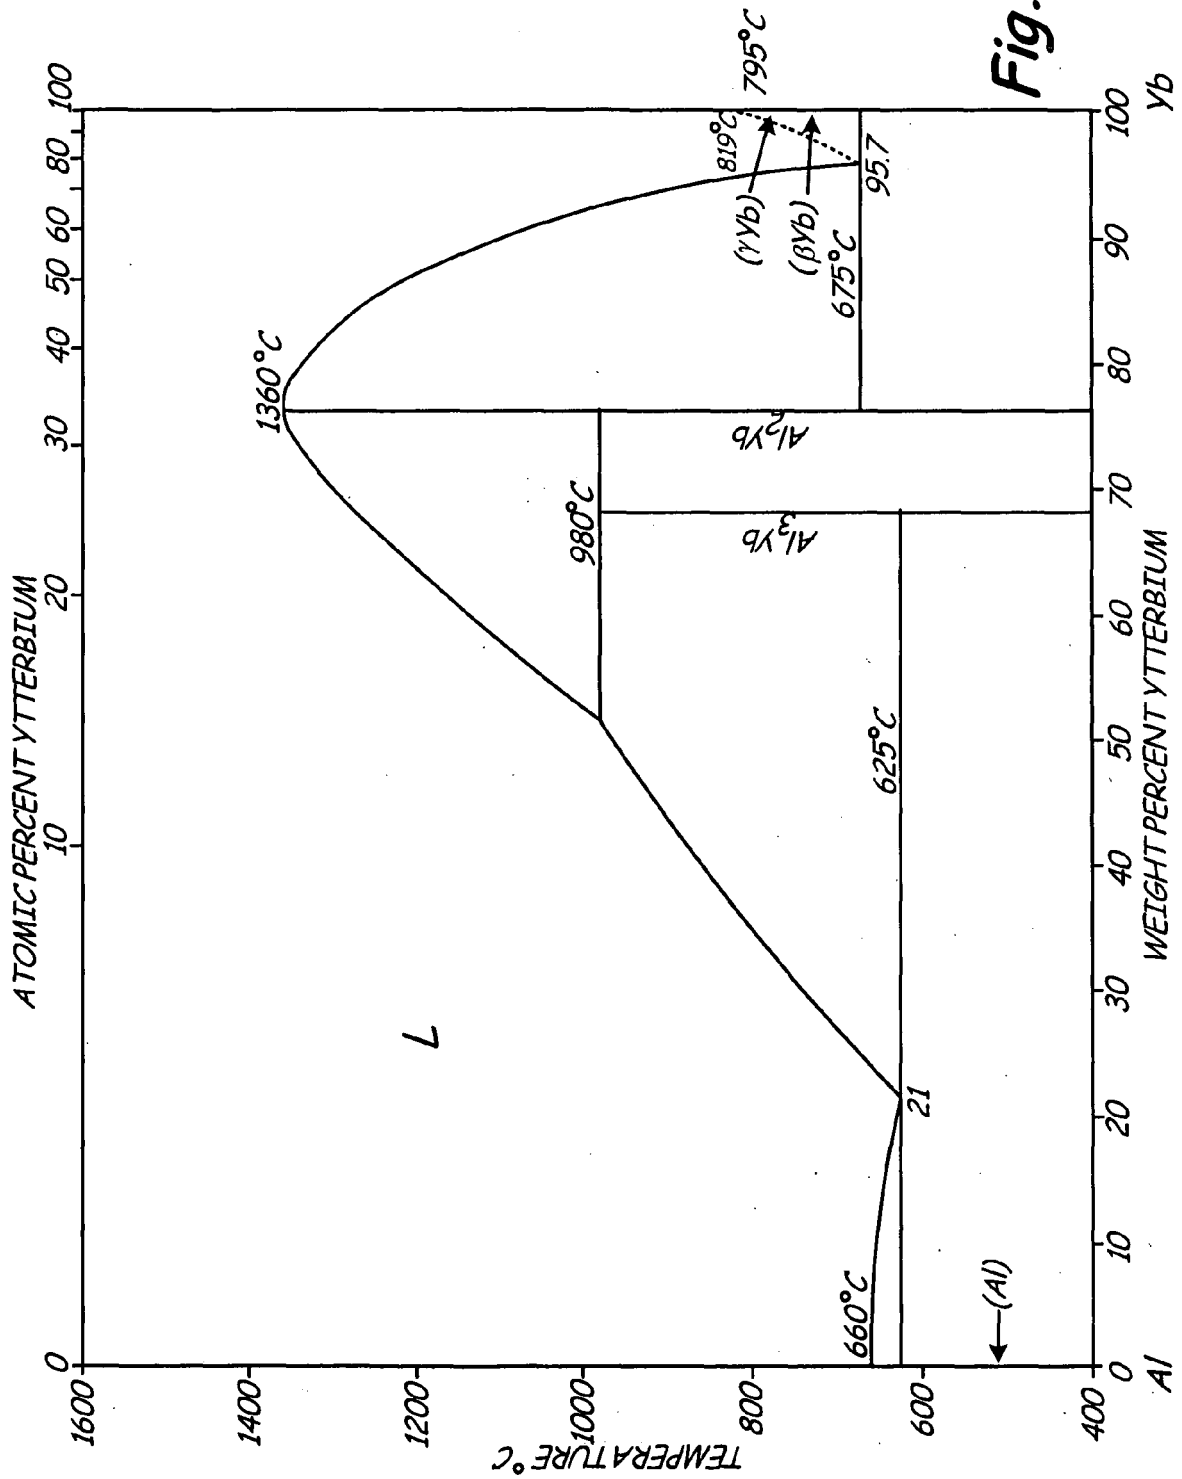


Fig. 7



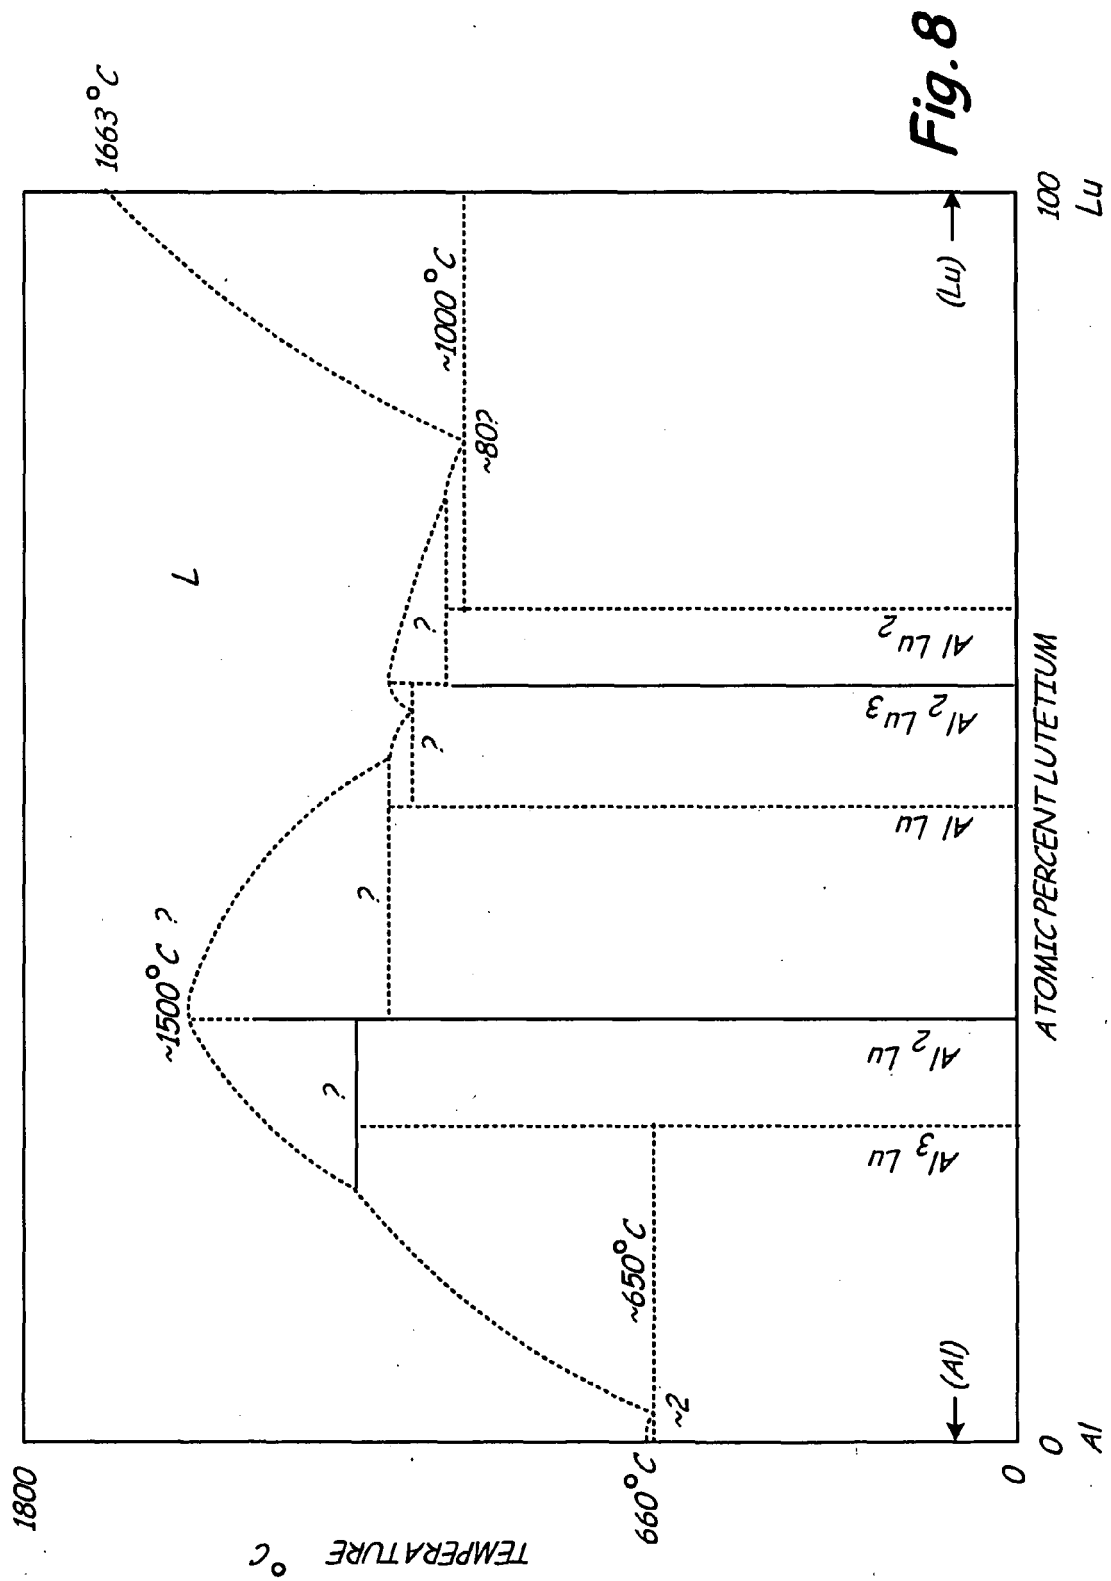

EUROPEAN SEARCH REPORT

Application Number
EP 09 25 1028

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	WO 95/32074 A (ASHURST CORP [US]) 30 November 1995 (1995-11-30) * the whole document *	1-15	INV. C22C21/10 C22F1/053
X	WO 96/10099 A (ASHURST TECHNOLOGY CORP IRELAN [IE]) 4 April 1996 (1996-04-04) * the whole document *	1-15	
X	JP 09 279284 A (FURUKAWA ELECTRIC CO LTD) 28 October 1997 (1997-10-28) * abstract * * page 6; examples 55-57; table 3 *	1-15	
X	US 2001/054247 A1 (STALL THOMAS C [US] ET AL) 27 December 2001 (2001-12-27) * the whole document *	1-15	
X	US 5 055 257 A (CHAKRABARTI DHRUBA J [US] ET AL) 8 October 1991 (1991-10-08) * the whole document *	1-15	
X	WO 03/085146 A (PECHINEY RHENALU [FR]; EBERL FRANK [FR]; SIGLI CHRISTOPHE [FR]; WARNER) 16 October 2003 (2003-10-16) * the whole document *	1-15	TECHNICAL FIELDS SEARCHED (IPC)
X	WO 03/085145 A (PECHINEY RHENALU [FR]; WARNER TIMOTHY [FR]; SIGLI CHRISTOPHE [FR]; BES) 16 October 2003 (2003-10-16) * the whole document *	1-15	C22C C22F
X	US 2008/066833 A1 (LIN JEN C [US] ET AL) 20 March 2008 (2008-03-20) * the whole document *	1-15	
X	WO 2004/046402 A (UNIVERSAL ALLOY CORP [US]) 3 June 2004 (2004-06-03) * the whole document *	1-15	
		-/--	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 25 May 2009	Examiner Patton, Guy
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 5
EPO FORM 1503 03.82 (P04C01)



EUROPEAN SEARCH REPORT

Application Number
EP 09 25 1028

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	RIDDLE, YANCY W. ET AL: "Recrystallization performance of AA7050 varied with Sc and Zr" MATERIALS SCIENCE FORUM , 331-337(Pt. 2, ALLUMINIUM ALLOYS: THEIR PHYSICAL AND MECHANICAL PROPERTIES), 799-804 CODEN: MSFOEP; ISSN: 0255-5476, 2000, XP009117290 * the whole document *	1-15	
X	MIL'MAN, YU. V. ET AL: "Effect of additional alloying with transition metals on the structure of an Al-7.1 Zn-1.3 Mg-0.12 Zr alloy" METALLOFIZIKA I NOVEISHIE TEKHNologii , 26(10), 1363-1378 CODEN: MNTEEU; ISSN: 1024-1809, 2004, XP009117293 * page 1366; examples 2-6,8,11-13; table 1 *	1-15	
A	EP 1 439 239 A (UNITED TECHNOLOGIES CORP [US]) 21 July 2004 (2004-07-21) * the whole document *	1-15	
A	US 2004/191111 A1 (NIE ZUOREN [CN] ET AL) 30 September 2004 (2004-09-30) * the whole document *	1-15	
A	CN 1 436 870 A (UNIV BEIJING POLYTECHNIC [CN]) 20 August 2003 (2003-08-20) EPDOC abstract	1-15	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
5	Place of search Munich	Date of completion of the search 25 May 2009	Examiner Patton, Guy
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 09 25 1028

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-05-2009

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9532074	A	30-11-1995	AU 2651595 A	18-12-1995
			CA 2190951 A1	30-11-1995
			EP 0760727 A1	12-03-1997
			JP 10505282 T	26-05-1998
			NO 964958 A	14-01-1997
WO 9610099	A	04-04-1996	AU 3813795 A	19-04-1996
JP 9279284	A	28-10-1997	JP 3594272 B2	24-11-2004
US 2001054247	A1	27-12-2001	US 2004010917 A1	22-01-2004
US 5055257	A	08-10-1991	NONE	
WO 03085146	A	16-10-2003	AT 415498 T	15-12-2008
			AU 2003260003 A1	20-10-2003
			DE 03740569 T1	23-06-2005
			EP 1492896 A1	05-01-2005
			ES 2316779 T3	16-04-2009
			FR 2838135 A1	10-10-2003
			JP 2005530032 T	06-10-2005
			US 2006182650 A1	17-08-2006
			US 2005072497 A1	07-04-2005
WO 03085145	A	16-10-2003	AU 2003260001 A1	20-10-2003
			DE 03740568 T1	14-07-2005
			EP 1492895 A2	05-01-2005
			FR 2838136 A1	10-10-2003
			JP 2005528521 T	22-09-2005
			US 2003219353 A1	27-11-2003
US 2008066833	A1	20-03-2008	WO 2008036760 A2	27-03-2008
WO 2004046402	A	03-06-2004	AU 2003302139 A1	15-06-2004
			BR 0314845 A	09-08-2005
			CA 2499542 A1	03-06-2004
			CN 1692174 A	02-11-2005
			EP 1543174 A2	22-06-2005
			JP 2006504871 T	09-02-2006
			US 2004099352 A1	27-05-2004
EP 1439239	A	21-07-2004	JP 3929978 B2	13-06-2007
			JP 2004218090 A	05-08-2004
			US 2006093512 A1	04-05-2006
US 2004191111	A1	30-09-2004	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

25-05-2009

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
CN 1436870	A	20-08-2003	NONE

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6248453 A [0005]
- US 20060269437 A [0005]