



(11) **EP 2 128 841 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
02.12.2009 Bulletin 2009/49

(51) Int Cl.:
G08G 1/123 (2006.01) **H01Q 1/32** (2006.01)
H01Q 1/36 (2006.01) **H01Q 21/28** (2006.01)

(21) Application number: **08009800.7**

(22) Date of filing: **29.05.2008**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT
RO SE SI SK TR**
Designated Extension States:
AL BA MK RS

- **Moreno, Marc Torrent**
08100 Mollet del Vallés
Barcelona (ES)
- **Illera, Ramiro Quintero**
08100 Mollet del Vallés
Barcelona (ES)
- **Fernández Fernández, Adrian José**
08019 Barcelona (ES)

(71) Applicants:

- **Ficosa International S.A.**
08028 Barcelona (ES)
- **Grupo Mecanica de Vuelo Sistemas S.A.**
28760 Madrid (ES)

(74) Representative: **Hess, Peter K. G.**
Patent- und Rechtsanwälte
Bardehle . Pagenberg . Dost .
Altenburg . Geissler
Postfach 86 06 20
81633 München (DE)

(72) Inventors:

- **Rozan, Edouard Jean-Louis**
08100 Mollet del Vallés
Barcelona (ES)

(54) **In-vehicle telematics device**

(57) An in-vehicle telematics communication device adapted to receive telematic data from a plurality of sources from within the vehicle, process the data to yield vehicle state information, and adapted to transmit the vehicle state information to external nodes, thereby enabling the provision of multiple services, and a method of emergency signalling for vehicles.

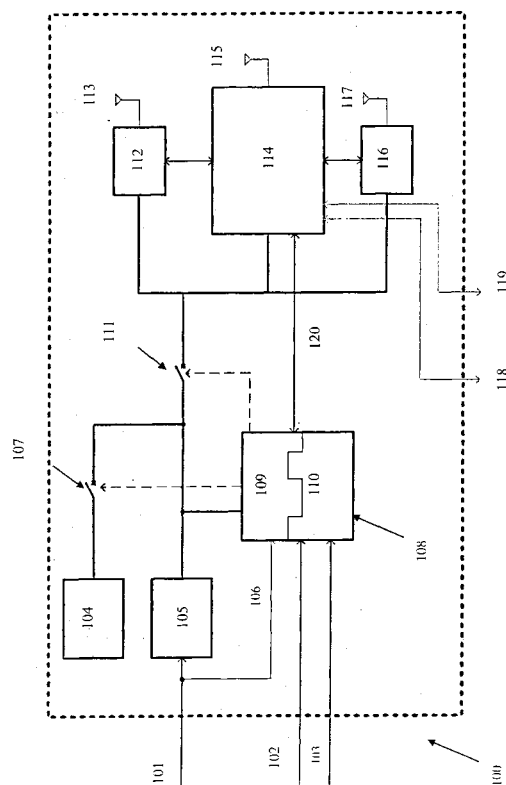


FIG. 1

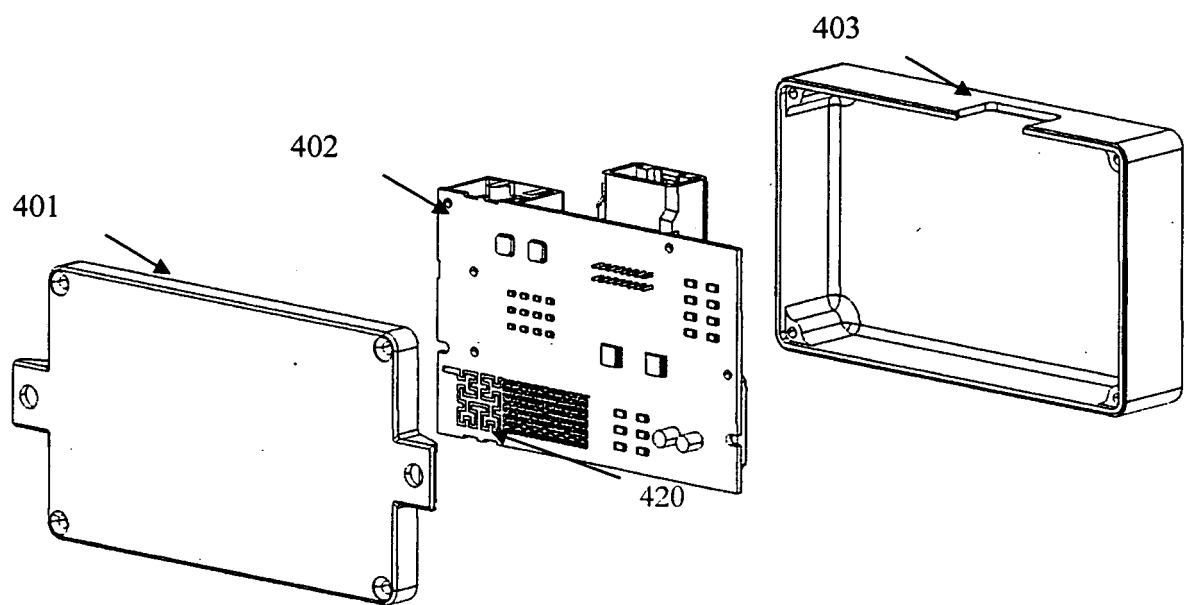


FIG. 4B

Description

FIELD OF THE INVENTION

[0001] The present invention relates generally to communications and more specifically to a novel and improved telematics communication device for automotive applications. The present invention also relates to a novel and improved method for emergency signalling for automotive applications.

BACKGROUND OF THE INVENTION

[0002] Latest developments in automotive electronics are dealing with the automatic monitoring of the state of a vehicle, such as a car, bus, train, airplane, or any similar vehicle. Such monitoring is based on the integration of numerous sensors into the bodywork such that the vehicle's most important structural and functional parts may be monitored. It is becoming of increasing interest to collect a variety of information, regarding different aspects of a vehicle, which may have different applications depending on their usage.

[0003] As an example, a first level of monitoring could be based on vehicle diagnostics, such as wheel tire pressure or wear, oil or fuel liquid levels, structural integrity measurements, or any other vehicle parameters which give an indication as to the "health" of the vehicle in terms of mechanics and electronics. A second level could be based on vehicle live parameters, such as speed, average fuel consumption, driving distance left till next fuel tank fill up, number of passengers, how many passengers have their seatbelts attached, temperature at different locations of the vehicle, or any other measurements which give an indication of the current state of the vehicle at any one moment in time in terms of its current usage patterns.

[0004] Location determination is one such measurement, giving an indication of the positional state of the vehicle, which has been widely accepted by vehicle users as an aid in route calculation and navigation. Current positioning devices within vehicles are stand-alone units comprising a Global Navigation Satellite Systems GNSS, which may be bought off-the-shelf and fixed to the windscreen or dashboard of the vehicle at a distance easily accessible by the driver. A disadvantage with such systems is that they provide a single functionality without any further connectivity, either externally or with other electronic devices inside the same vehicle.

[0005] Most other vehicle state information is gathered via sensors in a central controller, normally comprised inside a telematic unit. Current telematic units collect sensor data, and after some processing, display the raw data or simple statistic information in the vehicle's dashboard directly. A disadvantage with these current telematic units is also their independence from other vehicle systems as well as their lack of external connectivity.

[0006] Therefore current vehicle units do not provide

the possibility for live periodic transmission of vehicle telematic data to an external entity, such as a server, or data warehouse. Furthermore, these parameters are an example of information which belongs to the same vehicle, however they are provided independently from each other. In other words, their delivery to the user of the vehicle is performed in a mutually independent manner. It is therefore the user, being the driver or passenger, which decides how to use or combine the information being provided via a variety of sources.

[0007] Therefore there is a need to take advantage of the synergistic effect of the combination of a variety of vehicle statistical data, currently only available in a mutually independent manner. Furthermore, there is a need to combine location information with other vehicular data in order to provide the users of the vehicle with location based services, and also in order to provide location based services which are vehicle specific. Such service provision would be dependent on a combination of vehicular state information, and vary according to the first, second, or other levels of vehicle diagnostics provided by the multiple sensors or electronic control units throughout the vehicle.

[0008] One example where such information is advantageous if provided in combination is in solving current traffic problems in large urban areas. Another example would be for vehicle manufacturers to analyse the driving habits of their customers. Yet another example would be for the public traffic authorities to understand why certain "black" spots cause so many accidents.

[0009] Yet another vital application is the transmission of an SOS emergency signal in cases of distress, or heavy vehicle accident, to a central node for further routing to the appropriate emergency services, such as police ambulance, fire brigade, or the like. Such a service is being developed in several countries, and may be known as automatic emergency call, or eCall system.

[0010] Current commercialised positioning units which may be considered for use in possible eCall systems have developed from previous positioning units in that they incorporate external communication functionality to a central server. The idea with these current eCall systems is that they transmit the position of the vehicle when activated. However the disadvantage with these current solutions is that they cannot provide any other vehicle information to any external entity as they are limited to transmitting only position information which has been determined within the same unit.

[0011] Another disadvantage to the current eCall units available to vehicle users is that whereas the main unit is installed somewhere in the vehicle (central console, central tunnel, trunk, or similar location), the antennas for wireless communication, for example cellular, and/or navigation service provision via a Global Navigation Satellite System GNSS, are external, installed on top of the roof, windshield or other part of the vehicle, depending on the specific cellular or GNSS antenna characteristics. Hence the connection from the positioning unit to the

antennas requires typically a long coaxial cable for each antenna.

[0012] The choice of having an external antenna connection has the advantages of good electromagnetic characteristics, such as good transmission and reception performance. However, on the other hand, external antennas increase integration costs (cost of cabling, connectors and operator installation time), as wiring cannot be standardized (as it varies from vehicle to vehicle). Additionally, external antennas easily suffer breakage, either due to clipping with external objects, such as the roof of a tunnel or garage, or due to other acts, such as vandalism.

[0013] Another problem with current eCall units is their dependence on the wired connection with the vehicle's main power supply. Since they have not been designed with the possibility of complete loss of connectivity due to an accident, when vehicles comprising these current units undergo a heavy crash, the unit's wired connections are severed, in addition to the whole unit being destroyed in the process. Therefore they would neither have electric power, nor wired connections to the external antennas, for emitting a distress signal after the accident. This could have disastrous consequences in case of accidents where the chance of survival of injured passengers depends directly on the reaction time of the emergency services.

SUMMARY OF THE INVENTION

[0014] It is therefore an object of the present invention to provide a solution to the above mentioned problems.

[0015] According to one aspect of the invention a telematics communication device is provided with internal connectivity enabling the collection of telematic data from multiple sensors and/or electronic control units spread throughout the vehicle.

[0016] According to another aspect of the invention control processing means are provided for determining a state of the vehicle from the collected telematic data, and in particular, for the determination of the state of the vehicle after processing the multiple telematic information in combination and synergistically, as well as the provision of raw data directly. Location information may be included as part of this telematic data.

[0017] According to another aspect of the invention a telematics communication device is provided with external connectivity enabling the notification of the vehicle state derived from the telematic data collected and therefore the provision of services, in particular allowing for the provision of services directly dependent on the state of the vehicle, including its users.

[0018] According to another aspect of the invention, a telematics communication device is provided with all the antennas of the different communication modules integrated within the device.

[0019] According to another aspect of the present invention, a telematics communication device is provided

with power supply means which enables the continued operation of the device even when the wired connections with the main vehicle power supply lose their functionality, due to the vehicle being involved, for example, in a heavy accident.

[0020] According to another aspect of the invention, a method for emergency signalling in a telematics communication device is provided whereby an automatic emergency distress signal may be transmitted to the appropriate emergency services even after the device has lost all wired connectivity with the vehicle, due to the vehicle being involved, for example, in a heavy accident.

[0021] The invention provides a method and device that implements various aspects, embodiments, and features of the invention, as described in the following.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] The features and advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings, in which like reference characters identify correspondingly throughout.

Figure 1 shows a functional block diagram of an exemplary in-vehicle telematics communication device according to the present invention.

Figure 2 depicts the inside of an exemplary in-vehicle telematics communication device according to the present invention.

Figure 3 depicts the housing of an in-vehicle telematics communication device according to the present invention.

Figure 4 is a graphic representation of various antenna integration strategies possible according to the teachings of the invention.

Figure 5 is a graphic representation of cellular antenna characterization at different locations.

Figure 6 is a graphic representation of GNSS antenna characterization at different locations.

Figure 7 is a graphic representation of Bluetooth antenna characterization at different locations.

Figure 8 is a graphic representation of the radiated emissions from the vehicle in an example GNSS band.

Figure 9 is a graphic representation of the radiated emissions from the vehicle in an example cellular band.

Figure 10 represents graphically the flexibility and malleability of the housing of an exemplary device according to the present invention.

Figure 11 represents graphically the modularity of the housing of an exemplary device according to the present invention.

DESCRIPTION OF THE EMBODIMENTS OF THE INVENTION

[0023] From the following description, it will be understood by the person skilled in the arts that although any one preferred aspect of the invention already provides solutions to the problems of the prior art devices and methods, the non-obvious combination of multiple aspects provides additional synergistic advantageous effects over the prior art.

[0024] FIG. 1 depicts the functional block diagram of an example telematics communication device 100. The device 100 is adapted to support a wide range of services, such as:

- Automatic emergency notification (eCall);
- Manual emergency notification;
- Breakdown assistance (bCall);
- Remote vehicle diagnostics;
- Toll collect;
- Pay as you drive (PAYD);
- Stolen vehicle location;
- Remote door lock/unlock;
- Fleet management.

[0025] In order to provide such wide ranging services, numerous telematic data must be collected from different sensors. The multiple sensor units fixed all over the vehicle may transmit raw measurements to a central processing unit. They may also be integrated within a single module together with an electronic control unit, where a preprocessing of measurements is performed, in order to transmit to the central controller, or even to other modules, data already in a state which might be further utilised.

[0026] Example measurements could include a subset from a plurality of telematic data, such as:

- wheel tire pressure or wear;
- liquid levels (oil, fuel, coolant), average fuel consumption, driving distance left till next fuel tank fill up;
- structural integrity measurements;
- speed, acceleration, maximum speed reached;
- number of passengers, how many passengers have their seatbelts attached;
- temperature at different locations of the vehicle;
- airbag deployment flag as an indicator of the occurrence of an accident;
- window open/close, doors locked/unlocked.

[0027] The performance of the telematics device is dependent on a plurality of parameters:

- wireless communication reception sensitivity;
- wireless communication transmission range;
- internal data communication;
- processing power;
- overall volume and weight;

- ease of integration and installation at production line;
- accuracy of positioning system;
- availability and integrity in the positioning.

[0028] The power supply means of device 100 comprises a DC/DC converter 105 connected to the vehicle's main power supply line 101. Power supply means also comprises an internal backup battery 104 connected to the remaining circuitry and processing means 108 via switch 107. Thanks to its high processing power, the unit is able to run several services and communication technologies at the same time, and can operate as the main telematics gateway of the vehicle.

[0029] Processing means 108 comprises means for control processing 109 as well as means for internal communications 110 with the rest of the vehicle. These two functionalities may be comprised within the same programmable micro-controller or they may be independent inter-connected units, as depicted via the broken line.

[0030] Control processing means 109 is adapted to detect a loss of connectivity, via data line 106, with the vehicle's main power supply line 101 and therefore activate switch 107 to connect the internal backup battery 104. Such automatic detection of loss of power has the advantage of providing service continuity in case the telematics communication device's connection to the vehicle's cables is lost, for example, due to a crash. Therefore the device of the present invention can continue to function and transmit data independently from this connection, at least temporarily, for a duration of several hours.

[0031] Such data provision continuity may be vital in order to request the immediate assistance of emergency services. After connectivity with the vehicle's main power supply line 101 is re-established, processing means 109 is adapted to recharge the internal backup battery 104 via internal recharging circuitry. Once recharged, means 109 is adapted to disconnect switch 107, thereby leaving battery 104 ready for the next eventuality.

[0032] Means for internal communications 110 provides connectivity with multiple modules throughout the vehicle. Each module may comprise a single sensor unit, a single electronic control unit ECU, or a combination of sensor and electronic control units. Therefore the internal communications means 110 interfaces with at least one module via data cable 102. Such connectivity is possible as the means for internal communications implements a data networking protocol which interfaces with similar protocols in the different modules.

[0033] Therefore data from the sensors and/or electronic control units are routed via the vehicle cable to the telematics communication device. This data is received by the means for internal communications 110 and may be further routed either as non-processed raw data, or a combination of such information may be further processed by the control processor means 109. Whereas prior art telematics units comprised a plurality of connections to multiple points within the vehicle, the number of

external connectors in the device of the present invention has been reduced to only one, the main connector of the vehicle.

[0034] An example of one such networking protocol is the CAN protocol for vehicle data communications. In such example data cable 102 would be a CAN Bus, and every module within the vehicle would comprise a CAN communications unit connected to the CAN Bus. However any other protocol providing internal data connectivity over a common communications line may be implemented.

[0035] Processing means 108 is adapted to further connect with wireless communications means via switch 111 and connection 120. Means 108 can therefore open or close this switch depending on whether the telematics device is to have wireless functionality or not. In the case where the only connection of the telematics device is intended through wireline connection, this section would be disconnected from the means for power supply.

[0036] Wireless communication means may comprise an internal wireless communication section and external wireless communication sections, both functionalities being shared by a common wireless controller 114. It will be understood by the person skilled in the art that the two functionalities may be implemented as completely independent units as well.

[0037] Wireless controller 114 comprises a radio frequency section for long range communications and a Bluetooth module 116 for short range communications. A position determination module 112, comprising a Global Navigation Satellite System as well as optional inertial sensors, provides the additional location information in case necessary.

[0038] Radio frequency section comprises at least one transceiver for cellular communications, connected to RF antenna 115. When more than one cellular communication protocol is being implemented, the plurality of transceivers may be implemented as a software definable radio SDR unit, sharing a common antenna. Optionally, separate antenna units may be provided, or in combination with separate transceiver units. Common cellular standards currently in use are based on the GSM, CDMA, or OFDMA standards. Optionally antenna 115 may be a multiple input multiple output MIMO antenna. The implementation of such a cellular unit, according to the plurality of communication protocols, is within the scope of the person skilled in the art and will not be further detailed here.

[0039] Wireless controller 114 has a data connection to processing means 108 to collect the data being provided via the wireline connection, either in raw format or processed, in order to transmit it to vehicle-external servers, or vehicle internal modules.

[0040] Bluetooth module 116 has also the functionality for internal data communications due to its short range communication characteristics. Therefore it complements the internal communication means section for providing data to, and receiving from, sensors and/or elec-

tronic control units which do not necessarily have a cable connection via the internal data networking protocol.

[0041] This additional connectivity is especially advantageous in case the standard cable connections 118 and 102 are lost, for example due to a heavy accident. In such a situation the Bluetooth module 116, connected to the vehicle's speakers and microphone, would provide an uninterrupted audio link between the passengers of the vehicle and the operator of a central emergency service. Such audio link is instrumental in saving lives when be used for providing vital first aid instructions either to the passengers themselves or to pedestrians.

[0042] Similarly, the Bluetooth module may be configured to act as a backup external transmission device by attempting to link to an on-board phone, or a passenger phone with activated Bluetooth functionality. Periodic dialling of the default emergency services telephone number would provide redundancy in attempting to notify the appropriate emergency services.

[0043] Another advantageous example for this wireless connectivity is to have a Bluetooth SOS button in the vehicle's dashboard. Therefore a user may still request assistance manually via the wireless connection, even if the standard cable connection 119 is lost. The button may also be in the form of an LED, which would be activated in case of an accident to signal visually the position of the SOS button.

[0044] The position determination module 112 may be based on a plurality of location determination services. One such system is the Global Positioning System GPS, readily made available for use for the general public. Other systems such as GLONASS, IRNSS or COMPASS also exist for different geographical regions in the world. In the case of Europe the satellite-based system being developed is the GALILEO satellite system.

[0045] The GNSS system implemented may be additionally complemented via inertial sensors located within module 112. Inertial sensors have the functionality of improving the location estimate calculated from the signals received via the plurality of satellite transponders. In particular, they have the functionality of updating the current location of the vehicle in the interval between the reception of different satellite signals. Therefore since the location is constantly tracked, at any one time very accurate position information will be available.

[0046] Dead reckoning is the process of estimating a vehicle's current position based upon a previously determined position, or fix, and advancing that position based upon known speed, elapsed time, and course. Classic schemes of Inertial Navigation Systems INS include external motion sensors such as gyroscopes, accelerometers and other devices besides a GNSS receiver. These sensors increase highly both the final price of the equipment and the complexity of the installation into vehicles.

[0047] The telematics communication device object of the present invention provides the innovative solution whereby the telematic information gathered via the vehicle's data bus is used for building an INS based on

these data. With such procedure the accuracy of the positioning service is improved in hard environments with low satellite coverage in a cost effective and reliable manner.

[0048] Relevant telematic data, in addition to the location information provided by the GNSS module, obtained from the vehicle's internal communication bus could be:

- Yaw rate provided by a gyroscope;
- Differential wheel ticks;
- Unified wheel ticks;
- Acceleration provided by accelerometers.

[0049] Particular advantage of this characteristic is provided in areas where satellite coverage is blocked by large obstacles, such as building or tunnels in urban zones, or forest or mountains in rural zones. Therefore location information provision will still be possible when the vehicles are transiting through regions of low satellite signal level reception.

[0050] Prior art positioning applications suffer from a basic limitation in that they do not guarantee service availability nor service integrity. These two aspects are indispensable for the provision of a plurality of services. Service integrity is an important component for the implementation of GNSS safety critical applications as well as for liability-critical applications. The latter applications are delicate in that performance problems can generate significant legal or economic consequences when not properly identified.

[0051] The telematics communication device of the present invention conforms to the service requirements in order to provide the necessary guarantee to fulfil service availability and integrity needs. This is possible due to the integration of a Protection Level PL calculation with each position determination. The Protection Levels correspond to the radius of a plurality of circumferences centered at calculated positions. The multiple circumferences build a region where the actual calculated position is guaranteed to a pre-determined level. The telematics communication device of the present invention has been designed to comply with a protection level with a probability of 99.9999%.

[0052] Protection Level analysis while designing the device filters the wrong detections and thereby avoids problems caused by erroneous calculations. This is especially important in liability-critical applications: for example, in an electronic toll collect system that charges the user depending on the number of kilometers driven within a specific road or zone.

[0053] FIG. 2 depicts a section of the inside of an exemplary telematics communication device of the present invention. The compact design can be readily appreciated in this configuration 200. A section of the power supply means 201 is contiguous to the internal backup battery 202. Connector 203 provides wireline connectivity between the device and the rest of the vehicle. In particular, the telematics communication device is provided with

electric power supply via this connector. Likewise, most data communication and exchange with the rest of the vehicle normally takes place via connector 203.

[0054] A particular advantage of the device of the present invention is the complete integration of the antennas from the different communication means, thereby removing the necessity of having a long external coaxial cable connecting the telematics device with external antennas. Similarly, the antennas are protected from tampering, therefore guaranteeing permanent connectivity. The various antennas of the at least one communication module, from the group of cellular RF, Bluetooth or GNSS antennas, are built in such a way that they comply with the compact limitation of the device's housing. The integrated cellular and Bluetooth antennas 205 are designed not to be contiguous with GNSS antenna 204 in order to minimise interference.

[0055] The integration of prior art external antennas into such small devices is possible via the use of miniaturized communication antennas based on space-filling geometries or Planar Inverted F Antenna PIFA structures.

[0056] In an embodiment at least one antenna may be a space-filling curve antenna in the form of a circuit board, with a printed pattern based, at least in part, on specific space-filling curve geometry. Due to the pattern fixing process, there is no constraint that the board be flat. The circuit board may have many different shapes and forms, be flat or curved, spherical or conical, as long as it can contain the copper serigraphy which will form the antenna pattern.

[0057] The high adaptability of the pattern design allows for the integration of the miniature antenna into a wide variety of shapes. However, no matter the shape or form of the antenna, its space-filling curve pattern is designed in order to enable it to receive either GNSS signals, or receive and transmit RF signals or Bluetooth signals.

[0058] Antennas based on space-filling curves are characterised by their self-similar repetitive designs, enabling to maximise their length, or increase their perimeter, to cover inside sections or outside structures, of the supporting material which can receive or transmit electromagnetic signals. A space-filling curve can be described as a curve that is large in terms of physical length but small in terms of the area in which the curve can be included. Whatever the design of such space-filling curve is, it can never intersect with itself at any point except the initial and final point (that is, the whole curve can be arranged as a closed curve or loop, but none of the parts of the curve can become a closed loop). A space-filling curve can be fitted over a flat or curved surface, and due to the angles between segments, the physical length of the curve is always larger than that of any straight line that can be fitted in the same area (surface) as said space-filling curve.

[0059] The self-similar repetitive design is obtained via a multi-scalar repetition of a pattern, or motif, and results

in the advantageous characteristics described, among which are its ability to operate simultaneously at a plurality of frequency bands, and frequency ranges, as well as providing the possibility of integration. The inconvenience of the long coaxial cables connecting external antennas with the telematics unit of the prior art is solved by providing at least one antenna with a highly compact pattern. This characteristic enables the space-filling curve antenna to be implemented in an exceptionally small surface area, allowing it to be integrated within a single housing.

[0060] The space-filling curve pattern may be printed on a standard copper printed circuit board. An example of such a board would be the thin FR4 PCB (example dimensions: 35 μ m Cu, 0.2mm thick) as well as other supports which offer a good compromise between ease of assembling, flexibility, cost and dielectric properties. As supports for the copper either blended plastic films, Moulded Interconnected Device MID technology, cartons or flex-film may be used. Other materials which offer the advantageous feature during integration of flexibility are ceramic-based materials. The antenna may be integrated into the device by attaching it via clips or heatstaking it to the device.

[0061] One example of how a space-filling curve antenna may be designed is following the Hilbert geometry as it offers a very high degree of miniaturisation. Consequently, it also offers good integration characteristics inside the device. The Hilbert geometry allows for a variety of designs where different patterns vary in complexity and degree in which the space of the antenna is filled. The overall effect is to change the antenna's effective length and therefore electromagnetic properties.

[0062] As can be seen from FIG. 4 various designs exist offering a good compromise between performances and integration power. FIG 4A depicts the front cover 401, the back cover 403 and the printed circuit board 402 of an exemplary device according to the present invention, where the antennas are assembled in the PCB. FIG. 4B depicts the PCB 402 with the pattern printed 420 on the board. FIG. 4C depicts the pattern printed on a flexible plastic film 430, which may then be fixed on any surface of the housing or the board. FIG. 4D depicts the integration of the antennas 440 using MID technology.

[0063] However other antenna geometries exist which offer the advantages of high degree of miniaturisation. Antenna patterns may be designed by using the Koch geometry or the Meander geometry. Further miniaturisation may also be achieved via the use of a PIFA configuration, consisting on connecting two parallel conducting sheets, said sheets separated either by air or a dielectric, magnetic or magnetodielectric material, said sheets connected through a conducting strip near one of the sheets corners and orthogonally mounted to both sheets. The antenna is fed through a coaxial cable, said coaxial cable having its outer conductor connected to first sheet, being the second sheet coupled either by direct contact or capacitatively to the inner conductor of said coaxial cable.

[0064] Antennas may also be designed as a conducting arm, part of the arm being shaped as a space-filling curve, or as a miniature microstrip patch antenna, part of said antenna being shaped as a space-filling curve, based on any of the abovementioned geometries. Antennas may also be formed as a superposition of two conducting sheets. These conducting sheets may have a space-filling curve pattern designed on them, or they may have a gap shaped as a space-filling curve.

[0065] The various patterns are carefully designed in order to provide a good compromise between antenna performance and degree of integration. The correct choice while designing the geometry of the antenna will depend on a number of factors, as well as finally affect the performance of a number of parameters of the antenna 100. Among these factors and parameters are antenna size, its relative gain, electromagnetic radiation patterns, impedance characteristics, degree of flatness or curvature, frequency range of operation, antenna efficiency, specific absorption rate and polarization.

[0066] It is to be understood that the advantageous features of the preferred embodiments of the present invention are equally applicable to other types of antennas such as, IFA, monopole, dipole, coupled monopole, or loop antennas, and the person skilled in the art is able to apply the miniaturisation and integration teachings described to space-filling curves and PIFA antennas to any combination of antennas.

[0067] The antennas depicted in FIG. 2 are located inside the housing of the telematics device. However the at least one antenna may be also integrated on the exterior of the back cover. In either configuration the shape of the antenna's board is chosen to fit in with the rest of the components.

[0068] The advantages of integrating the miniature antenna within the same housing as the remaining components are readily apparent, as the pattern may be also designed to optimise its fit in relation to the remaining components, following the constraints of the printed circuit board size, area and forms, as can be appreciated from FIG. 4D. When integrated within the housing the antenna pattern is designed to be located substantially along the outer perimeter of the communications device or of the antenna's PCB, in order to maximise its irradiating characteristics and minimise the interference and electromagnetic coupling of other electronic modules. The antenna may also be designed to be integrated either in parallel to the PCB or perpendicular to it. Either way, or even at any other angle, the advantages of flexibility while designing the pattern exist in order to achieve the advantages of highest integration and lowest interference reception.

[0069] FIG. 3 depicts the housing of an exemplary telematics communication device of the present invention. Device 300 is designed to be embedded inside vehicles and be able to operate in extreme situations, for example, after a heavy accident, where most of the vehicle's integrity has been compromised. Even after the

whole vehicle's mechanic structure has been destroyed, device 300 is able to operate in order to transmit, for example, an SOS emergency signal with the necessary telematic information.

[0070] Device 300 comprises a housing 301, wherein all the different components providing the advantageous aspects of the invention are integrated, and a connector 302, for connecting the various data cables to the internal vehicular data network and the power line to the vehicle's main power supply.

[0071] All the components of the telematics communication device are integrated in a compact manner resulting in a discrete small telematics box. Such device can be positioned inside the vehicle in remote locations, such as in vehicle zones protected by the vehicle's own structure. Such positioning safeguards the telematics communication device's integrity best in situation of heavy collision. Therefore the correct internal component layout design within housing 301 provides the advantage of flexibility while installing the device inside the vehicle, and allows it to be placed in the safest less accident-prone zones.

[0072] Such placement of the telematics communication device has the additional advantage whereas important components will not be easily accessible for by-passers. In particular, it will be very difficult to steal such a device, tamper with it, and therefore extra protection against vandalism is provided.

[0073] These advantages may be obtained also by designing the housing of the telematics communication device in order to provide it with a degree of flexibility to fit the shape and form of the place within the vehicle where it will be lodged. Such flexibility may be provided by building the housing from an inherently flexible and mouldable material, which once placed within the vehicle, may be solidified into place, for example through heating, or via a chemical reaction, or the application of electricity. FIG. 10A depicts an example housing of a device before fitting into the vehicle, and FIG. 10B depicts the housing conformed to the spacing of the vehicle. Such procedure would enable the device to be fit into non-uniform spaces, around or in-between existing objects, therefore optimising space occupation as well as overall protection, due to the shaping of the flexible part 1001 of the structure. Either the whole structure or part of it may be made conformable.

[0074] The housing of the device itself may also be designed to comprise at least two inter-connected modules 1101, 1102, as in FIG. 11, wherein the connection 1103 is made from a thin flat flexible material or cable. Antenna elements could be placed in one of these modules, whereas other electronic components, usually bigger in size, could be placed in other modules. Depending on the overall size and layout of the internal components, the telematics communication device could comprise two, three or more of these modules electrically and physically connected with each other so that the device may be fit into a free space within the vehicle even in difficult

to reach zones, or spaces with a not well defined shape, for example, around or in-between other components and objects, such as pipes, or vehicle mechanical parts. The modularity of the device's structure provides the flexibility during placement, and allows finding the optimal place and orientation for the antenna elements inside the vehicle.

[0075] A combination of these integration strategies is also possible. The housing could be designed to be modular, as in FIG. 11, and have at least one flexible malleable module 1102. Such a combination would maximise the integration capabilities of the device in non-accessible zones, therefore increasing its security against theft and structural deformations due to heavy crashes.

[0076] The small size of the device allows it to be placed in more accessible locations as well. Such necessities may arise in order to extend the possibilities of integration and vehicle-dependent customisation, especially when the main vehicle parts have already been mounted, and the less accessible regions are not an option for device placement anymore. More common locations where the telematics communication device may therefore be placed are for example under the dashboard, inside the glovebox, inside the central console, or inside the trunk.

[0077] In general terms, the smaller the volume the easier its integration inside the vehicle. In an exemplary device according to the present invention the device has approximate dimensions which do not exceed 120mm x 65mm x 35 mm. Moreover, its design can be customized in several forms and shapes in order to fit inside places with very different dimensions and configurations inside the vehicle bodywork.

[0078] The device's integrity is further safeguarded by the correct choice of materials for the housing 301. Special plastic polymers may be chosen which provide the housing with extra mechanical strength, which in turn will result in a device 300 less prone to damage when under stress. Example materials may be based on glass fibre reinforced polyamides, or polypropylene with talc. The shape and form of housing 300 is also so designed to improve the crash-resistant characteristics of the telematics communication device 300. The resulting compact and robust electronic and mechanical design is able to withstand the stresses and G-forces present in an accident scenario.

[0079] In order to provide the exemplary device with an even higher resistance to heavy loads and pressure, existent in vehicle crash scenarios, the space within the housing of the telematics device may be filled with a solidifying material, such as silicon or resin, so that after solidification extra strength is provided to the walls of the device in addition to the increase in device integrity.

[0080] Dynamic scenarios have been simulated in order to determine the stresses and G-forces applied to the unit in case of vehicle crash when installed in several vehicle locations. The material of the packaging has been selected to provide the best mechanical behaviour while

maximizing antenna performance.

[0081] These integrated antennas may also be optimized for performance by choosing the correct placement of the device inside the vehicle. Since the resulting telematics communication device object of the present invention comprises complex communication circuitry and a plurality of electronic modules, thorough integration studies have to be performed to find out the best location for the device in order to guarantee correct operation while maximizing the performance of the device.

[0082] The main design guidelines in order to achieve optimised overall system performance depend on a combination of the placement of the components within the device as well as the placement of the device inside the vehicle. This combination of placements should take into account that in order to optimise performance, an iterative procedure optimising several parameters is necessary, whereby the different antennas:

- should have a good reference plane (ground plane);
- should be placed as far away as possible from any metallic elements;
- should be placed as far away as possible from any source of radiated noise, or capacitive coupling.

[0083] Additionally, the GNSS antenna could be placed in such manner to have as much a direct view of the sky as possible. A view angle of approximately 170° is recommended. The use of other sources of information to aid in location determination in case GNSS reception is compromised should not be discarded.

[0084] In order to achieve such optimised performance, a thorough integration study is normally necessary. The vehicle normally has bodywork with metal based components which attenuate GNSS signal reception and introduce undesirable reflected signals received by the antenna, commonly known as multipath components. Moreover, metal and plastic components attenuate both cellular and Bluetooth signal reception and reduce the transmission range of the device. Furthermore, the telematics communication device should be installed in a place where it can continue to operate after an accident.

[0085] The combined optimisation of all these different factors results in a non-obvious iterative procedure yielding the optimal placement for the device inside the vehicle. Due to all these different complexity factors, and due to the fact that every vehicle is different, such optimisation has to be done on a case by case basis.

[0086] Such thorough integration study may be based in part on simulations and tests performed to measure antenna performance in different locations for the different modules, such as GNSS, cellular and Bluetooth. FIG. 5 is a graphic representation of different electromagnetic properties of the communication modules in different placements (glove box, dashboard), with different types of antennas (PIFA, radio PIFA, monopole) operating at different frequencies (920 Mhz, 1795 MHz). FIG. 6 is a similar graphic representation of the GNSS module per-

formance at different angular elevations, whereas FIG. 7 depicts the case for the Bluetooth module.

[0087] Interference caused by emissions in the same frequency band is commonly known as in-band noise. Measurements aimed at characterising the in-band noise of the GNSS module is depicted in FIG. 8, and in FIG. 9 for cellular communications. The correct antenna design, integration within the housing and placement of the device within the vehicle is a compromise between all these different characterisation patterns.

[0088] Therefore a discrete crash-tolerant telematics communication device for integration inside vehicles has been described which is able to transmit complex vehicle state information avoiding the use of any external antennas. Such transmission enables the provision of services which are tuned specifically to the state of the vehicle at the instant of telematic information compilation. The vehicle state information may include, in particular, vehicle positioning information, thereby enabling the provision of location based services dependent on the remaining telematic parameters of the vehicle.

[0089] A method of telematic communication is thereby enabled not possible in prior art positioning units or telematic units. The vehicle incorporating the telematics communication device of the present invention will be able to collect a variety of sensor data, and processed information from a variety of electronic control units, and periodically transmit the information to an external communication node connected to a server or database.

[0090] The information from multiple vehicles may optionally be used by traffic authorities to monitor country-wide traffic parameters. The information may optionally be used by vehicle manufacturers in order to monitor the state of the vehicle and use this information as feedback in the design process and improvement of the vehicles. The information may optionally be used by private service providers pushing information to the vehicle's display modules informing the driver and/or passengers not only of services available in the vicinity of the vehicle, such as restaurants or hotels, but more specifically, information linked to the current state of the vehicle. In the case it is detected the tyre pressure or the fuel level is low, the route to the next service station may be indicated. If the telematics data is indicative of a vehicle manufacturer specific problem, the next manufacturer service station may be indicated.

[0091] If the device's control processing means detects a state of anomalous functioning of the vehicle after having combined a plurality of telematic data from different sensors, a data and audio link with a service station may be provided, where an operator located in a remote location may have access directly to the telematic data in order for it to be analysed by a technician understanding the details of vehicle mechanics and electronics. In such a situation an overall diagnostic as to the severity of the malfunction may be given and the appropriate actions to be followed proposed.

[0092] Such telematic data need not be limited only to

vehicle specific information, but since sensors will be installed throughout the vehicle passenger compartment, even various health monitoring schemes may be installed either as a standard procedure, or for passengers with a medical record, live monitoring of the vital signs.

[0093] This guaranteed transmission of vehicle state information to emergency services during periods of vehicle anomalous functioning is advantageously available without interruption even after a heavy accident. A method of emergency signalling in a telematic communication device is thereby enabled not possible in prior art positioning units or telematic units.

[0094] When the device detects a continuous worsening of the vehicle state, or a driver's state, due to the telematic information being read and processed, or a sudden variation in telematic levels being monitored indicative of a major change in the state of the vehicle, or due to loss of functionality of the main wired data connection, or any such similar information indicative of an accident, the telematics communication device is still enabled to transmit an SOS emergency signal requesting the immediate assistance by emergency services, such as ambulance, police, or fire brigade. The autonomous power supply means provides continued electric power, enabling the continued functioning of the remaining components. The external communication means periodically transmits an emergency signal including the latest telematic data, be it either from the vehicle or its passengers, to a central emergency service center. This data may comprise current telematic data available via the internal communication means if any wireless connection is still available, and may also comprise an audio link so that an operator may either provide instructions as to first aid help, or just reassure the people involved in the accident.

[0095] In chain accident scenarios involving a plurality of vehicles, gathering a centralised picture of this scenario, including data such as number of vehicles, number of passengers involved, if any are old people, children, or people which requires special medical attention, is vital for providing the best optimised emergency services.

[0096] After the accident, the plurality of telematic data collected may be analysed by the appropriate traffic authority intending to find out the causes of the accident, in order to prevent such a situation from happening again.

[0097] Therefore, the telematics communication device of the present invention provides a variety of advantageous characteristics amongst them the increased security of vehicle transit.

[0098] It is to be understood to the skilled person in the art that the disclosure of the various embodiments of the invention is intended as non-limitative preferred examples and realisations of the inventions, and therefore features of different embodiments may be readily combined within the scope of the general inventive concept described.

[0099] The various logical blocks, modules, and circuits described in connection with the embodiments dis-

closed herein may be implemented or performed with a general purpose processor, a digital signal processor (DSP), and application specific integrated circuit (ASIC), a field programmable gate array (FPGA), or other programmable logic device, discrete gate or transistor logic, discrete hardware components, or any combination thereof designed to perform the functions described. A general-purpose processor may be a microprocessor, but in the alternative, the processor may be any conventional processor, controller, microcontroller, or state machine.

[0100] The methods or algorithms described may be embodied directly in hardware, in a software module executed by a processor, or a combination of the two. A software module may reside in RAM memory, flash memory, ROM memory, EPROM memory, EEPROM memory, registers, hard disk, a removable disk, a CD-ROM, or any other form of storage medium known in the art.

[0101] The previous description of the disclosed embodiments is provided to enable any person skilled in the art to make or use the present invention. Various modifications to these embodiments will be readily apparent to those skilled in the art. Likewise, the generic principles disclosed herein may be applied without departing from the spirit or scope of the invention. Therefore, the present invention is not intended to be limited by the embodiments disclosed but to be accorded the widest scope consistent with the principles and the novel features disclosed herein.

[0102] Those skilled in the art should appreciate that the foregoing discussion of one or more embodiments does not limit the present invention, nor do the accompanying figures. Rather, the present invention is limited only by the following claims.

Claims

1. A telematics communication device for vehicles, comprising:

power supply means;
means for internal data communications with at least one module of the vehicle;
means for control processing adapted to determine a state of the vehicle based on data received from the at least one module of said vehicle; and
means for external communications for transmitting at least one signal including the vehicle state information.

2. The telematics communication device of claim 1, wherein the device is placed inside the vehicle, further comprising a connector for electrically connecting the device with the vehicle.
3. The telematics communication device of claim 2,

wherein the different means are integrated within a single housing.

4. The telematics communication device of claim 3, wherein the signal may be an audio signal, a light signal or an electromagnetic signal, or a combination thereof.
5. The telematics communication device of any of the preceding claims, wherein the means for internal and external communications comprise respectively at least one antenna integrated with and/or within the housing of the device and wherein the at least one antenna is one of the group of space-filling curve antenna, or multilevel structure antenna.
6. The telematics communication device of claim 5, wherein the at least one antenna is from the group of Planar Inverted F Antenna PIFA, or Inverted F Antenna IFA, or monopole antenna, or dipole antenna, or coupled monopole antenna, or loop antenna, or microstrip patch antenna.
7. The telematics communication device of claim 5, wherein the at least one antenna is adapted to have a pattern located substantially along the outer perimeter of the communication device, or adapted to substantially fill the central part of the antenna, or the outer diameter, or a combination thereof, and wherein the pattern follows the Hilbert geometry or Koch geometry or Meander geometry, or a combination of any geometry allowing its integration.
8. The telematics communication device of any of the preceding claims, wherein the at least one integrated antenna is integrated within the housing of the device, or inside its back cover, or a combination thereof, and may be placed at any angle to the printed circuit board of the telematics communication device.
9. The telematics communication device of any of the preceding claims, wherein the power supply means comprises a connection to the main vehicle power supply; and at least one internal backup battery adapted to be activated when the main vehicle power supply, or the connection to the main vehicle power supply, fails to operate.
10. The telematics communication device of claim 9, wherein the at least one internal backup battery is a rechargeable battery adapted to be recharged whenever connected to the main vehicle power supply.
11. The telematics communication device of any of the preceding claims, wherein the means for internal data communications is based on a standard vehicular

protocol for data networking and wherein the device is in communication with the at least one module via the means for internal data communications.

12. The telematics communication device of any of the preceding claims, wherein the at least one module comprises at least one sensor unit or at least one electronic control unit ECU, or a combination thereof, located in or around the engine, doors, wheels, motor, seats, windshield, windows, antennas, electronic devices, cables, driving wheel, axis, or any other component of the vehicle, and the vehicle state information comprises information from the at least one module.
13. The telematics communication device of any of the preceding claims, wherein the means for external communications comprises at least a radio frequency RF module based, for instance, on cellular communication protocols over the GSM or CDMA air interface.
14. The telematics communication device of any of the preceding claims, further comprising means for position determination based on cellular techniques or via a global navigation satellite system GNSS positioning protocol, wherein the position determination antenna is also integrated within the housing of the device, and the signal with the vehicle state information comprises also vehicle location information.
15. The telematics communication device of claim 14, wherein the means for position determination comprises at least one inertial sensor, and is adapted to update the location of the vehicle using information from the at least one module even during temporal absence of any cellular or satellite positioning information.
16. The telematics communication device of any of the preceding claims, wherein the means for control processing is adapted to automatically detect a state of anomaly, emergency or crash, based on data received from the at least one module, and notify the means for external communications for transmitting at least one emergency signal and/or establish an audio link with an emergency control center.
17. The telematics communication device of claim 16, wherein the state of emergency of the vehicle can also be triggered manually by the user by means of the activation of an emergency button.
18. The telematics communication device of any of the preceding claims, wherein the housing comprises a flexible module or at least two flexibly interconnected modules permitting relative movement between them, thereby allowing the housing to be placed with-

in a free space inside the vehicle conforming to non-uniform structures and spaces around and in-between other vehicle components.

19. The telematics communication device of any of the preceding claims, wherein the housing is at least partly, or fully, made of a flexible mouldable material adapted to be solidified by heating, by a chemical reaction or by electricity, and wherein the solidifying step is applied after the device has been placed within a free space inside the vehicle conforming to non-uniform structures and spaces around and in-between other vehicle components. 5 10
20. The telematics communication device of any of the preceding claims, wherein the housing is partly made of special plastic polymers, such as glass fibre reinforced polyamides, or polypropylene with talc, and the physical characteristics of the device, such as shape and form, have been designed to withstand the mechanical stresses in case of crash of the vehicle. 15 20
21. A method of emergency signaling for vehicles in a telematics communication device, the method comprising the steps of: 25
- determining a vehicle emergency state by a control processing means based on data received from at least one module via means for internal communications; 30
- transmitting at least one signal including information about the vehicle state via means for external communications; 35
- wherein the transmitting step may still be performed even if the wired connections of the device to the vehicle lose their functionality. 40

40

45

50

55

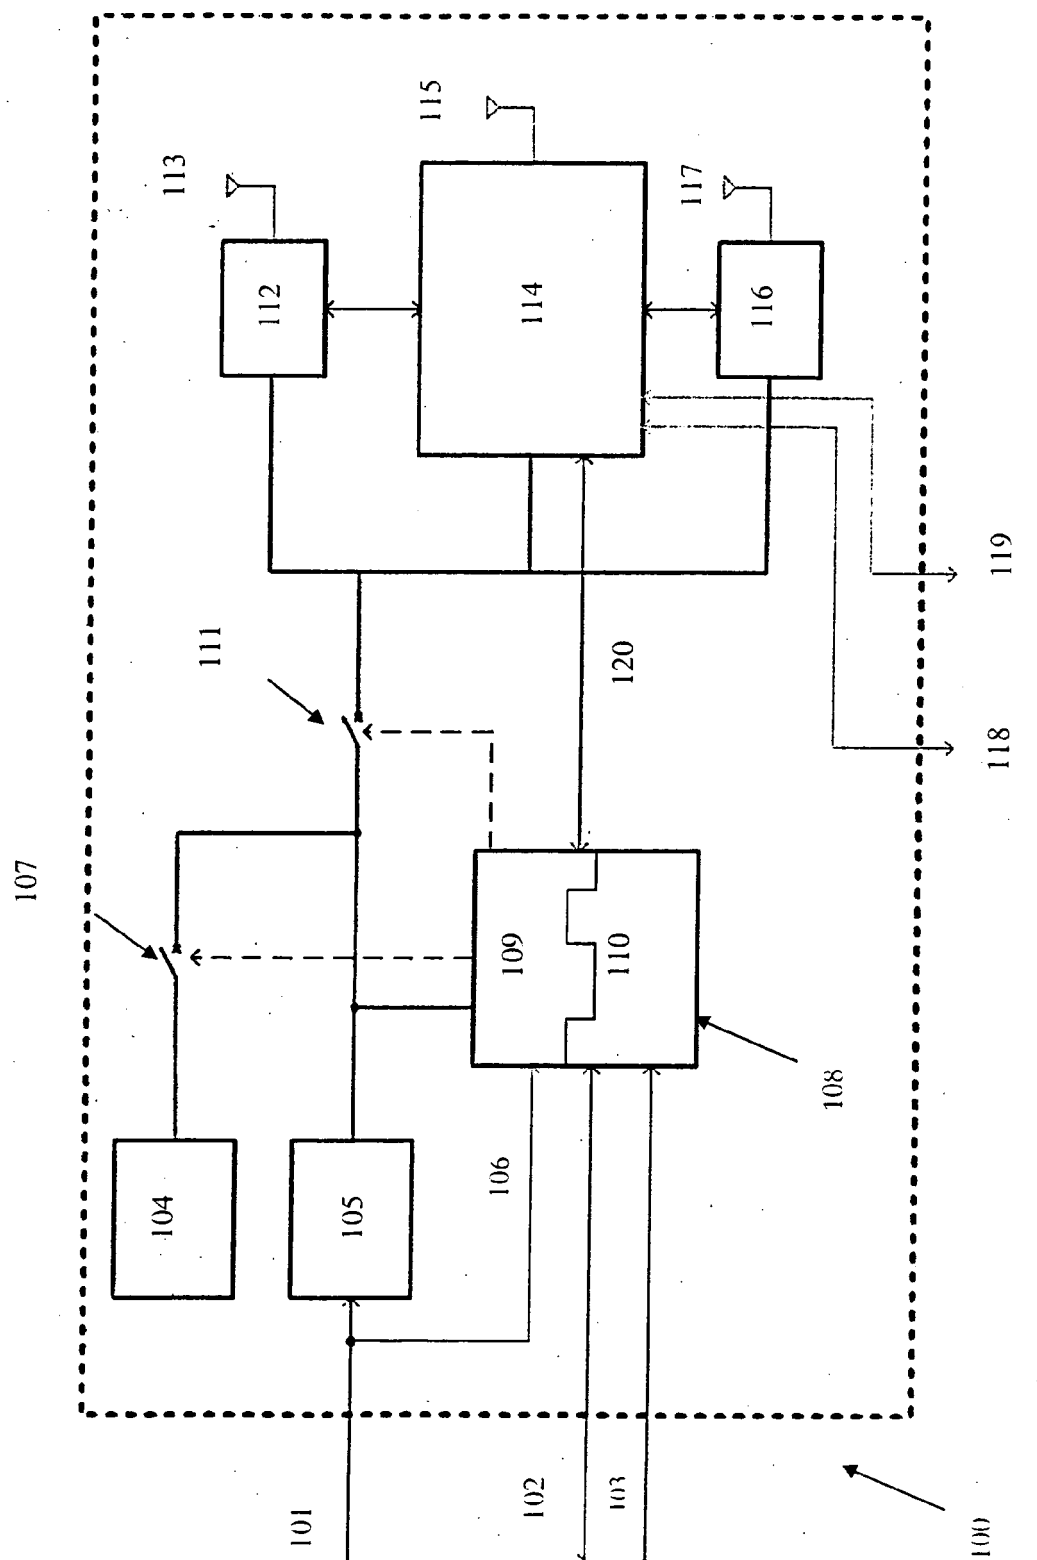
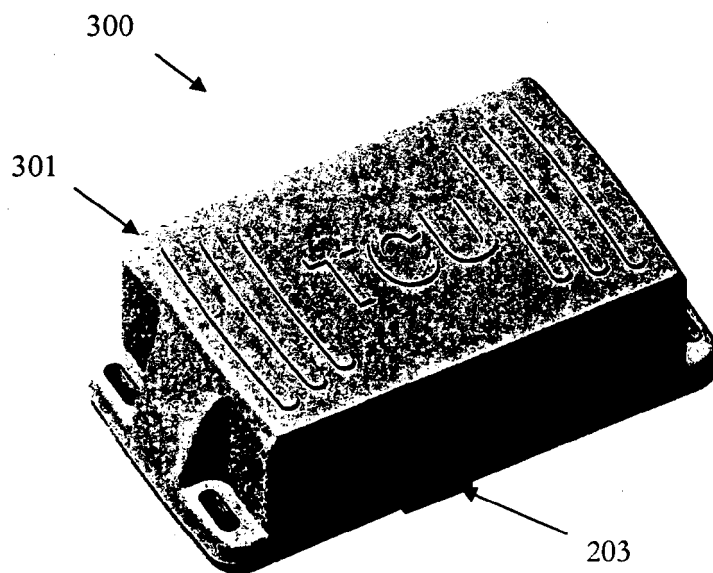
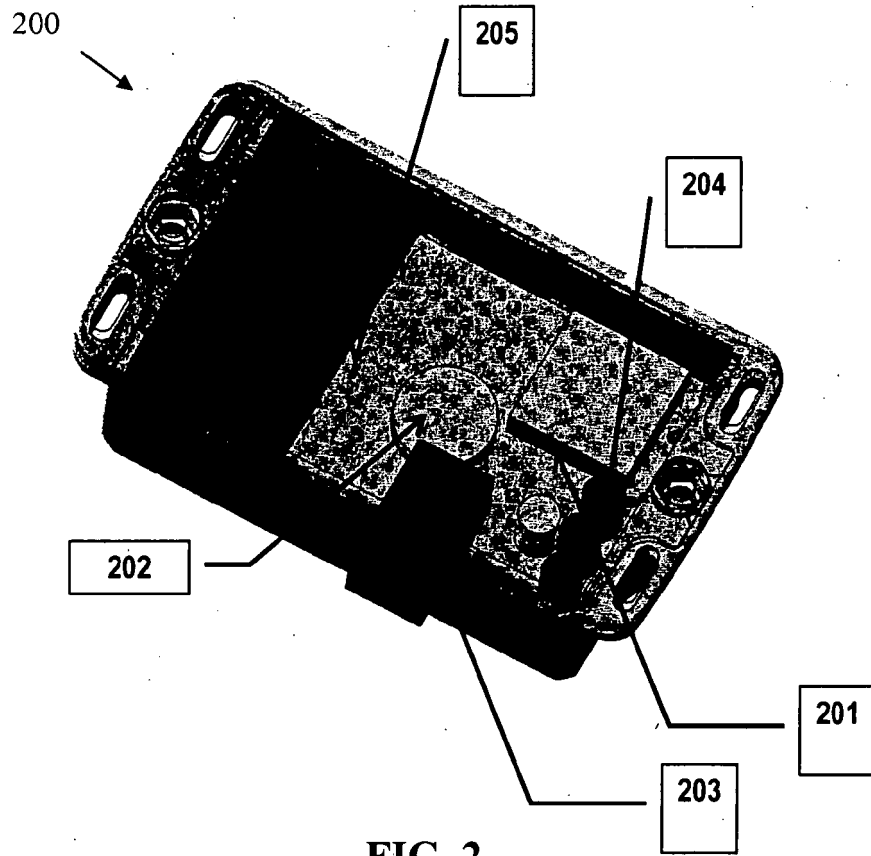


FIG. 1



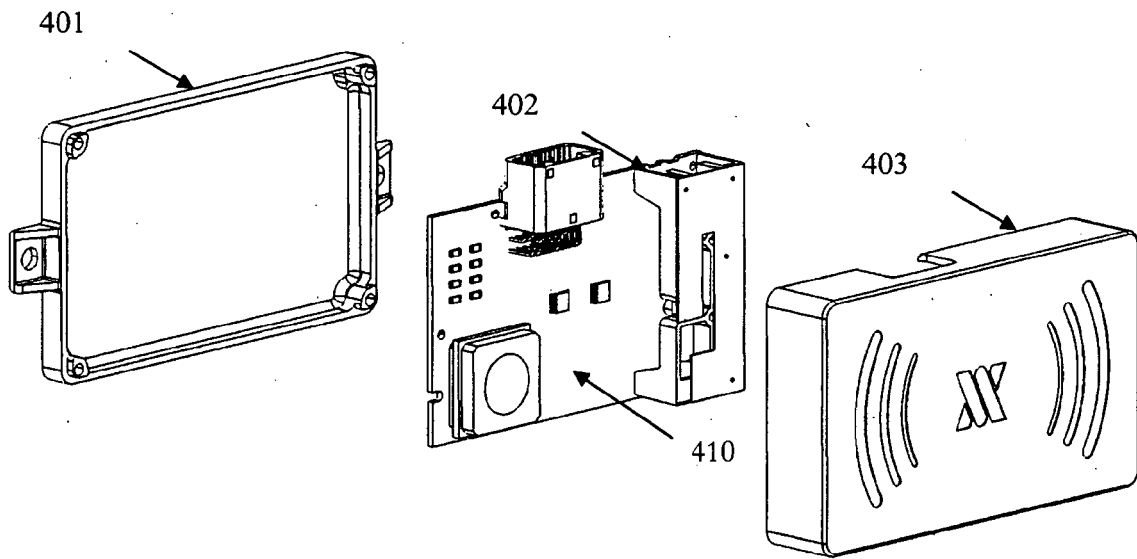


FIG. 4A

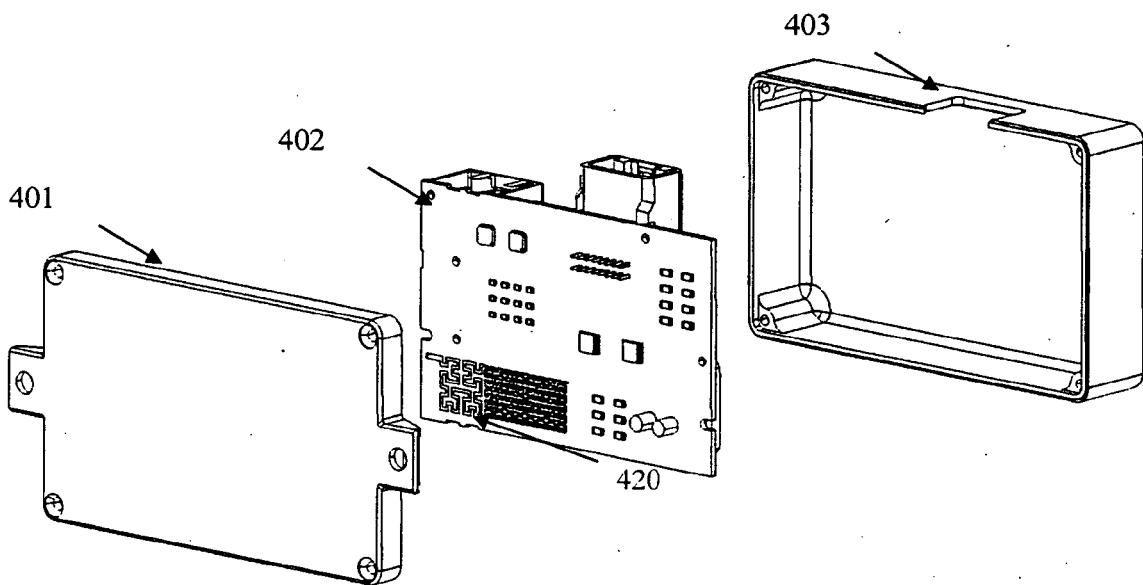


FIG. 4B

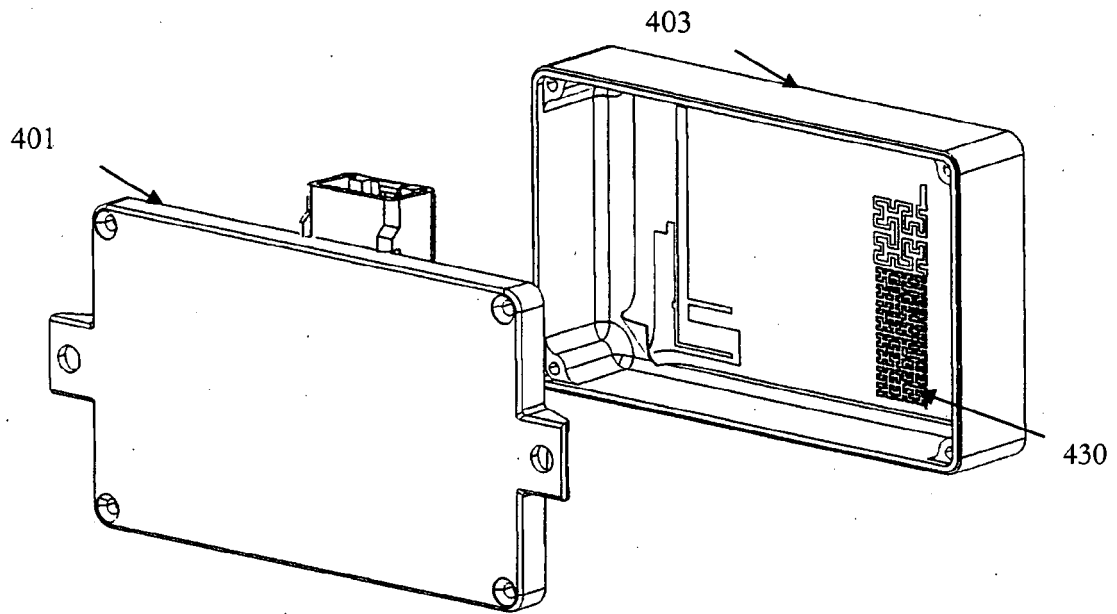


FIG. 4C

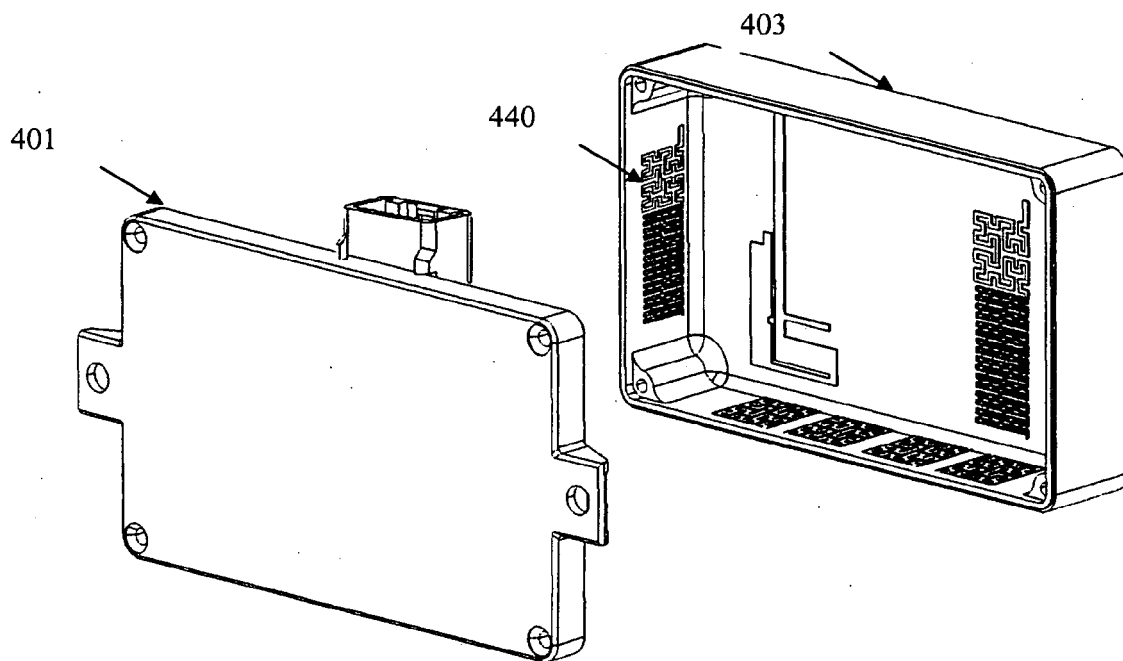


FIG. 4D

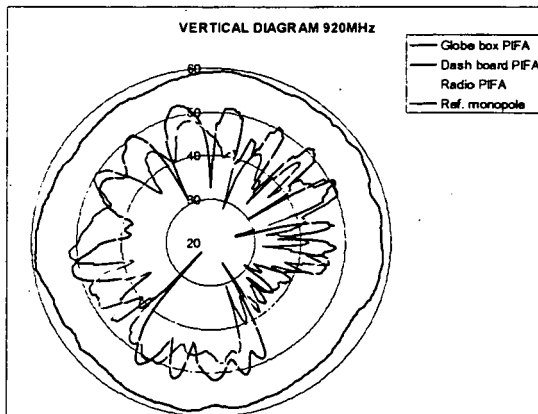


FIG. 5A

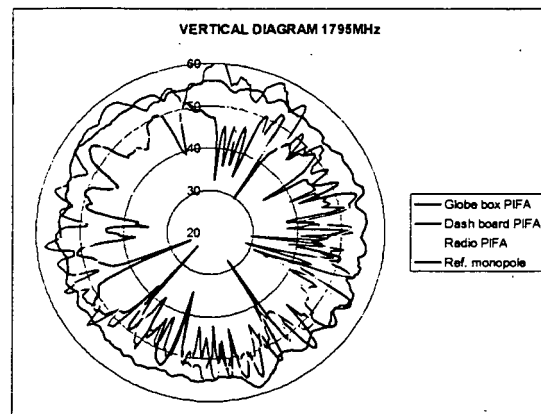


FIG. 5B

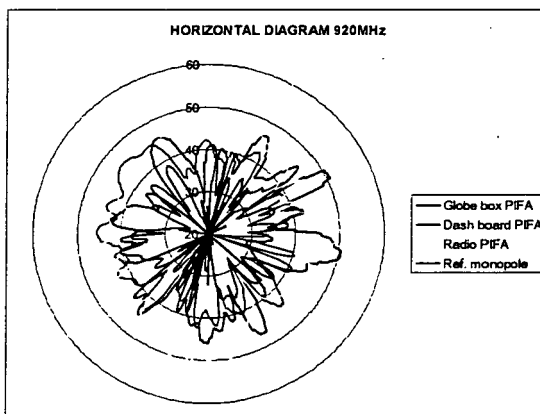


FIG. 5C


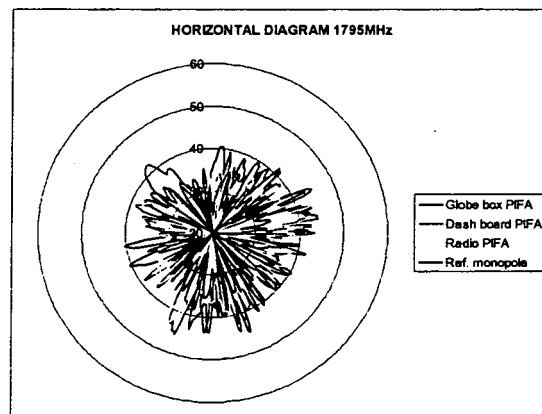


FIG. 5D

FIG. 5

Frequency 1575,42 MHz / GPS 0° to 40° Elev.

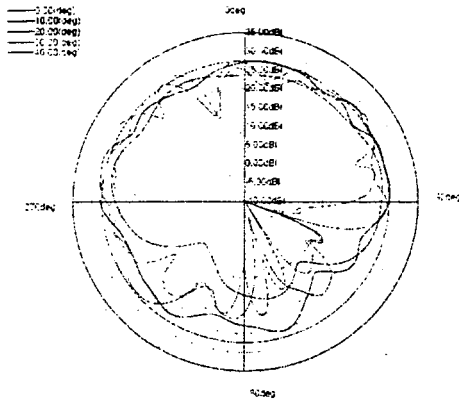

Frequency 1575,42 MHz / GPS 50° to 90° Elev.


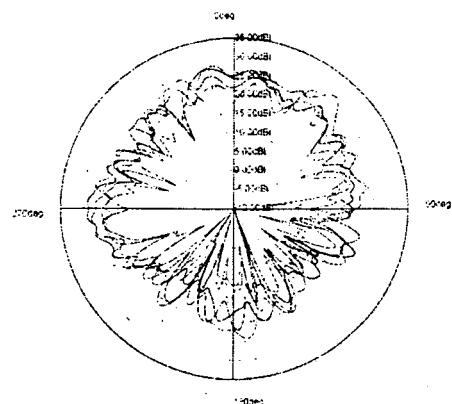


FIG. 6

Frequency 2460 MHz / Bluetooth 0° to 40° Elev.

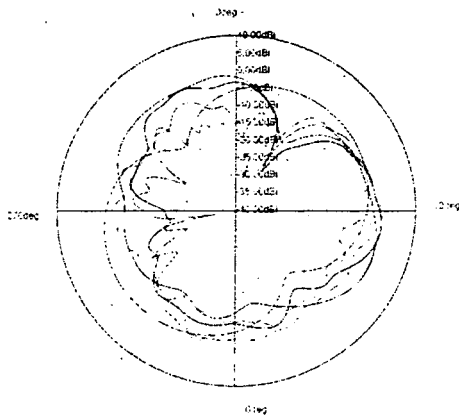

Frequency 2460 MHz / Bluetooth 50° to 90° Elev.

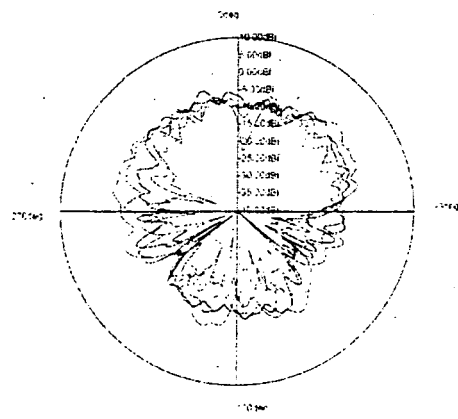


FIG. 7

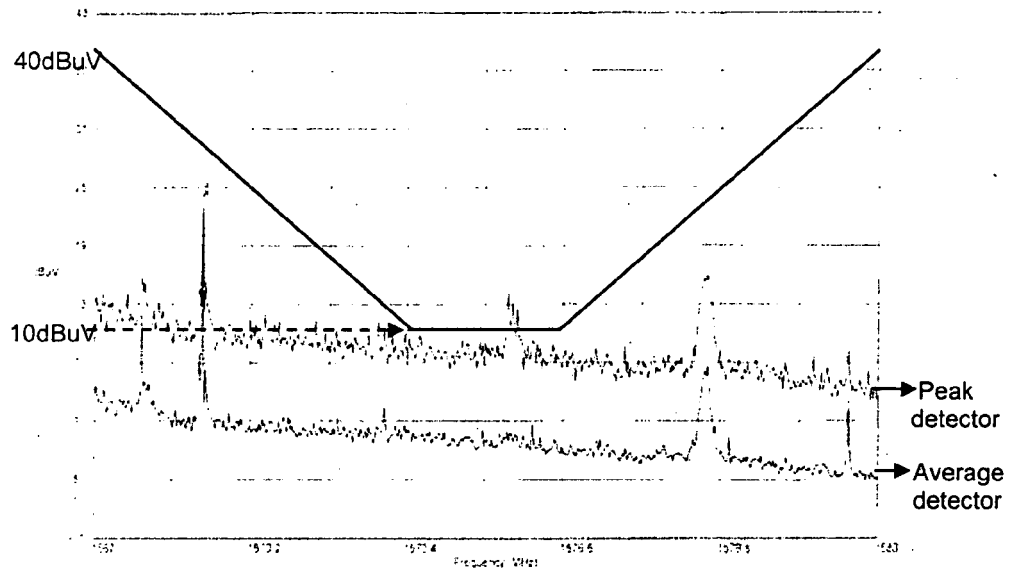


FIG. 8

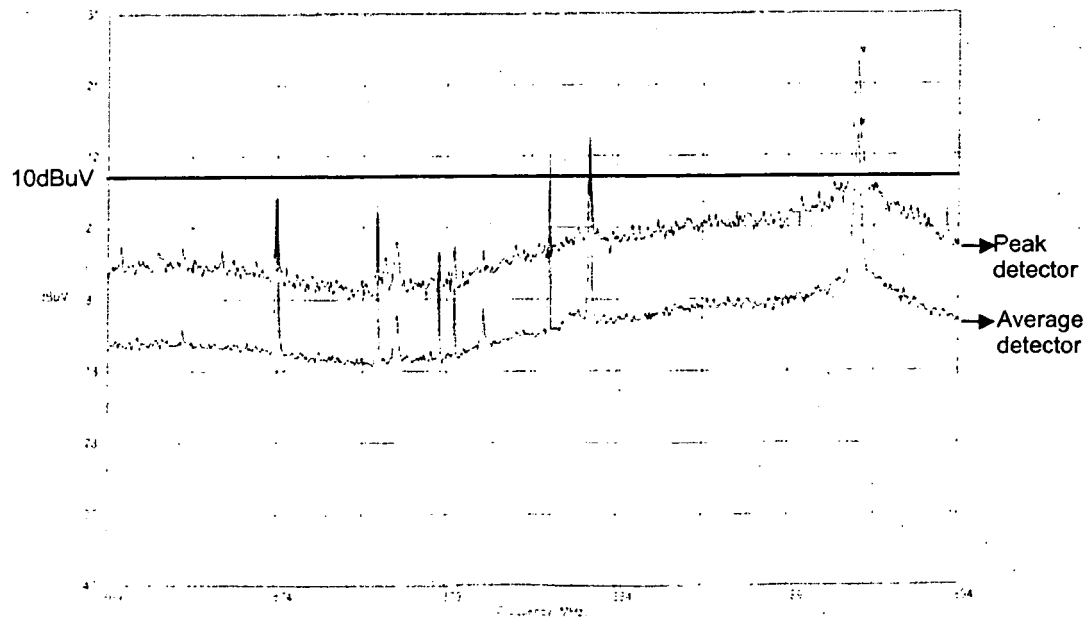


FIG. 9

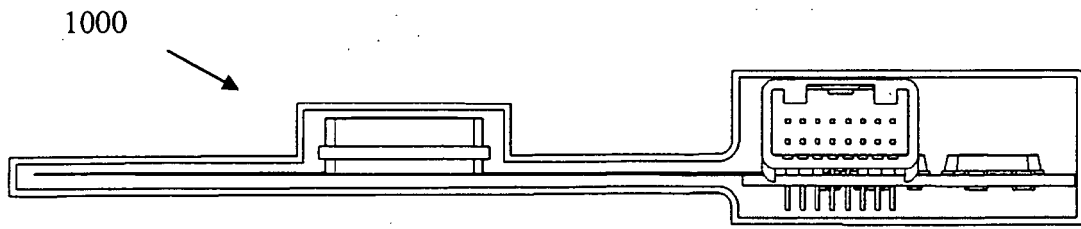


FIG. 10A

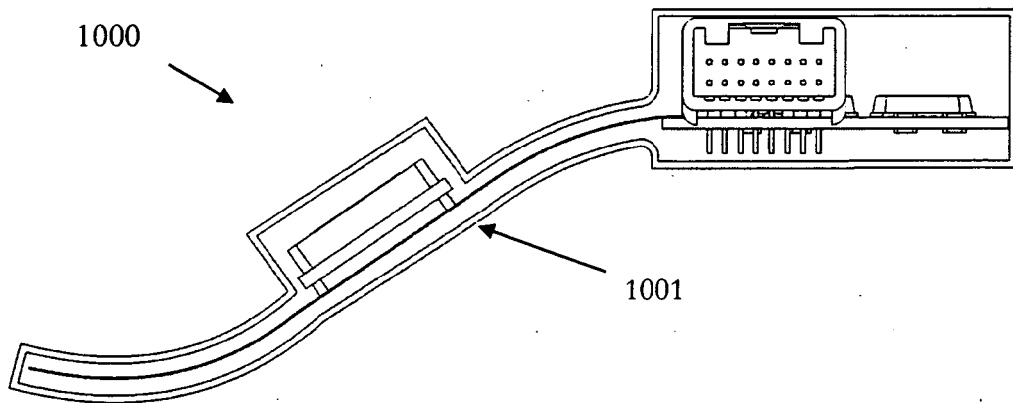


FIG. 10B

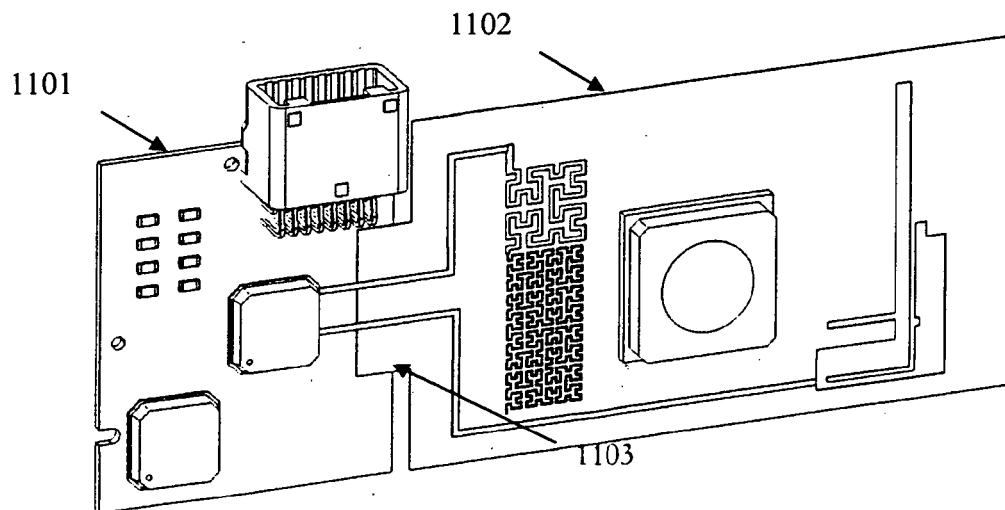


FIG. 11



EUROPEAN SEARCH REPORT

Application Number
EP 08 00 9800

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	WO 01/80353 A (GENTEX CORP [US]) 25 October 2001 (2001-10-25)	1-6, 9-17,21	INV. G08G1/123
Y	* claims 65-76; figures 3,6,10A-G,11-13 *	18-20	H01Q1/32 H01Q1/36 H01Q21/28
X	US 6 493 629 B1 (VAN BOSCH JAMES A [US]) 10 December 2002 (2002-12-10)	1,2, 11-17,21	
Y	* column 1, line 12 - column 2, line 3 *	3-8, 18-20	
	* column 2, line 34 - column 3, line 36; figure 1 *		
Y	EP 1 338 058 B (ADVANCED AUTOMOTIVE ANTENNAS S [ES]) 14 June 2006 (2006-06-14)	3-8, 18-20	
	* paragraphs [0018] - [0025], [0031]; figures 1-13 *		
Y	EP 1 843 430 A (DELPHI TECH INC [US]) 10 October 2007 (2007-10-10)	3-6	
	* paragraphs [0006] - [0010] *		
	* paragraph [0015] - paragraph [0026]; figures 1-4 *		
A	WO 2004/030143 A (RADIAL ANTENNA TECHNOLOGIES I [US]; GRANT GARY W [US]; SHERMAN DOUGLA) 8 April 2004 (2004-04-08)	1-21	G08G H01Q
	* figures 1-7 *		
A	US 2004/051661 A1 (WIXFORTH THOMAS [DE] ET AL) 18 March 2004 (2004-03-18)	1-21	
	* paragraphs [0028] - [0047]; figures 1-5 *		
A	WO 2005/076409 A (FRACTUS SA [ES]; SOLER CASTANNY JORDI [ES]; PUENTE BALIARDA CARLES [ES]) 18 August 2005 (2005-08-18)	1-21	
	* abstract; figures 1-5 *		
	-/--		
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 6 November 2008	Examiner Angrabeit, Frank
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

2

EPO FORM 1503 03.82 (P04C01)



EUROPEAN SEARCH REPORT

Application Number
EP 08 00 9800

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	EP 0 915 443 A (GRUNDIG AG [DE] GRUNDIG CAR INTERMEDIA SYSTEM [DE] DELPHI TECH INC [US] 12 May 1999 (1999-05-12) * paragraphs [0015] - [0029] * -----	1,21	
A	US 6 282 491 B1 (BOCHMANN HARALD [DE] ET AL) 28 August 2001 (2001-08-28) * abstract; figures 1,2 * -----	1,21	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
Place of search The Hague		Date of completion of the search 6 November 2008	Examiner Angrabeit, Frank
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

2

EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 08 00 9800

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-11-2008

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0180353	A	25-10-2001	AU 5322101 A	30-10-2001
			CA 2400752 A1	25-10-2001
			EP 1350284 A1	08-10-2003
US 6493629	B1	10-12-2002	AT 360308 T	15-05-2007
			AU 2002350267 A1	17-06-2003
			DE 60219681 T2	17-01-2008
			EP 1454459 A1	08-09-2004
			WO 03049380 A1	12-06-2003
EP 1338058	B	14-06-2006	AT 330338 T	15-07-2006
			AU 1388101 A	06-05-2002
			CN 1511356 A	07-07-2004
			DE 60028840 T2	06-06-2007
			WO 0235646 A1	02-05-2002
			EP 1338058 A1	27-08-2003
			ES 2264941 T3	01-02-2007
			JP 2004512755 T	22-04-2004
EP 1843430	A	10-10-2007	US 2007236404 A1	11-10-2007
WO 2004030143	A	08-04-2004	AU 2003299055 A1	19-04-2004
US 2004051661	A1	18-03-2004	WO 0211240 A1	07-02-2002
			DE 10037386 A1	14-02-2002
			EP 1307945 A1	07-05-2003
			JP 2004505584 T	19-02-2004
WO 2005076409	A	18-08-2005	EP 1714353 A1	25-10-2006
			US 2007152887 A1	05-07-2007
EP 0915443	A	12-05-1999	DE 19748992 A1	20-05-1999
			ES 2213250 T3	16-08-2004
US 6282491	B1	28-08-2001	WO 9815075 A2	09-04-1998
			DE 19640735 A1	23-04-1998
			EP 0929953 A2	21-07-1999
			ES 2257770 T3	01-08-2006
			JP 3902666 B2	11-04-2007
			JP 2001503513 T	13-03-2001

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82