



(12) **CORRECTED EUROPEAN PATENT APPLICATION**

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 84

(51) Int Cl.:
G01F 23/26 (2006.01) **G01F 25/00** (2006.01)

(48) Corrigendum issued on:
28.04.2010 Bulletin 2010/17

(43) Date of publication:
23.12.2009 Bulletin 2009/52

(21) Application number: **09162846.1**

(22) Date of filing: **16.06.2009**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK TR
Designated Extension States:
AL BA RS

• **Franchetti, Bruno**
36040, BRENDOLA VI (IT)
• **Sinico, Francesco**
36075, MONTECCHIO MAGGIORE VI (IT)

(30) Priority: **18.06.2008 IT PD20080178**

(71) Applicant: **Dab Pumps S.p.A.**
35035 Mestrino (Padova) (IT)

(74) Representative: **Modiano, Micaela Nadia**
Dr. Modiano & Associati SpA
Via Meravigli 16
20123 Milano (IT)

(72) Inventors:
• **Trentin, Enrico**
36053, GAMBELLARA VI (IT)

Remarks:
Amended claims in accordance with Rule 137(2) EPC.

(54) **Capacitive liquid level sensor**

(57) A level sensor (10) particularly for liquids comprising at least two capacitors (12, 13) arranged side by side, to be immersed in the same liquid (14) whose level is to be measured and having the same capacitance (C, C1) when they are immersed in the liquid (14) but a different geometry (S, S1, D, D1), both capacitors being connected to a control unit (15) that is designed to compare the signals that arrive from the two capacitors.

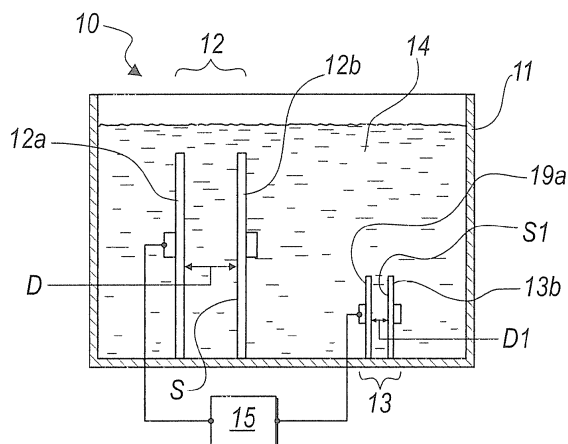


Fig. 1