(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 2 138 529 A8

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

(15) Correction information:
Corrected version no 1 (W1 A2)
Corrections, see
Bibliography INID code(s) 84

(48) Corrigendum issued on:
04.08.2010 Bulletin 2010/31

(43) Date of publication:
30.12.2009 Bulletin 2009/53

(21) Application number: **09012994.1**

(22) Date of filing: **04.12.2003**

(51) Int Cl.:
C08J 3/12 *(2006.01)* ***C08J 3/24*** *(2006.01)*
C08F 8/14 *(2006.01)* ***G01B 9/00*** *(2006.01)*
A61L 15/60 *(2006.01)* ***C08L 33/02*** *(2006.01)*

(84) Designated Contracting States:
BE DE

(30) Priority: **06.12.2002 JP 2002355679**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
03027850.1 / 1 426 402

(71) Applicant: **Nippon Shokubai Co., Ltd.**
Chuo-ku
Osaka-shi
Osaka 541-0043 (JP)

(72) Inventors:
- **Ishizaki, Kunihiko**
  Suita-shi, Osaka 565-0873 (JP)
- **Kajikawa, Katsuhiro**
  Himeji-shi, Hyogo 671-1224 (JP)


(74) Representative: **Glawe, Delfs, Moll**
Patent- und Rechtsanwälte
Postfach 26 01 62
80058 München (DE)

Remarks:
This application was filed on 14-10-2009 as a divisional application to the application mentioned under INID code 62.

(54) **Process for continuous production of water-absorbent resin product**

(57) There is disclosed a process for continuous production of a water-absorbent resin product by which the water-absorbent resin product having high properties can continuously be produced easily and inexpensively with stable constant quality. In addition, there is disclosed a water-absorbent resin product having high properties and being stable in quality. The process comprises a step of measuring a water-absorbent resin by its particle diameters, wherein the water-absorbent resin comes being continuously produced via a classification step and/or a surface-modifying step, wherein the aforementioned particle diameters of the water-absorbent resin are measured by a laser diffraction scattering method.

Fig. 1

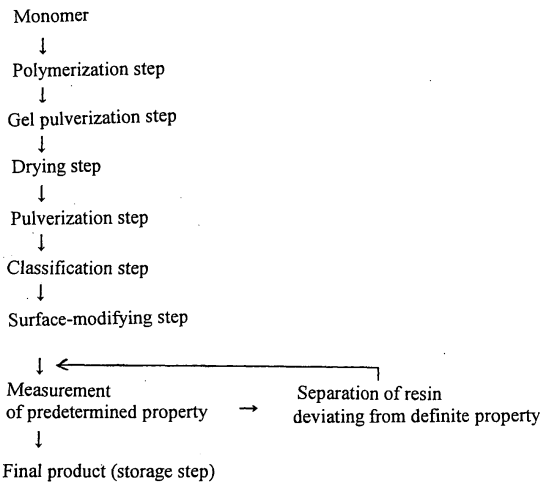

EP 2 138 529 A8