



(11) **EP 2 141 907 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
06.01.2010 Bulletin 2010/01

(51) Int Cl.:
H04N 1/60 (2006.01)

(21) Application number: **09013143.4**

(22) Date of filing: **27.12.2000**

(84) Designated Contracting States:
DE FR GB

(30) Priority: **28.12.1999 JP 37542399**

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
00311700.9 / 1 130 897

(71) Applicant: **Photographic Art Research Laboratory
Tokyo 105-8423 (JP)**

(72) Inventor: **Aoki, Akira
Kawasaki-shi
Kanagawa 211-0035 (JP)**

(74) Representative: **Paget, Hugh Charles Edward et al
Mewburn Ellis LLP
33 Gutter Lane
London
EC2V 8AS (GB)**

Remarks:

This application was filed on 19-10-2009 as a
divisional application to the application mentioned
under INID code 62.

(54) **Method for calibrating color of an image in transmission of a digital image**

(57) When transmitting an image between a pair of
computer image processing systems A and B, a common
color image Z is used as a medium image, the medium
image is read as digital data into the computer of the
system B from the system A, the color of the digital image
displayed on the monitor of the computer of the system
B is adjusted to substantially match the color of the com-
mon image Z by operating the conventional color adjust-

ment system of the computer, the deviation from the or-
igin (zero point) of the color data displayed on the monitor
(brightness, contrast, chroma, and color balance) is
found, and, when transmitting any image through the sys-
tem A to the system B, the color data of the digital image
displayed on the monitor of the computer of the system
B is corrected using the deviation as the correction value.

EP 2 141 907 A1

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates to a method for calibrating color of an image, such as a color photograph, in transmission of a digital image between a pair of computer image processing systems A, B.

2. Description of the Related Art

[0002] Along with the advances made in computer image processing and the advances made in digital data communications, it has become possible to send digital images from one location to another in a very short time regardless of the distance. In particular, the recent advances in Internet communications have made possible the convenient transmission and reception of digital images. These activities are now entering even our daily lives. Specifically, digital images are being transmitted through Internet communication systems from large numbers of unspecified points of transmission to organizations having specific specialized image processing (including value judging, image correction and processing, and printing) systems and are being processed to order in the specific specialized image processing systems. Further, specialized businesses having a plurality of computer image processing systems are using a combination of these systems for streamlining their work.

[0003] Such modern systems for transmission and reception of digital images, however, have only just been put together. The fact is that there are still problems which remain to be solved. One of the problems is the mismatch of the color of the image transmitted between a pair of computer image processing systems (brightness, contrast, chroma, and color balance, hereinafter referred to simply as "color").

[0004] In general, to read an image into a computer as digital data, the image is either read through a scanner or the image is captured by a digital camera and that digital data of the image recorded in the camera is read by connecting the camera to the computer. Whatever the case, it is impossible to avoid the reading function of the reading apparatus having an effect on the color of the image. Therefore, it is only natural that the color of the image read by the reading apparatus may not match the color of the digital image displayed on the monitor of the computer. Of course, further reading errors of color data are unavoidable in different reading apparatuses and are unique to each apparatus.

[0005] The extent of the color mismatch due to such unavoidable reasons is fixed within each system, so the problem becomes more complex between reading apparatuses in a pair of systems. On top of this, in the case of unspecified large numbers of systems, it may be said with no exaggeration that this problem has to be solved

or else no further spread of image transmission systems can be expected.

SUMMARY OF THE INVENTION

[0006] To solve the above problem, the invention of the present application has as its object the provision of a rational method of calibration for adjusting the above-mentioned mismatch of color of an image when using a certain pair of computer image processing systems or a plurality of computer image processing systems in combination or between two computer image processing systems through a system for transmission or reception of digital images using a communication system such as an Internet communication system.

[0007] To solve this problem, the invention of the present application was developed based on the confirmation by experiment that the problem of mismatch of color of an image when transmitting an image between a pair of computer image processing systems comprised of independent computer image processing systems A and B (hereinafter referred to as simply the systems A and B) is derived from the characteristics of the function of the equipment making up the systems, in particular the image reading equipment, and that the mismatch of color does not substantially change even if the images are different.

[0008] That is, from the above discovery, the problem of color in a computer image processing system is solved by the basic technical idea of using an RGB, CMYK, or other reference color image as a medium, transmitting the reference color image to the system B through the computer of the system A, (or vice versa), detecting the reading error of the color of the image (brightness, contrast, chroma, and color balance) at the time of transferring the reference color image, detecting the reading error of the reference color image by the system A as well if necessary, and operating the color adjustment system of the computers of the individual computers to adjust the color of the images displayed on the monitors respectively. Further, as the reference color image, it is also possible to have a pair of systems share a unique color image and to use this as the reference color image.

[0009] According to the present invention, even when the images to be transmitted between a pair of directly related computer image processing systems A and B differ, it is possible to transmit from the system A to the system B (or vice versa), a digital image substantially matching in hue with the original image in question through the reference color image.

[0010] Furthermore, the present invention has the further advantage that in a case where a new digital image is made by applying a conventional digital image processing technique and thereafter the new digital image is transferred to the system B, a digital image having substantially identical composition and color to the above-mentioned new digital image can be easily displayed on the monitor of the system A, according to the

simple method provided by the present invention.

[0011] The method for calibrating color of a color image in transmission between a pair of computer image processing systems A and B according to the present invention as mentioned above, comprises a first step of setting a correction value for applying to a color matching operation of either one of the computer image processing systems A and B, and a second step of operation of color matching of a digital image indicated in either one of the systems A and B to a color of an original image before said transmission of the color image, respectively.

[0012] For better understanding of the basic technical idea of the present invention, the above-mentioned process is explained in the case of transferring the original image from the system A to the system B as follows:

[0013] The first step of setting a correction value is started from an advance preparation of a reference color image as a common standard color image Z for the systems A and B. Then the color image z is transferred from the system A to the system B and a color matching operation is applied to a transferred digital image which is displayed on the monitor of the system B against the color image z, so that a difference of color data (brightness, contrast, chroma, and color data) from an origin (zero point) displayed on the monitor of the system B, is detected, and the correction value is set based upon this detected data.

[0014] The color matching operation applied to a transmission of any color images from the system A to system B is carried out by the following second step operation, that is, the color matching operation applied to a digital image displayed on the monitor of the system B is carried out by adopting the above-mentioned correcting value.

[0015] The basic technical idea of the present invention can be successfully applied to the color matching operation between a digital image indicated in the monitor of the system A and a digital image (corresponding to the above-mentioned digital image) indicated in the monitor of the system B, even though the transmission manner of the digital image is different from the above-mentioned explanation. Such effects of the present invention are hereinafter clarified by the detailed explanation of several embodiments.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] The present invention may be more fully understood from the description of the preferred embodiments of the invention set forth below together with the accompanying drawings, in which:

Fig. 1 is an explanatory view of an outline of the arrangement of equipment of computer image processing systems A and B in a typical embodiment of the basic aspect of the invention.

Fig. 2 is a flow chart indicating the action steps of the first embodiment of the present invention.

Fig. 3 is a view of an example of a reference color

basic image used for correction of the color of an image in transmission of an image shown in Figs. 1 and 2.

Fig. 4 is a flow chart indicating the action steps of the second embodiment of the present invention.

Fig. 5 is a flow chart indicating the action steps of the third embodiment of the present invention.

Fig. 6 is a view of the image (line drawing) of an original photograph of a combination of fruit.

Fig. 7 is a view of the image (line drawing) of an original photograph of Mt. Bandai.

Fig. 8 is a view of the image of the original photograph of Mt. Bandai, indicating instructions for trimming.

Fig. 9 is a view of the expected image of Mt. Bandai indicating desired color balance between components of picture.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0017] Information transmission systems linking a pair of computer image processing systems A and B through a communications line have already been perfected. The ability to precisely transmit digital data through them is a well known fact. Further, it is well known that precise digital data can be transmitted in a similar fashion even when transmitting digital data between the two systems by an MO disc. Therefore, for convenience in explanation, the invention of the present application will be explained with reference to the case of use of an MO disc.

[0018] First, an embodiment showing the basic technical idea of the invention of the present application will be explained with reference to Fig. 1. As shown in Fig. 1, the basic invention will be explained with reference to the example of use of a computer image processing system using a Power Macintosh G3 as the computer 1, a Mitsubishi Diamond RD 21G as the monitor 2, an Epson Inkjet Printer 2000C as the printer 3, a Microtek Scan Maker 5 as the scanner 4, and an Olympus Turbo MO 640S as the MO drive 5 (hereinafter referred to as the "system A") and a computer image processing system using a Power Macintosh 9600/300 as the computer 6, a Sony FD Trinitron GPD-G500 as the monitor 7, an Epson Inkjet Printer 2000C as the printer 8, a Microtek Scan Master 4 as the scanner 9, and an Olympus Turbo MO 640S as the MO drive 10 (hereinafter referred to as the "system B") as the pair of computer image processing systems.

[0019] As shown in Fig. 1, a known RGB color image (Fig. 3) is prepared as a reference color image and a positive film of a photograph (Fig. 5) of fruit is prepared as the original image for transmission of images from the system A to the system B equipped with the above equipment.

[0020] As explained already, in the present invention, it is normal that the preparatory action for setting the calibration value and the color matching operation applied to a digital image displayed on a monitor of either one of the systems A, B are independently carried out. In the

Japanese patent application No. PH11-375423, which is the parent patent application from which present patent application claims convention priority, since the first embodiment was carried out with the systems A and B positioned very close together in the inventor's laboratory, the scanning of the original image X was carried out successively to that for the standard color image Z.

[0021] To clarify the characteristic feature of the present invention, the first embodiment was carried out in the above-mentioned normal way, and thereby an identical result of the experiment to the first embodiment explained in the Japanese patent application, was obtained.

[0022] The first embodiment is hereinafter explained with reference to the flow chart shown in Fig. 2.

[0023] As indicated in this flow chart, as the first action, the standard color image Z (RGB color image) shown in Fig. 3 was scanned by the scanner 4 of the system A, whereby digital data of the color image z was stored in a memory of the computer 1, then this digital data was written on an MO disc by the MO driver 5 (step 1), and this digital data was transmitted to the system B, where the digital data was stored in a memory of the computer 6 of the system B, and a digital image Z_1 was displayed on the monitor 7 of the system B (step 2).

[0024] Next, a conventional color matching operation was applied to the digital image Z_1 of the system B by adjusting color data (brightness, contrast, chroma, color balance (R, G, B)) displayed on the monitor 7 whereby a digital image Z_2 being substantially identical to that of Z was displayed on the monitor 7, and then the deviation of color data from the origin (zero point) was read as the correction value α . This correction value was brightness (-54), contract (-9), chroma (0), color was (R (-8), G (0), B (-6)) (step 3).

[0025] Like the standard color image Z, the original image X was scanned by the scanner 4 of the system A and the digital data of X was stored in the memory of the computer 1 of the system A, then this digital data was written on an MO disc by the MO drive 5 (step 4). Then this digital data was transmitted to the system B by MO, whereby a digital image X_1 was displayed on the monitor 7 of the system B (step 5).

[0026] Next, the color matching operation is applied to the digital image X_1 by adopting the above-mentioned correction value α whereby a digital image X_2 being substantially identical to X was displayed on the monitor 7 of the system B.

[0027] The second embodiment is an experiment successively applied to the experiment disclosed in the first embodiment, therefore the result of the additional experiment is only disclosed with reference to the flow chart shown in Fig. 4, as follows.

[0028] As shown in the flow chart of Fig. 4, as the additional first step action, the standard color image Z was scanned by the scanner 4 of the system A and the digital data thereof was stored in the memory of the computer 1 and digital image Z_3 was displayed on the monitor 2,

then as the second additional step, the conventional color matching operation was applied to the digital image Z_3 .

[0029] Thereafter, as the third step action, deviation of color data from the origin (zero point) was read, as the step 3 of the first embodiment, and a correction value β which can be applied to the color-matching operation applied to a digital image displayed on the monitor 2 of the system A, which digital image is created by the identical successive operations to the successive operations to display the digital image Z_3 on the monitor 2, was settled. This correction value β was brightness (-39), contrast (-3), chroma (0), color balance (R (+1), G (0), B (+1)).

[0030] After the above-mentioned preparatory operation, as the fourth step, the printed picture of fruits (original image) X was scanned by the scanner 4 of the system A and the digital image X_3 was displayed on the monitor 2 of the system A. Then the color matching operation was applied to the digital image X_3 by adopting the above-mentioned correction value β so that a modified digital image X_4 , having substantially identical color to the original image, was displayed on the monitor 2.

[0031] The third embodiment of the present invention comprises the contents of the second embodiment mentioned above and additional action steps of transmitting the digital image X_4 to the system B whereby a digital image X_5 corresponding to the digital image X_4 is displayed on the monitor 7 of the system B, and color matching operation applied to the digital image X_5 whereby a modified image X_6 being substantially identical to the digital image X is displayed on the monitor 7 of the system B.

[0032] As is clear from the flow chart shown in Fig. 5, it is necessary to find a correction value γ for the color matching operation applied to the digital image X_5 displayed on the monitor 7 of the system B whereby a modified digital X_6 is displayed on the monitor 7 of the system B.

[0033] The first action of this embodiment is written the digital data of the digital image Z_4 on an MO disc by the MO drive 5 of the system A (step 1) and the transmission of the digital data of the digital image Z_4 to the system B whereby a digital image Z_5 is displayed on the monitor of the system B (step 2).

[0034] Then the conventional color matching operation is applied to the digital image Z_5 whereby a digital image Z_6 having substantially identical color to that of Z is displayed on the monitor 7 of the system B, and the data deviation from the origin of color data displayed on the monitor 7 was read as the correction value γ .

[0035] This correction value γ was brightness (-15), contrast (-6), chroma (0), color balance (R (-7), G (0), B (-5)) (step 3).

[0036] As the next operation (step 4), the digital data of the image X_4 was written on an MO disc by the MO drive 5 of the system 5, and then this digital data was transmitted to the system B by this MO, whereby a digital image X_5 was displayed on the monitor 7 of the system B (step 5).

[0037] As the action of step 5, the color matching op-

eration was applied to the digital image X_5 by adopting the correction value γ whereby a modified digital image X_6 being substantially identical to the color of the image X_4 was displayed on the monitor 7 of the system B.

[0038] From the result obtained by the third embodiment in relationship to the results of the first and second embodiments, the following very important knowledge was found regarding the relationship between the correction values α , β and γ , defined by the equation ($\alpha - \beta \doteq \gamma$).

[0039] Due to the results of the above-mentioned experiments of the first, second and third embodiments, a very interesting technical idea was found that correction values α' , β' , γ' being identical to $-\alpha$, $-\beta$, $-\gamma$ can be adopted as the correction values applied to a color matching operation in the case of digital-image-transmission when the direction of transmission is reverse to the direction of transmission of a digital image in the above-mentioned embodiments. The above-mentioned relationship of the correction values was confirmed by repeated tests.

[0040] It is common business sense that working efficiency should be as high as possible. From this viewpoint, the idea of adopting a so-called "action program" to operate the color matching operation explained by the above-mentioned embodiments, was conceived.

[0041] The following fourth embodiment disclosed the color matching operation carried out by the action program based upon the correction value explained in the first embodiment.

[0042] The method for calibrating color of a digital image disclosed by this embodiment is characterized by the application of an action program to perform the color matching operation, without manually adjusting respective color data such as brightness, contrast, chroma, color balance (R, G, B) indicated on the display of the computer 7 of the system B.

[0043] The application of an action program to modify a digital image indicated on the display of a computer is well known in the art by, for example, the operation manual of "Adobe Photoshop 5.5 J", and very effective power of the application of such an action program to carry out the computer image processing has been recognised in accordance with the progress of digital data processing technology. From this viewpoint, the fourth embodiment can be understood as a demonstration the power of an action program applied to the first embodiment. Therefore the fourth embodiment is simply explained by describing the action steps which are different from those of the first embodiment, as follows.

[0044] The same actions as the first, second and third actions of the first embodiment were carried out at first, so that the above-mentioned correction value α (brightness (-54), contrast (-9), chroma (0), color balance (R (-8), G (0), B (-6))) was settled. Then, as a fourth step action, the action program was made by adopting the above-mentioned known technology. Since the technical information regarding this action program is disclosed in detail in the above mentioned operation manual, the ex-

planation of this action in the action program is omitted.

[0045] In the condition that the action program titled "Action program 1" is installed in the memory of the computer 6 of the system B, the fifth step is carried out as follows. As disclosed in the explanation of the first embodiment, the digital data of X is transmitted to the system B by the step action 2 so that the digital image X_1 is displayed on the monitor 7 of the system B. The computer 6 is then operated to apply the above-mentioned action program titled "Action program 1" to modify the color of the digital image X_1 , and as a result of this calibration action, a digital image X_2 having a color substantially identical to that of the color of the original image X (printed picture of Mt. Bandai in this case) was indicated on the display 7 of the system B.

[0046] Since it is clear from the result of the fourth embodiment that the working efficiency of the color matching operation is much higher than that of the manual color matching operation disclosed by the first embodiment wherein matching of each color data such as brightness, contrast, chroma, and color balance is successively carried out manually. Therefore, a very effective result of this type of color matching operation can be expected in the case of a continuous business relationship of digital image transmission between the system A and system B. And it is further noted that a so-called batch operation can be successfully apply to a group of plural digital images transmitted from the system A.

[0047] The next embodiment concerns an application of the present invention related to a network system in the business of photography formed by a main shop (hereinafter referred as the system B), having sufficient power of carrying out the computer image processing process, and at least one subsidiary shop (hereinafter referred to as the system A) without such power as the system B.

[0048] In this embodiment, the experiment was planned to carried out as follows: that is, the system A receives an order from a customer M to make an enlarged printed picture of Mt. Bandai from an original printed picture X with reference to the customer's instruction note. Then, the system A scans this printed picture X by their computer system and the scanned digital data is transmitted to the system B together with the digital data of the instruction note, so that the digital image X_1 and any other images of the instruction note are displayed on the monitor 7 of the system B, then a color matching operation is applied to this digital image X_1 so that a modified digital image X_2 having a color being substantially coincident with the color of the printed picture X is displayed on this display 7.

[0049] Thereafter, this digital image X_2 is processed with reference to the contents of the instruction indicated on display of this system B. This process is carried out by using a known technique to change the composition by trimming and adjusting the color balance (brightness, contrast, chroma, and color balance) of the components of the digital image X_2 . As a result of such processing, a

final image X_5 is created on the monitor 7.

[0050] The next step action is the preparatory action applied to the digital image X_7 before transmitting the image to the system A. It was recognized from the experiments of the above-mentioned embodiments that the correction value Σ applied to the color-matching operation applied to the case of transmission from the system B to the system A is identical to $(-\Sigma)$ wherein Σ is the correction value applied to the case of transmitting a digital image from the system A to the system B, to satisfy the condition of color matching the corresponding digital images displayed on the respective monitors of these systems A and B. Therefore the color modification is applied to the digital image X_7 by adopting the correction value δ , that is a correction value (brightness (+15), contrast (+6), chroma (0), color balance (R (+7), G (0), B (+5))), whereby a color-modified digital image X_8 can be displayed on the monitor 7 of the system B. Thereafter, the digital image X_8 is transmitted to the system A by an MO disc. Accordingly, a digital image X_9 having identical composition and color to the digital image X_7 can be displayed on the monitor 2 of the system A.

[0051] The first action of the experiment of the fifth embodiment was started by making a reference note Q based upon the above-mentioned instruction. Thereafter, the printed picture X of Mt. Bandai and the reference note were scanned by the scanner 2 of the system A, then the scanned digital data of these materials were transmitted to the system B by MO disc whereby a digital image X_1 and a digital image Q_1 of the reference note Q were displayed on the monitor 7 of the system B.

[0052] Next, the color matching operation was applied to the digital images X_1 and Q_1 by adopting a correction value being identical to the correction value α selected in the experiment of the first embodiment, whereby a digital image X_2 having substantially identical color to the original picture X was displayed on the monitor 7 of the system B, while the digital image Q_2 indicating color balance of the background sky (11), top portion of Mt. Bandai (12), thin cloud portion (13) and mountain range (14, 15, 16 and 17) was also clearly displayed on the monitor 7.

[0053] The third step action was applied to create a new digital image X_7 based upon the instruction indicated in the digital image of the above-mentioned reference note. That is, digital data processing was carried out by operating the computer 6 of the system B based upon the reference note (digital image Q_2) so that digital image X_7 was displayed on the monitor 7 of the system B.

[0054] The fourth step action, which is the preparatory action applied to the digital image X_7 before transmission to the system A, was carried out by adopting the correction value γ mentioned above, that is, a color modification operation was applied to the digital image X_7 by adopting the above-mentioned correction value γ whereby a color-modified digital image X_8 was displayed on the monitor 7 of the system B. Thereafter, the digital image X_8 was transmitted from the system B to the system A by MO disc, and as the result of this transmission of the digital

image X_9 , a digital image X_9 was displayed on the monitor 2 of the system 2.

[0055] As already explained in the introduction part of the present specification, the color mismatch problem in the digital image transmission between the system A and system B is mainly caused by the characteristics of the function of the equipments making up these systems. Therefore, the correction value for adopting the color matching operation according to the present invention could be constant, unless the basic function of the equipment is changed. However, in the present invention, since the color matching operation for finding a correction value is carried out on the basis of manual observation, it is impossible to prevent deviation of observed color data, even if such a deviation is small. The influence of the environment during the color matching observation to find a correction value must also be considered. Accordingly, the following method to raise the level of accuracy of the correction value is recommended. (1) The environment during the process to find a correction value is desired to be maintained in a highly constant condition. (2) The correction value should be settled several times and an average of the correction values should be set as a standard correction value. If such an action is carried out by several persons, a more reliable result can be expected.

[0056] According to the experience of the applicant, it is also helpful to increase the accuracy of the correction value by the result of the color matching operation applied to several cases of digital transmission between two systems located in an identical working place.

EFFECT OF THE INVENTION

[0057] As explained above, the previously unavoidable problem of mismatch between the color (brightness, contrast, chroma, and color balance) of images in transmission of images between a pair of computer image processing systems can be eliminated by an extremely simple operation. Therefore, in the case of maintaining a continuous business relation between the system A and the system B, once the above-mentioned correction value is settled for applying the color matching operation, the color matching operation can be carried out very effectively, until the basic condition that can be affect the correction value is changed. Due to such an advantage attained by the present invention, it is expected to contribute a great deal to business engaged in image processing by a plurality of computer image processing systems and to development of image processing by specialized business using communication by, for example, the Internet.

[0058] While the invention has been described by reference to specific embodiments chosen for purposes of illustration, it should be apparent that numerous modifications could be made thereto by those skilled in the art without departing from the basic concept and scope of the invention.

Claims

1. A method for calibrating color of an image which is transmitted from a computer image processing system A to a computer image processing system B, comprising:

(1) a preparatory operation for selecting a correction value for use in applying a color matching operation, comprising:

scanning a printed standard color image (Z) by said system A whereby a digital standard color image (Z₃) is displayed on a monitor of said system A,
 carrying out a color matching operation on said digital standard color image (Z₃) by a manual operation of adjusting color data displayed on said monitor so that a corrected digital standard color image (Z₄) having a color substantially identical to a color of said printed standard color image (Z) is displayed on said monitor of said system A,
 reading a color data deviation from said printed standard color image (Z) (zero point) and setting the read color data as a correction value β ,
 transmitting the corrected digital standard color image (Z₄) from said system A to said system B whereby a transmitted corrected digital standard color image (Z₅) is displayed on a monitor of said system B,
 carrying out a color matching operation on said transmitted corrected digital standard color image (Z₅) by said manual operation of adjusting color data displayed on said monitor so that a corrected digital standard color image (Z₆) having a color substantially identical to the color of said printed standard color image (Z) is displayed on said monitor of said system B, and
 reading a color data deviation from said printed standard color image (Z) (zero point) and setting the read color data as a correction value γ ,

(2) a color matching operation applied to a digital original color image comprising:

scanning a printed original color image (X) by said system A whereby a scanned digital original color image (X₃) is displayed on said monitor of said system A,
 carrying out a color matching operation on said displayed digital original color image (X₃) by adopting said correction value β whereby a corrected digital original color image (X₄) having a color substantially identical

cal to the color of said original color image (X) is displayed on said monitor of said system A,
 transmitting said corrected digital original color image (X₄) from said system A to said system B whereby a transmitted digital original color image (X₅) is displayed on said monitor of said system B, and
 carrying out a color matching operation on said displayed digital original color image (X₅) by adopting said correction value γ whereby a corrected digital original color image (X₆) having a color substantially identical to the color of said printed original color image (X) is displayed on said monitor of said system B.

2. A method for calibrating color of an image which is transmitted from a computer image processing system A to a computer image processing system B, according to claim 1, wherein said printed standard color image is an RGB standard color image.

3. A method for calibrating color of an image in transmission between a pair of computer image processing systems A and B, comprising:

a preparatory operation for selecting a correction value for applying a color matching operation by either one of said computer image processing systems A and B based upon a common standard color image, and
 a color matching operation applied to a digital image displayed on a monitor of either one of said systems A and B to create a condition of substantial coincidence of a color thereof with a color of an original image, by adopting said correction value.

4. A method for calibrating color of an image in transmission between a pair of computer image processing systems A and B, according to claim 3, said preparatory operation further comprising:

an operation of making an action program by adopting said correction value to carry out said color matching operation without adjusting respective color data separately by a manual operation, and said color matching operation being carried out by adopting said action program to said color matching operation.

5. A method for calibrating color of an image in transmission between a pair of computer image processing systems A and B according to claim 3, wherein said common standard color image is a RGB standard color image.

6. A method for calibrating color of an image in transmission between a pair of computer image processing systems A and B according to claim 3, comprising:

preparation of a common standard color image Z for said systems in advance to said preparatory operation, said preparatory operation comprising:

transferring said color image Z from said system A to said system B whereby a digital image Z_1 is displayed on the monitor of said system B,

carrying out a color matching operation applied to said digital image Z_1 by a manual operation of adjusting color data displayed on said monitor so that a modified digital image Z_2 having a color substantially coincident with a color of said image Z is displayed on said monitor of said system B, reading color data deviated from an origin (zero point) of color data displayed on said monitor and setting the read data as a correction value α applied to said color matching operation for correcting color of any digital image made by operations identical to successive operations applied to display said digital image Z_2 on said monitor of said system B, said color matching operation comprising:

transferring an original image X from said system A to said system B whereby a digital image X_1 is displayed on the monitor of said system B, and carrying out said color matching operation applied to said digital image X_1 by adopting said correction value α so that a modified digital image X_2 having a color substantially coincident with the color of the original image X is displayed on the monitor of the system B.

7. A method for calibrating color of an image in transmission between a pair of computer image processing systems A and B according to claim 6, further comprising:

a color matching operation applied to the system A, comprising:

an additional operation for setting a correction value for applying a digital image X_3 displayed on the monitor of said system A created by a scanning operation, applied to said original image X, comprising:

firstly scanning said color image Z whereby a image Z_3 is displayed on the monitor of said system A, carrying out a color matching operation applied to said digital image Z_3 by a manual operation of adjusting color data displayed on said monitor so that a color of said digital image Z_3 becomes substantially coincident with a color of said color image Z, thereafter reading color data deviated from an origin (zero point) of color data displayed on the monitor of said system A, and setting the read data as a correction value β applied to said color matching operation applied to a digital image displayed on the monitor of said system A, created by applying the same operation as the operation applied to said digital image Z, a color matching operation being applied to said digital image X_3 by adopting said correction value β whereby a modified digital image X_4 having a color substantially identical to a color of said original image X is displayed on said monitor of said system A.

8. A method for calibrating color of an image in transmission between a pair of computer image processing systems A and B according to claim 3, comprising:

preparation of a common standard color image Z for said systems A and B in advance, said preparatory operation comprising:

scanning said standard color image Z by a scanner of said system A whereby a digital image Z_3 is displayed on the monitor of said system A, carrying out a color matching operation applied to said digital image Z_3 by a manual operation of adjusting color data displayed on said monitor so that a modified digital image Z_4 having a color substantially coincident with a color of said color image z is displayed on said monitor, transmission of said digital image Z_4 to said system B whereby a digital image Z_5 is displayed on the monitor of said system B, carrying out a color matching operation applied to said digital image Z_5 by a manual operation of adjusting color data displayed on said monitor of said system B so that a color of said digital image Z_5 is changed to a condition substantially identical to a color of said standard image Z,


reading color data deviated from an origin
(zero point) of color data displayed on said
monitor and setting the read data as a cor-
rection value γ , said correction value being
applied to a color matching operation for ad-
justing a digital image made by successive
operations identical to successive opera-
tions to display said digital image Z_5 on said
monitor of said system B, and said color
matching operation comprising:

when a color matching operation is re-
quired to apply a digital image X_5 made
from an original image X by successive
operations identical to the successive
operations to display said digital image
 Z_5 on said monitor of said system B,
carrying out said color matching oper-
ation on said digital image X_5 by adopt-
ing said correction value γ , whereby a
modified digital image X_6 having a sub-
stantially identical color to said original
image X is displayed on said monitor of
said system B.

9. A method for calibrating color of an image in trans-
mission between a pair of computer image process-
ing systems A and B according to claims 6 and 8,
further comprising,
creation of a new digital image X_7 from said digital
image X_2 by applying a conventional method to mod-
ify either one or both of image components and color
of said digital image X_2 displayed on said monitor of
system B,
a preparatory operation to modify color of said digital
image X_7 by adopting a correction value being iden-
tical to $(-\gamma)$, whereby a modified digital image X_8 is
displayed on said monitor of system B,
transferring said digital image X_8 from said system
B to system A by an MO disc, whereby a digital image
 X_9 is displayed on said monitor of system A in a con-
dition having substantially identical color to said dig-
ital image X_7 .

Fig.1

(A)

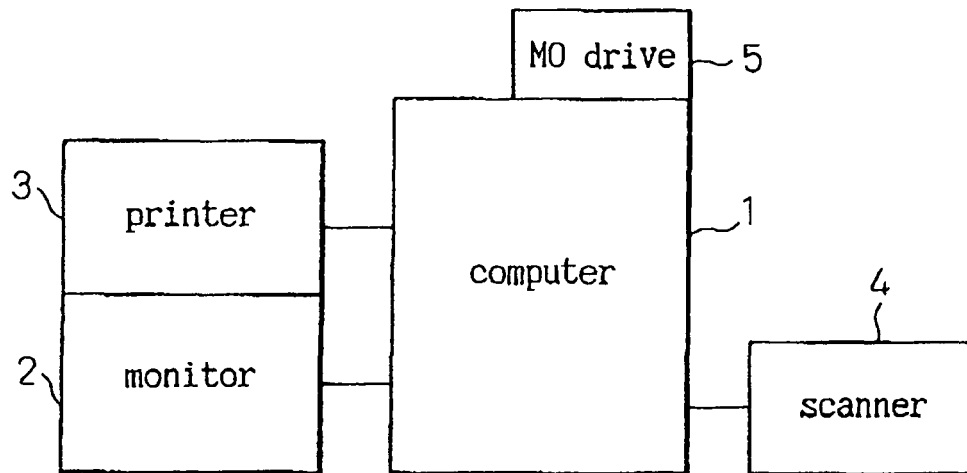

(B)

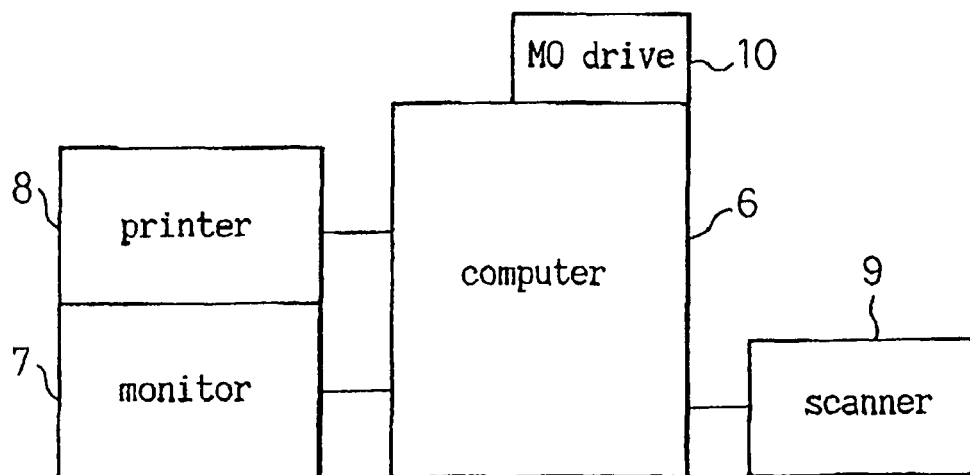


Fig.2

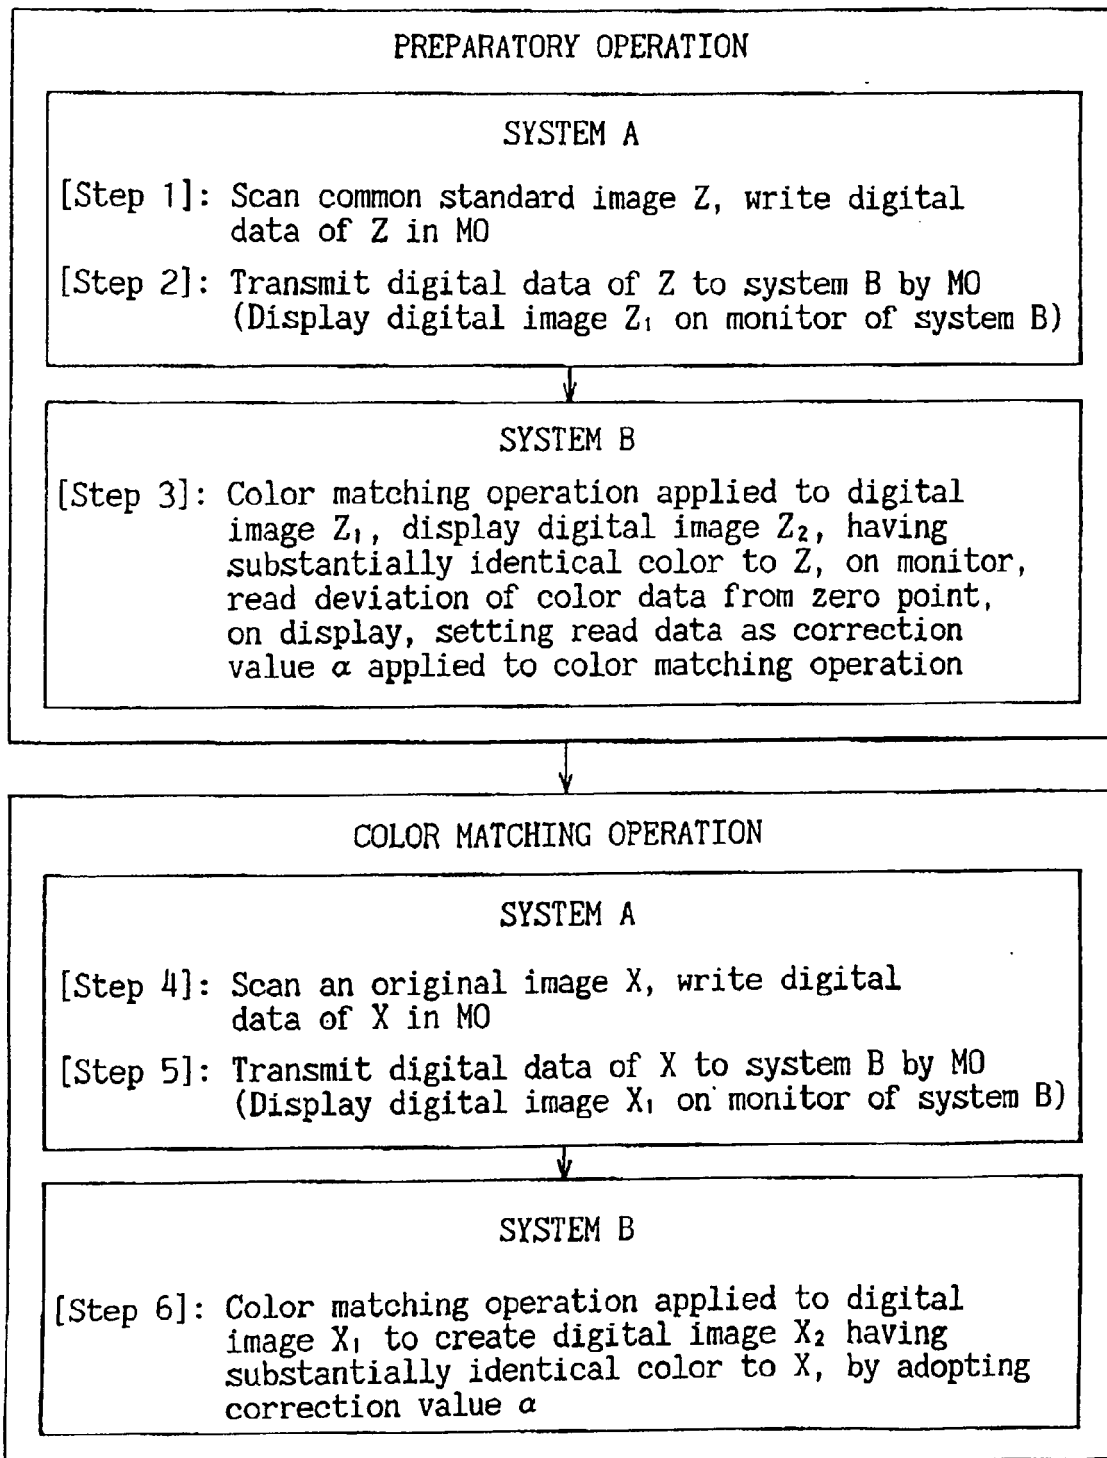


Fig. 3

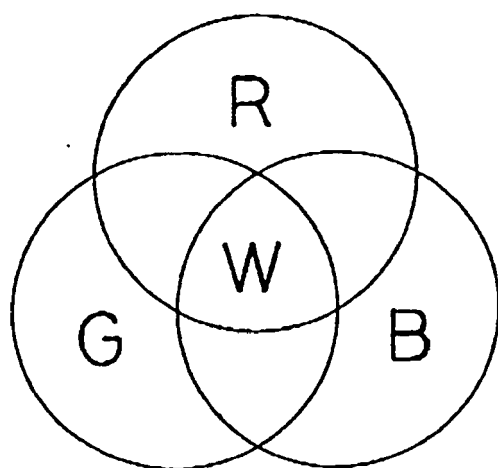


Fig.4

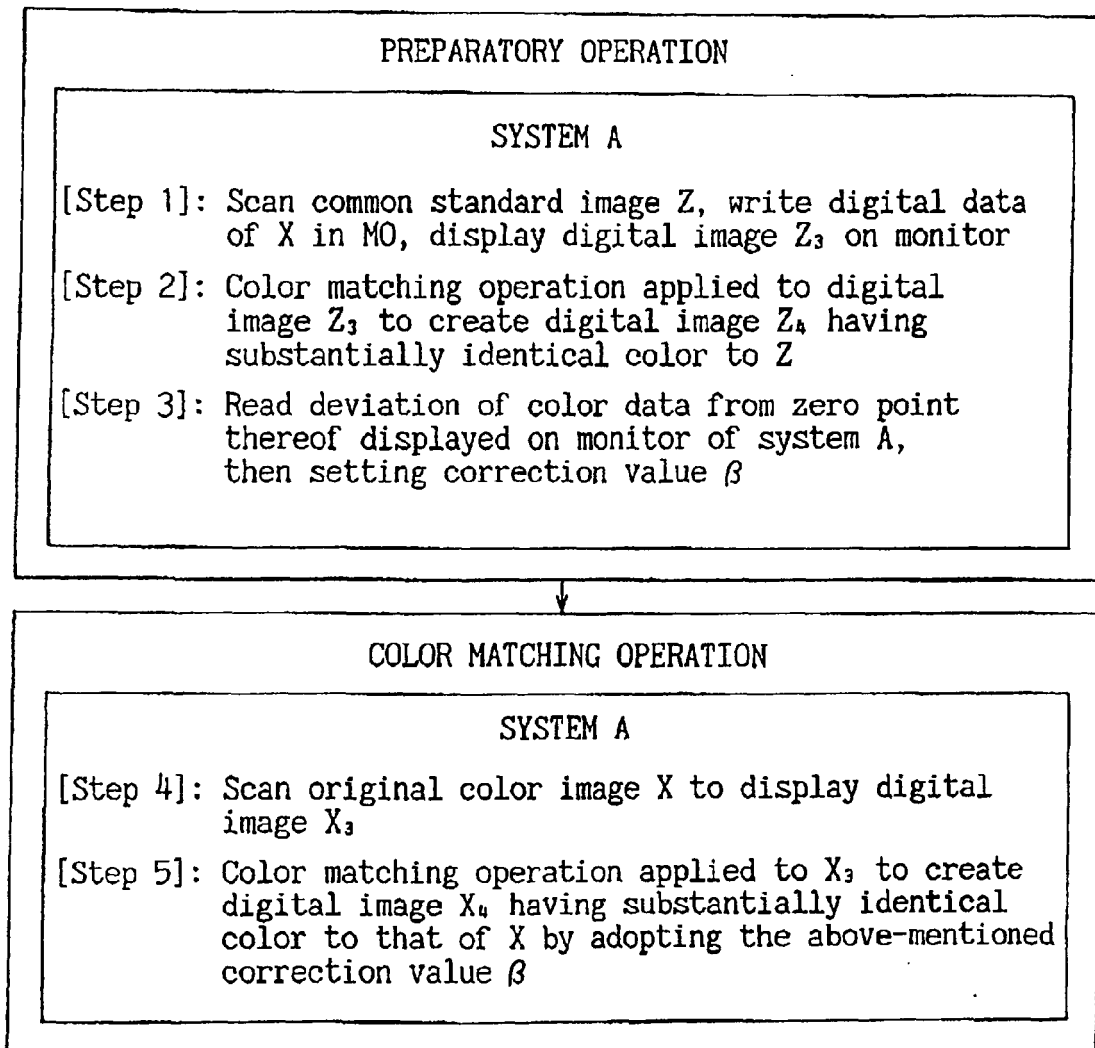


Fig.5

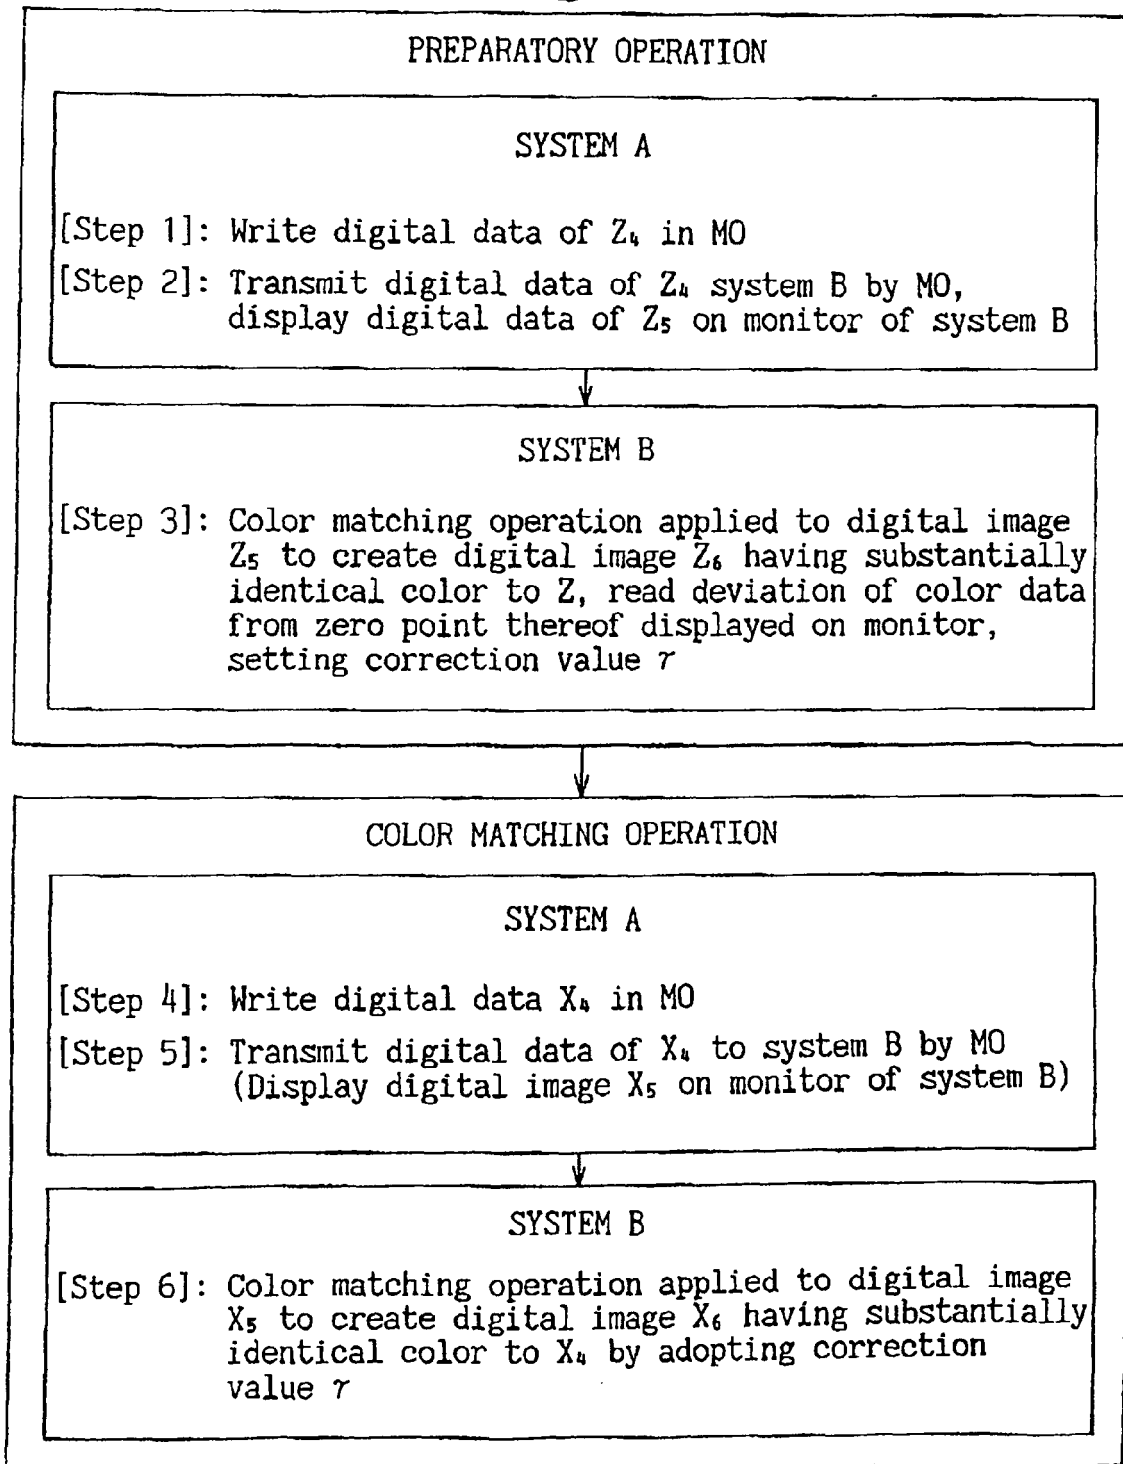


Fig.6

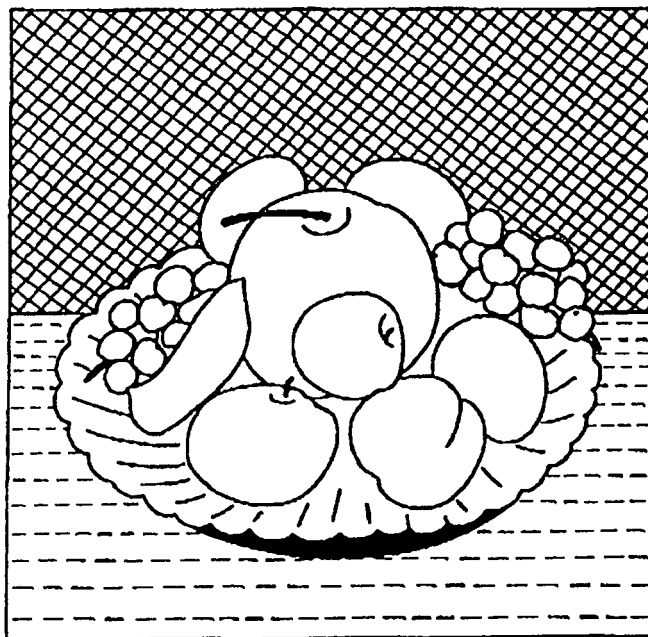


Fig.7

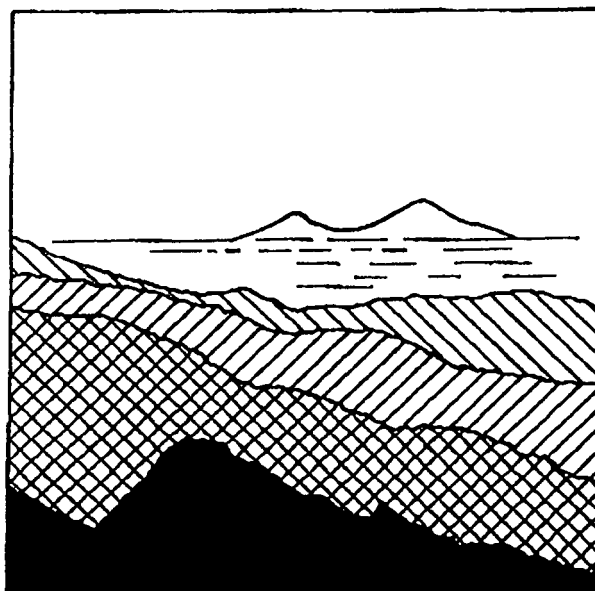


Fig.8


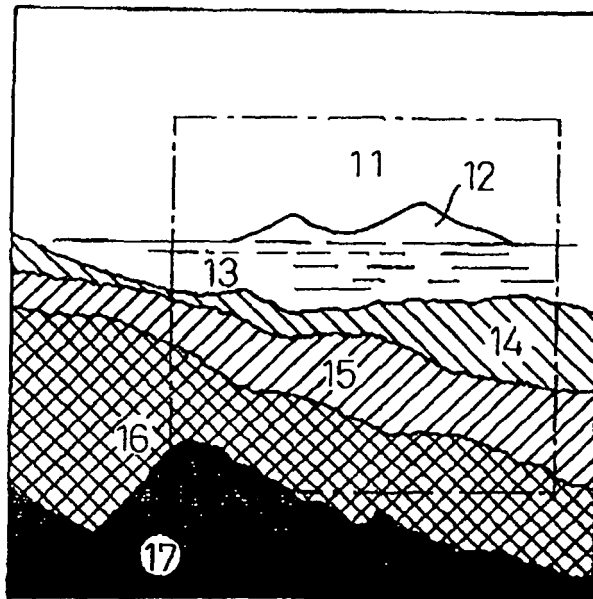


Fig.9



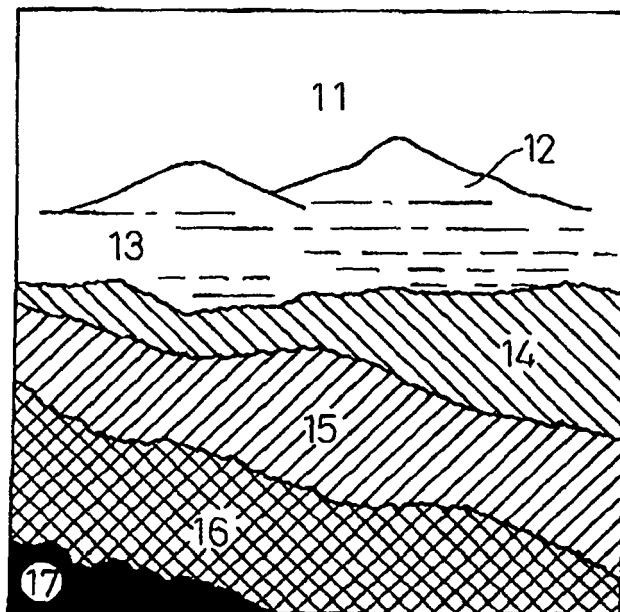

EUROPEAN SEARCH REPORT

Application Number
EP 09 01 3143

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	US 5 579 031 A (LIANG ZHONGJIE) 26 November 1996 (1996-11-26) * column 3, line 10 - line 28 * * column 8, line 46 - line 58 * * figure 3 * * claim 1 *	1-9	INV. H04N1/60
A	WO 96/00435 A (RADIUS INC) 4 January 1996 (1996-01-04) * figures 2,3 *	1-9	
A	US 5 801 853 A (SUZUKI YASUTOMO ET AL) 1 September 1998 (1998-09-01) * figure 1 * * column 6, line 47 - line 58 * * column 2, line 1 - line 52 * * column 3, line 55 - column 4, line 42 *	1-9	
A	US 5 909 291 A (OTHMER KONSTANTIN ET AL) 1 June 1999 (1999-06-01) * abstract; figure 1 *	1-9	TECHNICAL FIELDS SEARCHED (IPC)
A	US 5 142 356 A (FUKUSHIMA HISASHI ET AL) 25 August 1992 (1992-08-25) * column 1, line 32 - line 39 *	1-9	H04N
A	US 4 888 636 A (ABE SHUNICHI) 19 December 1989 (1989-12-19) * claims 1-3 *	1-9	
The present search report has been drawn up for all claims			
Place of search Berlin		Date of completion of the search 30 November 2009	Examiner Le Gleut, Ronan
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 09 01 3143

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

30-11-2009

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 5579031	A	26-11-1996	DE	69324899 D1	17-06-1999
			DE	69324899 T2	21-10-1999
			EP	0604755 A1	06-07-1994
			JP	3436402 B2	11-08-2003
			JP	7077954 A	20-03-1995

WO 9600435	A	04-01-1996	US	5499040 A	12-03-1996
			US	5570108 A	29-10-1996

US 5801853	A	01-09-1998	NONE		

US 5909291	A	01-06-1999	NONE		

US 5142356	A	25-08-1992	DE	3787611 D1	04-11-1993
			DE	3787611 T2	24-03-1994
			EP	0266186 A2	04-05-1988

US 4888636	A	19-12-1989	DE	3408336 A1	13-09-1984

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP PH11375423 B [0020]