



(11) **EP 2 145 828 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
13.07.2011 Bulletin 2011/28

(51) Int Cl.:
B65D 5/54 ^(2006.01) **B65D 5/66** ^(2006.01)

(21) Application number: **09008696.8**

(22) Date of filing: **02.07.2009**

(54) **Cardboard or like material box having a body and a cover obtained from a single punched and creased blank.**

Kartonschachtel oder Schachtel aus ähnlichem Material mit einem Körper und einer Abdeckung aus einem einzigen gelochten und gefaltetem Zuschnitt

Boîte en carton ou matériau similaire dotée d'un corps et d'un couvercle obtenue à partir d'une découpe unique perforée et pliée

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR**

(30) Priority: **16.07.2008 IT MI20081292**

(43) Date of publication of application:
20.01.2010 Bulletin 2010/03

(73) Proprietor: **GPP Industrie Grafiche S.p.A.
20060 Truccazzano (MI) (IT)**

(72) Inventor: **Bianchi, Filippo
20154 Milan (IT)**

(74) Representative: **Carloni, Franco
Calvani, Salvi & Veronelli S.r.l.
Piazza Luigi di Savoia, 2
20124 Milano (IT)**

(56) References cited:
DE-U- 7 533 244 DE-U1- 9 312 675

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 145 828 B1

Description

Technical field

[0001] The present invention relates to the cardboard-packaging sector, and in particular concerns a box made from a single blank of cardboard, or the like material, and having a flip-top and snap-closing cover.

Background art

[0002] There are known boxes made of cardboard, or the like material, and provided with a flip-top and snap-closing cover. In a conventional embodiment thereof, such boxes are obtained from a single blank of cardboard, in which cut lines and crease lines define a first portion designed to form the box body and a second portion designed to form the box cover. DE 75 33 244 U discloses a structure according to the preamble of claim 1. It is an object of the present invention to make a box of the kind indicated above, which is improved over the prior art, both in respect of the production and use thereof.

Disclosure of invention

[0003] The above object is achieved, according to the invention, with a cardboard, or like material, box having a body and a cover obtained from a single punched and creased blank comprising a first blank portion intended to form the box body and a second blank portion intended to form the box cover, said first and second blank portions being joined by crease lines and, in the remainder, being separated by intermediate cut lines, wherein:

- said first blank portion comprises a front panel, a rear panel, two side panels, and a glue flap, sequentially arranged and connected along parallel sides by transverse crease lines,
- said front panel and said rear panel extend downwardly into longitudinal flaps and said side panels into side flaps, respectively, said longitudinal flaps and said side flaps being foldable along a longitudinal crease line and being made to overlap and adhere to one another to form a box bottom,
- said rear panel extends upwardly into a longitudinal flap which is foldable along a longitudinal crease line,
- said second blank portion comprises a front band and two side bands connected along parallel sides by transverse crease lines,
- said front band extends upwardly into a longitudinal flap and said side bands into side flaps, respectively, said longitudinal flap and said side flaps being foldable along a longitudinal crease line and being made to adhere to the longitudinal flap of said rear panel of said first blank portion to form a box cover,
- said front band extends downwardly into a longitudinal glue tab and said side bands into glue tabs in

the shape of a right-angled triangle, respectively, said longitudinal glue tab and each of said glue tabs in the shape of a right-angled triangle being foldable along a longitudinal crease line and being made to adhere to said front band and to a corresponding one of said side bands, respectively, to form, in co-operation therewith, a cuff for stiffening the cover,

- said longitudinal glue tab is joined to the front panel of said first blank portion by a crease line and includes, adjacent to said crease line, a lip which is separable therefrom along a tear line,

characterised in that:

- a connecting membrane extends obliquely and downwardly from a crease line along the hypotenuse of each of said glue tabs in the shape of a right-angled triangle,
- said connecting membrane is joined, at its lower edge, to a corresponding one of said side panels of the first blank portion by a crease line,
- said connecting membrane includes a glue flap which is separable therefrom along a tear line and is further joined, at its upper edge, to a corresponding one of said side bands, along a length of said longitudinal crease line, said glue flap being foldable along said longitudinal crease line and being made to adhere to said corresponding one of said side bands.

Brief description of drawings

[0004] For the purpose of illustrating the structure and the features of a box according to the invention, a preferred, although non-limiting embodiment thereof will be now described in more detail, with reference to the accompanying drawings, wherein:

Figures 1 to 4 show a punched and creased cardboard blank, in a flat, unfolded state and in the sequential folding steps for forming a box according to the present invention;

Figure 5 is a perspective view of the box in the final three-dimensional state, for receiving the products to be contained therein; and

Figure 6 is a perspective view of the finished box with the cover in the open condition.

Preferred embodiment of the invention

[0005] In Figure 1 there is shown a punched and creased cardboard blank from which a box according to the invention can be obtained. The blank comprises a first portion A, designed to form the box body, and a second portion B, designed to form the box cover. The aforesaid first and second portions A and B are joined by crease lines C and in the remainder they are separated by intermediate cut lines F.

[0006] Blank portion A comprises a front panel 10, a rear panel 11, two side panels 12 and 13, and a glue flap 14, which are sequentially arranged and connected along parallel sides by transverse crease lines 15, 16, 17 and 18.

[0007] The front panel 10 and the rear panel 11 extend downwardly into longitudinal flaps 19 and 20, whilst the side panels 12 and 13 extend downwardly into side flaps 21 and 22, respectively. The aforesaid longitudinal flaps 19, 20 and side flaps 21, 22 can be folded along a longitudinal crease line 23 and can be placed one above the other and glued together to form a bottom of the box. The rear panel 11 extends upwardly into a longitudinal flap 24 which can be folded along a longitudinal crease line 25.

[0008] Blank portion B comprises a front band 26 and side bands 27 and 28 connected along parallel sides by transverse crease lines 29 and 30. The front band 26 extends upwardly into a longitudinal flap 31, whilst the side bands 27 and 28 extend into side flaps 32 and 33, respectively. The aforesaid longitudinal flap 31 and side flaps 32 and 33 can be folded along a longitudinal crease line 34 and are made to adhere to flap 24 of the blank portion A to form a box cover.

[0009] The front band 26 extends downwardly into a longitudinal glue tab 35, whilst the side bands 27 and 28 extend into corresponding glue tabs 36 and 37, respectively, which are in the shape of a right-angled triangle. Glue tab 35 and glue tabs 36 and 37 can be folded along a longitudinal crease line 38. Glue tab 35, which is designed to be adhered to band 26, is joined to panel 10 of the blank portion A by a crease line C and includes, adjacent to said crease line, a lip 39 which is separable therefrom along a tear line 40. From a crease line S along the hypotenuse of each of said glue tabs 36 and 37 in the shape of a right-angled triangle, a connecting membrane 41 and 42, respectively, extends obliquely and downwardly and is joined by a crease line C to a corresponding one of the side panels 12 and 13 of the blank portion A. Each connecting membrane 41 and 42 includes a glue flap 43 and 44, which is separable therefrom along a tear line 45 and 46, respectively, and is further joined at its upper portion to a corresponding one of the side bands 27 and 28, along a length of the longitudinal crease line 38.

[0010] To form the box, starting from the condition shown in Figure 1, wherein the cardboard blank is in the flat, unfolded state, a glue line is firstly applied to glue tab 35 and to glue tabs 36 and 37, then the glue tabs 35, 36 and 37 are rotated upwardly about crease line 38 to overlap each of them exactly on a corresponding one of the bands 26, 27 and 28, respectively, so as to form, on the face of the blank opposite to that shown in Figure 1, a cuff portion R, which can be seen in phantom lines in Figure 2 of the drawings, for the purpose of stiffening the box cover.

[0011] Side panel 12 and side band 27 are then rotated together about crease line 16 and crease line 29, respec-

tively, as shown in Figure 3 of the drawings, and a glue line is applied to flap 14.

[0012] Longitudinal panel 11 is then rotated about transverse crease line 18, as illustrated in Figure 4 of the drawings, and flap 14 is adhered to panel 11, such that crease line 15 lies very close, virtually coincident with the edge of panel 11.

[0013] The first step for forming the box structure according to the invention terminates at this point. The boxes in the flattened condition, as shown in Figure 4, can be packed on each other for shipment to the user, which, by means of known and commonly used automatic machines, gives the boxes their final three-dimensional configuration, in order to receive the products to be contained therein.

Industrial applicability and mode of use of the invention

[0014] In order to give the box a three-dimensional configuration, the aforesaid automatic machines press against the opposing crease lines 16 and 18 to urge them towards each other so that the box assumes a tubular shape, then the longitudinal flaps 19 and 20 and the side flaps 21 and 22 are rotated and glued to each other to form the box bottom, and the products to be packed are introduced into the box. It should be emphasized that the operations for packing the products do not require special filling and packaging lines, instead known and generally used line equipment can be used. Once the products have been placed in the box, the box can be closed by rotating and gluing to each other the longitudinal flaps 24 and 31 and the side flaps 32 and 33 to form the box cover, which is thereby hinged to the box body along crease line 25 of the longitudinal flap 24. Thereafter, the second step for forming the box structure according to the invention and for packaging the products to be contained therein is terminated.

[0015] In the first use of the box, the user grips the lower edge of the cuff R and pulls it upwardly to cause the separation of the lip 39 from the glue tab 35 along the tear line 40. Following the breaking of the tear line 40, the cover remains hinged to the panel 11 of the box body along crease line 25 and can be further rotated upwards and backwards with respect to panel 11, as shown in Figure 6 of the drawings. The opening rotation movement of the box cover about crease line 25 causes the separation of the connecting membranes 41 and 42 from the corresponding glue flaps 43 and 44 along tear lines 45 and 46, respectively, whereby the connecting membranes can rotate concurrently with the box cover about crease lines C and S. During the opening rotation movement of the box cover, the connecting membranes 41 and 42 are caused, at first, to bend, then they spring back to the original flat shape, causing thereby the box cover to automatically flip open, and they are capable of keeping the box cover in the open position, in order to permit the user to access the products contained in the box.

[0016] Thereafter, in a similar way as previously described, when the box cover is rotated into the closed position, the connecting membranes 41 and 42 are caused, at first, to bend into a curvilinear shape, then they spring back to the original flat shape, causing the box cover to automatically flip in the closing position. During the closing rotation movement of the box cover, lip 39 is pressed inwardly by the lower edge of the cuff R and, therefore, it can releasably latch to a step portion 47 formed by the glue stripe 35 along the tear line 40, whereby an unintentional opening of the cover is prevented. Thus, the cover is capable of ensuring a secure snap-closure of the box.

[0017] From the foregoing description, it can be clearly seen that the box has a simple structure and construction, and that it can be used to package various kinds of products and to provide always a easy access to the products contained. Furthermore, the stiffening cuff gives greater strength to the box compared to other structure known in the art.

[0018] The invention as described is subject to modifications and variations without departing from the scope of the inventive concept. In practice, the embodiments of the invention may be made from any material and in any size, depending on requirements, without departing from the scope of the invention as defined in the claims below.

Claims

1. Cardboard, or like material, box having a body and a cover obtained from a single punched and creased blank comprising a first blank portion (A) intended to form the box body and a second blank portion (B) intended to form the box cover, said first and second blank portions (A, B) being joined by crease lines (C) and, in the remainder, being separated by intermediate cut lines (F), wherein:

- said first blank portion (A) comprises a front panel (10), a rear panel (11), two side panels (12, 13), and a glue flap (14), sequentially arranged and connected along parallel sides by transverse crease lines (15, 16, 17, 18),
- said front panel (10) and said rear panel (11) extend downwardly into longitudinal flaps (19, 20) and said side panels (12, 13) into side flaps (21, 22), respectively, said longitudinal flaps (19, 20) and said side flaps (21, 22) being foldable along a longitudinal crease line (23) and being made to overlap and adhere to one another to form a box bottom,
- said rear panel (11) extends upwardly into a longitudinal flap (24) which is foldable along a longitudinal crease line (25),
- said second blank portion (B) comprises a front band (26) and two side bands (27, 28) connect-

ed along parallel sides by transverse crease lines (29, 30),

- said front band (26) extends upwardly into a longitudinal flap (31) and said side bands (27, 28) into side flaps (32, 33), respectively, said longitudinal flap (31) and said side flaps (32, 33) being foldable along a longitudinal crease line (34) and being made to adhere to the flap (24) of said rear panel (11) of said first blank portion (A) to form a box cover,

- said front band (26) extends downwardly into a longitudinal glue tab (35) and said side bands (27, 28) into glue tabs (36, 37) in the shape of a right-angled triangle, respectively, said longitudinal glue tab (35) and each of said glue tabs (36, 37) in the shape of a right-angled triangle being foldable along a longitudinal crease line (38) and being made to adhere to said front band (26) and to a corresponding one of said side bands (27, 28), respectively, to form, in co-operation therewith, a cuff (R) for stiffening the cover,

- said longitudinal glue tab (35) is joined to the front panel (10) of said first blank portion (A) by a crease line (C) and includes, adjacent to said crease line (C), a lip (39) which is separable therefrom along a tear line (40),

characterised in that:

- a connecting membrane (41, 42) extends obliquely and downwardly from a crease line (S) along the hypotenuse of each of said glue tabs (36, 37) in the shape of a right-angled triangle,
- said connecting membrane (41, 42) is joined, at its lower edge, to a corresponding one of said side panels (12, 13) of the first blank portion (A) by a crease line (C),
- said connecting membrane (41, 42) includes a glue flap (43, 44) which is separable therefrom along a tear line (45, 46) and is further joined, at its upper edge, to a corresponding one of said side bands (27, 28), along a length of said longitudinal crease line (38), said glue flap (43, 44) being foldable along said longitudinal crease line (38) and being made to adhere to said corresponding one of said side bands (27, 28).

2. Box according to claim 1, **characterised in that** for forming the box cover said longitudinal flap (24) of the first blank portion (A) is interposed between and adhered to said longitudinal flap (31) and to said side flaps (32, 33) of the second blank portion (B).
3. Box according to claim 1, **characterised in that**, after the lip (39) is separated from the glue tab (35), when the box is first opened, said glue tab (35) forms a step portion (47) along the tear line (40), so as to

permit the lip (39) to be releasably latched thereto when the cover is lowered for closing the box.

Patentansprüche

1. Kartonschachtel oder Schachtel aus ähnlichem Material mit einem Rumpf und einem Deckel aus einem einzigen gelochten und gefalteten Zuschnitt, bestehend aus einem ersten Folienabschnitt (A) zum Bilden des Schachtelrumpfes und einem zweiten Folienabschnitt (B) zum Bilden des Schachteldeckels, wobei der erste und der zweite Folienabschnitt (A, B) mittels Faltlinien (C) zusammengefügt und ansonsten mittels gelochten Zwischenlinien (F) abgetrennt sind, worin

- der erste Folienabschnitt (A) aus einer Vorderwand (10), einer Rückwand (11), zwei Seitenwänden (12,13) und einer Klebeklappe (14) besteht, die serienmäßig und entlang parallelen Seiten mittels querlaufenden Faltlinien (15,16,17,18) verbunden sind,

- die Vorderwand (10) und die Rückwand (11) sich nach unten in Längsklappen (19,20) und beziehungsweise die Seitenwände (12,13) in entsprechende Seitenklappen (21,22) erstrecken, wobei die Längsklappen (19,20) und die Seitenklappen (21,22) entlang einer Längsfaltlinie (23) umfaltbar und derart gestaltet sind, um sich übereinanderzulegen und miteinander verklebt zu werden, um auf diese Weise den Schachtelboden zu bilden,

- die Rückwand (11) sich nach oben in eine Längsklappe (24) erstreckt, die entlang einer Längsfaltlinie (25) umgefaltet werden kann,

- der zweite Folienabschnitt (B) einen Vorderstreifen (26) und zwei Seitenstreifen (27,28) umfasst, die entlang parallelen Seiten, mittels querlaufenden Faltlinien (29,30), verbunden sind,

- der Vorderstreifen (26) sich nach oben in eine Längsklappe (31) und beziehungsweise die Seitenstreifen (27,28) sich in Seitenklappen (32,33) erstrecken, wobei die Längsklappe (31) und die Seitenklappen (32,33) entlang einer Längsfaltlinie (34) umgefaltet werden können und derart gestaltet sind, um an die Längsklappe (24) der Rückwand (11) vom ersten Folienabschnitt (A) angeklebt zu werden und den Schachteldeckel zu bilden,

- der Vorderstreifen (26) sich nach unten in eine längliche Klebelasche (35) und beziehungsweise die Seitenstreifen (27,28) sich in Klebelaschen (36,37) in der Form eines rechtwinkligen Dreiecks erstrecken, wobei die längliche Klebelasche (35) und jede der Klebelaschen (36,37) in der Form eines rechtwinkligen Dreiecks entlang einer Längsfaltlinie (38) umfaltbar sind und

an den Vorderstreifen (26) und beziehungsweise an einen entsprechenden Seitenstreifen der Seitenstreifen (27,28) angeklebt werden können, um in Zusammenarbeit damit einen Umschlag (R) zum Versteifen des Deckels zu bilden,

- die längliche Klebelasche (35) mit der Vorderwand (10) des ersten Folienabschnitts (A) mittels einer Faltlinie (C) verbunden ist und neben der Faltlinie (C) eine Lippe (39) aufweist, die davon, entlang einer Aufreißlinie (40), abgetrennt werden kann,

dadurch gekennzeichnet, dass

- eine Verbindungsmembrane (41,42) sich schräg sowie nach unten, beginnend von einer Faltlinie (S), entlang der Hypotenuse einer jeden Klebelasche (36,37) in der Form eines rechtwinkligen Dreiecks erstreckt,

- die Verbindungsmembrane (41,42) an ihrer unteren Kante mit einer entsprechenden Seitenwand der Seitenwände (12,13) des ersten Folienabschnitts (A) mittels der Faltlinie (C) verbunden ist,

- die Verbindungsmembrane (41,42) eine Klebeklappe (43,44) umfasst, die entlang einer Aufreißlinie (45,46) davon abgetrennt werden kann und ferner an ihrer oberen Kante an einen entsprechenden Seitenstreifen von den Seitenstreifen (27,28), entlang einer Länge der Längsfaltlinie (38), verbunden ist, wobei die Klebeklappe (43,44), entlang der Längsfaltlinie (38), umfaltbar und derart gestaltet ist, um an dem entsprechenden Seitenstreifen der Seitenstreifen (27,28) angeklebt zu werden.

2. Schachtel nach Anspruch 1, **dadurch gekennzeichnet, dass** zum Formen des Schachteldeckels die Längsklappe (24) des ersten Folienabschnitts (A) dazwischen gelegt ist und an der Längsklappe (31) und an den Seitenklappen (32,33) des zweiten Folienabschnitts (B) angeklebt ist.

3. Schachtel nach Anspruch 1, **dadurch gekennzeichnet, dass**, nachdem die Lippe (39) von der Klebelasche (35) beim ersten Öffnen der Schachtel gelöst wurde, die Klebelasche (35) entlang der Aufreißlinie (40) eine Stufe (47) bildet, um **dadurch** der Lippe (39) eine lösbare Befestigung daran zu ermöglichen, wenn der Deckel zum Schließen der Schachtel heruntergedrückt wird.

Revendications

1. Boîte en carton ou matériau similaire ayant un corps et un couvercle, obtenue à partir d'une découpe uni-

que perforée et pliée comprenant une première partie de découpe (A) prévue pour former le corps de boîte et une deuxième partie de découpe (B) prévue pour former le couvercle de boîte, lesdites première et deuxième parties de découpe (A, B) étant assemblées par des lignes de pli (C) et, dans la partie résiduelle, étant séparées par des lignes de coupe intermédiaires (F), dans laquelle :

la première partie de découpe (A) comprend un panneau avant (10), un panneau arrière (11), deux panneaux latéraux (12, 13) et un rabat de colle (14), agencés de manière séquentielle et raccordés le long des côtés parallèles par des lignes de pli transversales (15, 16, 17, 18), ledit panneau avant (10) et ledit panneau arrière (11) s'étendent vers le bas dans les rabats longitudinaux (19, 20) et lesdits panneaux latéraux (12, 13) dans les rabats latéraux (21, 22), respectivement, lesdits rabats longitudinaux (19, 20) et lesdits rabats latéraux (21, 22) pouvant être pliés le long d'une ligne de pli longitudinale (23) et étant réalisés pour se chevaucher et se fixer les uns aux autres afin de former un fond de boîte, ledit panneau arrière (11) s'étend vers le haut dans un rabat longitudinal (24) qui peut être plié le long d'une ligne de pli longitudinale (25), ladite deuxième partie de découpe (B) comprend une bande avant (26) et deux bandes latérales (27, 28) raccordées le long des côtés parallèles par des lignes de pli transversales (29, 30), ladite bande avant (26) s'étend vers le haut dans un rabat longitudinal (31) et lesdites bandes latérales (27, 28) dans les rabats latéraux (32, 33), respectivement, ledit rabat longitudinal (31) et lesdits rabats latéraux (32, 33) pouvant être pliés le long d'une ligne de pli longitudinale (34) et étant réalisés pour se fixer sur le rabat (24) dudit panneau arrière (11) de ladite première partie de découpe (A) afin de former un couvercle de boîte, ladite bande avant (26) s'étend vers le bas dans une languette de colle longitudinale (35) et lesdites bandes latérales (27, 28) dans des languettes de colle (36, 37) se présentant sous la forme d'un triangle rectangle, respectivement, ladite languette de colle longitudinale (35) et chacune desdites languettes de colle (36, 37) se présentant sous la forme d'un triangle rectangle pouvant être pliées le long d'une ligne de pli longitudinale (38) et être réalisées pour se fixer à ladite bande avant (26) et à une bande correspondante desdites bandes latérales (27, 28), respectivement, afin de former, en coopération avec ces dernières, un revers (R) pour rigidifier le couvercle,

ladite languette de colle longitudinale (35) est assemblée au panneau avant (10) de ladite première partie de découpe (A) par une ligne de pli (C) et comprend, de manière adjacente à ladite ligne de pli (C), une lèvre (39) qui peut se séparer de cette dernière le long d'une ligne de pointillés (40),

caractérisée en ce que:

une membrane de raccordement (41, 42) s'étend de manière oblique et vers le bas à partir d'une ligne de pli (S) le long de l'hypoténuse de chacune desdites languettes de colle (36, 37) se présentant sous la forme d'un triangle rectangle, ladite membrane de raccordement (41, 42) est assemblée, au niveau de son bord inférieur, à un panneau correspondant desdits panneaux latéraux (12, 13) de la première partie de découpe (A) par une ligne de pli (C), ladite membrane de raccordement (41, 42) comprend un rabat de colle (43, 44) qui peut être séparé de cette dernière le long d'une ligne de déchirement (45, 46) et est en outre assemblée, au niveau de son bord supérieur, à une bande correspondante desdites bandes latérales (27, 28) le long d'une trajectoire de ladite ligne de pli longitudinale (38), ledit rabat de colle (43, 44) pouvant être plié le long de ladite ligne de pli longitudinale (38) et réalisé pour se fixer sur ladite bande correspondante desdites bandes latérales (27, 28).

2. Boîte selon la revendication 1, **caractérisée en ce que** pour former le couvercle de boîte, ledit rabat longitudinal (24) de ladite première partie de découpe (A) est intercalé entre et fixé sur ledit rabat longitudinal (31) et sur lesdits rabats latéraux (32, 33) de ladite deuxième partie de découpe (B).
3. Boîte selon la revendication 1, **caractérisée en ce que**, après que la lèvre (39) a été séparée de la languette de colle (35), lors de la première ouverture de la boîte, ladite languette de colle (35) forme une partie d'échelon (47) le long de la ligne de pointillés (40), afin de permettre à la lèvre (39) d'être bloquée de manière amovible sur cette dernière lorsque le couvercle est abaissé pour fermer la boîte.

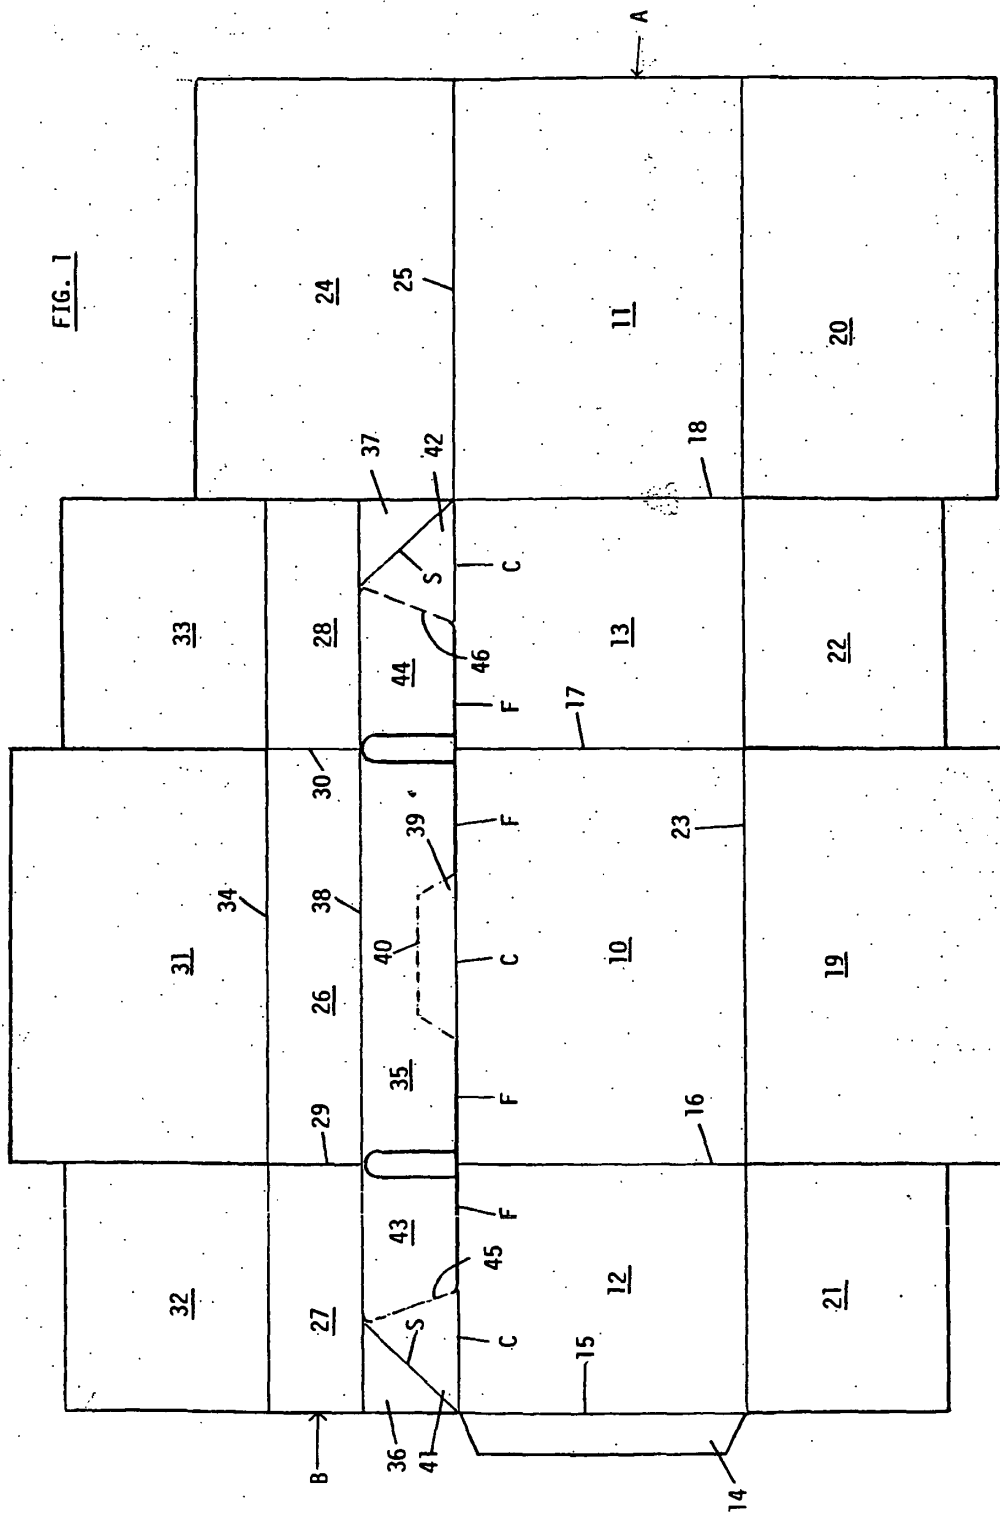


FIG. 2

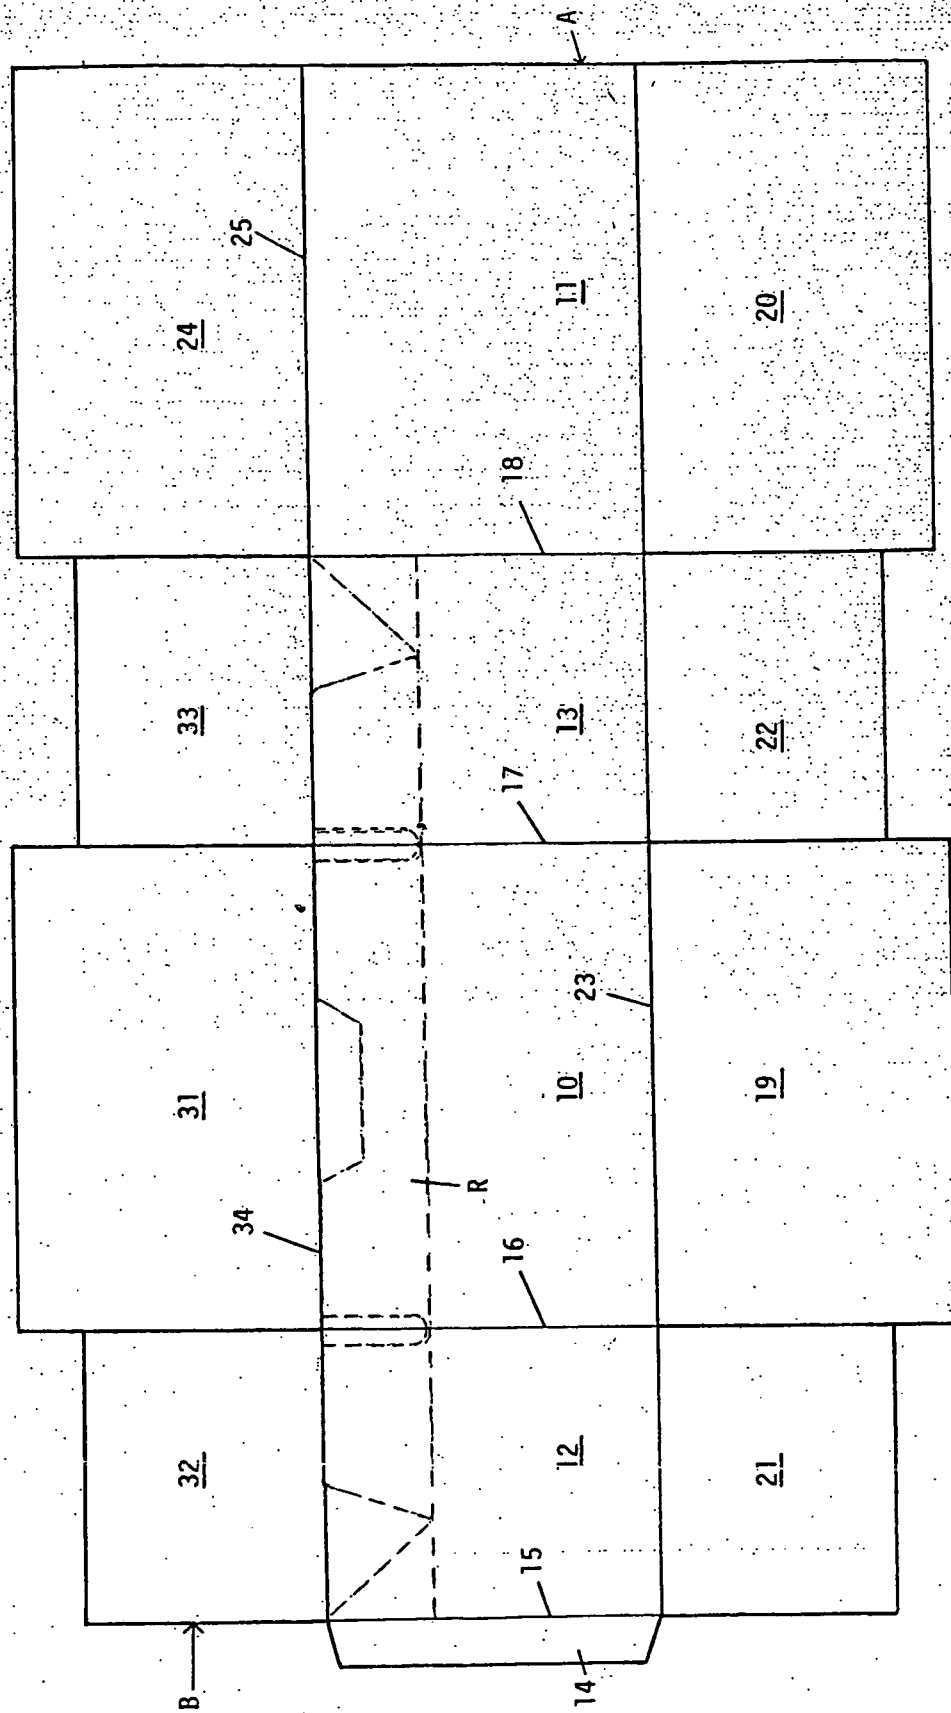


FIG. 3

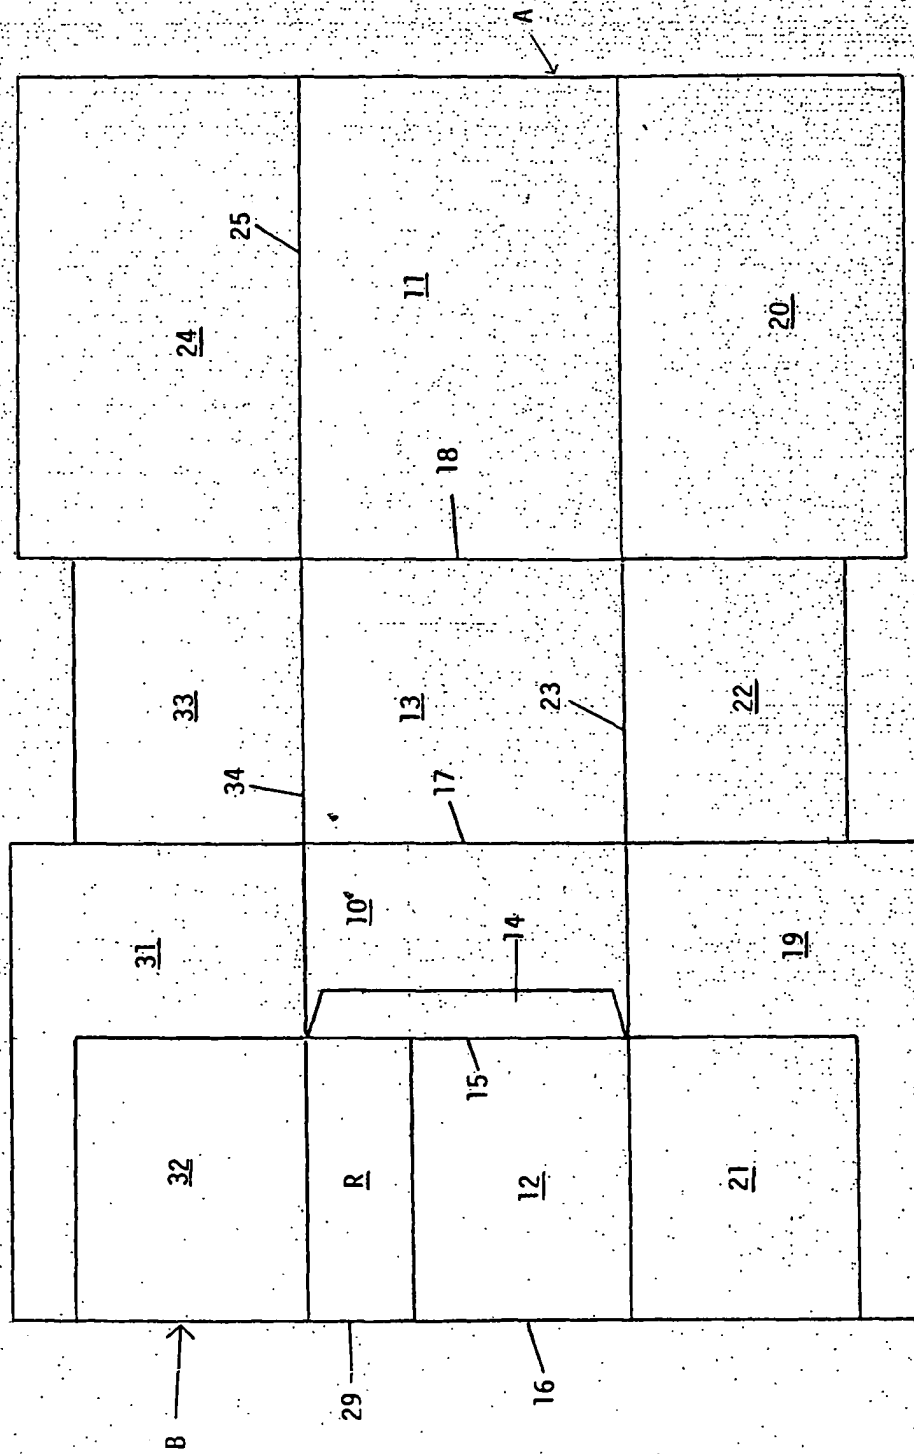
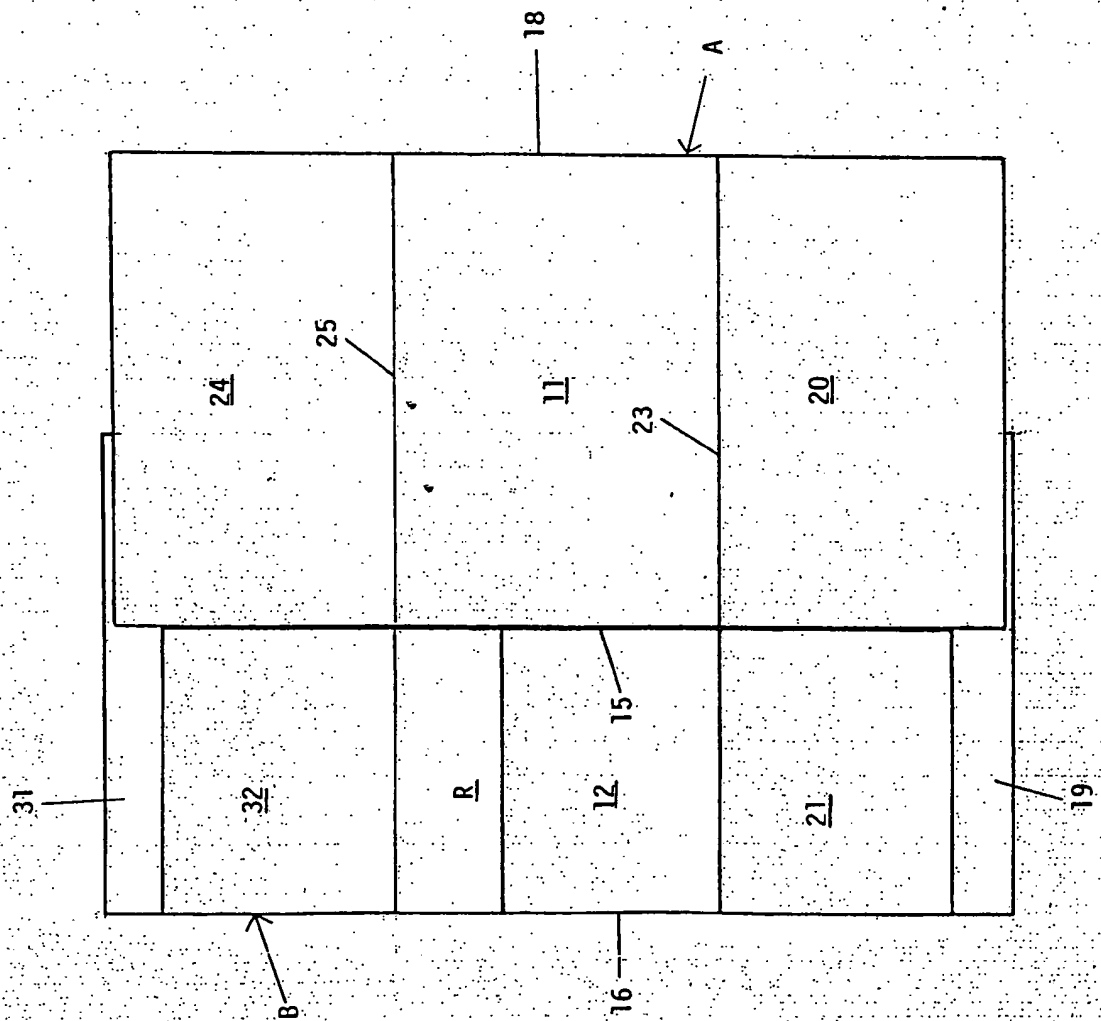


FIG. 4




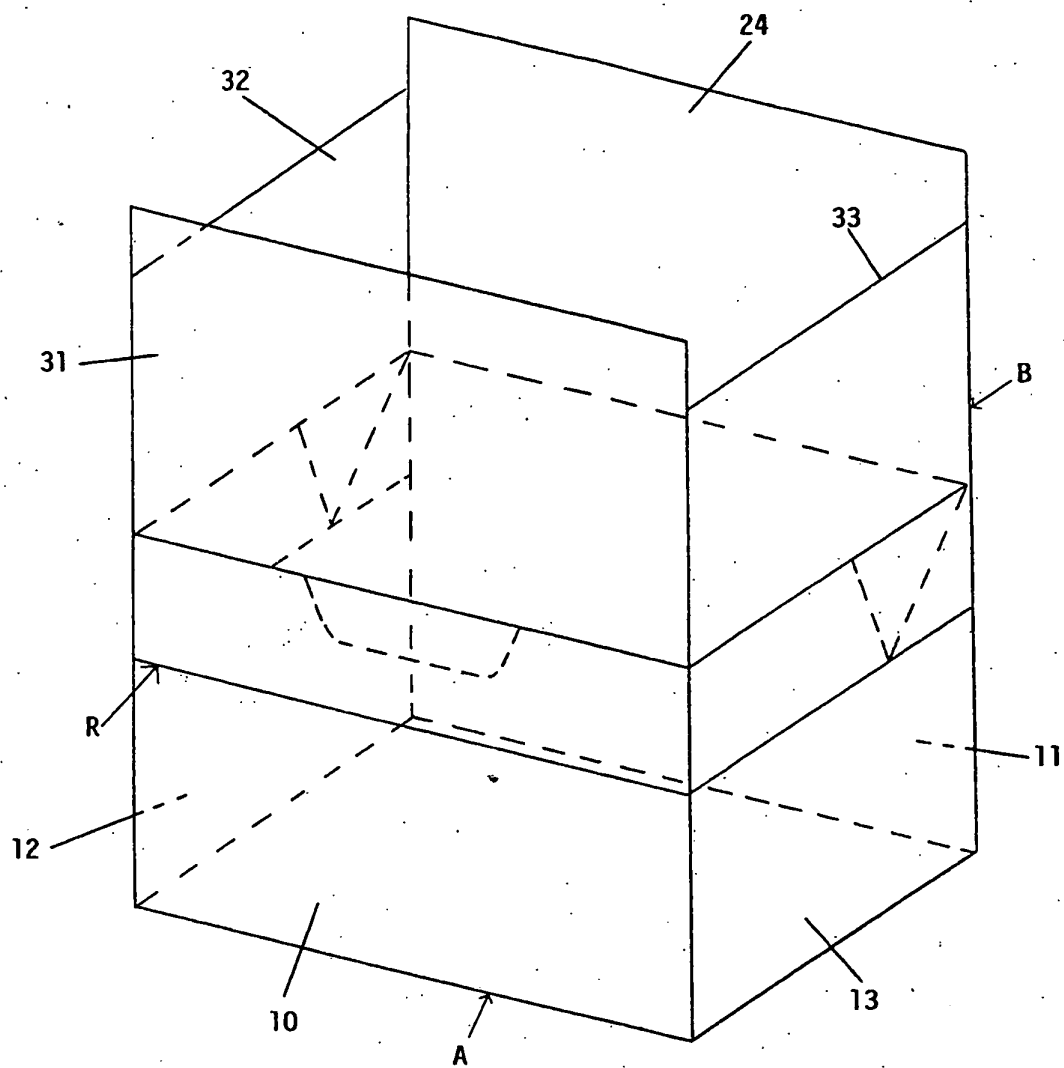


FIG. 5

FIG. 6

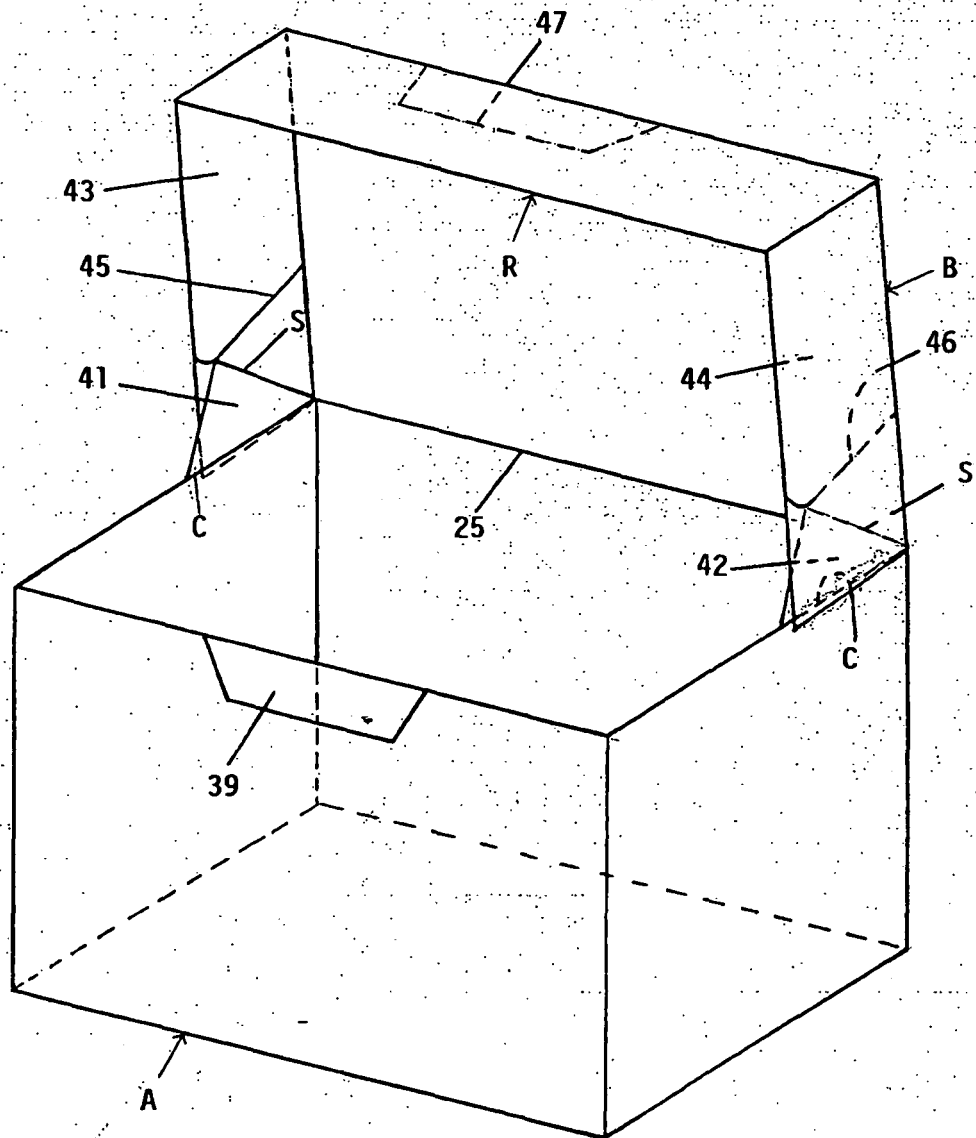

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 7533244 U [0002]