



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
27.01.2010 Bulletin 2010/04

(51) Int Cl.:
A43C 11/14 ^(2006.01) **B21D 7/00** ^(2006.01)
B21D 35/00 ^(2006.01) **B21D 53/36** ^(2006.01)

(21) Application number: **09162766.1**

(22) Date of filing: **16.06.2009**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK TR
Designated Extension States:
AL BA RS

(72) Inventors:
• **Baggio, Giorgio**
35018 San Martino Di Lupari PD (IT)
• **Salatin, Nicola**
31010 Godega Di Sant'Urbano, Frazione Pianzano TV (IT)

(30) Priority: **25.07.2008 IT TV20080097**


(74) Representative: **Modiano, Micaela Nadia**
Dr. Modiano & Associati SpA
Via Meravigli 16
20123 Milano (IT)

(71) Applicants:
• **Premec S.P.A.**
31010 Godega di Sant'Urbano (TV) (IT)
• **Baggio, Giorgio**
35018 San Martino di Lupari (PD) (IT)

(54) **Method for manufacturing semi-finished products adapted to form levers, particularly for sports shoes, and levers obtained with the method**

(57) A method for providing semi-finished products adapted to form levers (1), particularly for sports shoes, comprising a step of flattening and/or coining one or more parts of a tube or rod or bar made of metal is comprised, followed by a blanking to obtain one or more holes (16a, 16b) and/or slots. It is then possible to perform a step of shaping the tube or rod or bar until it is given a substantially U-shaped configuration. A lever component (1), par-

ticularly for sports shoes, is thus obtained which is constituted by a tube or rod or bar made of metal that is flattened and/or coined and/or blanked and contoured so as to obtain a tensioning lever arm (2), which is associated with a first flap to be joined and can be actuated by the user, and/or a ring or bridge (10) that interacts with a rack or hook (13) associated with a second flap to be joined.

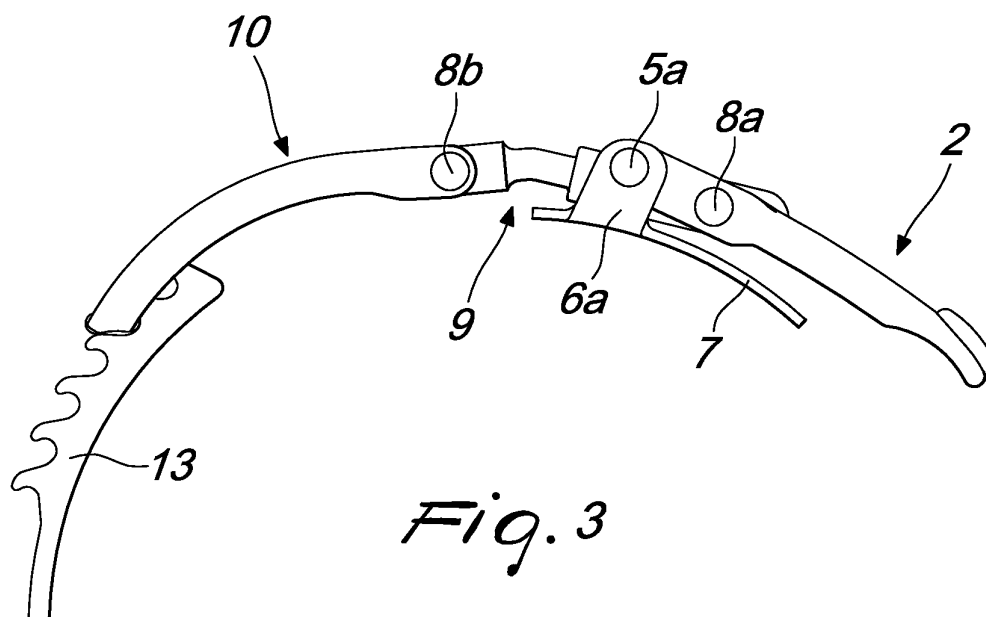

Description

[0001] The present invention relates to a method for providing semi-finished products adapted to form levers, particularly for sports shoes, and to levers obtained with the method.

[0002] In the field of sports shoes it is known to use levers that are designed to allow the fastening of a first flap and of a second flap that constitute the shoe.

[0003] These known types of lever comprise a first lever arm, which can be gripped by the user and is associated with a first flap to be joined and is connected, by means of an interconnection element, to a ring that interacts for example with a rack or hook that can be associated with the second flap to be joined of the shoe.

[0004] The lever arm and the ring are usually provided by die-casting; however, this solution entails a large investment in the dies and it is further necessary to take into account the fact that each different shape and dimension of the lever arm or of the bridge require the use of a separate die.

[0005] It is also known to provide these components for levers by cold pressing; although this solution allows a smaller investment in providing the dies, more usually aluminum rods of a given diameter, approximately 25 mm are adopted, which are flattened at an appropriately provided impression, obtaining the semi-finished product which has a large perimetric flash that has to be cropped and finished.

[0006] This solution entails the production of a high percentage of waste of more than 50% of the material.

[0007] It is also known to provide these components by drawing by removal of material; even this solution, however, has high costs which limit its use only to upper-range products sold to the public at high prices that justify its investment.

[0008] It is also known to provide these components for levers made of plastics; this solution, however, still has a high investment in molds.

[0009] The aim of the present invention is to solve the above-mentioned drawbacks of the cited background art, by providing a method that allows to obtain, with a small investment, components for levers particularly for sports shoes.

[0010] Within this aim, an object of the invention is to provide semi-finished products that are adapted to form levers particularly for sports shoes that have no flash to be removed.

[0011] Another object of the invention is to provide a method that allows to obtain semi-finished products for forming levers particularly for sports shoes that have very little waste, so as to achieve an optimum saving in material.

[0012] Another object of the invention is to provide a method that allows to obtain semi-finished products adapted to form levers particularly for sports shoes that requires low investments.

[0013] Another object of the invention is to obtain a

method that combines the above cited characteristics with the characteristic of allowing to obtain semi-finished products that are adapted to form levers particularly for sports shoes that have low costs and weights.

[0014] This aim and these and other objects, which will become better apparent hereinafter, are achieved by a method for providing semi-finished products adapted to form levers, particularly for sports shoes, **characterized in that** it comprises the following steps, even in a different sequence:

- a) flattening and/or coining of one or more parts of a tube or rod or bar made of metal,
- b) blanking to obtain one or more holes and/or slots;
- c) optional repetition of steps a) and b);
- d) shaping of such tube or rod or bar until it assumes a substantially U-shaped configuration, and a lever component, particularly for sports shoes,

characterized in that it is constituted by a tube or rod or bar made of metal that is flattened and/or coined and/or blanked and contoured so as to obtain a tensioning lever arm, which is associated with a first flap to be joined and can be actuated by the user, and/or a ring or bridge that interacts with a rack or hook associated with a second flap to be joined.

[0015] Further characteristics and advantages of the invention will become better apparent from the following detailed description of a preferred but not exclusive embodiment thereof, illustrated by way of non-limiting example in the accompanying drawings, wherein:

Figure 1 is a plan view of a lever for sports shoes;
 Figure 2 is a sectional view, taken along the line II-II of Figure 1;
 Figure 3 is a side view of the lever of Figure 1;
 Figure 4 is an exploded view of the components and of the structure of the lever;
 Figures 5 and 6 are front and side views of a rod;
 Figures 7 and 8 are side and front views of the rod after a first flattening step;
 Figure 9 is a view of the semi-finished product of Figure 7, rotated through approximately 90°;
 Figures 10 and 11 are a side view and a front view of the semi-finished product after a blanking step;
 Figure 12 is a view of the semi-finished product of Figure 10 rotated through approximately 90°;
 Figure 13 is a view of the semi-finished product after the shaping step to obtain a lever arm or a bridge or a ring;
 Figure 14 is a sectional view, taken along the line XIV-XIV of Figure 13;
 Figure 15 is a top view of the semi-finished product;
 Figure 16 is a view, similar to Figure 13, of the semi-finished product subjected to a further coining step to obtain a lever arm or a bridge or a ring;
 Figure 17 is a sectional view, taken along the line XVII-XVII of Figure 16;

Figure 18 is a rear view of the semi-finished product according to the invention.

[0016] In the exemplary embodiments that follow, individual characteristics, given in relation to specific examples, may actually be interchanged with other different characteristics that exist in other exemplary embodiments.

[0017] Moreover, it is noted that anything found to be already known during the patenting process is understood not to be claimed and to be the subject of a disclaimer.

[0018] With reference to the figures, the reference numeral 1 designates a lever constituted by a lever arm 2 that is substantially U-shaped so as to form a first base 3 and a pair of first wings 4a, 4b, which are rotatably interconnected at their ends, by means of a pair of first rivets 5a, 5b, at two wings 6a, 6b, which are perforated and protrude from a base 7 that is coupled to a first flap of a shoe.

[0019] Between the first wings 4a and 4b there is an interposed first pivot 8a for the pivoting of an element 9 for interconnection, by means of a second pivot 8b, to a ring or bridge 10, which is also U-shaped, so as to form a pair of second wings 11, which are blended by a second base 12 that is designed to engage a rack or hook 13, which can be associated with a second flap of a shoe.

[0020] The lever arm 3 and the bridge or ring 10 are provided by means of a method that initially starts from a tube or rod or bar made of metal, for example preferably of aluminum, which has a preferably round cross-section.

[0021] The method then provides for flattening, for example at the ends of the rod so as to form two flat regions, designated by the reference numerals 15a and 15b.

[0022] As an alternative or in combination, it is possible to obtain coining, this term being used to reference a flattening by impression in a positive or negative form, used for example to insert an acronym or lettering or a logo.

[0023] The method then provides for the possibility to perform a blanking step, for example at the flat regions 15a and 15b, in order to obtain for example one or more pairs of holes 16a and 16b.

[0024] As an alternative, blanking can provide for the obtainment of preset slots.

[0025] The method then provides for the optional repetition of the preceding steps, for example a further flattening and/or coining of a central region of the tube that was not affected previously by flattening and blanking; it is thus possible to obtain for example a flattened and slightly arc-like region 17, as shown in Figure 17.

[0026] The method then provides for the shaping of the tube or rod or bar until it is given a substantially U-shaped configuration, so as to obtain for example the lever arm 2, which is also shown in Figure 16, or the ring or bridge 10.

[0027] Two semi-finished products are thus obtained which have respectively a shape that can be traced back

to the first base 3 and to the second base 12, both of which are blended with the pair of first wings 4a, 4b, the tips of which have the flat regions 15a and 15b which are conveniently perforated and on which the one or more holes 16a, 16b for subsequent interconnection to the remaining components of the lever 1 are provided.

[0028] It has thus been shown that the invention has achieved the proposed aim and objects, a method having been provided which allows to obtain, with a small investment, components for levers particularly for sports shoes without having, in such components, flash to be removed but only possibly a very small amount of waste, so as to obtain an optimum saving of material.

[0029] The investment in machinery and equipment is low with respect to the described background art, and this allows to provide semi-finished products at low costs which have modest weights.

[0030] The materials used, as well as the dimensions that constitute the individual components of the invention, may of course be more pertinent according to specific requirements.

[0031] The various means for performing certain different functions need not certainly coexist only in the illustrated embodiment but can be present per se in many embodiments, including ones that are not illustrated. The characteristics indicated as advantageous, convenient or the like can also be omitted or be replaced with equivalents.

[0032] The disclosures in Italian Patent Application No. TV2008A000097 from which this application claims priority are incorporated herein by reference.

[0033] Where technical features mentioned in any claim are followed by reference signs, those reference signs have been included for the sole purpose of increasing the intelligibility of the claims and accordingly, such reference signs do not have any limiting effect on the interpretation of each element identified by way of example by such reference signs.




Claims




1. A method for providing semi-finished products adapted to form levers, particularly for sports shoes, **characterized in that** it comprises the following steps, even in a different sequence:
 - a) flattening and/or coining of one or more parts of a tube or rod or bar made of metal,
 - b) blanking to obtain one or more holes and/or slots;
 - c) optional repetition of steps a) and b);
 - d) shaping of said tube or rod or bar until it assumes an essentially U-shaped configuration.
2. A lever component, particularly for sports shoes, **characterized in that** it is constituted by a tube or rod or bar made of metal that is flattened and/or

coined and/or blanked and contoured so as to obtain a tensioning lever arm, which is associated with a first flap to be joined and can be actuated by the user, and/or a ring or bridge that interacts with a rack or hook associated with a second flap to be joined. 5

3. The method and the component according to claims 1 and 2, **characterized in that** said component is obtained starting from a tube or rod or bar made of metal, preferably made of aluminum, which has a polygonal, preferably circular, cross-section. 10
4. The method and the component according to claims 1 and 3, **characterized in that** said tube or rod or bar made of metal is subjected to at least one flattening. 15
5. The method and the component according to claim 1 and 4, **characterized in that** said at least one flattening is obtained at the ends of said tube or rod or bar made of metal so as to form two flat regions. 20
6. The method and the component according to claims 1 and 3, **characterized in that** said tube or rod or bar made of metal is subjected to at least one coining. 25
7. The method and the component according to one or more of the preceding claims, **characterized in that** said tube or rod or bar made of metal worked previously is subjected to a blanking step. 30
8. The method and the component according to claims 1 and 7, **characterized in that** said blanking is obtained at the flat regions formed at the ends of said tube or rod or bar made of metal in order to obtain one or more pairs of slots or holes. 35
9. The method and the component according to one or more of the preceding claims, **characterized in that** it provides for an additional step for flattening and/or coining a central region of said tube or rod or bar made of metal not affected previously by flattening and blanking so as to obtain a flattened and slightly arc-like region. 40
45
10. The method and the component according to one or more of the preceding claims, **characterized in that** it provides for the shaping of said tube or rod or bar made of metal so as to give it a substantially U-shaped configuration and obtain a lever arm or a ring or a bridge. 50

55

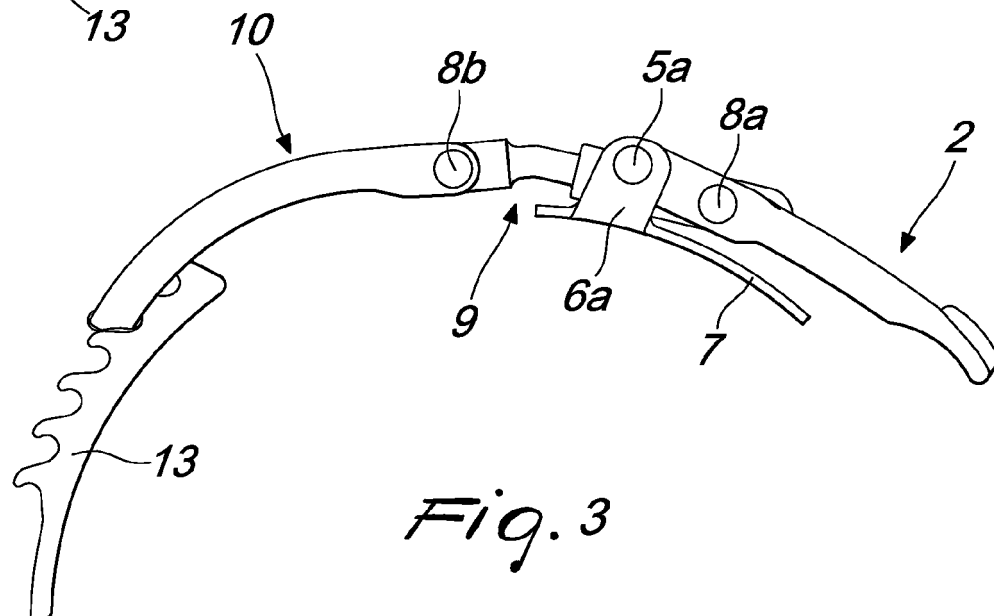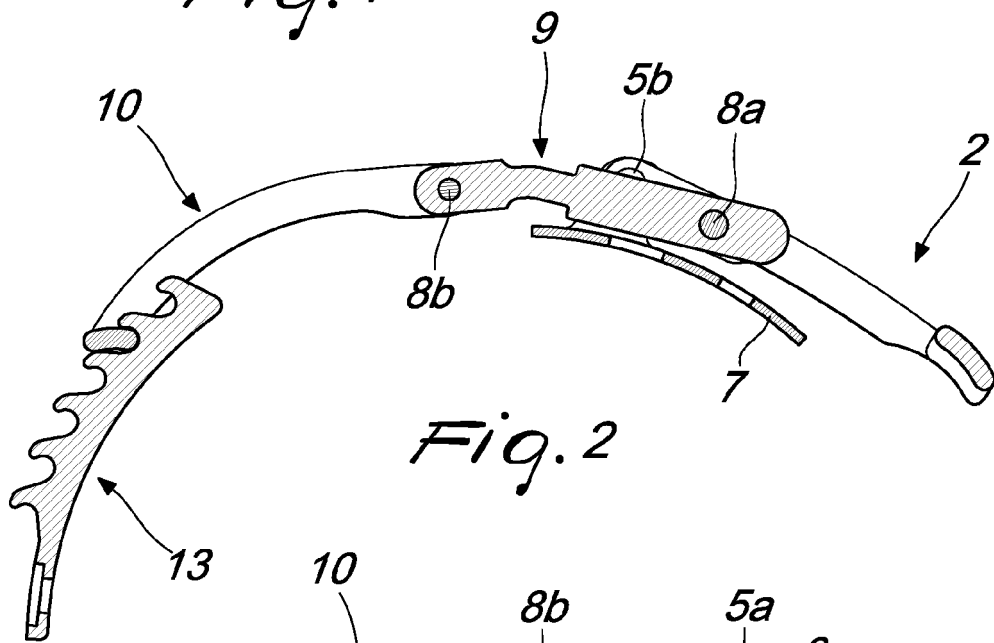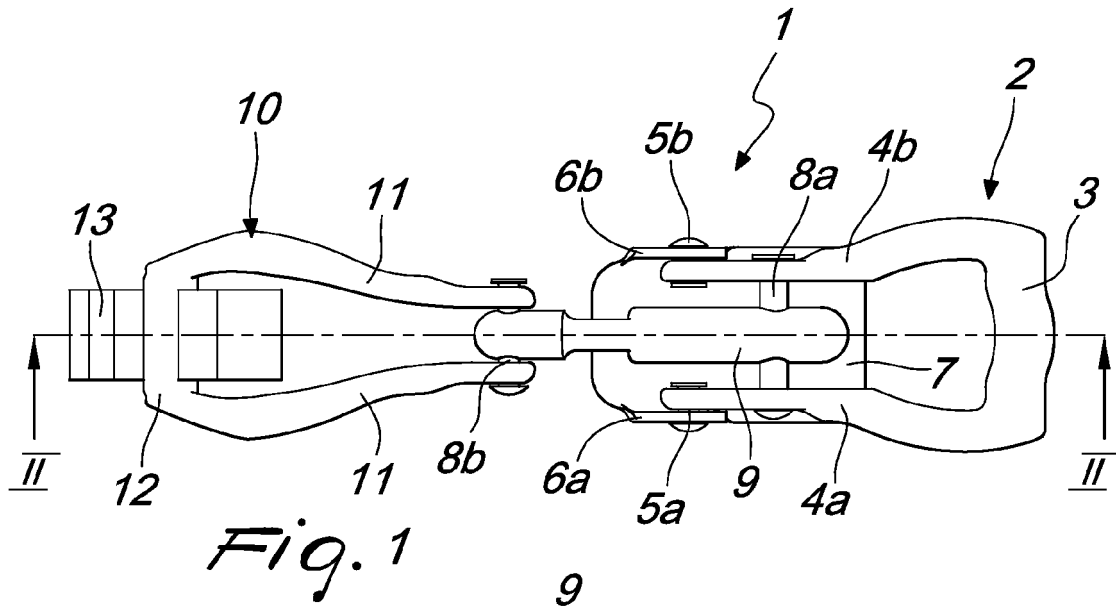

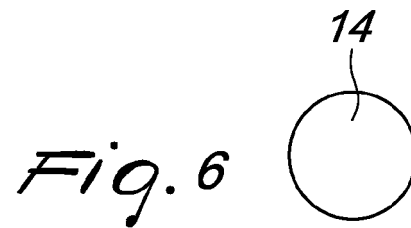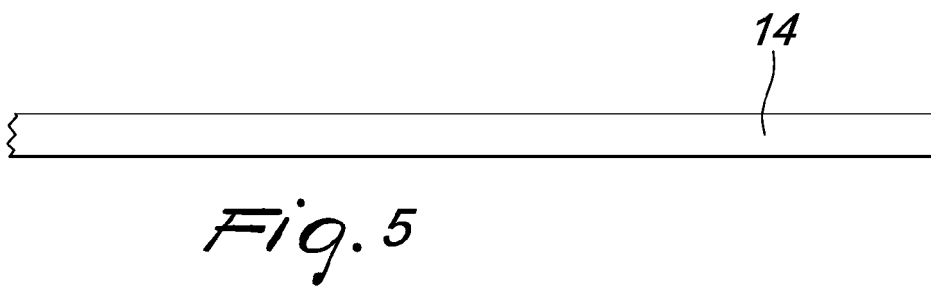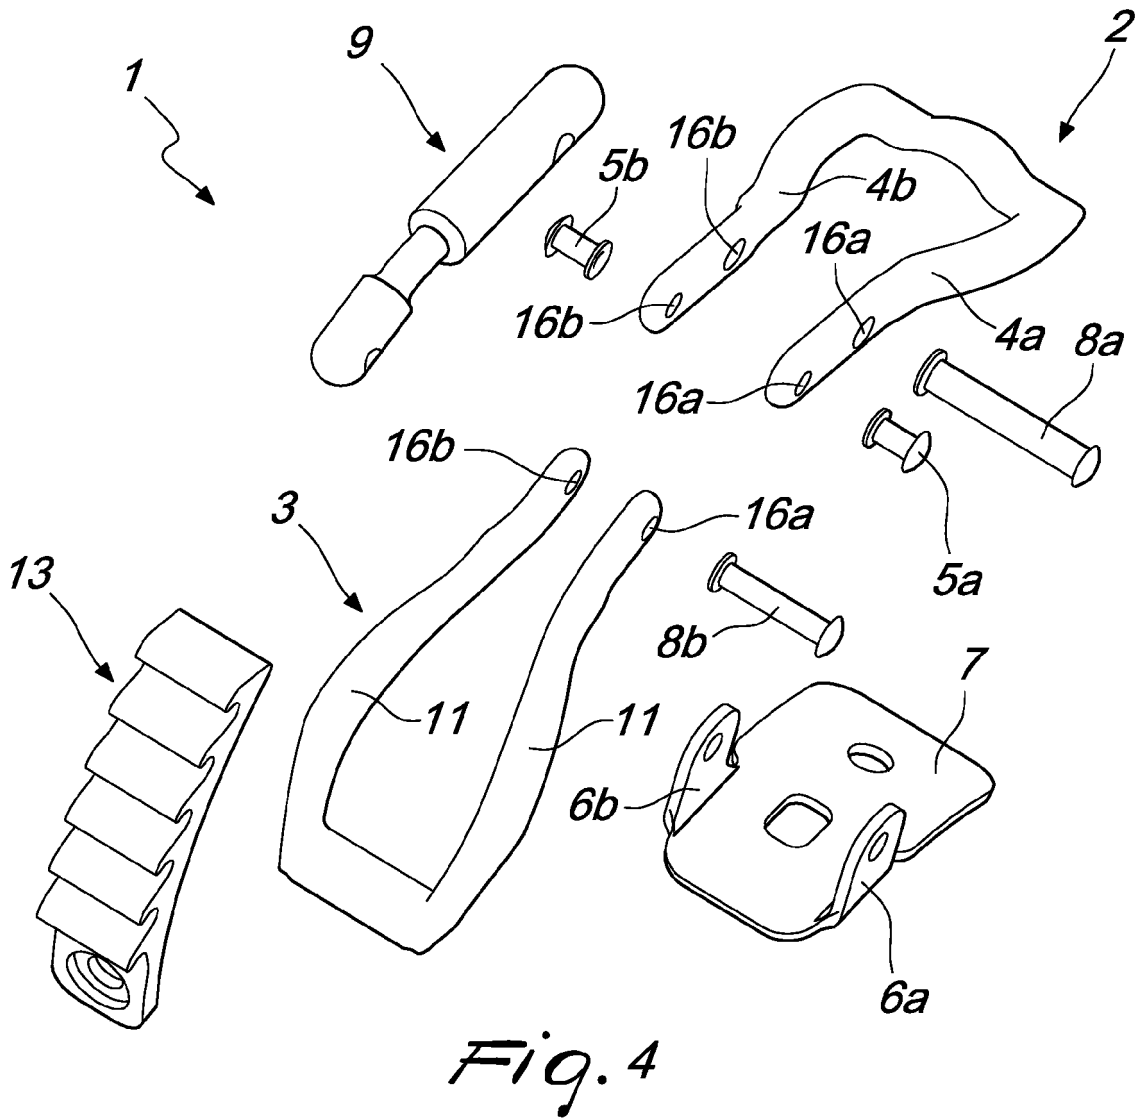

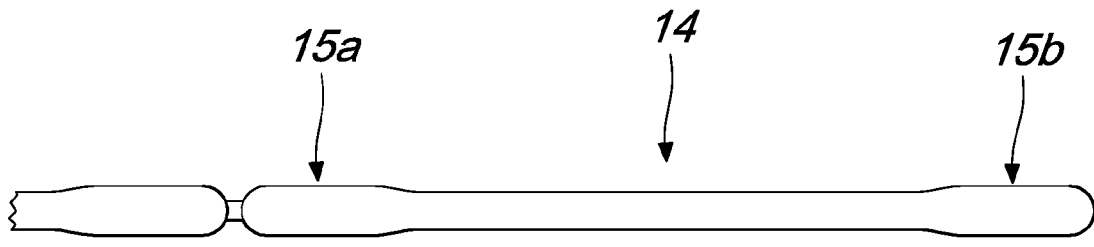


Fig. 7

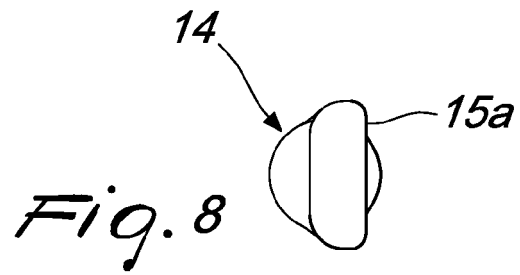


Fig. 8

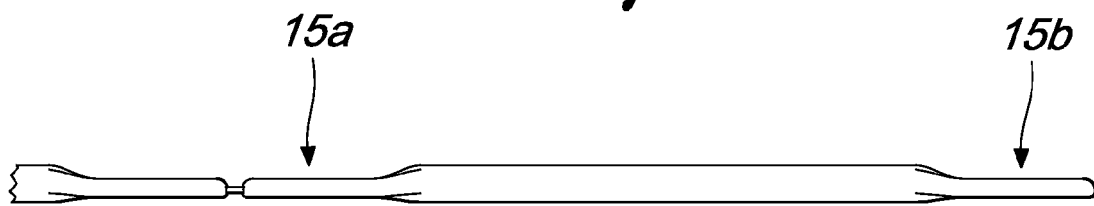


Fig. 9

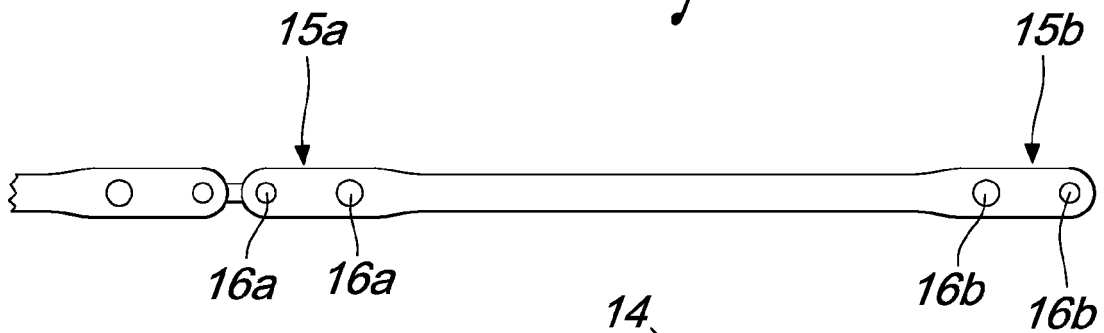


Fig. 10







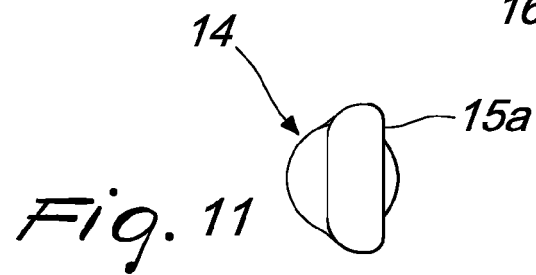


Fig. 11



Fig. 12

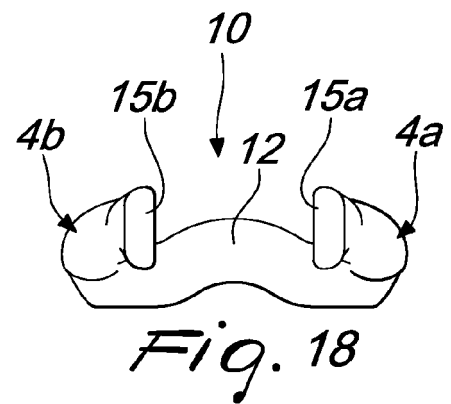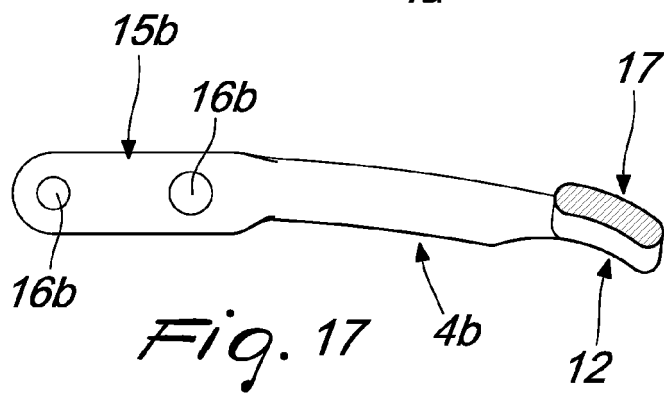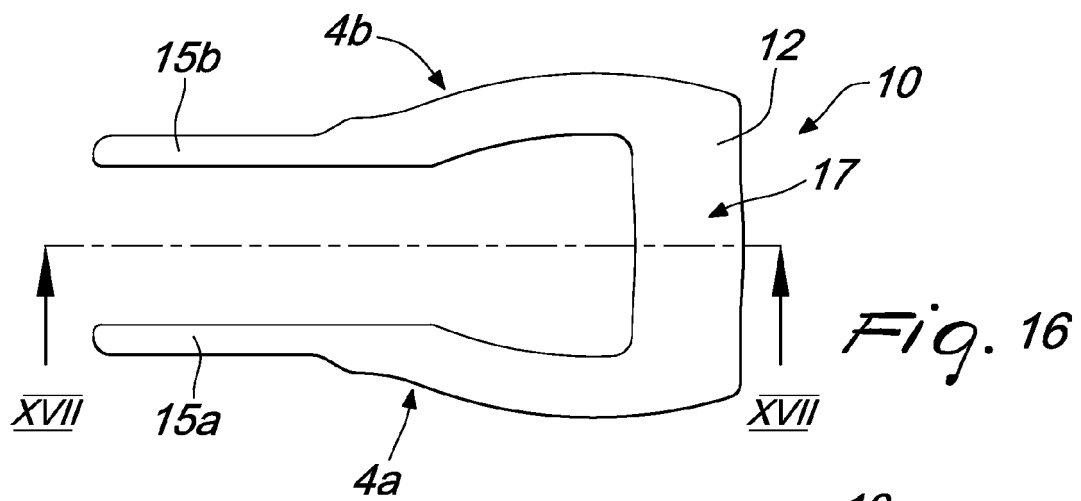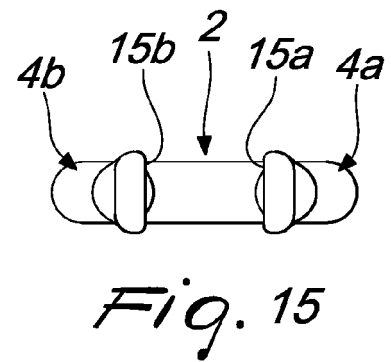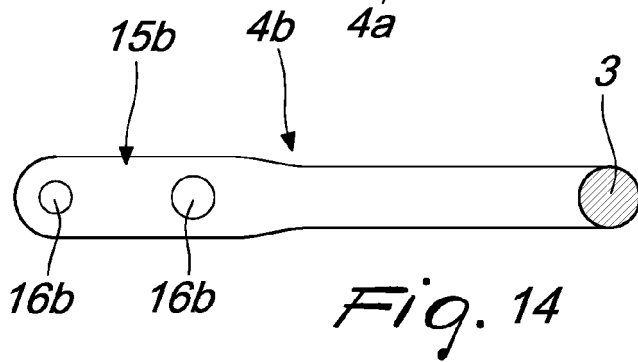

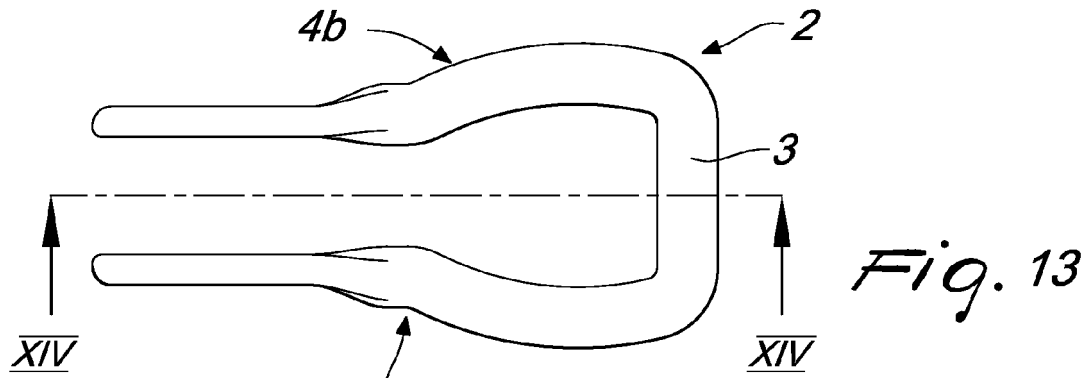

EUROPEAN SEARCH REPORT

Application Number
EP 09 16 2766

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	EP 1 922 945 A1 (PREMEC S P A [IT]) 21 May 2008 (2008-05-21) * paragraphs [0018], [0023]; figures 3-6 *	1-10	INV. A43C11/14 B21D7/00 B21D35/00 B21D53/36
A	EP 1 922 944 A1 (PREMEC S P A [IT]) 21 May 2008 (2008-05-21) * figures 5,8 *	1-10	
A	EP 0 880 912 A2 (BAUER ITALIA SPA [IT]) 2 December 1998 (1998-12-02) * column 3, lines 2-5 * * column 4, lines 4-13; figure 4 *	1-10	
A	EP 1 774 864 A1 (PREMEC S P A [IT]) 18 April 2007 (2007-04-18) * figures *	1-10	
A	WO 03/035295 A1 (CONS METAL PRODUCTS INC [US]; WHEELER ROBERT P JR [US]) 1 May 2003 (2003-05-01) * claim 1; figures 1A-1F *	1-10	
			TECHNICAL FIELDS SEARCHED (IPC)
			A43C B21D
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 11 November 2009	Examiner Vesin, Stéphane
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 09 16 2766

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

11-11-2009

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1922945	A1	21-05-2008	NONE	
EP 1922944	A1	21-05-2008	NONE	
EP 0880912	A2	02-12-1998	CA 2238699 A1	29-11-1998
			IT PD970114 A1	30-11-1998
			JP 11075909 A	23-03-1999
EP 1774864	A1	18-04-2007	NONE	
WO 03035295	A1	01-05-2003	AT 367874 T	15-08-2007
			BR 0213439 A	09-11-2004
			CA 2463371 A1	01-05-2003
			DE 60221423 T2	17-04-2008
			EP 1446244 A1	18-08-2004
			ES 2289178 T3	01-02-2008
			JP 2005506906 T	10-03-2005
			PT 1446244 E	29-10-2007

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- IT TV20080097 A [0032]