



(11) **EP 2 151 226 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**10.02.2010 Bulletin 2010/06**

(51) Int Cl.:  
**A61H 1/00 (2006.01)**

(21) Application number: **09009998.7**

(22) Date of filing: **03.08.2009**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR**  
Designated Extension States:  
**AL BA RS**

- **Takahashi, Tatsuya**  
**Kadoma-shi**  
**Osaka (JP)**
- **Nishimura, Yoshinari**  
**Kadoma-shi**  
**Osaka (JP)**
- **Michimori, Akihiro**  
**Kadoma-shi**  
**Osaka (JP)**

(30) Priority: **05.08.2008 JP 2008202112**

(71) Applicant: **Panasonic Electric Works Co., Ltd.**  
**Kadoma-shi**  
**Osaka (JP)**

(74) Representative: **Samson & Partner**  
**Widenmayerstrasse 5**  
**80538 München (DE)**


(72) Inventors:  
• **Morikawa, Daisuke**  
**Kadoma-shi**  
**Osaka (JP)**

(54) **Relaxation apparatus**

(57) A relaxation apparatus includes a body-supporting unit for supporting a user's body, a rocking unit for rocking back and forth the body-supporting unit and a controller for controlling the rocking unit to rock the body-supporting unit. The body-supporting unit includes an air

bag which is inflated to press the user's body or contracted in accordance with supply or exhaust of air by an air pump. The controller controls output of the air pump to increase and decrease in accordance with forward and backward rocking motions of the body-supporting unit.

**FIG. 1**

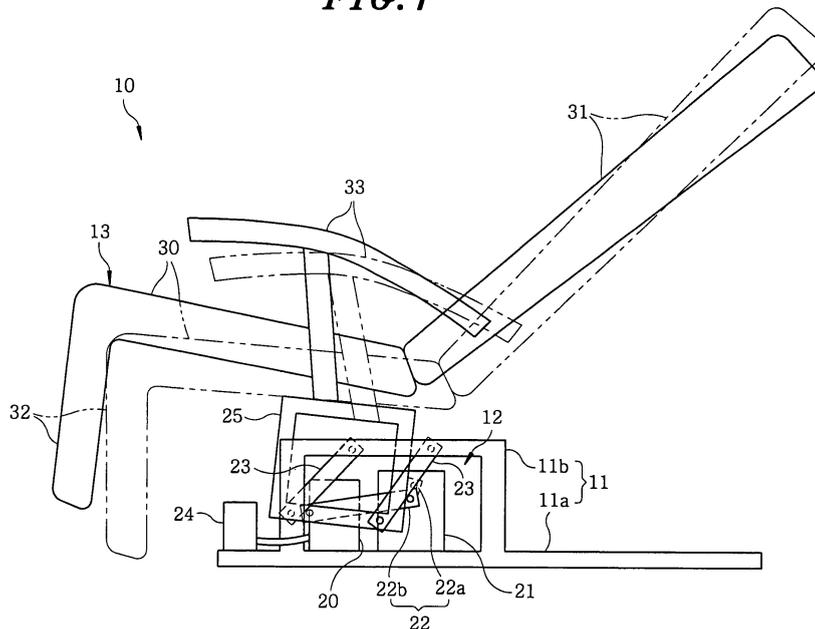

**EP 2 151 226 A1**

## Description

### Field of the Invention

[0001] The present invention relates to an apparatus for providing a user with a relaxing effect.

### Background of the Invention

[0002] A conventional relaxation apparatus, which provides a user seating on a chair-shaped body-supporting member with relaxing effect by rocking the user's body, is described in Japanese Patent Laid-open Publication No. 2003-250851 (hereinafter, referred to as the cited reference).

[0003] The relaxation apparatus in the cited reference has a rocking unit (i.e., the relaxation mechanism in the cited reference) which rocks a body-supporting member (i.e., the main body of the seating unit in the cited reference) back and forth and hence provides a user with a relaxing effect by the rocking motion. This relaxation apparatus also has air bags in the left and right portions of the body-supporting member. The air bags, driven by an air pump, inflate and contract alternatively so that it is possible to roll a user to his/her left and right like a hammock or cradle, which can also provide its user with a relaxation effect.

[0004] In the above-mentioned relaxation apparatus, however, the inflation and contraction by the air pump take place independently of the rocking motion of the body-supporting member. Sometimes they give a feeling of insufficient movement due to the mutual cancellation effect of relaxation motions associated with them, resulting in ineffective relaxation effects.

### Summary of the Invention

[0005] In view of the above, the present invention provides a relaxation apparatus capable of giving an effective relaxation effect to a user by using the rocking motion of the user's body and the inflation and contraction of air bags.

[0006] In accordance with an aspect of the present invention, there is provided a relaxation apparatus including a body-supporting unit for supporting a user's body, a rocking unit for rocking back and forth the body-supporting unit and a controller for controlling the rocking unit to rock the body-supporting unit, **characterized in that:** the body-supporting unit includes an air bag which is inflated to press the user's body or contracted in accordance with supply or exhaust of air by an air pump, and the controller controls output of the air pump to increase and decrease in accordance with forward and backward rocking motions of the body-supporting unit.

[0007] With such configuration, the body-supporting unit includes the air bag that is inflated to press the user or contracted in accordance with supply or exhaust of the air by the air pump, and the controller controls the

output of the air pump to increase or decrease in accordance with the direction of the rocking motion of the body-supporting unit. For example, the air pump can be controlled to increase and decrease its output during the forward and backward motions, respectively, of the body-supporting unit. Accordingly, the rate of inflation of the air bag can be made higher during the forward motion than during the backward motion, and it becomes possible to give the user during the forward motion a feeling of floating, yielding an effective relaxation effect.

[0008] The controller may control the rocking unit and the air pump to perform, on a user in a relaxed state, a refresh rocking in which frequency and/or amplitude of the rocking motion is increased to refresh the user in the relaxed state, and the output of the pump is increased and decreased during the backward and forward motions of the body-supporting unit, respectively.

[0009] In accordance with the present invention, the relaxation apparatus is capable of giving an effective relaxation effect to a user by using the rocking motion of the user's body and the inflation and contraction of the air bag.

### Brief Description of the Drawings

#### [0010]

Fig. 1 shows a schematic configuration of a relaxation apparatus in accordance with an embodiment of the present invention.

Fig. 2 illustrates a perspective view of a body-supporting member of the relaxation apparatus in Fig. 1. Fig. 3 depicts a graph for explaining frequency and amplitude of a rocking motion of the body-supporting member.

Fig. 4 shows a graph for explaining the relationship between the frequency of the rocking motion and the output of an air pump during a relaxation rocking.

Fig. 5 sets forth a graph for explaining the relationship between the frequency of the rocking motion and the output of the air pump during a refresh rocking.

### Detailed Description of the Embodiments

[0011] Hereinafter, embodiments of the present invention will be described in detail with reference to the accompanying drawings.

[0012] Fig. 1 shows a schematic configuration of a relaxation apparatus in accordance with an embodiment of the present invention. The relaxation apparatus 10 includes a base 11 having a bottom portion 11a placed on a floor (not shown), a rocking mechanism 12 as a rocking unit provided to the base 11 and a body-supporting member 13 as a body-supporting unit driven by the rocking mechanism 12.

[0013] The rocking mechanism 12 has a motor 20, a reduction gear 21, a crank mechanism 22 and a plurality

of, e.g., two, link members 23. The motor 20 is provided on the bottom portion 11a of the base 11. The operation of the motor 20 is controlled by a controller 24 provided on the bottom portion 11a of the base 11. The reduction gear 21 is provided on the bottom portion 11a of the base 11. The reduction gear 21 is operationally coupled with the motor 20 and serves to reduce the power of the motor 20.

**[0014]** The crank mechanism 22 has two connecting rods 22a and 22b, and converts the rotating motion of the reduction gear 21 into a large circular motion. The base end of the connecting rod 22a is connected to and rotates with an output shaft of the reduction gear 21, while its leading end is rotatably connected to the base end of the connecting rod 22b. The leading end of the connecting rod 22b is connected to the lower portion of a rectangular frame 25 to which the body-supporting member 13 is fixed.

**[0015]** The base 11 also has a support frame 11b protruded upward from the bottom portion 11a. The base ends of the linkages 23 are rotatably connected to the upper portion of the support frame 11b at an interval, while their leading ends 22b are rotatably connected to the lower portion of the rectangular frame 25. The linkages 23 rotate around their base ends and, therefore, the body-supporting member 13, fixed to the rectangular frame 25, can be rocked back and forth by the power delivered from the crank mechanism 22, like a rocking chair. In the present embodiment of the invention, the movement path of the body-supporting member 13 from the rear to the front is referred to as a forward path and that from the front to the rear is referred to as a backward path.

**[0016]** The body-supporting member 13 of a chair shape includes a seat portion 30 which is fixed to an upper portion of the rectangular frame 25 so that they can move together, a back portion attached to the rear side of the seat portion 30 so that it can recline about the rear of the seat portion 30, an ottoman fixed at the front side of the seat portion 30 and two arm rests 33 fixed at both sides of the seat portion 30.

**[0017]** The back portion 31 can be reclined suitably by a reclining mechanism 34, which is controlled by the controller 24 as shown in Fig. 2.

**[0018]** In the upper part of the back portion 31, a pair of air bags 40 and 41 is provided corresponding respectively to the left and right shoulders of a user. In the middle of the back portion 31, three air bags 42, 43 and 44 are arranged vertically corresponding to the back of a user. In the lower part of the back portion 31, two air bags 45 and 46 corresponding respectively to the left and right sides of the waist of a user. Two air bags 47 and 48 are provided at the left and right sides in the seat portion 30 corresponding to the hip and thigh of a user. The air bags 40 to 48 provided corresponding to respective body parts of a user, are installed to be activated by an air pump 49 provided under the seat portion 30 via connecting hoses (not shown). The operation of the air pump 49 is control-

led by the controller 24 so that the air bags 40 to 48 can be inflated and contracted.

**[0019]** Hereinafter, the operation of the relaxation apparatus 10 configured as described above will be described with reference to Figs. 1 to 5.

**[0020]** In the controller 24, several modes are provided including a single mode in which a relaxation rocking of the body-supporting member 13 is carried out by driving the rocking mechanism 12 and a combination mode in which the relaxation rocking is carried out in combination with operation of the respective air bags 40 to 48 and reclining of the back portion 31. Among them, in a relaxation-rocking mode having a refresh effect, a "relaxation rocking" is initiated to give a relaxation effect to a user for a predetermined period of time, after which the operation mode is switched from the "relaxation rocking" to "refresh rocking" until the operation mode ends. Fig. 3 shows the variations of amplitude and frequency with time of the motion of the body-supporting member 13 driven by the rocking mechanism 12 in the relaxation-rocking mode.

(Relaxation rocking)

**[0021]** At first, the controller 24 controls the reclining mechanism 34 to recline the back portion 31 by a specified degree (for example,  $\Delta\theta = 30^\circ$ ) from a normal state (for example, at  $\theta = 120^\circ$ ) to a reclined state (for example, at  $\theta = 150^\circ$ ), where  $\theta$  denotes the angle the back portion 31 makes with the seat portion 30. During the reclining, the speed at which the back 31 is reclined is controlled to have a gradual decrease.

**[0022]** In order to lead a user to be from an awakened state to a relaxed state, the controller 24 controls the motor 20 to decrease the frequency of rocking of the body-supporting member 13 gradually, for example, from its initial value 0.35 Hz to the final 0.2 Hz in a piecewise manner by a decrement of 0.05 Hz until a predetermined time denoted by A in Fig. 3. At the same time, the motor is controlled to introduce fluctuations to the amplitude of the rocking motion.

**[0023]** As shown in Figs. 2 and 4, for example, at the time when the body-supporting member 13 moves forward along the forward path during the relaxation rocking, the controller 24 drives the air pump 49 to operate at its duty ratio of 100% to inflate the air bags 45 and 46 at the waist position which move in the same direction as the user's body, among the air bags 40 to 48 provided in the back portion 31 and the seat portion 30 of the body-supporting member 13. On the other hand, at the time when the body-supporting member 13 moves backward along the backward path, for example, the controller 24 drives the air pump 49 to operate at its duty ratio of 70% so that the rate of inflation of the air bags 45 and 46 gets decreased. After the inflation of the air bags 45 and 46 is completed, the controller 24 stops the operation of the air pump 49 at the same time when the body-supporting member 13 moves forward along the forward path so that

the air bags 45 and 56 get contracted while the body-supporting member 13 makes one round-trip.

**[0024]** In other words, in the above-mentioned operations of air bags, supply and exhaust of air alternate for each round-trip the body-supporting member 13 makes, and, while the air bags 45 and 46 are inflated, the duty ratio of the air pump 49 is set to be higher during the forward motion than during the backward motion of the body-supporting member 13.

**[0025]** Accordingly, since the air pump 49 is operated at the high duty ratio in accordance with the forward motion of the body-supporting member 13, a user may have an improved feeling of the relaxation movement like an increase of floating of his/her body, yielding a more effective relaxation effect.

**[0026]** Until a predetermined time B after the time A has lapsed, the controller 24 controls the motor 20 to generate fluctuations in the amplitude of the body-supporting member 13 at the minimum value of the frequency, 0.2 Hz in the present embodiment, and to continue the rocking motion in order to let the user rest in sleep in the relaxation state. During the time interval between A and B, the controller 24 suspends the operation of the air pump 49 and the air bags 40 to 48 as well.

(Refresh rocking)

**[0027]** After the lapse of time B, the controller 24 controls the motor 24 to increase the frequency of the rocking motion in a piecewise manner, for example, from 0.2 Hz to 0.3 Hz, 0.4 Hz and 0.6 Hz, in order to induce a user in the sleep (or relaxation) state to an awakened state. At this time, the controller 24 controls the frequency change timings, for example, such that the frequency changes every ten round trips the rocking motion of the body-supporting member 13 makes. Further, the controller 24 controls the motor 20 such that the amplitude increases stepwise in synchronization with the frequency change timings.

**[0028]** In the refresh rocking, for example, at the time when the body-supporting member 13 moves backward along the backward path during the refresh rocking, the controller 24 drives the air pump 49 to operate at its duty ratio of 100% to inflate the air bags 45 and 46 at the waist position which move in the same direction as the user's body, among the air bags 40 to 48 provided in the back portion 31 and the seat portion 30 of the body-supporting member 13. On the other hand, at the time when the body-supporting member 13 moves forward along the forward path, the controller 24 drives the air pump 49 to operate at its duty ratio of 70% so that the rate of inflation of the air bags 45 and 46 gets decreased. At the time when the body-supporting member 13 moves backward along the backward path after the inflation of the air bags 45 and 46 is completed, the controller 24 stops the operation of the air pump 49 so that the air bags 45 and 46 get contracted while the body-supporting member 13 makes one round-trip.

**[0029]** In other words, in the above-mentioned operations of the air bags, supply and exhaust of air alternate for each round-trip the body-supporting member 13 makes, and, while the bags are inflated, the duty ratio of the air pump 49 is set to be higher during the backward motion than during the forward motion of the body-supporting member 13.

**[0030]** Accordingly, since the air pump 49 is operated at the high duty ratio in accordance with the backward motion of the body-supporting member 13, a user may have an improved feeling of the refresh movement like an increase of raising of his/her body, yielding a more effective refresh effect.

**[0031]** After the afore-mentioned operations of the air bags are completed, the controller 24 controls the air pump 49 to supply air to the air bags 42 to 44 to lift the back of a user, leading to stretching his/her back. Further, the controller 24 controls the reclining mechanism 34 to raise the back portion 31 by a specified angle (for example,  $\Delta\theta = 30^\circ$ ) from a reclined state (for example, at  $\theta = 150^\circ$ ) to a normal state (for example, at  $\theta = 120^\circ$ ), where  $\theta$  denotes the angle the back portion 31 makes with the seat portion 30.

**[0032]** Next, the characteristic effects of the present embodiments are described.

(1) The controller 24 controls the air pump 49 to increase and decrease its output during the forward and backward motions, respectively, of the body-supporting member 13 in relaxation rocking. In other words, with the output (duty ratio) of the air pump 49 higher during the forward motion (100%) than during the backward motion (70%) of the body-supporting member 13 as shown in Fig. 4, a user may have an improved feeling of the relaxation movement like an increase of floating of his/her body, yielding a more effective relaxation effect.

(2) The controller 24 controls the rocking mechanism 12 to carry out the refresh rocking that increases both the frequency and amplitude of the rocking motion after the relaxation rocking, thereby refreshing a user in a relaxation state. In addition, the controller 24 controls the air pump 49 to decrease and increase its output during the forward and backward motions, respectively, of the body-supporting member 13 in refresh rocking. In other words, with the output (duty ratio) of the air pump 49 higher during the backward motion (100%) than during the forward motion (70%) of the body-supporting member 13 as shown in Fig. 5, the inflation rate of the air bags 45 and 46 becomes greater during the backward motion, so that a user may have an improved feeling of the refreshing movement like an increase of raising of his/her body, yielding a more effective refresh effect.

**[0033]** The embodiments of the present invention may be modified as described below.

**[0034]** Although the relaxation rocking is followed by

a refresh rocking in the aforementioned embodiment, the relaxation rocking may be carried out alone without the refresh rocking.

**[0035]** In the embodiment described above, during the relaxation and refresh rocking motions, it is configured that the duty ratio (output) of the air pump 49 for the air bags 45 and 46 changes in accordance with the direction of the rocking motion of the body-supporting member 13. However, the present invention is not limited to the above and it may be possible to change the duty ratio of the air pump 49 for other air bags 40 to 44 that have the same direction of application on the user's body. In addition, if the air bags 47 and 48 provided in the seat portion 30 have the same direction of application on the user's body, then it may be possible to change the duty ratio of the air pump 49 for them similarly to the air bags 45 and 46.

**[0036]** When plural air bags are employed, it may be configured that the air bags can take turns to inflate each time the body-supporting member 13 makes a round-trip, for example. For a specific example, it can be controlled that during the relaxation rocking, the three air bags 42, 43 and 44 can take turns to inflate; that is, the air bags 42, 43 and 44 inflate at the first, second and third round-trips, respectively, of the body-supporting member 13 and the remaining air bags get contracted at the respective round-trips. In this case, the output of the air pump 49 during the respective inflation is configured as in the embodiment described above.

**[0037]** Besides, it may be configured that, during the forward motion of the body-supporting member 13, the air pump 49 operates at a duty ratio of 100% to inflate the air bag 42 and contract the air bags 43 and 44, while, during the backward motion of the body-supporting member 13, the air pump 49 operates at a duty ratio of 70% to inflate the air bag 43 and contract the air bags 42 and 44. In other words, it may be configured that the air bags take turns to inflate and contract every time the body-supporting member 13 makes a one-way trip.

**[0038]** In the embodiment described above, when the air bags 45 and 46 inflate during the relaxation rocking, it is configured that the air pump 49 operates at a duty ratio of 100% and 70% during the forward and backward motions, respectively, of the body-supporting member 13. However, the present invention is not limited to the above and other values of the duty ratio may be employed. The important point is to drive the air pump 49 at a duty ratio higher during the forward motion than during the backward motion of the body-supporting member 13.

**[0039]** In the embodiment described above, when the air bags 45 and 46 inflate during the refresh rocking, it is configured that the air pump 49 operates at a duty ratio of 100% and 70% during the backward and forward motions, respectively, of the body-supporting member 13. However, the present invention is not limited to the above and other values of the duty ratio may be employed. The important point is to drive the air pump 49 at a duty ratio higher during the backward motion than during the for-

ward motion of the body-supporting member 13.

**[0040]** In the embodiment described above, the controller 24 controls such that the inception of the forward and backward motions of the body-supporting member 13 is synchronized with that of inflation and contraction of the air bags 45 and 46. However, the present invention is not limited to the above. The inception of the forward and backward motions of the body-supporting member 13 may be carried out in synchronization with inflation of at least one of the air bags 40 to 44, 47 and 48 other than the air bags 45 and 46.

**[0041]** In the embodiment described above, fluctuations are imposed only on the amplitude of the relaxation rocking motion. In a modified embodiment, fluctuations may be imposed on the frequency instead or on both the amplitude and frequency.

**[0042]** In the embodiment described above, during the relaxation rocking, the controller 24 controls the motor 20 to change the frequency of the rocking motion of the body-supporting member 13 (the rectangular frame 25) in a range from 0.35 Hz to 0.2 Hz. However, controller 24 controls the motor 20 to change the frequency of the rocking motion of the body-supporting member 13 in other frequency bands for the relaxation rocking motion.

**[0043]** In the embodiment described above, during the refresh rocking, the controller 24 controls the motor 20 to change the frequency of the rocking motion of the body-supporting member 13 (the rectangular frame 25) from 0.2 Hz to 0.6 Hz stepwise. However, other frequency bands for the refresh rocking motion may be used.

**[0044]** In the embodiment described above, after the elapse of time B, the controller 24 controls the motor 20 to increase the amplitude and frequency of the rocking motion in synchronization with each other. In a modified configuration, however, such synchronization is not necessary. In addition, either of the amplitude and frequency may be made to increase.

**[0045]** In the embodiment described above, the controller 24 makes changes in control over the respective parts at times A and B. In a modified configuration, for example, there may be provided a switch capable of changing the control of the respective parts by the controller 24 so that a user can selectively control the respective parts by using the switch as needed.

**[0046]** Although the body-supporting member 13 has the shape of a chair in the embodiment described above, it may have other shapes, for example, a bed.

**[0047]** In the embodiment described in the above, even though it is not mentioned explicitly, there may be provided a mechanism for generating music or vibration corresponding to the relaxation rocking or refresh rocking.

**[0048]** While the invention has been shown and described with respect to the embodiments, it will be understood by those skilled in the art that various changes and modifications may be made without departing from the scope of the invention as defined in the following claims.

**Claims**

1. A relaxation apparatus comprising a body-supporting unit for supporting a user's body, a rocking unit for rocking back and forth the body-supporting unit and a controller for controlling the rocking unit to rock the body-supporting unit, **characterized in that:**
  - the body-supporting unit includes an air bag which is inflated to press the user's body or contracted in accordance with supply or exhaust of air by an air pump, and
  - the controller controls output of the air pump to increase and decrease in accordance with forward and backward rocking motions of the body-supporting unit.
2. The relaxation apparatus of claim 1, wherein the controller controls the air pump to increase and decrease its output during the forward and backward motions of the body-supporting unit, respectively.
3. The relaxation apparatus of claim 1 or 2, wherein the controller controls the rocking unit and the air pump to perform, on a user in a relaxed state, a refresh rocking in which frequency and/or amplitude of the rocking motion is increased to refresh the user in the relaxed state, and the output of the pump is increased and decreased during the backward and forward motions of the body-supporting unit, respectively.

5

10

15

20

25

30

35


40

45

50

55

FIG. 1

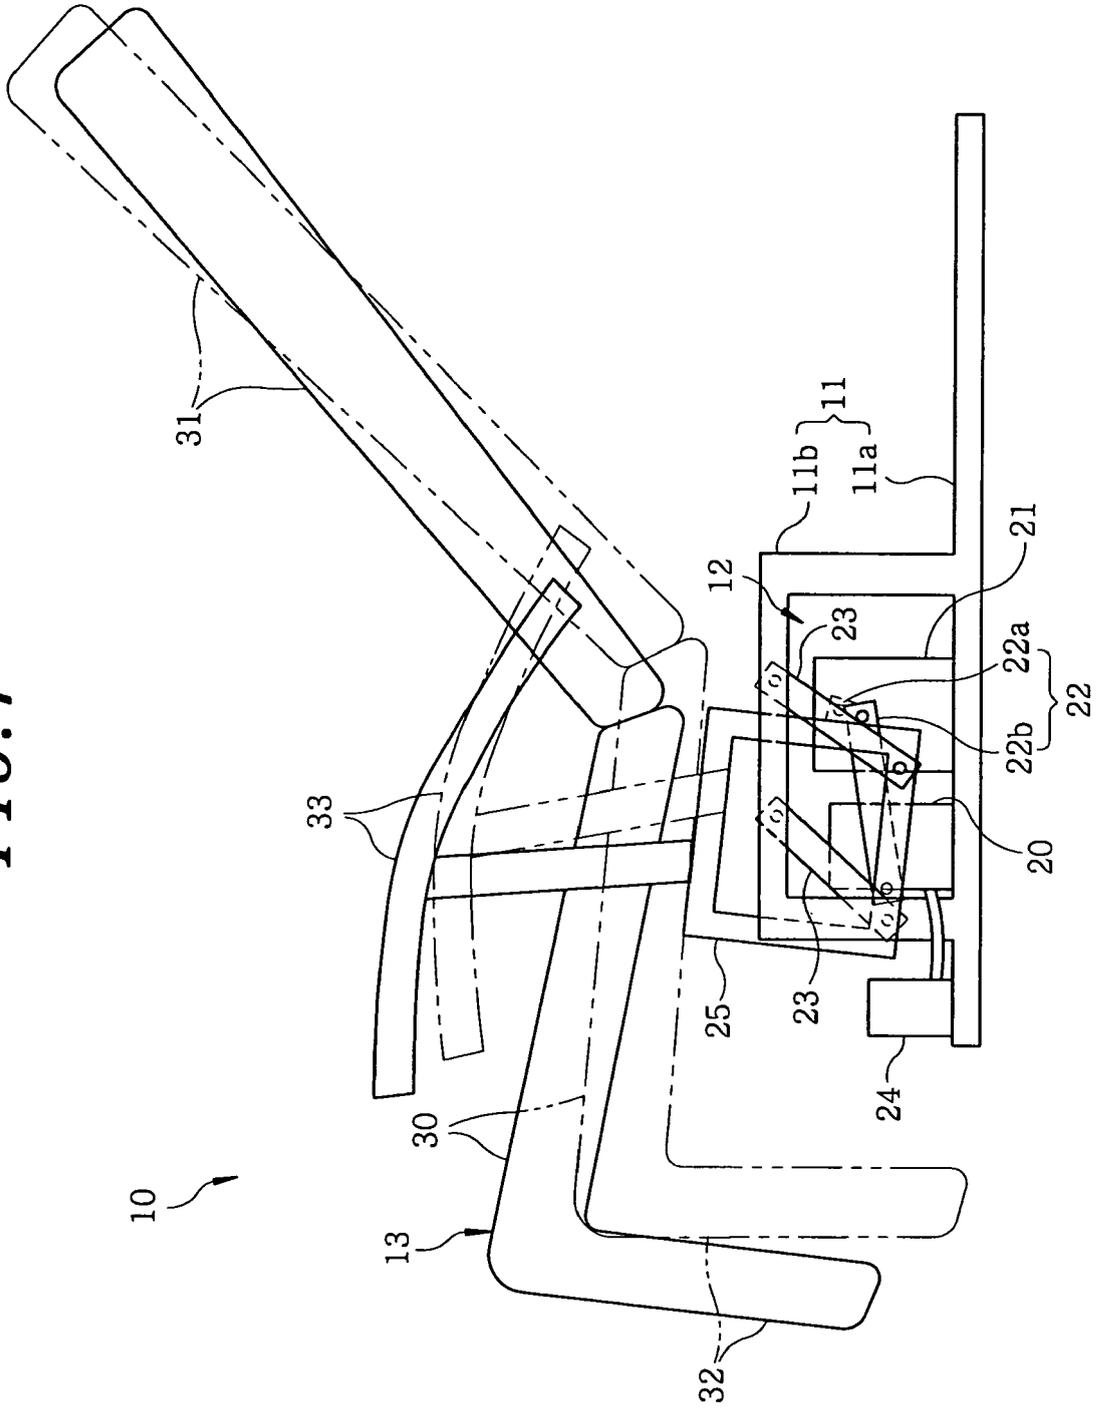

**FIG. 2**



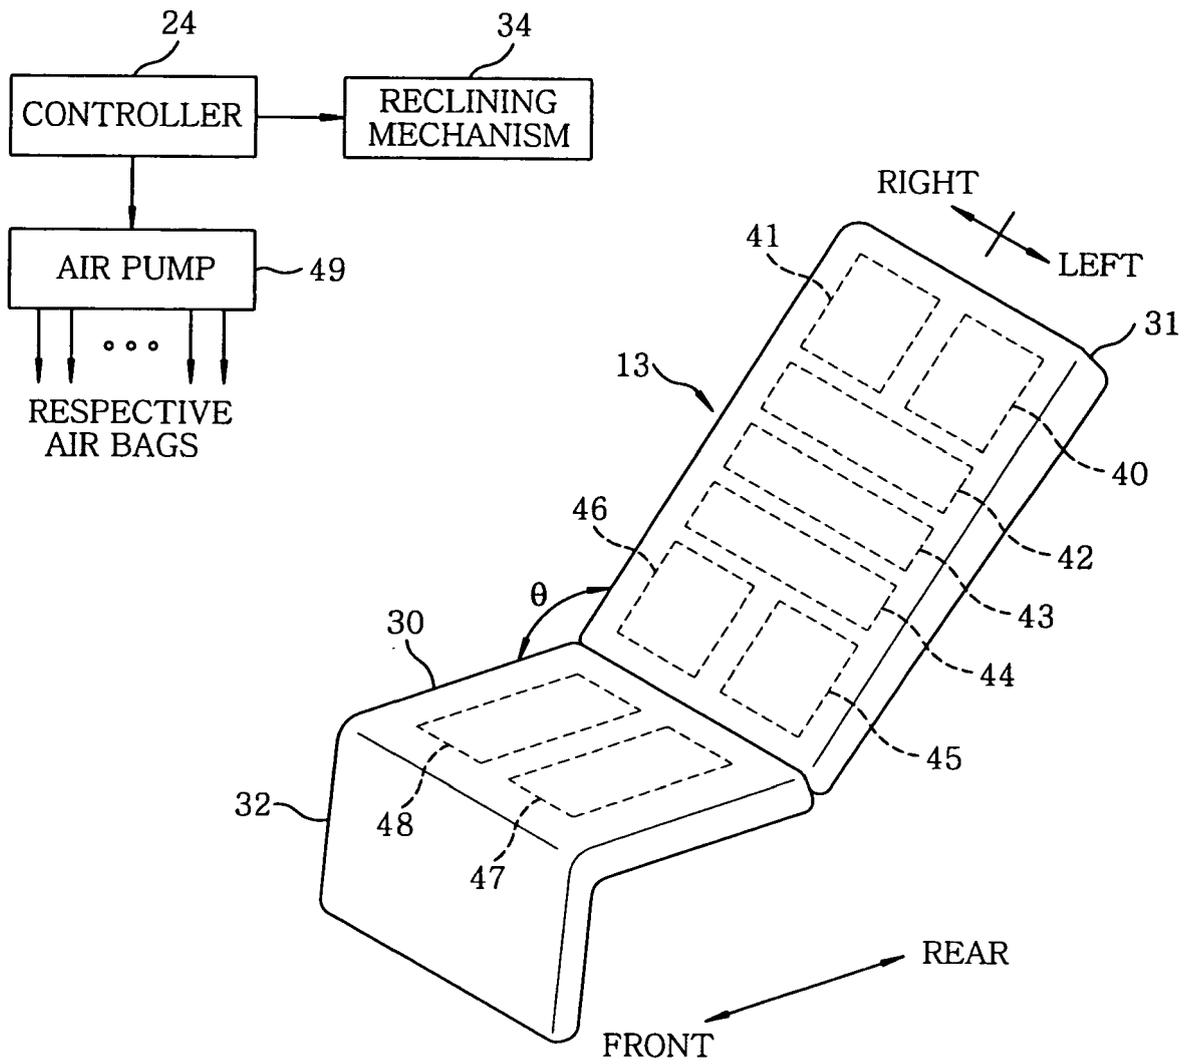



FIG. 3

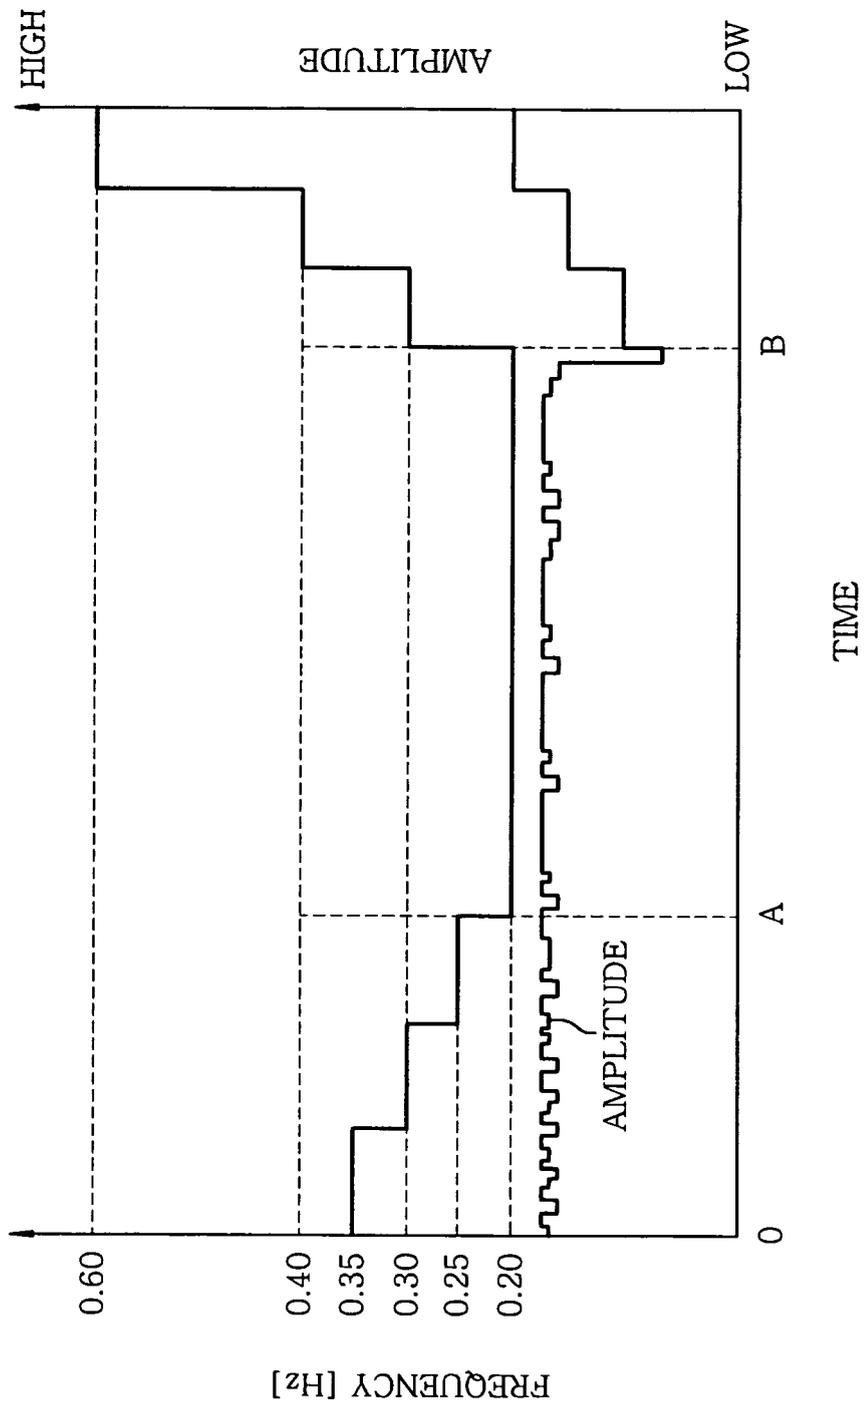

**FIG. 4**

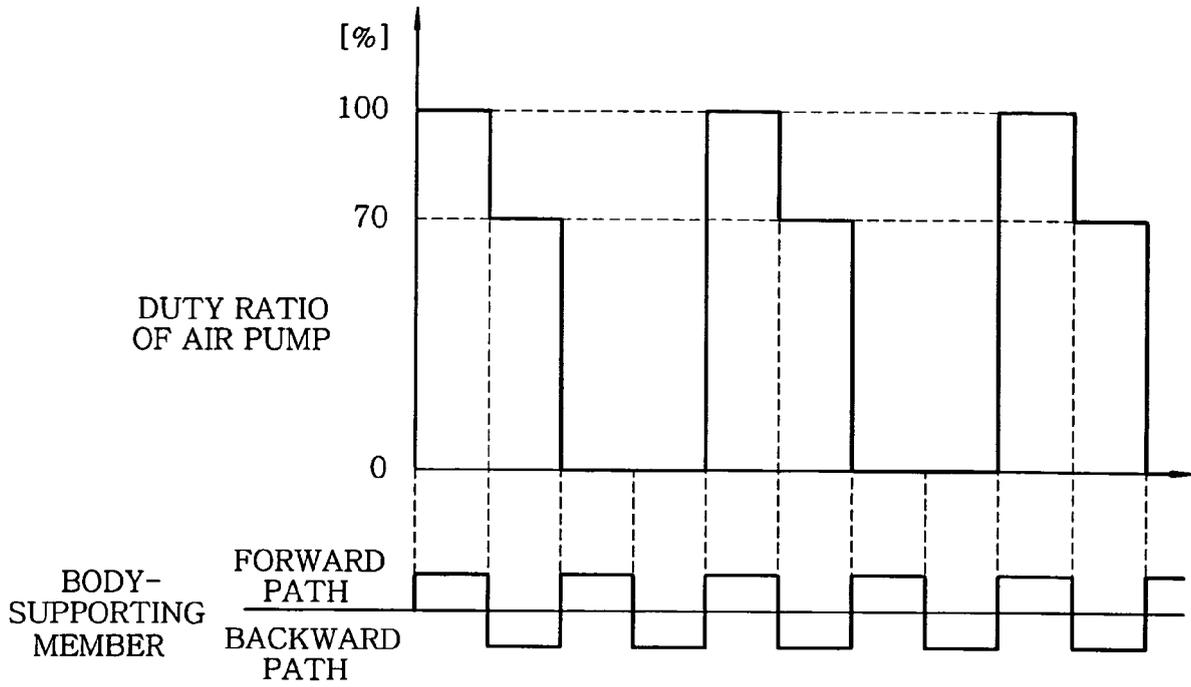

**FIG. 5**

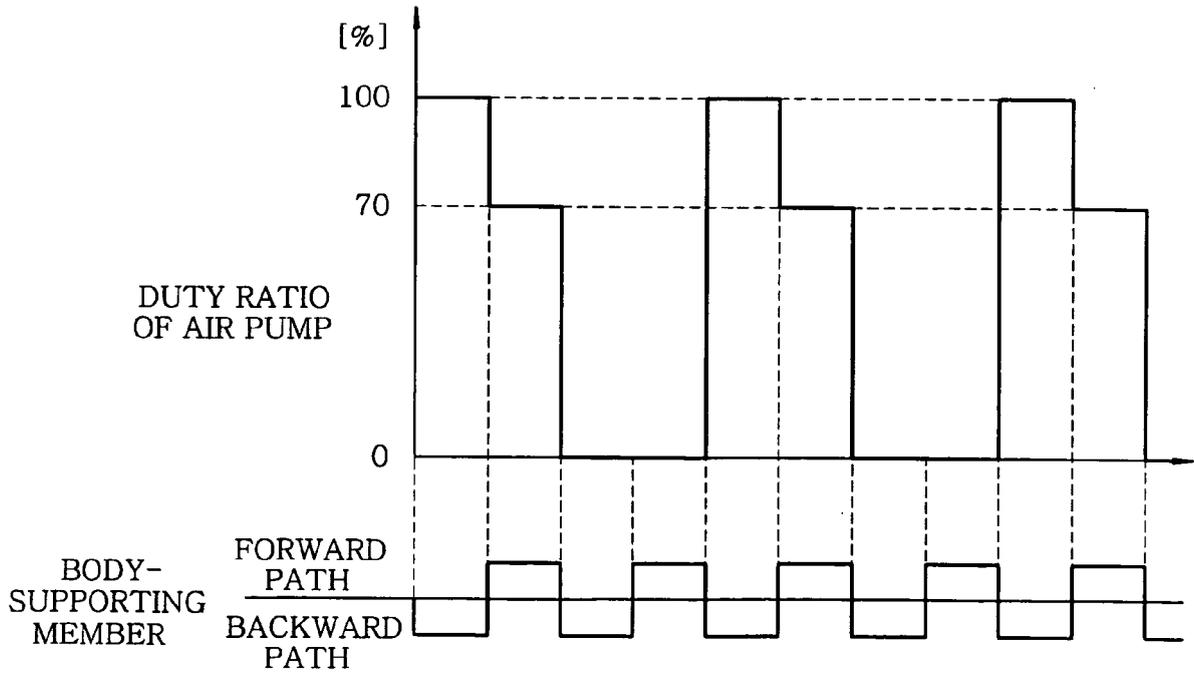



EUROPEAN SEARCH REPORT

Application Number  
EP 09 00 9998

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	WO 2007/119516 A (MATSUSHITA ELECTRIC WORKS LTD [JP]; TANIZAWA TAKAYOSHI [JP]; MIYAGUCHI) 25 October 2007 (2007-10-25) * the whole document *	1-3	INV. A61H1/00
X	& US 2009/099489 A1 (TANIZAWA TAKAYOSHI [JP] ET AL) 16 April 2009 (2009-04-16) * paragraphs [0005], [0032] - [0035], [0048] - [0051]; figures *	1-3	
X	US 2008/048475 A1 (TANIZAWA TAKAYOSHI [JP] ET AL) 28 February 2008 (2008-02-28) * paragraphs [0003], [0007], [0018] - [0020]; figures *	1-3	
X	US 2007/273187 A1 (TANIZAWA TAKAYOSHI [JP] ET AL) 29 November 2007 (2007-11-29) * paragraphs [0006], [0028] - [0033]; figures *	1-3	
X	JP 2005 288013 A (TOSHIBA TEC KK) 20 October 2005 (2005-10-20) * abstract; figures *	1-3	
A	WO 2007/116561 A (FAMILY CO LTD [JP]; KANAOKA SHOJI [JP]) 18 October 2007 (2007-10-18) * the whole document *	1-3	
A	& EP 2 005 932 A (FAMILY CO LTD [JP]) 24 December 2008 (2008-12-24) * paragraphs [0033] - [0043]; figures *	1-3	TECHNICAL FIELDS SEARCHED (IPC) A61H
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 28 October 2009	Examiner Teissier, Sara
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... & : member of the same patent family, corresponding document	

1  
EPO FORM 1503 03.02 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.

EP 09 00 9998

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-10-2009

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2007119516 A	25-10-2007	CN 101410083 A	15-04-2009
		JP 2007260173 A	11-10-2007
		US 2009099489 A1	16-04-2009
-----			
US 2009099489 A1	16-04-2009	CN 101410083 A	15-04-2009
		JP 2007260173 A	11-10-2007
		WO 2007119516 A1	25-10-2007
-----			
US 2008048475 A1	28-02-2008	CN 101133995 A	05-03-2008
		CN 201150627 Y	19-11-2008
		JP 2008049083 A	06-03-2008
		KR 20080019552 A	04-03-2008
-----			
US 2007273187 A1	29-11-2007	CN 101077326 A	28-11-2007
		CN 201061601 Y	21-05-2008
		JP 4293204 B2	08-07-2009
		JP 2007313125 A	06-12-2007
		KR 20070114048 A	29-11-2007
-----			
JP 2005288013 A	20-10-2005	NONE	
-----			
WO 2007116561 A	18-10-2007	EP 2005932 A2	24-12-2008
		KR 20080105028 A	03-12-2008
		US 2009227914 A1	10-09-2009
-----			
EP 2005932 A	24-12-2008	WO 2007116561 A1	18-10-2007
		KR 20080105028 A	03-12-2008
		US 2009227914 A1	10-09-2009
-----			

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- JP 2003250851 A [0002]