



(11) **EP 2 154 305 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
29.11.2017 Bulletin 2017/48

(51) Int Cl.:
E04B 1/76 (2006.01)

(21) Application number: **09167510.8**

(22) Date of filing: **07.08.2009**

(54) **Use of a mineral fibre insulation product as thermal and/or acoustic insulation**

Verwendung eines dämmenden Mineralfaserprodukts als Wärmedämmung und/oder Schallisolierung

Emploi d'un produit d'isolation contenant des fibres minérales pour l'isolation thermique et/ou acoustique

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR**
Designated Extension States:
BA RS

(30) Priority: **12.08.2008 GB 0814688**

(43) Date of publication of application:
17.02.2010 Bulletin 2010/07

(60) Divisional application:
15192447.9 / 3 002 378

(73) Proprietor: **Knauf Insulation
4600 Visé (BE)**

(72) Inventor: **Dheur, Etienne
B-4600 Visé (BE)**

(74) Representative: **ARC-IP
ARC-IP sprl
Rue Emile Francqui 4
1435 Mont Saint-Guibert (BE)**

(56) References cited:
**WO-A1-94/29540 WO-A1-95/28533
WO-A1-99/13185 WO-A1-99/26778
WO-A2-01/09445 US-A- 3 056 707
US-A- 3 934 066 US-A1- 2004 123 539
US-A1- 2005 211 839**

- **MACDONALDW: "Polyester Films, Encyclopedia of Polymer Science and Technology passage", 1 January 2003 (2003-01-01), POLYESTER FILMS, ENCYCLOPEDIA OF POLYMER SCIENCE AND TECHNOLOGY,, PAGE(S) 30 - 41, XP007922625, [retrieved on 2003-10-15]**

EP 2 154 305 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention relates particularly to thermal insulation products and to facings.

[0002] The invention is particularly useful in relation to an insulation product which comprises a blanket of mineral fibres, for example glass fibres or stone wool fibres. The fibres of such products are generally held together by a binder dispersed within the blanket. The mineral fibre insulation is used as thermal and/or acoustic insulation for buildings or as insulated ducting, for example in heating or air conditioning systems.

[0003] Insulation products of this type are generally provided either as continuous lengths generally packaged as a roll or individual panels, or batts. A facing is often provided on one or both major surfaces of the insulation product. Depending upon the intended use, the facing can be permeable or provide a gas and/or vapour barrier, and/or have other functionalities including an encapsulation function and/or a reinforcing function and/or provide a soft touch or feel to the product.

[0004] One commonly used facing consists of a sheet of kraft paper having a weight in the range 50-70 g/m² secured to the insulation using an adhesive. Another commonly used facing consists of a laminated aluminium/kraft paper sheet.

[0005] Examples of mineral fibre insulation products with facings are disclosed in WO 01/09445, WO 99/26778, US 2009/0123539, WO 94/29540, US 2005/0211839 and WO 95/28533.

[0006] According to one aspect, the present invention provides a use of a mineral fibre insulation product as defined in claim 1. Dependent claims define preferred and/or alternative embodiments.

[0007] The thickness of the continuous plastics sheet(s) of the facing is preferably in the range 5 - 30 µm; it may be in the range 10 - 20 µm. It may be significantly lower in thickness than the 120 µm thickness commonly used for kraft paper facings. It may, even at these lower thicknesses, provide equivalent or indeed improved vapour barrier performance.

[0008] The ability to use a lower thickness of facing whilst providing desired levels of performance may provide advantages to the product and/or to its manufacture. For example:

- The facings may be more flexible and/or supple than previously used facings. This may allow the facing to conform better to the surface of the mineral wool blanket making it easier to apply the facing to the blanket and/or improving adhesion between the facing and the blanket and/or allowing reduced quantities of adhesive to be used to achieve equivalent bonding.
- The ability to use a thin facing may enable rolls of facing used in manufacture to have greater lengths of facing for the same diameter of rolls. This may

allow the rolls of facing to be changed less frequently during manufacture of the product.

- The flexibility of the facing may improve the way it conforms to the surface of a heated roller when this is used to heat an adhesive provided on the facing; this may improve heat transfer and be particularly beneficial at high manufacturing line speeds

[0009] The facing may be secured to the mineral wool blanket using solvent-based, water-based or hot melt adhesives applied to the facing material or to the surface of the mineral wool blanket. Preferably, the facing comprises hot melt adhesive, provided on the continuous plastics sheet. The hot melt adhesive comprises or consists essentially of a polyethylene (PE).

[0010] The adhesive may be provided on the facing in the form of a layer; it may be a continuous layer. Arranging for the adhesive to extend over substantially the entire surface of the insulation product and/or the facing may enable the adhesive to provide or contribute to providing a vapour barrier, particularly a barrier to water vapour. Use of a polymer as the adhesive may be particularly advantageous in this respect, notably a polyethylene.

[0011] Alternatively, the adhesive may be provided in the form of bands or strips, for example strips of adhesive having a width greater than 5, 10 or 15mm and/or less than 60, 50, 40, 30 or 25 mm; such strips may be spaced by a distance greater than 20, 30 or 40 mm and/or less than 100, 80 or 60 mm. The use of discontinuous areas of adhesive may reduce the total quantity of adhesive used. In addition to cost considerations, a reduced quantity of adhesive may improve fire and/or flame retarding properties; adhesives can be detrimental to the flame performance of mineral wool insulating products.

[0012] The adhesive may be co-extruded with the facing material.

[0013] Preferably, the facing consists of a single continuous sheet of PET (polyethylene terephthalate) provided with a layer of adhesive, particularly a polyethylene (PE). The PET may provide a desired combination of properties including tear resistance and/or water vapour impermeability and/or heat resistance, particularly at the desired thicknesses.

[0014] The facing consists essentially of a PET layer secured to the mineral wool blanket with an adhesive, that is to say that, in this case, apart from the PET layer and the adhesive there are no other elements comprised within the facing which materially affect the basic and novel characteristic(s) of the claimed invention. In particular, there is no fibrous reinforcing scrim layer present in this embodiment of the invention, such a layer having been found to be unnecessary and undesirable in this embodiment. However, the PET layer in this embodiment may be coloured or provided with a reflective surface.

[0015] The facing may consist of the PET layer secured to the mineral wool blanket with an adhesive.

[0016] In some embodiments, the facing may comprise

a continuous sheet of polypropylene provided with adhesive.

[0017] The facing may be secured to the insulation product by heat softening a thermoplastics material such as a synthetic polymer layer on one surface of the facing and then pressing this against the mineral wool blanket. In this case, the adhesive layer on the facing is generally heated by passing the facing over one or more heated rollers, for example rollers supplied with heated oil and heating the adhesive through the facing. The ability to use a relatively thin facing may facilitate this process and/or aid heat transfer to the adhesive and/or limit the risk of heating deteriorating the facing. The use of PET as the facing layer, especially where the facing consists essentially of a layer of PET and the adhesive, is particularly advantageous in this respect as PET transmits heat better than other potentially possible materials. Furthermore, the melting point of PET, more particularly the difference in melting point between PET and the preferred hot melt adhesives, facilitates the application of a PET facing to a mineral wool blanket.

[0018] Particularly where the adhesive is a hot melt adhesive, it may have a melting point in the range 60°C to 200°C, more particularly 80°C to 120°C.

[0019] Particularly where the adhesive forms a substantially continuous film, it may be used at a weight of greater than 5 g/m² and/or less than 30, 20 or 15 g/m². It has been common practice with prior art facings to use 20-30 g/m² of adhesive in order to provide sufficient adhesion. An advantageous aspect of certain embodiments of the invention is thus the ability to provide sufficient adhesion using less adhesive than equivalent prior art systems, for example to use 5-15 g/m² of adhesive.

[0020] The plastics sheet of the facing is continuous, that is to say that it comprises a substantially continuous material as opposed to being made of woven or nonwoven fibres having interstices between the material making up the sheet. The facing may be perforated or micro-perforated, for example when it is desired to allow the passage of water vapour.

[0021] The facing and/or one or more of its constituent parts, may comprise a fire or flame retardant. The insulation product may have a fire rating of A2 in accordance with EN 13501

[0022] The continuous plastics sheet may be metalised, for example, with aluminium. This may provide a reflective surface; it may contribute to the thermal performance of the insulating product. The facing, particularly the continuous plastics sheet, may be coloured, for example, by incorporation of a pigment or filler. It may be black in colour; alternatively, it may be transparent.

[0023] The facing may be applied to only one major surface of the insulating product; this may be the upper or lower surface during manufacture. The facing may be applied to both major surfaces of the insulating product. It may cover one or more side surfaces of the insulating product.

[0024] The insulation product may be a mineral wool

blanket, for example having a thickness of approximately 20 to 300 mm, especially 60 to 260 mm, and a bulk density of 8 to 45 kg/m³ (0.5 to 2.5 pcf), for example approximately 12 kg/m³ (0.75 pcf).

[0025] According to another of its aspects, the present invention provides a mineral fibre insulation assembly comprising two abutting mineral wool blankets each mineral wool blanket comprising a facing having an external plastics surface and a plastics tape joining the two blankets together across their abutting edge by being adhered to the external plastics facing of each blanket.

[0026] This arrangement is particularly advantageous where it is desired to provide a vapour barrier with the facings providing a vapour barrier over the surfaces of the mineral wool blankets and the tape providing a vapour barrier at the abutting edges of the blankets.

[0027] The tape may comprise a plastics film provided with a layer of adhesive, for example a plastics film comprising or consisting of a PET, a polypropylene, a polyethylene and a mixed polypropylene-polyethylene with an adhesive based on an acrylic.

[0028] The interaction of such a film with the external plastics surface of the mineral wool blankets, particularly when these are PET, provides particularly good sealing and durability and avoids problems that have been encountered when attempting to join eg kraft paper faced mineral wool blankets using similar tapes.

[0029] The facing may be provided at at least one or at single surface of the mineral wool blanket, preferably at a major surface of the mineral wool blanket. The facing may cover substantially the entire surface area of a major surface of the mineral wool blanket. The facing may be commensurate with the major surface of the blanket, that is to say, the facing may extend over substantially the entire surface area of a major surface of the blanket without extending substantially beyond this surface area. This may facilitate abutment of adjacent mineral wool blankets. Alternatively, the facing may extend beyond one edge, preferably beyond a single edge, of the mineral wool blanket to form a projection or flange. Such a flange may facilitate providing an overlap of the facings of adjacent mineral wool blankets and/or providing an extension of the facing which may extend over a beam, stud or other obstruction which prevents direct abutment of adjacent mineral wool blankets. Such flanges, extensions or projections of the facing are particularly useful in configurations in which it is desirable to provide continuity in a vapour barrier provided by facings of adjacent mineral wool blankets.

[0030] Embodiments of the invention are described below by way of example only with reference to

Fig. 1: an enlarged cross section of a facing;

Fig. 2: a schematic representation of the manufacture of an insulation product;

Fig 3a: a schematic cross-section of a mineral fibre insulation product;

Fig 3b: a schematic representation of a mineral fibre

insulation assembly;

Fig 4a: a schematic cross-section of an alternative mineral fibre insulation product;

Fig 4b: a schematic representation of an alternative mineral fibre insulation assembly; and

Fig 5: a schematic representation of a further mineral fibre insulation assembly.

[0031] The facing 10 represented in Fig 1 is a PET (17 μm thick) /low density polyethylene (9 g/m²) assembly, the polyethylene film 12 being secured to the continuous PET film 11. It may be made by co-extrusion. An alternative thickness for the PET is about 12 μm .

[0032] The quantity of adhesive is significantly lower than the 30 g/m² generally used to secure kraft paper facings to mineral wool.

[0033] The facing 10 may be provided on a roll 21 (typically 1.2 m - 2.4 m wide) and pass over an oil heated roller 22 so that its adhesive is brought in to contact with a mineral wool blanket 23 which has been cured and is moving along a production line (typically at about 15-70 m/min) on a series of conveying rollers 24. The heated roller 22 having a surface temperature of about 180 °C softens the PE adhesive through the PET film and the melted PE adhesive is pressed against the mineral wool blanket 23 between a rotating pressing belt 25 and the conveying rollers 24 to adhere the facing to the mineral wool blanket 23. The low density polyethylene (LDPE) preferably reaches a temperature of about 110 °C $\pm$ 5°C. Subsequent to application of the facing(s), the insulation product is cut and/or packaged.

[0034] In an alternative embodiment, a PET is used having a thickness of 12 μm , preferably with a flame retardant polyolefin.

[0035] Where the pressing belt or other pressing surface(s) have a dimpled pattern, the suppleness of the facing may cause the dimpled pattern to be reproduced in the facing when adhered to the mineral wool blanket.

[0036] In one embodiment, illustrated in Fig 3a, the mineral fibre insulation product comprises a mineral wool blanket 31 and a facing 33 secured to a major surface of the blanket 31. In this embodiment, the facing 33 is commensurate with the major surface of the blanket, that is to say, the facing 33 extends over substantially the entire surface area of the major surface of the blanket 33 without extending substantially beyond this surface area. For ease of representation, the adhesive is not shown separately from the facing film in this or subsequent figures.

[0037] Fig 3b illustrates an assembly 30 comprising two abutting mineral wool blankets 31,32, of the type illustrated in Fig 3a, each mineral wool blanket comprising a plastics facing 33,34 secured to a surface of the blanket which provides a vapour barrier. A plastics tape 35 having a layer of adhesive provided on its underlying face is using to join the two mineral wool blankets together where they abut by being adhered to the facing of each blanket. The contact between the adhesive of the tape and each of the facings provides a durable connection which, in

combination with the tape, provides continuity in the vapour barrier across the surface of the assembly.

[0038] In the embodiment illustrated in Fig 4a, the facing 43 covers substantially the entire surface area of a major surface of the mineral wool blanket 41 but also extends beyond one edge 47 of the blanket to form a projection or flange 48. This flange 48 runs along the entire length of the edge 47 of the blanket.

[0039] Fig 4b illustrates an assembly using the Fig4a insulation product in which mineral wool blankets 41, 42 are arranged on either side of a wooden beam or stud 45. The flanges 48 of the facing 43, 44 of each blanket are arranged to project across the wooden beam 45 and a length of adhesive tape 46 is used to join the facings 43, 44 together at least partially over the wooden beam 45. The flanges 48 may overlap each other in such an arrangement or, as illustrated, there may be a space between the edges of the flanges. The combination of the flanges 48 and the tape 46 provides a convenient way of providing continuity in a vapour barrier provided by the facings 43,44 where there is a structural member or other discontinuity between two adjacent mineral wool blankets 41,42.

[0040] In the embodiment illustrated in Fig 5, the flanges 58, 59 of the facing sheets 53,54 are arranged to project in the same direction such that the flange 58 associated with one mineral wool blanket 51 overlaps and lies at least partially on top of the facing 54 of an adjacent mineral wool blanket 52. Tape 56 (shown raised above the facings 53,54 for clarity) is used to secure the flange 58 of one facing 53 to the facing 54 of the adjacent mineral wool blanket 52. This facilitates providing continuity in the vapour barrier provided by the facings across adjacent mineral wool blankets. The overlapping of the flange 58 with the facing 54 of the adjacent mineral wool blanket may enhance the vapour barrier effect, for example, even if the tape used is vapour permeable (for example a paper tape provided with an vapour permeable adhesive) or partially vapour permeable (for example, a paper tape provided with a partially permeable adhesive).

Claims

1. Use of a mineral fibre insulation product as thermal and/or acoustic insulation for buildings or insulated ducting, the mineral fibre insulation product comprising a mineral wool blanket (31) and a facing (33) secured to a surface of the mineral wool blanket **characterised in that** the facing has a thickness in the range 5-100 μm and consists essentially of a PET sheet (11) secured to the mineral wool blanket by an adhesive (12) comprising a polyethylene.
2. Use of a mineral fibre insulation product in accordance with claim 1, in which the PET sheet (11) of the facing has a thickness in the range 5 - 30 μm .

3. Use of a mineral fibre insulation product in accordance with claim 1 or claim 2, in which the adhesive (12) is a hot melt adhesive.
4. Use of a mineral fibre insulation product in accordance with any of claims 1 to 3, in which the adhesive (12) is provided as a substantially continuous film on the PET sheet of the facing. 5
5. Use of a mineral fibre insulation product in accordance with any of claims 1 to 3, in which the adhesive (12) is provided as strips on the PET sheet of the facing. 10
6. Use of a mineral fibre insulation product in accordance with any preceding claim, in which the PET film (11) of the facing and the adhesive (12) are coextruded. 15
7. Use of a mineral fibre insulation product in accordance with any preceding claim, in which the facing (33) provides a vapour barrier. 20
8. Use of a mineral fibre insulation product in accordance with any of claims 1 to 6, in which the facing (33) is perforated and allows passage of water vapour. 25
9. Use of a mineral fibre insulation product in accordance with any preceding claim, in which the mineral fibre insulation product has a fire rating of at least A2 in accordance with EN 13501. 30
10. Use of a mineral fibre insulation product in accordance with any preceding claim, in which the PET sheet is provided with a reflective surface, notably in which the PET sheet is metallised with aluminium. 35
11. Use of a mineral fibre insulation product in accordance with any preceding claim, in which the adhesive forms a substantially continuous film and has a weight which is greater than 5 g/m² and less than 30 g/m², preferably less than 20 g/m² and more preferably less than 15 g/m². 40
12. Use of a mineral fibre insulation product in accordance with any of claims 1 to 10, in which the adhesive has a weight in the range 5-15 g/m². 45
13. Use of a mineral fibre insulation product in accordance with any preceding claim, in which the facing (43) covers substantially the entire surface area of a major surface of the mineral wool blanket and comprises a flange (48) which projects beyond one edge (47) of the mineral wool blanket (41). 50
14. Use of a mineral fibre insulation product in accordance with any of claims 1 to 6 or 9 to 13 in which 55

- two such mineral wool products are arranged adjacent to each other as a mineral fibre insulation assembly (30)
 - the facing of each mineral wool product provides a vapour barrier, and in which
 - the assembly comprises a plastics tape (35) provided with an adhesive on one of its sides, the tape being arranged to adhere the plastics film at the external face of one facing to the plastics film at the external face of the facing of the adjacent mineral wool product.

15. Use of a mineral fibre insulation product in accordance with claim 14, in which the tape (35) provides continuity in the vapour barrier provided by the facings of adjacent mineral wool products.

Patentansprüche

1. Verwendung eines Mineralfaserdämmungsprodukts als Wärme- und/oder Schalldämmung für Gebäude oder isolierte Kabelführung, wobei das Mineralfaserdämmungsprodukt eine Mineralwoldecke (31) und einen an einer Oberfläche der Mineralwoldecke befestigten Belag (33) umfasst, **dadurch gekennzeichnet, dass** der Belag eine Stärke im Bereich von 5 - 100 µm hat und hauptsächlich aus einem PET-Blatt (11) besteht, welches durch einen Klebstoff (12), welcher ein Polyethylen enthält, an der Mineralwoldecke befestigt ist.
2. Verwendung eines Mineralfaserdämmungsprodukts nach Anspruch 1, bei dem das PET-Blatt (11) des Belags eine Stärke im Bereich von 5 - 30 µm hat.
3. Verwendung eines Mineralfaserdämmungsprodukts nach Anspruch 1 oder 2, bei dem der Klebstoff (12) ein Schmelzklebstoff ist.
4. Verwendung eines Mineralfaserdämmungsprodukts nach einem der Ansprüche 1 bis 3, bei dem der Klebstoff (12) als ein im Wesentlichen durchgehender Film auf dem PET-Blatt des Belags bereitgestellt ist. 45
5. Verwendung eines Mineralfaserdämmungsprodukts nach einem der Ansprüche 1 bis 3, bei dem der Klebstoff (12) als Streifen auf dem PET-Blatt des Belags bereitgestellt ist.
6. Verwendung eines Mineralfaserdämmungsprodukts nach einem der vorhergehenden Ansprüche, bei dem der PET-Film (11) des Belags und der Klebstoff (12) coextrudiert sind.
7. Verwendung eines Mineralfaserdämmungsprodukts nach einem der vorhergehenden Ansprüche,

bei dem der Belag (33) eine Dampfsperre bereitstellt.

8. Verwendung eines Mineralfaserdämmungsprodukts nach einem der Ansprüche 1 bis 6, bei dem der Belag (33) perforiert ist und den Durchgang von Wasserdampf erlaubt.

5

9. Verwendung eines Mineralfaserdämmungsprodukts nach einem der vorhergehenden Ansprüche, bei dem das Mineralfaserdämmungsprodukt eine Feuerwiderstandsklasse von mindestens A2 gemäß EN 13501 hat.

10

10. Verwendung eines Mineralfaserdämmungsprodukts nach einem der vorhergehenden Ansprüche, bei dem das PET-Blatt mit einer reflektierenden Oberfläche ausgestattet ist, bei dem insbesondere das PET-Blatt mit Aluminium metallisiert ist.

15

11. Verwendung eines Mineralfaserdämmungsprodukts nach einem der vorhergehenden Ansprüche, bei dem der Klebstoff einen im Wesentlichen durchgehenden Film bildet und ein Gewicht hat, welches größer als 5 g/m² und geringer als 30 g/m², vorzugsweise geringer als 20 g/m² und besser geringer als 15 g/m² ist.

20

25

12. Verwendung eines Mineralfaserdämmungsprodukts nach einem der Ansprüche 1 bis 10, bei dem der Klebstoff ein Gewicht in Bereich von 5 - 15 g/m² hat.

30

13. Verwendung eines Mineralfaserdämmungsprodukts nach einem der vorhergehenden Ansprüche, bei dem der Belag (43) im Wesentlichen die gesamte Oberfläche einer größeren Fläche der Mineralwolldecke bedeckt und einen Flansch (48) enthält, welcher über eine Kante (47) der Mineralwolldecke (41) hinaus vorsteht.

35

14. Verwendung eines Mineralfaserdämmungsprodukts nach einem der Ansprüche 1 bis 6 oder 9 bis 13, bei dem

40

- zwei derartige Mineralwollprodukte als eine Mineralfaserdämmungsbaugruppe (30) aneinander angrenzend angeordnet sind
- der Belag jedes Mineralwollprodukts eine Dampfsperre bereitstellt und bei dem
- die Baugruppe ein Kunststoffband (35) enthält, welches auf einer seiner Seiten mit einem Klebstoff versehen ist, wobei das Band so angeordnet ist, dass es den Kunststoffilm an der Außenseite eines Belags an den Kunststoffilm an der Außenseite des Belags des angrenzenden Mineralwollprodukts klebt.

45

50

55

15. Verwendung eines Mineralfaserdämmungsprodukts nach Anspruch 14, bei dem das Band (35) Kontinuität in der Dampfsperre bereitstellt, welche durch die Beläge der aneinander angrenzenden Mineralwollprodukte bereitgestellt ist.

dukts nach Anspruch 14, bei dem das Band (35) Kontinuität in der Dampfsperre bereitstellt, welche durch die Beläge der aneinander angrenzenden Mineralwollprodukte bereitgestellt ist.

Revendications

1. Utilisation d'un produit d'isolation en fibres minérales en tant qu'isolant thermique et/ou acoustique pour bâtiment ou conduit isolé, le produit d'isolation en fibres minérales comprenant un matelas de laine minérale (31) et un revêtement (33) fixé sur une surface du matelas de laine minérale **caractérisé en ce que** le revêtement a une épaisseur dans la gamme 5-100 µm et consiste essentiellement en une feuille de PET (11) fixée sur le matelas de laine minérale par un adhésif (12) comprenant un polyéthylène.

2. Utilisation d'un produit d'isolation en fibres minérales selon la revendication 1, dans laquelle la feuille de PET (11) du revêtement à une épaisseur dans la gamme 5-30 µm.

3. Utilisation d'un produit d'isolation en fibres minérales selon la revendication 1 ou la revendication 2, dans laquelle l'adhésif (12) est un adhésif thermofusible.

4. Utilisation d'un produit d'isolation en fibres minérales selon l'une quelconque des revendications 1 à 3, dans laquelle l'adhésif (12) est fourni en tant que film substantiellement continu sur la feuille de PET du revêtement.

5. Utilisation d'un produit d'isolation en fibres minérales selon l'une quelconque des revendications 1 à 3, dans laquelle l'adhésif (12) est fourni sous forme de bandes sur la feuille de PET du revêtement.

6. Utilisation d'un produit d'isolation en fibres minérales selon l'une quelconque revendication précédente, dans laquelle la feuille de PET (11) du revêtement et l'adhésif (12) sont coextrudés.

7. Utilisation d'un produit d'isolation en fibres minérales selon l'une quelconque revendication précédente, dans laquelle le revêtement (33) fournit une barrière à la vapeur.

8. Utilisation d'un produit d'isolation en fibres minérales selon l'une quelconque des revendications 1 à 6, dans laquelle le revêtement (33) est perforé et permet le passage de vapeur d'eau.

9. Utilisation d'un produit d'isolation en fibres minérales selon l'une quelconque revendication précédente, dans laquelle le produit d'isolation en fibres minérales a un indice au feu d'au moins A2 selon EN 13501.

10. Utilisation d'un produit d'isolation en fibres minérales selon l'une quelconque revendication précédente, dans laquelle la feuille de PET est fournie avec un surface réfléchissante, notamment dans laquelle la feuille de PET est métallisée avec de l'aluminium. 5
11. Utilisation d'un produit d'isolation en fibres minérales selon l'une quelconque revendication précédente, dans laquelle l'adhésif forme un film substantiellement continu et a un poids qui est plus grand que 5 g/m² et moins de 30 g/m², de préférence moins de 20 g/m² et plus préféablement moins de 15 g/m². 10
12. Utilisation d'un produit d'isolation en fibres minérales selon l'une quelconque des revendications 1 à 10, dans laquelle l'adhésif a un poids dans la gamme 5-15 g/m². 15
13. Utilisation d'un produit d'isolation en fibres minérales selon l'une quelconque revendication précédente, dans laquelle le revêtement (43) couvre substantiellement l'entièreté d'une aire de surface d'une surface principale du matelas de laine minérale et comprends un rebord (48) qui dépasse au-delà d'un bord (47) du matelas de laine minérale (41). 20
25
14. Utilisation d'un produit d'isolation en fibres minérales selon l'une quelconque des revendications 1 à 6 ou 9 à 13, dans laquelle 30
- deux de ces produits de laine minérale sont disposés adjacents l'un de l'autre comme un assemblage d'isolation en fibres minérales (30)
 - le revêtement de chaque produit d'isolation de laine minérale fourni une barrière à la vapeur, et dans laquelle 35
 - l'assemblage comprends une bande plastique (35) fournie avec un adhésif sur un de ses côtés, la bande étant adaptée à adhérer le film plastique à la surface externe d'un revêtement au film plastique à la surface externe du revêtement du produit de laine minérale adjacent. 40
15. Utilisation d'un produit d'isolation en fibres minérales selon la revendication 14, dans laquelle la bande (35) fournit une continuité dans la barrière à la vapeur fournie par les revêtements des produits de laine minérale adjacents. 45

50

55

Fig 1

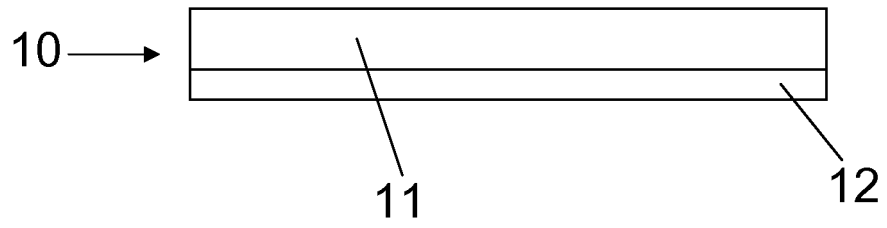


Fig 2

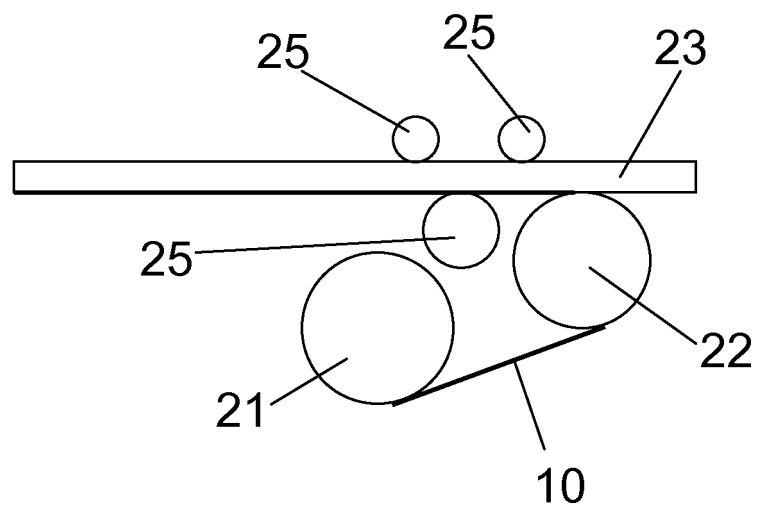


Fig 3a

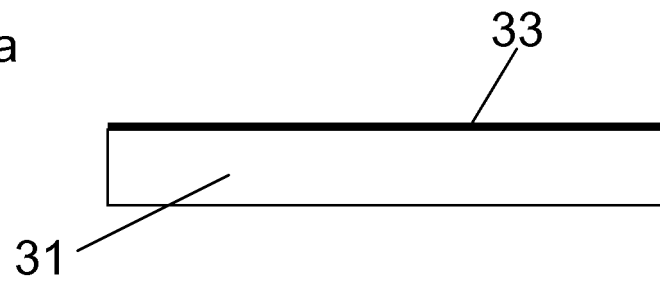


Fig 3b

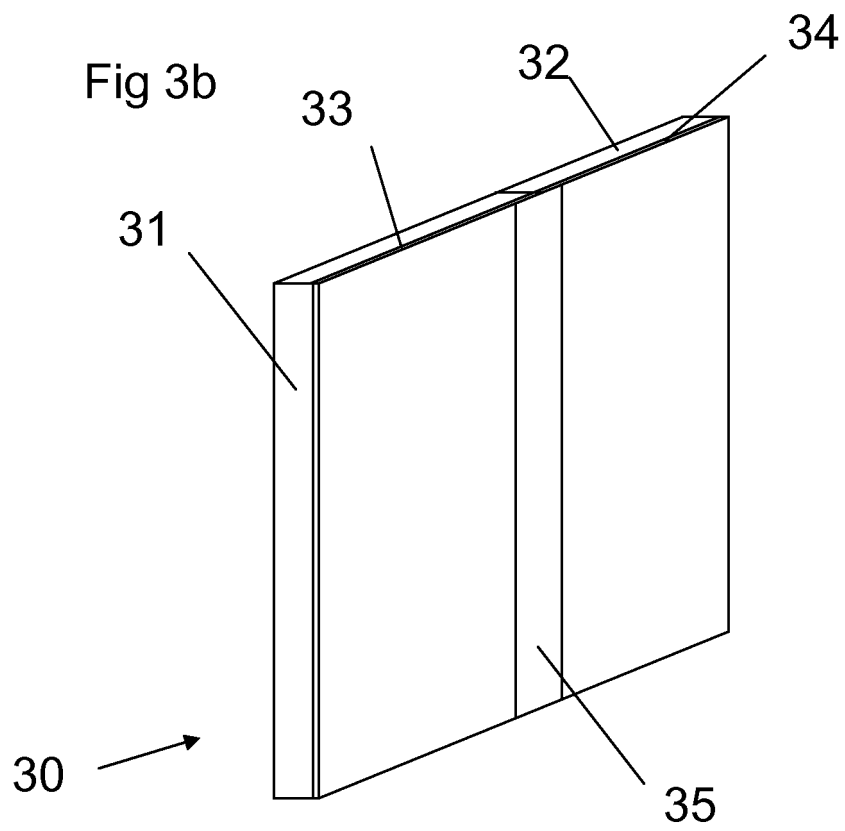


Fig 4a

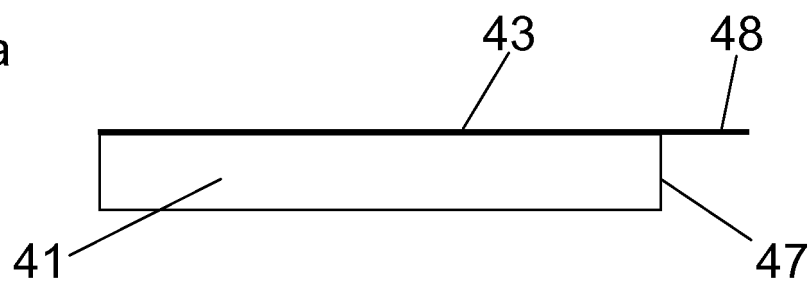


Fig 4b


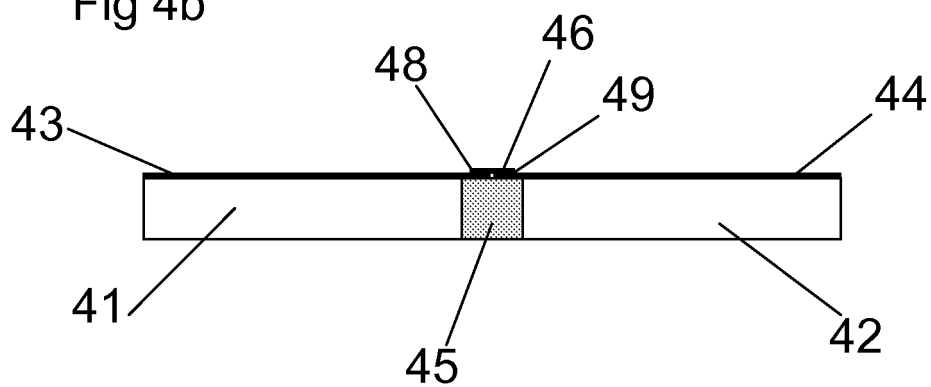


Fig 5

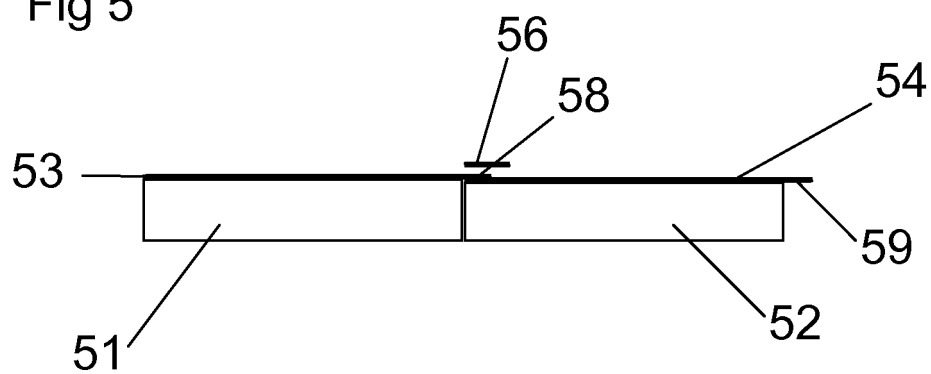

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 0109445 A [0005]
- WO 9926778 A [0005]
- US 20090123539 A [0005]
- WO 9429540 A [0005]
- US 20050211839 A [0005]
- WO 9528533 A [0005]