



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
24.02.2010 Bulletin 2010/08

(51) Int Cl.:
H01R 31/08 (2006.01) **H01R 4/48** (2006.01)
H01R 13/703 (2006.01) **H01R 4/66** (2006.01)

(21) Application number: **08162636.8**

(22) Date of filing: **19.08.2008**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT RO SE SI SK TR
Designated Extension States:
AL BA MK RS

(71) Applicant: **FLUKE CORPORATION**
Everett
Washington 98203 (US)

(72) Inventors:
• **Aikins, Brian Stanley**
Everett, WA 98201 (US)
• **Foisy, Greg Edward**
Everett, WA 98201 (US)


(74) Representative: **Lunt, Mark George Francis**
Harrison Goddard Foote
Fountain Precinct
Balm Green
Sheffield
South Yorkshire S1 2JA (GB)

(54) **Apparatus and method of zeroing a test instrument**

(57) An apparatus and method for shorting together a plurality of electrical leads. The apparatus includes an electrical conductor that extends between first and second ends and a first surface and a second surface facing away from the first surface. The electrical conductor includes a central bight that is disposed between the first and second ends and has a concave contour that defines a portion of the first surface. The electrical conductor also

includes first and second bights that have convex contours that define portions of the first surface. The first bight is disposed between the central bight and the first end and the second bight is disposed between the central bight and the second end. The electrical conductor also includes a first and second contact segments that are respectively disposed between the first and second bights and the first and second ends.

Figure 1

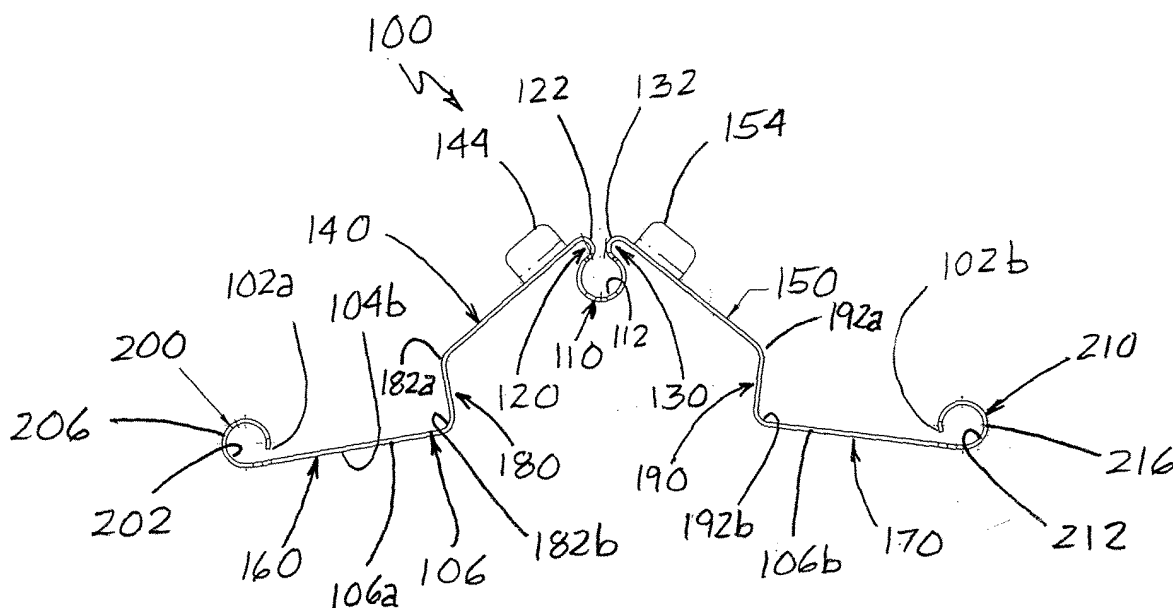

Description

TECHNICAL FIELD

[0001] The present disclosure relates to test instruments. More particularly, the present disclosure relates to the use of a zeroing apparatus to short together a plurality of leads.

BACKGROUND

[0002] A multimeter is an electronic measuring instrument that may combine in one unit a number of functions including the ability to measure voltage, current and resistance. Typically, a multimeter can perform these functions to a very high degree of accuracy. Accordingly, multimeters are typically used to diagnose or evaluate electrical devices such as batteries, motor controls, appliances, power supplies, and wiring systems.

[0003] To measure continuity or loop/line impedance accurately, a multimeter is typically calibrated or "zeroed" prior to making a measurement. Insofar as the resistance of the test leads that are used with the multimeter can impact accuracy, zeroing is typically performed by shorting together the distal ends of the leads, i.e., electrically coupling together those ends of the leads that are not plugged into the multimeter.

[0004] The distal ends of leads typically have many different arrangements. For example, conventional leads may be arranged with relatively independent distal ends that may include probe tips, alligator clips, sockets, or other lead ends. The distal ends also may be relatively positioned in a fixed pattern, e.g., so as to mimic appliance and device plugs that get connected to a power source via a wall socket. Given that a large number of options are available for the arrangement of the distal ends, the potential for incompletely shorting together the distal ends is also large.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] Figure 1 is a top view of an unloaded configuration of an apparatus for shorting together a plurality of leads according to an embodiment of the present disclosure.

[0006] Figure 2 is a front elevation view of the apparatus shown in Figure 1.

[0007] Figure 3 is a side elevation view of the apparatus shown in Figure 1.

[0008] Figure 4 is a first perspective view of the apparatus shown in Figure 1.

[0009] Figures 5 is a second perspective view of the apparatus shown in Figure 1.

[0010] Figures 6 is a top view illustrating a loaded configuration of the apparatus shown in Figure 1.

[0011] Figures 7A-7C illustrate an intermediate configuration of the apparatus shown in Figure 1 with respect to a first mains cord.

[0012] Figures 8A-8C illustrate an intermediate configuration of the apparatus shown in Figure 1 with respect to a second mains cord.

[0013] Figures 9A-9C illustrate an intermediate configuration of the apparatus shown in Figure 1 with respect to a third mains cord.

[0014] Figures 10A-10C illustrate an intermediate configuration of the apparatus of shown in Figure 1 with respect to a fourth mains cord.

[0015] Figures 11A-11C illustrate an intermediate configuration of the apparatus shown in Figure 1 with respect to a fifth mains cord.

[0016] Figures 12A-12C illustrate an intermediate configuration of the apparatus shown in Figure 1 with respect to a sixth mains cord.

[0017] Figures 13A-13C illustrate an intermediate configuration of the apparatus shown in Figure 1 with respect to a seventh mains cord.

[0018] Figure 14 illustrates a method according to an embodiment of the present disclosure for shorting together the distal ends of the seventh mains cord shown in Figures 13A-13C.

[0019] Figure 15 illustrates a method according to an embodiment of the present disclosure for shorting together independent test probes the distal ends of test leads.

DETAILED DESCRIPTION

[0020] Specific details of embodiments according to the present disclosure are described below with reference to a zeroing apparatus and methods for shorting together multimeter leads. According to embodiments of the present disclosure, multimeters can be used to measure voltage, current, resistance, temperature, or other parameters.

[0021] The term "coupled" can include various types of relationships between two or more components or features. Further, the phrase "electrically coupled" can include a path conductively linking two or more components or features or the phrase "mechanically coupled" may encompass a physical association or structural linking of two or more components or features. Moreover, several other embodiments of the disclosure can have configurations, components, features or procedures different than those described in this section. A person of ordinary skill in the art, therefore, will accordingly understand that the disclosure may have other embodiments with additional elements, or the disclosure may have other embodiments without several of the elements shown and described below with reference to Figures 1-15.

[0022] Figures 1-5 show an apparatus 100 according to an embodiment of the present disclosure. The apparatus 100 can short together a plurality of leads, for example, when zeroing a multimeter (not shown in Figures 1-5). The apparatus 100 as shown in Figures 1-5 is in an "unloaded configuration," which is the nominal state following its manufacture.

[0023] The apparatus 100 can include an electrically

conductive strip that extends between first and second ends 102a and 102b. The apparatus 100 includes a first surface 104a and a second surface 104b that faces away from the first surface 104a. The apparatus 100 further includes a first edge 106 that is spaced from a second edge 108. The first and second edges 106 and 108 couple the first and second surfaces 104a and 104b and extend between the first and second ends 102a and 102b. According to embodiments of the present disclosure, the electrically conductive strip can include a beryllium copper alloy substrate that is plated with sulphamate nickel. According to other embodiments of the present disclosure, the electrically conductive strip can include a stainless steel alloy or any other material that is electrically conductive, that can be plastically formed, and that can be elastically deformed between loaded and unloaded configurations for 3,000 or more cycles.

[0024] The apparatus includes a central bight 110 that is disposed between the first and second ends 102a and 102b. The central bight 110 has a concave contour 112 that defines a portion of the first surface 104a. The central bight 110 also defines an outward projecting central portion 116 of the first edge 106. The central bight 110 can be sized and shaped to resiliently surround an upstanding lead, to facilitate at least in part the elastic deformation of the apparatus 100 between unloaded and loaded configurations, and to resiliently go into an annular lead.

[0025] A first bight 120 is disposed between the central bight 110 and the first end 102a. The first bight 120 has a convex contour 122 that defines a portion of the first surface 104a. Similarly, a second bight 130 is disposed between the central bight 110 and the second end 102b. The second bight 130 has a convex contour 132 that also defines a portion of the first surface 104a. A first contact segment 140 is disposed between the first bight 120 and the first end 102a, and a second contact segment 150 is disposed between the second bight 130 and the second end 102b. The first bight 120 and the first contact segment 140 define a first portion 106a of the first edge 106, and the second bight 120 and the second contact segment 150 define a second portion 106b of the first edge 106.

[0026] The first contact segment 140 includes a first leg 142 that projects outward from the second edge 108 and the second contact segment 150 includes a second leg 152 that similarly projects outward from the second edge 108. The first leg 142 can include a first foot 144 and the second leg 152 includes a second foot 154. The first and second feet 144 and 154 can perpendicularly project with respect to the first and second contact segments 140 and 150, respectively.

[0027] A first grip segment 160 is disposed between the first contact segment 140 and the first end 102a, and a second grip segment 170 is disposed between the second contact segment 150 and the second end 102b. A first intermediate segment 180 is disposed between the first contact segment 140 and the first grip segment 160, and a second intermediate segment 190 is disposed be-

tween the second contact segment 150 and the second grip segment 170. The first intermediate segment 180 and the first grip segment 160 further define the first portion 106a of the first edge 106 and the second intermediate segment 190, and the second grip segment 170 second portion further define the second portion 106b of the first edge 106. According to embodiments of the present disclosure, the first and second intermediate segments 180 and 190 can include a ridge, hole, or other formation to which alligator clips of independent leads may be attached so as to avoid slippage of the alligator clips' jaws.

[0028] A first receptacle 200 is disposed at the first end 102a and includes a concave contour 202 that defines a portion of the first surface 104a. A second receptacle 210 is disposed at the second end 102b and includes a concave contour 212 that also defines a portion of the first surface 104a. The first receptacle 200 defines a first end portion 206 of the first edge 106 and the second receptacle 210 defines a second end portion 216 of the first edge 106. The first and second end portions 206 and 216 project outward from the first and second portions 106a and 106b, respectively, of the first edge 106. According to embodiments of the present disclosure, the first and second receptacles 200 and 210 can be sized and shaped to resiliently receive and short together test probes of independent leads.

[0029] Thus, according to the embodiment of the present disclosure shown in Figures 1-5, the central bight 110 is contiguously coupled to the first and second bights 120 and 130. The first bight 110 is contiguously coupled to the first contact segment 140, the first grip segment 160 is contiguously coupled to the first receptacle 200, and the first intermediate segment 180 contiguously couples the first contact segment 140 to the first grip segment 160. Similarly, the second bight 130 is contiguously coupled to the second contact segment 150, the second grip segment 170 is contiguously coupled to the second receptacle 210, and the second intermediate segment 190 contiguously couples the second contact segment 150 to the second grip segment 170. Additionally, the first surface 104a is partially defined by the concave contour 112 of the central bight 110, the convex contours 122 and 132 of the first and second bights 120 and 130, and the concave contours 202 and 212 of the first and second receptacles 200 and 210.

[0030] With particular reference to Figure 1, the first intermediate segment 180 is angularly oriented with respect to the first contact segment 140 and with respect to the first grip segment 160. For example, the intermediate segment 180 can be orthogonally disposed with respect to the first grip segment 160 and can be obliquely disposed with respect to the first contact segment 140. Of course, there can be different relative angles of the intermediate segments 180 with respect to the first contact segment 140 and with respect to the first grip segment 160. The second intermediate segment 190 is also angularly oriented with respect to the second contact

segment 150 and the second grip segment 170. As shown in the Figure 1 embodiment, the first intermediate segment 180 is contiguously coupled to the first contact segment 140 by a convex contour 182a that defines a portion of the first surface 104a and is contiguously coupled to the first grip segment 160 by a concave contour 182b that also defines a portion of the first surface 104a. Similarly, the second intermediate segment 190 is contiguously coupled to the second contact segment 150 by a convex contour 192a that defines a portion of the first surface 104a and is contiguously coupled to the second grip segment 170 by a concave contour 192b that defines a portion of the first surface 104a.

[0031] Figure 6 shows the "loaded" configuration of the apparatus 100. In the present disclosure, the term "load" can refer to storing of potential energy. For example, a compressive force, such as that indicated with arrows P, elastically deforms the apparatus 100 by displacing the first and second receptacles 200 and 210 toward one another, thereby loading the apparatus 100. A partial release of the stored potential energy is referred to in the present disclosure as an "intermediate" configuration.

[0032] Figures 7A-7C illustrate an intermediate configuration of the apparatus shown in Figure 1 with respect to a first mains cord 300. As it is used in the present disclosure, a "mains cord" refers to a plurality of leads that are fixed in a pattern. For example, Figures 7A and 7B respectively show elevation and end views of three leads arranged in a pattern that mimics a wall socket that is typically used in the United States. Figure 7C is an end view similar to Figure 7B that shows an intermediate configuration of the apparatus 100 that is disposed, e.g., intermingled amongst the leads, in the first mains cord 300 pattern such that the three leads are shorted together. In particular, the apparatus 100 is resiliently biased against each of the three leads and provides an electrical conductor that shorts the leads together.

[0033] Different mains cords can have different lead patterns. Figures 8A and 8B respectively show elevation and end views of a second mains cord 310 including three leads arranged in a pattern that mimics a wall socket that is typically used in Australia. Figure 8C shows an intermediate configuration of the apparatus 100 disposed in the second mains cord 310 pattern such that the three leads are shorted together. Figures 9A and 9B respectively show elevation and end views of a third mains cord 320 including three leads arranged in a pattern that mimics a wall socket that is typically used in Denmark. Figure 9C shows an intermediate configuration of the apparatus 100 disposed in the third mains cord 320 pattern such that the three leads are shorted together. Figures 10A and 10B respectively show elevation and end views of a fourth mains cord 330 including three leads arranged in a pattern that mimics a wall socket that is typically used in the United Kingdom. Figure 10C shows an intermediate configuration of the apparatus 100 disposed in the fourth mains cord 330 pattern such that the three leads are shorted together. Figures 11A and 11B respectively

show elevation and end views of a fifth mains cord 340 including three leads arranged in a pattern that mimics a wall socket that is typically used in Switzerland. Figure 11C shows an intermediate configuration of the apparatus 100 disposed in the fifth mains cord 340 pattern such that the three leads are shorted together. Figures 12A and 12B respectively show elevation and end views of a sixth mains cord 350 including three leads arranged in a pattern that mimics a wall socket that is typically used in Italy. Figure 12C shows an intermediate configuration of the apparatus 100 disposed in the sixth mains cord 350 pattern such that the three leads are shorted together. Figures 13A and 13B respectively show elevation and end views of a seventh mains cord 360 including three leads arranged in a pattern that mimics a wall socket that is typically used in Europe. Figure 13C shows an intermediate configuration of the apparatus 100 disposed in the seventh mains cord 360 pattern such that the three leads are shorted together.

[0034] With respect to Figures 13B and 13C, the central portion 116 of the central bight 110 extends into and resiliently engages an annular lead, and the first and second feet 144 and 154 can be subsequently grasped to pull the apparatus away from the seventh mains cord 360. According to embodiments in which the apparatus is oriented such that the central portion 116 projects away from a mains cord, the first and second legs 152 and 154 project toward the mains cord. The projection of the first and second legs 152 and 154 from the second edge 108 is selected such that the first and second feet 144 and 154 can displace a safety sheath (not shown) that surrounds one or more of the leads or can maintain the apparatus 100 at a pre-selected distance away from the body of the mains cord such that the apparatus engages electrically conductive portions of the leads.

[0035] Figure 14 illustrates a method according to an embodiment of the present disclosure for shorting together the distal ends of the seventh mains cord 360 shown in Figures 13A-13C. An electrical conductor, e.g., apparatus 100, is formed in an unloaded configuration. According to embodiments of the present disclosure, the forming can include plastically forming, e.g., punching, stamping, pressing, casting and/or other manufacturing operations, a substrate of beryllium copper that is plated with sulphamate nickel. The electrical conductor is elastically deformed from the unloaded configuration to a loaded configuration in which potential energy is stored. The electrical conductor is then disposed in a pattern of leads and permitted to resiliently assume an intermediate configuration at a potential energy level between the unloaded and loaded configurations. The electrical conductor in the intermediate configuration contiguously engages all three leads concurrently. As shown in Figure 14, disposing the electrical conductor can include inserting a projection of the electrical conductor into a recess defined by one of the three leads. The opposite ends of the mains cord 360 can be electrically coupled to a multimeter 400 and a zeroing operation performed by the mul-

timer 400.

[0036] Figure 15 illustrates another method according to an embodiment of the present disclosure for shorting together the distal ends of test leads. As compared to Figure 14, a set of test leads 370 include independent test probes that are not relatively fixed in a pattern. The distal ends of the test leads 370 can be resiliently received in the first and second receptacles 200 and 210 and are shorted together by the electrical conductor.

[0037] Specific details of the embodiments of the present disclosure are set forth in the description and in the figures to provide a thorough understanding of these embodiments. A person skilled in the art, however, will understand that the invention may be practiced without several of these details or additional details can be added to the invention. Well-known structures and functions have not been shown or described in detail to avoid unnecessarily obscuring the description of the embodiments of the present disclosure.

[0038] Unless the context clearly requires otherwise, throughout the description and the claims, the words "comprise", "comprising", and the like are to be construed in an inclusive sense, as opposed to an exclusive or exhaustive sense; that is to say, in the sense of including, but not limited to. Additionally, the words "herein", "above", "below", and words of similar connotation, when used in the present disclosure, shall refer to the present disclosure as a whole and not to any particular portions of the present disclosure. Where the context permits, words in the above Detailed Description using the singular or plural number may also include the plural or singular number respectively. The word "or", in reference to a list of two or more items, covers all of the following interpretations of the word: any of the items in the list, all of the items in the list, and any combination of the items in the list.

[0039] The above detailed description of embodiments is not intended to be exhaustive or to limit the invention to the precise form disclosed above. While specific embodiments of, and examples for, the invention are described above for illustrative purposes, various equivalent modifications are possible within the scope of the invention, as those skilled in the relevant art will recognize.

[0040] The teachings of the present disclosure provided herein can be applied to systems other than the analysis systems described above. The features of the various embodiments described above can be combined or altered to provide further embodiments.

[0041] These and other changes can be made to the invention in light of the above Detailed Description. While the above description describes certain embodiments of the invention, and describes the best mode contemplated, no matter how detailed the above appears in text, the invention can be practiced in many ways. Details of the embodiments in the present disclosure may vary considerably in their implementation details, while still being encompassed by the invention disclosed herein.

[0042] The terminology used in the Detailed Description is intended to be interpreted in its broadest reasonable manner, even though it is being used in conjunction with a detailed description of certain specific embodiments according to the present disclosure. Certain terms may even be emphasized; however, any terminology intended to be interpreted in any restricted manner will be overtly and specifically defined as such in this Detailed Description section. In general, the terms used in the following claims should not be construed to limit the invention to the specific embodiments disclosed in the present disclosure, unless the above Detailed Description section explicitly defines such terms. Accordingly, the actual scope of the invention encompasses not only the embodiments disclosed in the present disclosure, but also all equivalent ways of practicing or implementing the invention under the claims.

[0043] While certain aspects of the invention are presented below in certain claim forms, the inventors contemplate the various aspects of the invention in any number of claim forms. Accordingly, the inventors reserve the right to add additional claims after filing the application to pursue such additional claim forms for other aspects of the invention.

Claims

1. An apparatus for shorting together a plurality of electrical leads, the apparatus comprising an electrical conductor extending between first and second ends, the electrical conductor including:

a first surface and a second surface facing away from the first surface;
a central bight having a concave contour defining a portion of the first surface, the central bight is disposed between the first and second ends;
a first bight having a convex contour defining a portion of the first surface, the first bight is disposed between the central bight and the first end;
a second bight having a convex contour defining a portion of the first surface, the second bight is disposed between the central bight and the second end;
a first contact segment disposed between the first bight and the first end; and
a second contact segment disposed between the second bight and the second end.

2. The apparatus of claim 1, wherein the electrical conductor further comprises:

a first grip segment disposed between the first end and the first contact segment;
a second grip segment disposed between the

- second end and the second contact segment;
a first intermediate segment disposed between
the first contact segment and the first grip seg-
ment; and
a second intermediate segment disposed be- 5
tween the second contact segment and the sec-
ond grip segment.
3. The apparatus of claim 2, wherein the electrical con-
ductor further comprises: 10
- a first receptacle disposed at the first end; and
a second receptacle disposed at the second
end.
4. The apparatus of claim 3, 15
wherein the first receptacle comprises a concave
contour defining a portion of the first surface, and
the second receptacle comprises a concave contour
defining a portion of the first face; and, optionally, 20
wherein the central bight is contiguously coupled to
the first and second bights, the first bight is contig-
uously coupled to the first contact segment, the first
contact segment is contiguously coupled to the first
intermediate segment, the first intermediate seg- 25
ment is contiguously coupled to the first grip seg-
ment, and the first grip segment is contiguously cou-
pled to the first receptacle, and wherein the second
bight is contiguously coupled to the second contact
segment, the second contact segment is contiguously 30
coupled to the second intermediate segment, the
second intermediate segment is contiguously cou-
pled to the second grip segment, and the second
grip segment is contiguously coupled to the second
receptacle. 35
5. The apparatus of claim 2, 3 or 4,
wherein the first intermediate segment is angularly
oriented with respect to the first contact and first grip
segments, and the second intermediate segment is 40
angularly oriented with respect to the second contact
and second grip segments; and optionally
wherein the first intermediate segment is contig-
uously coupled to the first contact segment by a con-
vex contour defining a portion of the first surface and 45
is contiguously coupled to the first grip segment by
a concave contour defining a portion of the first sur-
face, and the second intermediate segment is con-
tiguously coupled to the second contact segment by
a convex contour defining a portion of the first surface 50
and is contiguously coupled to the second grip seg-
ment by a concave contour defining a portion of the
first surface.
6. The apparatus of any preceding claim, 55
wherein the electrical conductor further includes first
and second edges, the first edge couples the first
and second surfaces, and the second edge couples
- the first and second surfaces and is latitudinally
spaced from the first edge, and the first and second
edges extend between the first and second ends;
and, optionally,
wherein the central bight defines a central portion of
the first edge, the first bight and the first contact seg-
ment define a first portion of the first edge, the second
bight and the second contact segment define a sec-
ond portion of the first edge, and the central portion 60
projects outward from the first and second portions.
7. The apparatus of any preceding claim,
wherein the first contact segment includes a first leg
projecting outward from the second edge and the
second contact segment includes a second leg pro-
jecting outward from the second edge; and, option-
ally,
wherein the first leg includes a first foot perpendic-
ularly projecting with respect to the strip, and the
second leg includes a second foot perpendicularly
projecting with respect to the strip.
8. The apparatus of claim 7, wherein the strip further
comprises:
- a first receptacle disposed at the first end; and
a second receptacle disposed at the second
end;
- wherein the first portion of the first edge is further
defined by the first intermediate and first grip seg-
ments, the second portion of the first edge is further
defined by the second intermediate and second grip
segments, and the first and second receptacles
project outward from the first edge.
9. The apparatus of claim 8, wherein the first and sec-
ond receptacles define end portions of the first edge.
10. The apparatus of any preceding claim, wherein the
strip comprises a substrate and plating disposed on
the substrate, the substrate including a beryllium
copper alloy, and the plating including sulphamate
nickel.
11. A method of shorting three leads arranged in a pat-
tern, the method comprising:
- forming an electrical conductor in an unloaded
configuration;
elastically deforming the electrical conductor
from the unloaded configuration to a loaded con-
figuration;
disposing the electrical conductor in the pattern;
and
permitting the electrical conductor to resiliently
assume an intermediate configuration between
the unloaded and loaded configurations;

wherein the electrical conductor in the intermediate configuration contiguously engages all three leads concurrently.

12. The method of claim 11, wherein the forming comprises plastically forming the electrical conductor. 5

13. The method of claim 11 or 12, wherein the forming comprises plating a beryllium copper substrate with sulphamate nickel. 10

14. The method of claim 11, 12 or 13, wherein the disposing comprises inserting a projection of the electrical conductor into a recess defined by one of the three leads. 15

15. The method of any of claims 11 to 14, wherein the disposing comprises intermingling the electrical conductor and each of the three leads; and/or 20 wherein the forming comprises forming a bight and the disposing comprises engulfing at least one of the three leads in the bight.

25

30

35

40

45

50

55

Figure 1

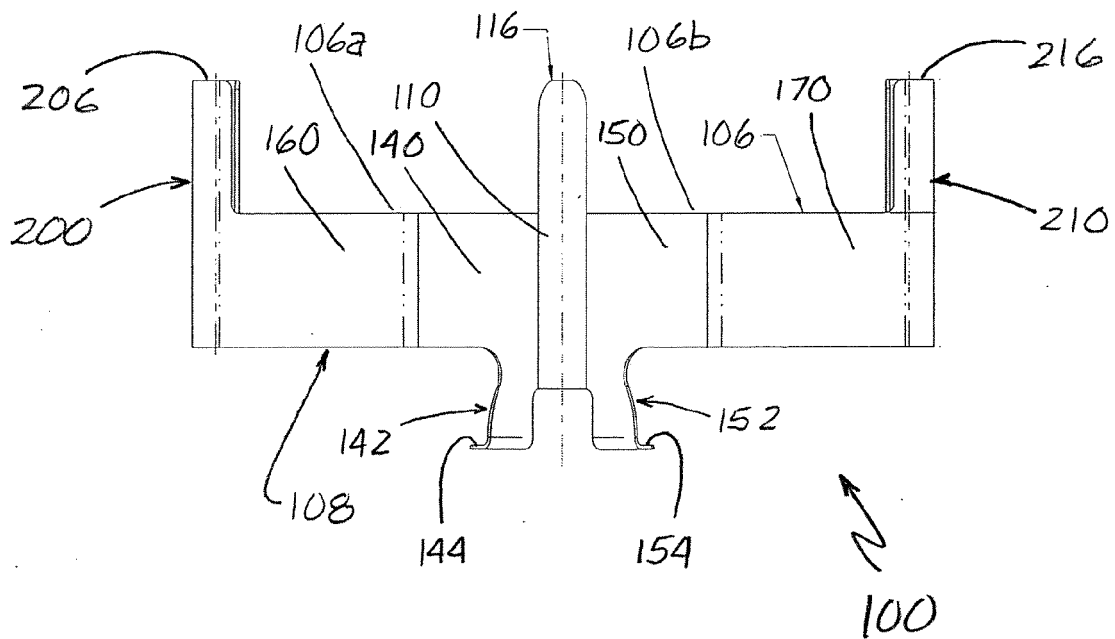
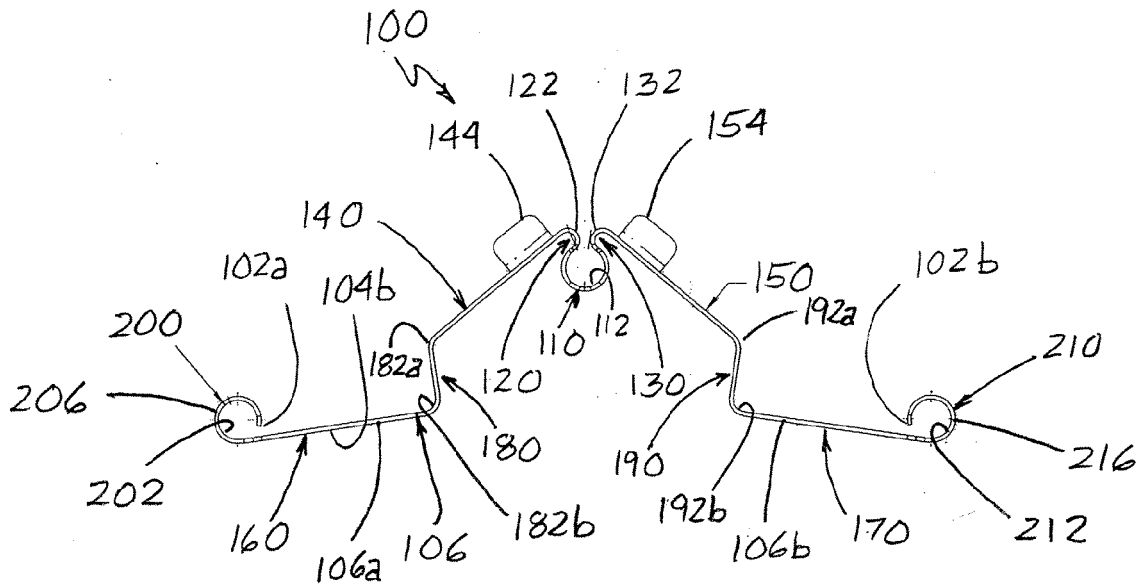


Figure 2

Figure 3

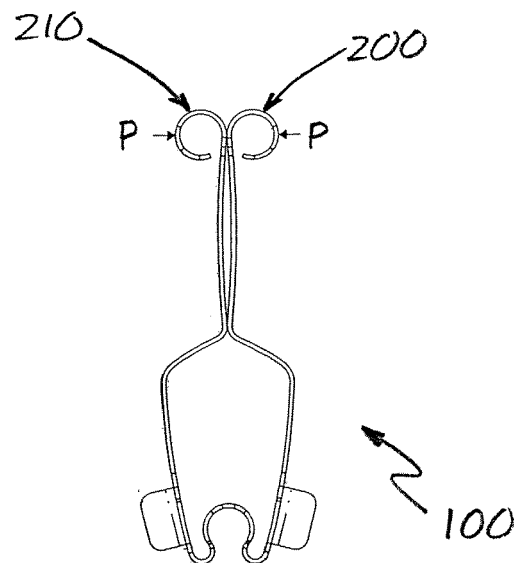
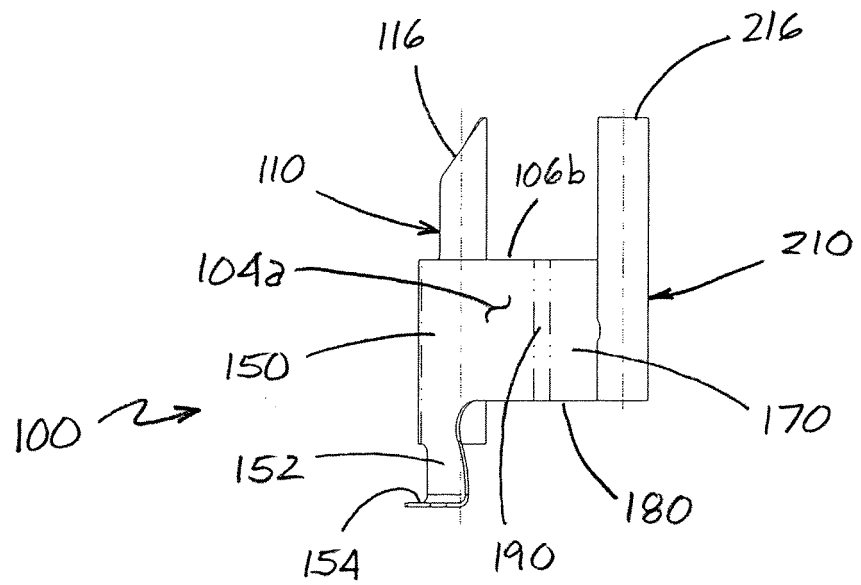


Figure 6

Figure 4

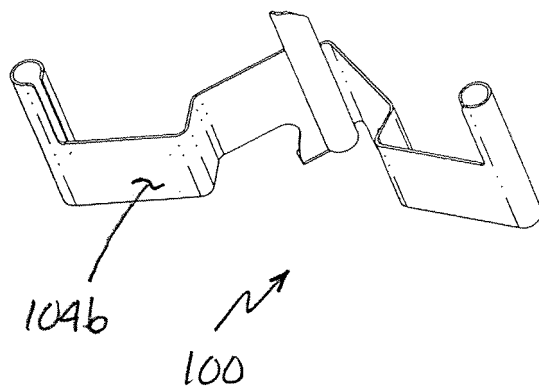
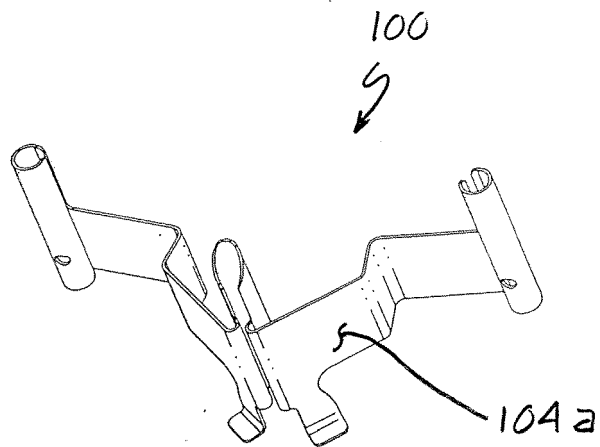


Figure 5




Fig. 7A

Fig. 7B




Fig. 7C




Fig. 8A

Fig. 8B




Fig. 8C




Fig. 9A

Fig. 9B




Fig. 9C




Fig. 10A

Fig. 10B




Fig. 10C




Fig. 11A

Fig. 11B




Fig. 11C



Fig. 12A

Fig. 12B



Fig. 12C




Fig. 13A

Fig. 13B




Fig. 13C

Figure 14


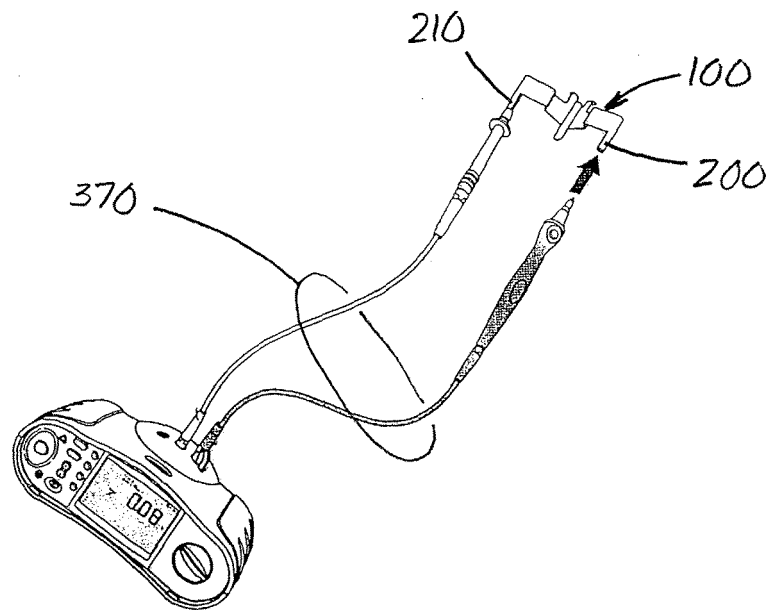


Figure 15

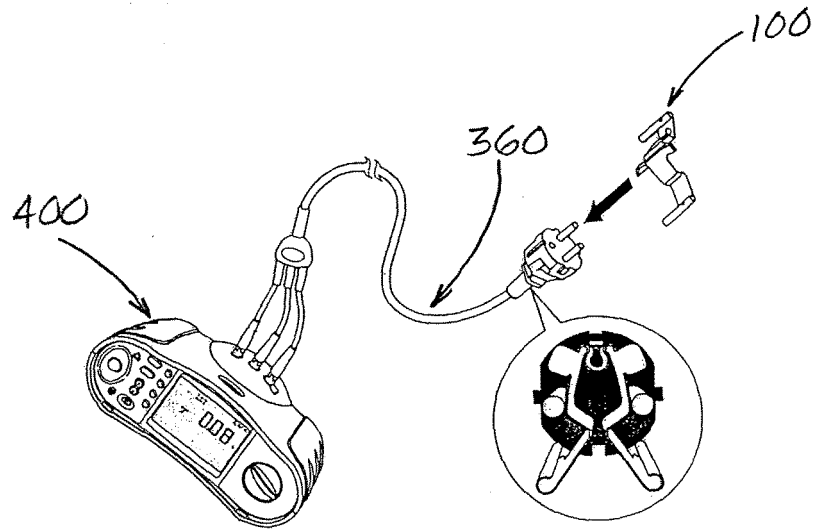

EUROPEAN SEARCH REPORT

Application Number
EP 08 16 2636

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 1 982 501 A (DOUGLAS HARRY A) 27 November 1934 (1934-11-27) * figure 4 *	1-15	INV. H01R31/08 H01R4/48
X	US 3 601 756 A (STROH ROBERT R) 24 August 1971 (1971-08-24) * figures 1-4 *	1-15	ADD. H01R13/703 H01R4/66
X	WO 97/22998 A (POLAROID CORP [US]) 26 June 1997 (1997-06-26) * figures 2,3 *	1-15	
X	WO 97/22997 A (POLAROID CORP [US]) 26 June 1997 (1997-06-26) * figure 1a *	11-15	
X	US 3 951 497 A (BALZANO ALFIERO F ET AL) 20 April 1976 (1976-04-20) * figures 1-4 *	11-15	
X	EP 0 509 634 A (POLAROID CORP [US]) 21 October 1992 (1992-10-21) * figure 7a *	11-15	TECHNICAL FIELDS SEARCHED (IPC)
X	GB 2 363 526 A (ENTRELEC SA [FR]) 19 December 2001 (2001-12-19) * figure 1 *	11-15	H01R
X	US 4 029 377 A (GUGLIELMI ANTHONY C) 14 June 1977 (1977-06-14) * figures 1-3 *	11-15	
X	US 4 449 771 A (CARR DAVID W [US]) 22 May 1984 (1984-05-22) * figure 1 *	11-15	
		-/--	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 2 February 2009	Examiner Demol, Stefan
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1
EPO FORM 1503 03.82 (P04C01)



EUROPEAN SEARCH REPORT

Application Number
EP 08 16 2636

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	US 4 470 651 A (SCHWAB PIERRE P [US]) 11 September 1984 (1984-09-11) * figure 7 *	1-15	
A	----- US 2 700 752 A (CATALDO JOHN B) 25 January 1955 (1955-01-25) * figures 4,5 *	1-15	
A	----- US 4 820 194 A (STINE JON D [US]) 11 April 1989 (1989-04-11) * figures 1,2 *	1-15	
			TECHNICAL FIELDS SEARCHED (IPC)
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 2 February 2009	Examiner Demol, Stefan
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03/82 (P04/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 08 16 2636

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-02-2009

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 1982501	A	27-11-1934	NONE		
US 3601756	A	24-08-1971	NONE		
WO 9722998	A	26-06-1997	EP	0868748 A1	07-10-1998
			US	5847914 A	08-12-1998
WO 9722997	A	26-06-1997	EP	0868747 A1	07-10-1998
			US	5697501 A	16-12-1997
US 3951497	A	20-04-1976	NONE		
EP 0509634	A	21-10-1992	CA	2062248 A1	19-10-1992
			DE	69207467 D1	22-02-1996
			DE	69207467 T2	23-05-1996
			DE	69226788 D1	01-10-1998
			DE	69226788 T2	14-01-1999
			DE	69226789 D1	01-10-1998
			DE	69226789 T2	14-01-1999
			DE	69226790 D1	01-10-1998
			DE	69226790 T2	14-01-1999
			JP	2500172 B2	29-05-1996
			JP	5114660 A	07-05-1993
			US	5163850 A	17-11-1992
GB 2363526	A	19-12-2001	DE	10129053 A1	07-03-2002
			FR	2810458 A1	21-12-2001
			US	2002031941 A1	14-03-2002
US 4029377	A	14-06-1977	BE	850960 A1	31-05-1977
			CA	1064123 A1	09-10-1979
			DE	2704087 A1	04-08-1977
			FR	2340631 A1	02-09-1977
			GB	1555402 A	07-11-1979
			IT	1085911 B	28-05-1985
			JP	52107588 A	09-09-1977
			NL	7701161 A	05-08-1977
			SE	7701044 A	04-08-1977
US 4449771	A	22-05-1984	NONE		
US 4470651	A	11-09-1984	NONE		
US 2700752	A	25-01-1955	GB	702868 A	27-01-1954
US 4820194	A	11-04-1989	NONE		

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82