



(11) **EP 2 159 484 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
07.01.2015 Bulletin 2015/02

(51) Int Cl.:
F21V 21/00 ^(2006.01) **F21V 29/00** ^(2015.01)
F21Y 10/02 ^(2006.01)

(21) Application number: **09007109.3**

(22) Date of filing: **28.05.2009**

(54) **Luminaire**

Leuchte

Luminaire

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK TR**

(30) Priority: **25.08.2008 NL 1035864**

(43) Date of publication of application:
03.03.2010 Bulletin 2010/09

(73) Proprietor: **LEDexpert B.V.
5652 BJ Eindhoven (NL)**

(72) Inventor: **Swennen, Erik Nicolaas Johannes
5615 PJ Eindhoven (NL)**

(74) Representative: **Algemeen Octrooi- en
Merkenbureau B.V. et al
P.O. Box 645
5600 AP Eindhoven (NL)**

(56) References cited:
**EP-A- 0 420 364 EP-A1- 0 350 522
WO-A-98/51963 WO-A1-94/23243
US-A- 5 161 883 US-A1- 2004 109 310**

EP 2 159 484 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention relates to a luminaire comprising a support to which at least one holder for housing a LED light source is connected, which support and which holder comprise a thermally conductive material and which are thermally interconnected for dissipating the heat generated by the LED(s) during operation, which holder is provided with an optical element which cooperates with the LED light source for generating a light beam during operation.

[0002] The term "LED light source" as used herein is understood to mean a light source which comprises one or more light-emitting diodes (LEDs).

[0003] Such luminaires comprising LED light sources are used in various places. The use of LED lighting has increased enormously in recent years. LEDs have a high luminous efficacy and a long operational life, they are energy-efficient and they are compact. Furthermore, it is possible to adjust the colour of the emitted light when several ("RGB") LEDs are used.

[0004] Thus, it is now possible to realise applications that were hitherto less interesting when conventional light sources, such as lamps, were used. Not only light applications with colour effects are conceivable in this connection, but the use of LEDs also makes it possible to realise applications in which in particular the compactness of the LED light source is utilised. In that case use is made of the fact that LEDs are pointed light sources. Using optical means, this makes it possible to realise effects that were difficult to realise when lamps were used, for example creating light beams in small spaces.

[0005] LEDs generate relatively much heat during operation. To prevent overheating of the LED or the printed circuit board on which the LED is provided (for example together with a supply circuit provided thereon), it is necessary to take measures to ensure that the heat is dissipated rapidly. This is all the more necessary in order to prevent a loss of efficacy of the LEDs and to prevent damage. The LEDs are to that end mounted to a support or in a holder made of a thermally conductive material, such as a metal.

[0006] Published patent application EP 1 898 146 A1 describes a luminaire comprising a light source provided with one or more LEDs and an optical system comprising a reflector and a lens, whilst the heat generated by the LEDs during operation is adequately dissipated by a support made of a thermally conductive material. The light source described in said application is not very suitable for use in compact luminaires when a user also wishes to influence the direction of the light beam emitted by the LED. Generally, a user must move the entire housing of the luminaire in a selected direction. This is problematic.

[0007] US 2005/0,281,047 A1 describes a lighting unit with an LED light source and a reflector, which comprises a thermally conductive material. In the lighting unit described in said US application, the light source takes up a fixed position relative to the reflector. It is difficult for

the user to adjust the light beam from the light source himself or herself.

[0008] WO 94/23243 A1 describes a lighting unit according to the preamble of claim 1, with a light source in a holder wherein an optical element can be adjusted relative to the holder for setting the light beam in a certain direction.

[0009] The object of the invention is to provide a luminaire comprising a support for an LED light source which efficiently provides adequate cooling of the LEDs by dissipating the heat generated by the LEDs, whilst the direction of the light beam generated by said LEDs is furthermore easy to adjust by a user.

[0010] In order to accomplish that object, a luminaire of the kind referred to in the introduction is characterised in that a user can set various directions of the optical element relative to the holder with the LED light source as desired.

[0011] With a luminaire according to the invention, a user can set a desired direction of the light beam himself or herself in a simple manner. The holder with the light source remains in place while the direction is being set.

[0012] The holder consists of a thermally conductive material and is in thermal contact with the LED light source, so that heat from the light source can be dissipated in an adequate manner.

[0013] The holder functions as a heat sink, therefore. To that end, the holder is connected to the support over a relatively large contact area. The heat resistance between the support and the holder is small (less than 10K per Watt) in that case.

[0014] A luminaire according to the invention comprises of an extruded aluminium bar configured as a support, for example, to which aluminium holders with the LEDs are mounted. The LEDs are mounted in the holders in a manner which is known per se, for example by means of printed circuit boards comprising a power supply circuit. The heat dissipation of the LEDs is ensured by thermally conductive connections between the LEDs and/or the printed circuit board. The printed circuit board and the support are also in intense thermal contact with each other, preferably with a heat resistance of less than 10K/Watt.

[0015] The optical element is a reflector. The optical element is preferably a parabolic, spherical, elliptical or hyperbolic reflector having an inlet opening and an outlet opening, wherein the inlet opening is spaced from the holder with the LED light source by some distance, which reflector can be set in various orientations to the holder, and wherein the LED light source is located in or near the focal point of the reflector.

[0016] When a user wishes to direct a light beam emitted by the LEDs, he or she only needs to adjust the orientation of the reflector rather than that of the entire housing of the luminaire with the light source and the reflector.

[0017] The outer wall of the reflector is mounted between the ends of a U-shaped element, which is rotatable about its axis of symmetry relative to the holder, whilst

the reflector is rotatable about an axis between the attachment points of the reflector to the U-shaped ends.

[0018] The luminaire according to the invention can be used in various places. In one embodiment, the luminaire according to the invention is provided with an elongated support configured as a conductor rail. One or more holders with LEDs are mounted to the support. In one embodiment, the holders are detachable and can be mounted to the support at a selected location by a user. The rail comprises power supply wires for the LEDs. Such conductor rails are frequently used for lighting display windows and shops. In a special embodiment of the luminaire according to the invention, the support is mounted in a rib of a display case. Such display cases have walls made of glass or a transparent plastic material, which are oriented perpendicular to each other, for example. In this way the objects to be presented in the display case can be illuminated in an efficient manner and with a high degree of flexibility for a user by the light source that is mounted to a rib. The reflectors can be directed at the objects present in the case in a simple manner by a user. An adequate heat dissipation is realised during operation of the LEDs. Preferably, high-power LEDs are used in such a display case. High standards are set for the heat dissipation in that case.

[0019] Embodiments of a luminaire according to the invention will now be explained in more detail with reference to the drawing. In the drawing:

Figure 1 is an elevation view of a preferred embodiment of a luminaire; and

Figure 2 is a view of a display case provided with a luminaire according to the invention.

[0020] The luminaire shown in figure 1 comprises an elongated aluminium support 1, to which a holder 2, likewise made of aluminium, is attached, in which holder an LED light source 3 is mounted. Aluminium is a suitable thermally conductive material for dissipating the heat that is generated by the LED (or several LEDs, such as RGD LEDs) during operation.

[0021] The holder 2 is connected to a reflector 4 (for example a parabolic reflector), which cooperates with the LED light source 3 for generating a light beam during operation.

[0022] The reflector is provided with an inlet opening 5 and an outlet opening 6, which inlet opening 5 is spaced from the LED light source 3 by some distance. The reflector can be placed in various orientations relative to the holder 2, with the LED light source 3 being located in the focal point of the reflector 4.

[0023] The outer wall of the reflector 4 is mounted between the ends of a U-shaped element 7, which is rotatable about its axis of symmetry 8 relative to the holder 2, whilst the reflector is also rotatable about an axis 9 between the attachment points of the reflector to the ends of the U-shaped element 7. One of said attachment points is indicated at 10 in the drawing.

[0024] Figure 2 schematically shows a display case. Products can be presented in such a glass case. The case is provided with four glass walls 11 - 14, which are oriented perpendicular to each other and which are interconnected by means of ribs (such as the ribs 16). The glass shelves (such as the shelves 15) for the objects to be presented make the case look transparent. This effect is further enhanced by the lighting that is realised by means of aluminium supports provided with LED light sources and reflectors according to the invention, which are mounted in the ribs. Said units are indicated at 17, 18 and 19, respectively. The ribs are formed and dimensioned such that the electric supply wires for the power supply of the LEDs are arranged within the ribs, electrically insulated therefrom, such that they are hidden from the users' view. The LEDs are Lumileds K2 high-power LEDs, for example. In a practical embodiment, the thermal contacts between the high-power LED light source (for example 5 W), the aluminium printed circuit board and the aluminium support are such that the thermal resistance is at most 3L/Watt. An acceptable temperature difference of 15 degrees is realised in that case.

[0025] The reflectors attached to the holders of the LEDs can be directed at the objects to be presented on the shelves in a simple manner by a user. Consequently there is no need to mount the light sources to the upper side of the display case, as is necessary with known display cases.

[0026] In one embodiment, the holders with the reflectors can be detached from the support. A holder forms part of an adapter in that case, which adapter is provided with means that are known per se for cooperation with the support, which forms part of a conductor rail, for example.

Claims

1. A luminaire comprising a support (1) to which at least one holder (2) for housing a LED light source (3) is connected, which holder (2) is provided with an optical element (4) which cooperates with the LED light source (3) for generating a light beam during operation, wherein a user can set various directions of the optical element (4) relative to the holder (2) with the LED light source (3) as desired, wherein the optical element (4) is a reflector having an inlet opening (5) and an outlet opening (6), and wherein the inlet opening (5) is spaced from the holder (2) with the LED light source (3) by some distance, which reflector can be set in various orientations relative to the holder (2), and wherein the LED light source (3) is located in or near the focal point of the reflector, **characterised in that** the support (1) and the holder (2) comprise a thermally conductive material and which are thermally interconnected for dissipating the heat generated by the LED(s) during operation, and wherein the outer side of the reflector is mounted

between the ends of a U-shaped element (7), which is rotatable about its axis of symmetry relative to the holder (2), whilst the reflector is rotatable about an axis between the attachment points of the reflector to the U-shaped ends.

2. A conductor rail provided with a luminaire according to claim 1.
3. A conductor rail according to claim 2, **characterised in that** the holders can be detached from the support.
4. A display case provided with one or more ribs (16), in at least one of which ribs (16) a luminaire or conductor rail according to claim 1 or 2 is housed.

Patentansprüche

1. Leuchte mit einer Halterung (1), mit der wenigstens ein Halter (2) zur Aufnahme einer LED-Lichtquelle (3) verbunden ist, wobei der Halter (2) mit einem optischen Element (4) versehen ist, das mit der LED-Lichtquelle (3) zusammenwirkt, um während des Betriebs einen Lichtstrahl zu erzeugen, wobei ein Benutzer nach Wunsch verschiedene Richtungen des optischen Elements (4) relativ zum Halter (2) mit der LED-Lichtquelle (3) einstellen kann, wobei das optische Element (4) ein Reflektor ist, der eine Einlassöffnung (5) und eine Auslassöffnung (6) hat, und wobei die Einlassöffnung (5) in einigem Abstand vom Halter (2) mit der LED-Lichtquelle (3) angeordnet ist, wobei der Reflektor in verschiedenen Ausrichtungen relativ zum Halter (2) eingestellt werden kann, und wobei die LED-Lichtquelle (3) in oder nahe dem Brennpunkt des Reflektors gelegen ist, **dadurch gekennzeichnet, dass** die Halterung (1) und der Halter (2) ein wärmeleitfähiges Material umfassen und zum Abführen der während des Betriebs von der LED bzw. den LEDs erzeugten Wärme thermisch miteinander verbunden sind, und wobei die Außenseite des Reflektors zwischen den Enden eines U-förmigen Elements (7) angebracht ist, das um seine Symmetrieachse relativ zum Halter (2) verdrehbar ist, während der Reflektor um eine Achse zwischen den Befestigungspunkten des Reflektors an den U-förmigen Enden verdrehbar ist.
2. Stromschiene, die mit einer Leuchte nach Anspruch 1 versehen ist.
3. Stromschiene nach Anspruch 2, **dadurch gekennzeichnet, dass** die Halter von der Halterung abgenommen werden können.
4. Schaukasten, der mit einer oder mehreren Rippen (16) versehen ist, wobei in wenigstens einer der Rippen (16) eine Leuchte oder eine Stromschiene nach

Anspruch 1 oder 2 aufgenommen ist.

Revendications

1. Luminaire comprenant un support (1) auquel est raccordé au moins un dispositif de maintien (2) pour loger une source de diode électroluminescente (3), ledit dispositif de maintien (2) est prévu avec un élément optique (4) qui coopère avec la source de diode électroluminescente (3) pour générer un faisceau lumineux pendant le fonctionnement, dans lequel un utilisateur peut régler différentes directions de l'élément optique (4) par rapport au dispositif de maintien (2) avec la source de diode électroluminescente (3), si nécessaire, dans lequel l'élément optique (4) est un réflecteur ayant une ouverture d'entrée (5) et une ouverture de sortie (6), et dans lequel l'ouverture d'entrée (5) est espacée du dispositif de maintien (2) avec la source de diode électroluminescente (3) par une certaine distance, lequel réflecteur peut être réglé dans différentes orientations par rapport au dispositif de maintien (2) et dans lequel la source de diode électroluminescente (3) est positionnée dans ou à proximité du point focal du réflecteur, **caractérisé en ce que** le support (1) et le dispositif de maintien (2) comprennent un matériau thermiquement conducteur et qui sont thermiquement interconnectés pour dissiper la chaleur générée par la (les) diode(s) électroluminescente (s) pendant le fonctionnement, et dans lequel le côté externe du réflecteur est monté entre les extrémités d'un élément en forme de U (7), qui peut tourner autour de son axe de symétrie par rapport au dispositif de maintien (2), alors que le réflecteur peut tourner autour d'un axe entre les points de fixation du réflecteur sur les extrémités en forme de U.
2. Rail conducteur prévu avec un luminaire selon la revendication 1.
3. Rail conducteur selon la revendication 2, **caractérisé en ce que** les dispositifs de maintien peuvent être détachés du support.
4. Boîtier d'affichage prévu avec une ou plusieurs nervures (16), dans au moins l'une desquelles nervures (16), est logé un luminaire ou un rail conducteur selon la revendication 1 ou 2.

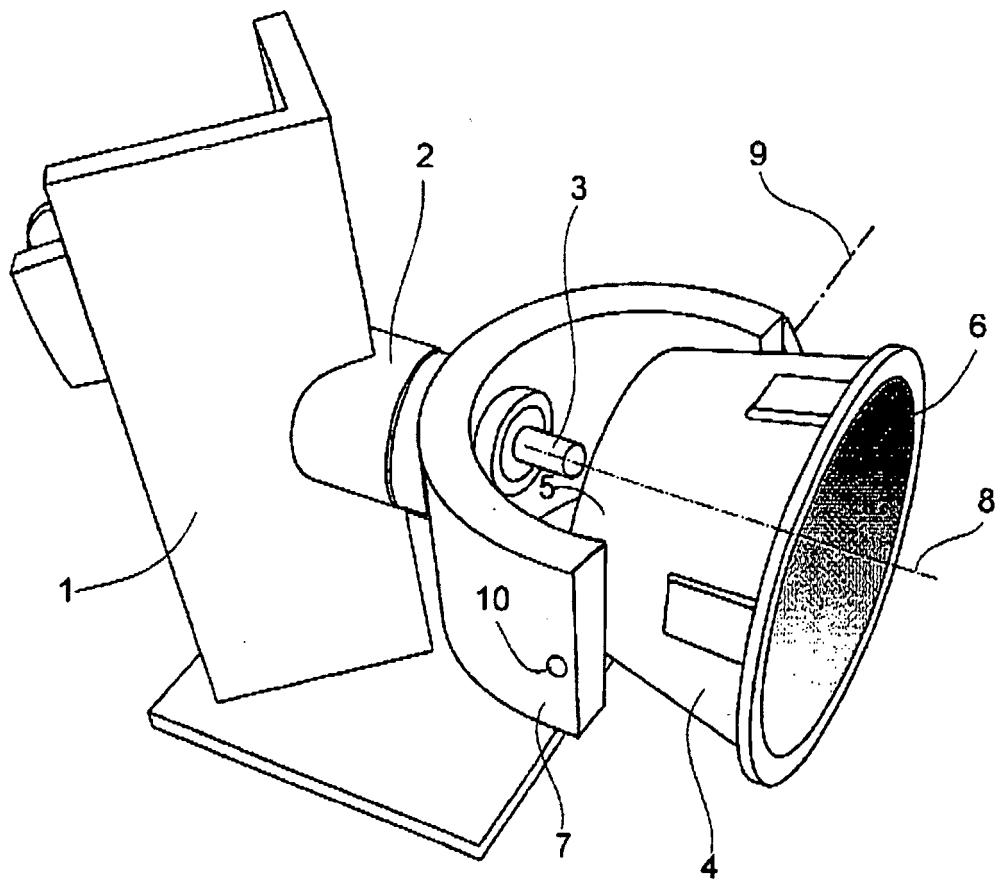


Fig. 1

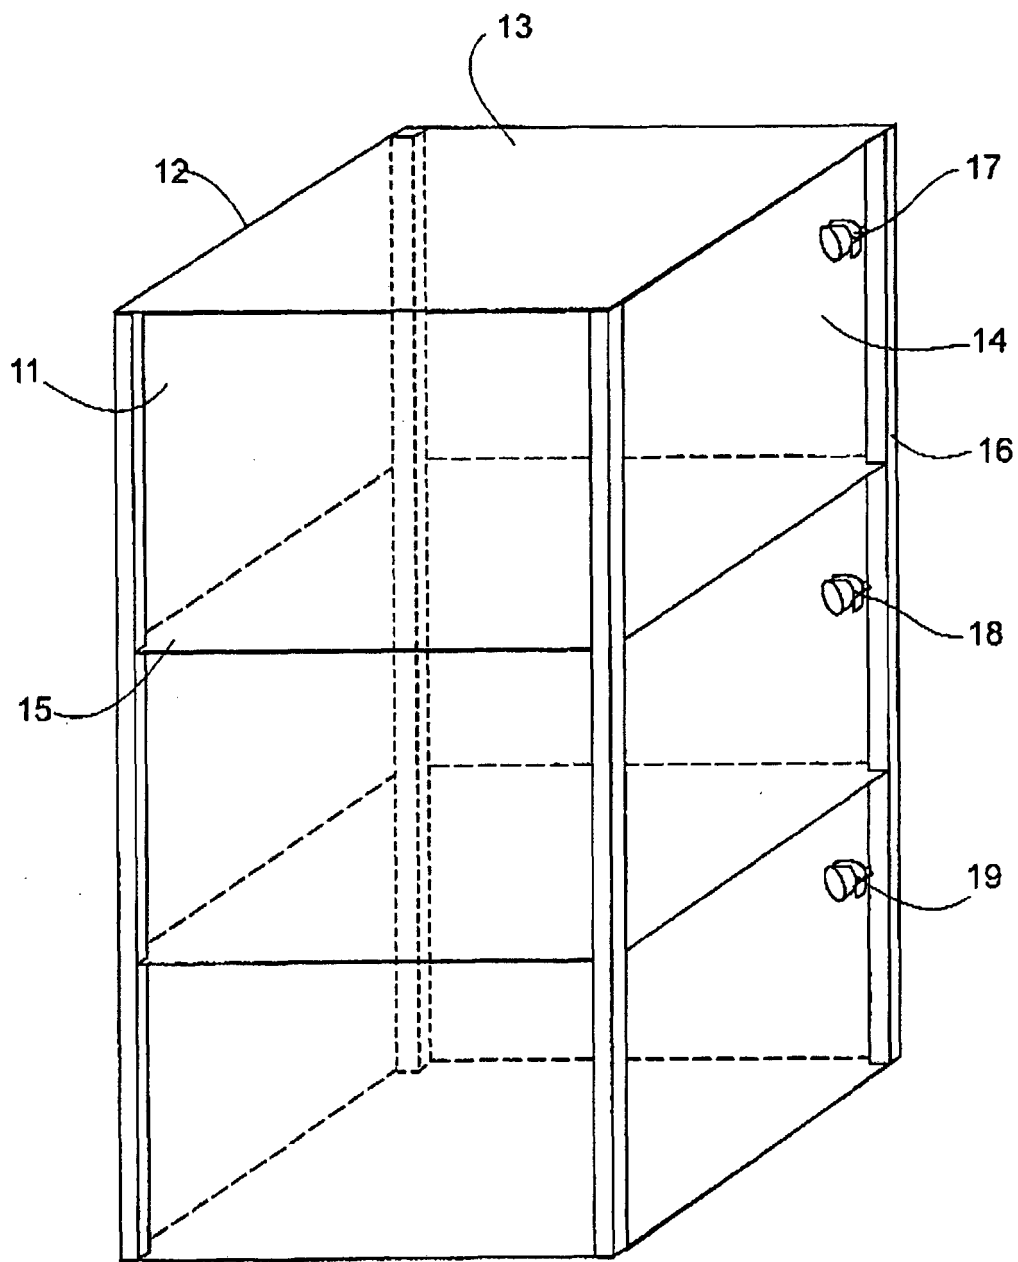


Fig. 2

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1898146 A1 [0006]
- US 20050281047 A1 [0007]
- WO 9423243 A1 [0008]