

(19)



(11)

**EP 2 180 749 B9**

(12)

**CORRECTED EUROPEAN PATENT SPECIFICATION**

(15) Correction information:  
**Corrected version no 1 (W1 B1)**  
**Corrections, see**  
**Description Paragraph(s) 17**  
**Claims EN 1**

(51) Int Cl.:  
**H04W 72/12 (2009.01)**

(48) Corrigendum issued on:  
**19.09.2018 Bulletin 2018/38**

(45) Date of publication and mention  
of the grant of the patent:  
**01.06.2016 Bulletin 2016/22**

(21) Application number: **09013306.7**

(22) Date of filing: **21.10.2009**

(54) **Method and apparatus for handling UL-SCH transmission**

Verfahren und Vorrichtung zur Handhabung von Uplink-Shared-Channel (UL-SCH) -Übertragung  
Procédé et appareil pour gérer une transmission UL-SCH

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL  
PT RO SE SI SK SM TR**

(30) Priority: **22.10.2008 US 107348 P**

(43) Date of publication of application:  
**28.04.2010 Bulletin 2010/17**

(73) Proprietor: **Innovative Sonic Limited  
Ebene 72201 (MU)**

(72) Inventor: **Kuo, Richard Lee-Chee  
Taipei City (TW)**

(74) Representative: **Hoefler & Partner Patentanwälte  
mbB  
Pilgersheimer Straße 20  
81543 München (DE)**

(56) References cited:  
**EP-A- 1 871 121**

- **SAMSUNG: "Message 3 transmission interrupted by the adaptive retransmission command" 3GPP DRAFT; R2-085612 MESSAGE 3 TRANSMISSION INTERRUPTION, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, no. Prague, Czech Republic; 20080923, 23 September 2008 (2008-09-23), XP050320408**
- **NOKIA CORPORATION ET AL: "Message 3 Definition" 3GPP DRAFT; R2-084999 MESSAGE 3 DEFINITION 36321 CR, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, no. Prague, Czech Republic; 20080922, 22 September 2008 (2008-09-22), XP050319971**

**EP 2 180 749 B9**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

- ERICSSON: "Text Proposal for TTI bundling" 3GPP DRAFT; R2-081466 TTI-BUNDLING\_MAC TEXT PROPOSAL, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, vol. RAN WG2, no. Shenzhen, China; 20080325, 25 March 2008 (2008-03-25), XP050139210
- SAMSUNG: "Correction to prevent message 3 transmission being interrupted by adaptive retransmission command" 3GPP DRAFT; R2-085613 MESSAGE 3 TRANSMISSION INTERRUPTION CR, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, no. Prague, Czech Republic; 20080923, 23 September 2008 (2008-09-23), XP050320409
- LG ELECTRONICS INC: "Handling of Received UL Grant in RA procedure" 3GPP DRAFT; R2-084387 HANDLING OF RECEIVED UL GRANT IN RA PROCEDURE\_R1, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, no. Jeju; 20080812, 12 August 2008 (2008-08-12), XP050319457
- ASUSTEK: "Interactions between Msg3 transmission and TTI bundling" 3GPP TSG-RAN WG 2 #64BIS, R2-090133, [Online] 6 January 2009 (2009-01-06), pages 1-2, XP002559922 Retrieved from the Internet:  
URL:[http://www.3gpp.org/ftp/tsg\\_ran/WG2\\_RL2/TSGR2\\_64bis/Docs/](http://www.3gpp.org/ftp/tsg_ran/WG2_RL2/TSGR2_64bis/Docs/) [retrieved on 2010-01-11]

## Description

### Background of the Invention

#### 1. Field of the Invention

**[0001]** The present invention relates to a method and apparatus for handling Uplink Shared Channel (UL-SCH) transmission, and more particularly, to a method and apparatus for handling UL-SCH transmission in a UE of a wireless communication system according to the pre-characterizing clauses of claims 1 and 4.

#### 2. Description of the Prior Art

**[0002]** Long Term Evolution wireless communications system (LTE system), an advanced high-speed wireless communications system established upon the 3G mobile telecommunications system, supports only packet-switched transmission, and tends to implement both Medium Access Control (MAC) layer and Radio Link Control (RLC) layer in one single communication site, such as in Node B alone rather than in Node B and RNC (Radio Network Controller) respectively, so that the system structure becomes simple.

**[0003]** In the LTE system, a user equipment (UE) needs to initiate a random access procedure for any of the following events, to connect with a Node B. The events are: (1) Initial access from a RRC\_IDLE state; (2) Initial access after a radio link failure; (3) Handover; (4) Downlink data arrival during a RRC\_CONNECTED state; (5)

**[0004]** Uplink data arrival during RRC\_CONNECTED. The random access procedure can be performed by contention-based or non-contention-based manner depending on whether a Random Access Channel (RACH) resource used by the UE is assigned by the network or randomly selected by the UE itself.

**[0005]** Please refer to FIG.1, which is a schematic diagram of a contention-based random access procedure. As shown in FIG.1, the contention-based random access procedure mainly includes the following four steps: (1) Step "Random Access Preamble on RACH in uplink", (2) Step "Random Access Response on Downlink Shared Channel (DL-SCH)", (3) Step "Scheduled Transmission on Uplink Shared Channel (UL-SCH)", and (4) Step "Contention Resolution on Physical Downlink Control Channel (PDCCH) or DL-SCH". First, when RRC layer or MAC layer initiate a random access procedure, a UE randomly selects a RACH resource to transmit a random access preamble, also called Message 1 (Msg1), to Node B for requesting an uplink grant. A Random Access Response message, also called Message 2 (Msg2), carrying an uplink grant and a Temporary Cell Radio Network Temporary Identifier (Temporary C-RNTI) is then transmitted from the network to the UEs those sent the Random Access Preamble. Thus, the UEs using the same Random Access Preamble in Message 1 would receive the same

uplink grant and Temporary C-RNTI from Msg2 and use the same uplink grant to transmit a Scheduled Transmission message, also called Message 3 (Msg3), to the Node B, so as to cause contention between the UEs. The content carried by the Msg3 mainly includes uplink data and a User Equipment Identity (UE ID).

**[0006]** According to different trigger events, the UE ID carried in Message 3 can be divided into two types: Cell Radio Network Temporary Identifier MAC control element (C-RNTI MAC CE) and Common Control Channel Service Data Unit (CCCH SDU). The C-RNTI MAC CE includes a C-RNTI of the UE; while the CCCH SDU includes a UE Contention Resolution Identity provided by an upper layer. Therefore, when the Node B outputs a contention resolution message including a specific UE ID, also called Message 4 (Msg4), contention between the UEs can be solved. Please note that the way to handle Msg4 would be different depending on the UE ID type carried in Msg3. As for detailed description of the random access procedure, please refer to related MAC specifications, which are not narrated herein.

**[0007]** On the other hand, a technique of transmission time interval (TTI) bundling is introduced for improving uplink coverage in the prior art. TTI bundling is performed by repeatedly encoding and transmitting a same transport block (TB) in a set of consecutive TTIs, and those repeatedly transmitted packets are named a TTI bundle. UEs in cell boundary utilizing TTI bundling can reduce transmission delay and signaling of control channels for enhancing reliability and accuracy of data transmission, such that LTE uplink coverage can be improved.

**[0008]** According to current specifications, TTI bundling is characterized as below:

- (1) The same HARQ process is used for all transmissions within the TTI bundle.
- (2) TTI bundling is switched on/off per UE with higher layer signaling, e.g. Radio Resource Control (RRC) signaling. When switched on, TTI bundling would apply to all uplink transmissions using Physical Uplink Shared Channel (PUSCH).
- (3) A bundle is treated as a single resource, i.e., a single grant and a single HARQ feedback (e.g. acknowledgement ACK or non-acknowledgement NACK) is used for each bundle.

**[0009]** Therefore, the retransmission of a TTI bundle is also a TTI bundle. However, for each transmission (except a first transmission) within the TTI bundle, non-adaptive retransmissions are generated by the HARQ process according to a size of the TTI bundle, i.e. the number of consecutive TTIs in the bundle, without waiting for HARQ feedback from previous transmissions. Compared to new transmissions and adaptive retransmissions which are performed on the resource indicated on PDCCH, a non-adaptive retransmission is performed on the same resource as was used for the last transmission. Related HARQ operation is known by those skilled in the art, and

is not narrated herein.

**[0010]** It is worth noting that the HARQ Round Trip Time (RTT) for TTI bundling is doubled compared with the normal HARQ operation, i.e. non-TTI bundling operation. That is to say, if a first transmission of a bundle occurs at TTI  $k$ , retransmission of the bundle starts at TTI  $(k+2*\text{HARQ\_RTT})$ , where HARQ\_RTT represents the HARQ RTT of the normal HARQ operation. For example, in the current specification, the normal HARQ RTT is 8 ms, while the HARQ RTT for TTI bundling is 16ms.

**[0011]** According to the current specification, the HARQ process is applicable for the Msg3 transmission of a random access procedure. However, the network cannot know whether TTI bundling is activated when the UE performs a random access procedure, so TTI bundling does not apply to the Msg3 transmission. Therefore, the HARQ RTT of the Msg3 transmission is the same as the HARQ RTT of the normal HARQ operation even if TTI bundling is active in a UE. In this case, since the UE can only perform one UL HARQ transmission per TTI, the Msg3 transmission may collide with a retransmission of a previous TB already stored in UL HARQ buffer.

**[0012]** For example, please refer to Fig.2, which illustrates a situation that a UE performs an Msg3 transmission when TTI bundling is activated. According to the current specification, when TTI bundling is activated, the number of HARQ processes is 4, and the size of a TTI bundle is fixed to 4, as shown in Fig.2. Under this condition, an HARQ RRT for TTI bundling Bundle\_RTT is 16ms. Assume that the UE receives an UL grant for Msg3 transmission at time A and uses a first HARQ process (process id=1) to perform an initial Msg3 transmission. If the first HARQ process is already assigned to a transmission of a TTI bundle, the Msg3 transmission may collide with a non-adaptive retransmission of the TTI bundle.

**[0013]** On the other hand, assume the first HARQ process is not assigned to any TTI bundle transmission and completes the initial Msg3 transmission at time A. If the UE cannot successfully receive an ACK for the Msg3 transmission, the first HARQ process would perform an Msg3 retransmission after the HARQ RTT of the normal HARQ operation, i.e. at time B. In such situation, since the HARQ RTT of the Msg3 transmission is different from the HARQ RTT for TTI bundling, the Msg3 transmission may collide with a non-adaptive retransmission of a TTI bundle performed by a third HARQ process (process id=3).

**[0014]** In fact, even if TTI bundling is not active, the initial Msg3 transmission may also collide with a retransmission of the previous TB already stored in UL HARQ buffer, causing the UE at a loss.

**[0015]** R2-085612 discloses a Msg 3 transmission interrupted by an adaptive retransmission command. It is assumed that a random access procedure is initiated by an UL data resume before the transmission of a TB 'blah' is completed. The Msg 3 and the TB 'blah' cannot be transmitted simultaneously. It is therefore proposed that

during the random access procedure, an UL grant for retransmission addressed by the C-RNTI shall be ignored, if the grant is relevant to the HARQ process where Msg 3 is being processed.

**[0016]** EP 1 871 121 A2 discloses a method for constructing packets for MAC layer in a wireless communication system.

**[0017]** R2-084999 discloses a definition for Msg 3 of the random access procedure.

#### Summary of the Invention

**[0018]** It is therefore an objective of the present invention to provide a method and apparatus for handling up-link shared channel (UL-SCH) transmission, to avoid collision of transmissions.

**[0019]** The present invention discloses a method for handling UL-SCH transmission in a UE of a wireless communication system. The method comprises performing an UL-SCH retransmission; and prioritizing a Message 3 (Msg3) transmission for a random access procedure, when the Msg3 retransmission and a retransmission of a transport block (TB) already stored in an UL HARQ buffer of a HARQ process different from the one used by Msg3 are scheduled at same time.

**[0020]** The present invention also discloses a communication device for handling UL-SCH transmission in a UE of a wireless communication system. The communication device comprises a processor for executing a program; and a memory, coupled to the processor, for storing the program. The program comprises performing an UL-SCH transmission; and prioritizing an Msg3 retransmission for a random access procedure, when the Msg3 retransmission and a retransmission of a TB already stored in an UL HARQ buffer of a HARQ process different from the one used by Msg3 are scheduled at same time.

**[0021]** These and other objectives of the present invention will no doubt become obvious to those of ordinary skill in the art after reading the following detailed description of the preferred embodiment that is illustrated in the various figures and drawings.

#### Brief Description of the Drawings

**[0022]**

FIG.1 is a schematic diagram of a contention-based random access procedure.

Fig.2 illustrates a situation that a UE performs an Msg3 transmission when TTI bundling is active.

FIG.3 is a schematic diagram of a wireless communications system.

FIG.4 is a functional block diagram of a communications device.

FIG.5 is a schematic diagram of a program shown in FIG.4.

Fig.6 is a schematic diagram of a process according to an embodiment of the present invention.

## Detailed Description

**[0023]** Please refer to FIG.3, which is a schematic diagram of a wireless communications system 10. The wireless communications system 10 is preferred to be a Long Term Evolution (LTE) communications system, and is briefly formed with a network terminal and a plurality of user equipments (UEs). In FIG.3, the network terminal and the UEs are simply utilized for illustrating the structure of the wireless communications system 10. Practically, the network terminal may include a plurality of evolved base stations (eNBs), an evolved UMTS radio access network (EUTRAN) and so on according to actual demands, and the UEs can be apparatuses such as mobile phones, computer systems, etc.

**[0024]** Please refer to FIG.4, which is a functional block diagram of a communications device 100. The communications device 100 can be utilized for realizing the UEs in FIG.3. For the sake of brevity, FIG.4 only shows an input device 102, an output device 104, a control circuit 106, a central processing unit (CPU) (or processor)108, a memory 110, a program 112, and a transceiver 114 of the communications device 100. In the communications device 100, the control circuit 106 executes the program 112 in the memory 110 through the CPU 108, thereby controlling an operation of the communications device 100. The communications device 100 can receive signals input by a user through the input device 102, such as a keyboard, and can output images and sounds through the output device 104, such as a monitor or speakers. The transceiver 114 is used to receive and transmit wireless signals, delivering received signals to the control circuit 106, and outputting signals generated by the control circuit 106 wirelessly. From a perspective of a communications protocol framework, the transceiver 114 can be seen as a portion of Layer 1, and the control circuit 106 can be utilized to realize functions of Layer 2 and Layer 3.

**[0025]** Please continue to refer to FIG.5, which is a schematic diagram of the program 112 shown in FIG.4. The program 112 includes an application layer 200, a Layer 3 202, and a Layer 2 206, and is coupled to a Layer 1 218. The Layer 3 202 includes a Radio Resource Control (RRC) entity, and is utilized for realizing resource control. The Layer 2 206 includes a Radio Link Control (RLC) entity and a Medium Access Control (MAC) entity, and is utilized for realizing link control. The Layer 1 218 is utilized for realizing physical link.

**[0026]** In LTE system, if a UE performs an Msg3 transmission when TTI bundling is active, since TTI bundling does not apply to the Msg3 transmission and the UE can only perform one uplink HARQ transmission per TTI, the Msg3 transmission may collide with a retransmission of a previous TB already stored in UL HARQ buffer. The Msg3 transmission is an uplink shared channel (UL-SCH) transmission triggered by a random access procedure, and an Msg3 includes a cell radio network temporary identifier MAC control element (C-RNTI MAC CE) or a

common control channel service data unit (CCCH SDU), which is known by those skilled in the art, and not narrated herein.

**[0027]** In this case, the embodiment of the present invention provides an uplink shared channel (UL-SCH) transmission handling program 220 in the program 112, for preventing an Msg3 transmission from colliding with a retransmission of a previous TB already stored in UL HARQ buffer. Please refer to Fig.6, which is a schematic diagram of a process 60 according to the embodiment of the present invention. The process 60 is utilized for handling UL-SCH transmission in a UE of the wireless communication system 10, and includes the following steps:

- Step 600: Start.
- Step 602: Perform an UL-SCH transmission.
- Step 604: Prioritize an Msg3 transmission when the Msg3 transmission and a retransmission of a TB already stored in an UL HARQ buffer of the UE are scheduled at same time.
- Step 606: End.

**[0028]** According to the process 60, when the UL-SCH transmission is performed, if the Msg3 transmission and the retransmission of the TB already stored in the UL HARQ buffer of the UE are scheduled at the same time, the UE prioritizes the Msg3 transmission over the existing retransmission. As a result, the embodiment of the present invention can prevent the Msg3 transmission from colliding with the retransmission of the previous TB already stored in the UL HARQ buffer.

**[0029]** In the embodiment of the present invention, the said Msg3 is generated by a contention-based random access procedure, and the contention-based random access procedure is preferably initiated due to uplink data arrival. As known by those skilled in the art, the Msg3 transmission is mainly used for providing UE's information, such as data amount to be transmitted, to the network, so the Msg3 transmission is more essential to system scheduling efficiency. In such a situation, the embodiment of the present invention prioritizes the Msg3 transmission over the existing retransmission, for enhancing system efficiency.

**[0030]** For example, please continue to refer to Fig.2. Assume that the UE receives an UL grant for an Msg3 transmission at time A and uses a first HARQ process (process id=1) to perform an initial Msg3 transmission. If the first HARQ process is already assigned to a transmission of a TTI bundle, the Msg3 transmission may collide with a non-adaptive retransmission of the TTI bundle. In such situation, the embodiment of the present invention prioritizes the Msg3 transmission to avoid transmission collision. Besides, the Msg3 transmission can be considered as a new transmission of the first HARQ process, so the embodiment of the present invention further replaces the TB already stored in the UL HARQ buffer with a TB stored in an Msg3 buffer of the UE.

[0031] On the other hand, assume that the first HARQ process completes the initial Msg3 transmission at time A. If the UE cannot successfully receive an ACK for the Msg3 transmission, the first HARQ process would perform an Msg3 retransmission after an HARQ RTT of the normal HARQ operation, i.e. at time B. Since the HARQ RTT of the Msg3 transmission is different from the HARQ RTT for TTI bundling, the Msg3 transmission may collide with a non-adaptive retransmission of a TTI bundle performed by a third HARQ process (process id=3). In such a situation, the embodiment of the present invention prioritizes the Msg3 transmission, and skips the retransmission of the TB stored in the UL HARQ buffer of the third HARQ process, so as to avoid transmission collisions. More specifically, the embodiment of the present invention can flush the UL HARQ buffer of the third HARQ process to skip the retransmission of the TB stored in the UL buffer. Such variation also belongs to the present invention.

[0032] Of course, in the embodiment of the present invention, the said TB retransmission is not limited to a non-adaptive retransmission, and can be an adaptive retransmission as well. As a result, when TTI bundling is not active, the embodiment of the present invention can also prevent the initial Msg3 transmission from colliding with the retransmission of the previous TB already stored in the UL HARQ buffer.

[0033] To sum up, the embodiment of the present invention provides a method for handling the UL-SCH transmission, to prevent the Msg3 transmission from colliding with the retransmission of the previous TB already stored in the UL HARQ buffer, such that the system performance can be improved.

[0034] Those skilled in the art will readily observe that numerous modifications and alterations of the device and method may be made while retaining the teachings of the invention.

## Claims

1. A method for handling uplink shared channel, UL-SCH, transmission in a user equipment, UE, of a wireless communication system, the method comprising:

performing an UL-SCH transmission (602); and

### characterized by

prioritizing a Message 3, Msg3, retransmission for a random access procedure when the Msg3 retransmission and a retransmission of a transport block, TB, already stored in an UL HARQ buffer of a HARQ process different from the one used by Msg3 are scheduled at same time (604).

2. The method of claim 1, **characterized in that** the

method further comprises skipping the retransmission of the TB.

3. The method of claim 1, **characterized in that** the retransmission of the TB can be an adaptive retransmission or a non-adaptive retransmission.

4. A communication device (100) for handling uplink shared channel, UL-SCH, transmission in a user equipment, UE, of a wireless communication system (10), the communication device (100) comprising:

a processor (108) for executing a program (112); and

a memory (110), coupled to the processor (108), for storing the program (112),

wherein the program (112) comprises:

performing an UL-SCH transmission; and

### characterized by

prioritizing a Message 3, Msg3, retransmission for a random access procedure when the Msg3 retransmission and a retransmission of a transport block, TB, already stored in an UL HARQ buffer of a HARQ process different from the one used by Msg3 are scheduled at same time.

5. The communication device of claim 4, **characterized in that** the program (112) further comprises skipping the retransmission of the TB.

6. The communication device of claim 4, **characterized in that** the retransmission of the TB can be an adaptive retransmission or a non-adaptive retransmission.

7. The method of any one of claims 1 to 3, or the communication device of any one of claims 4 to 6, **characterized in that** the retransmission of the TB belongs to a transmission time interval (TTI) bundle.

8. The method of any one of claims 1 to 3 and 7 or the communication device of any one of claims 4 to 7, **characterized in that** the Msg3 transmission is an uplink transmission on UL-SCH triggered by a random access procedure, and an Msg3 comprises a cell radio network temporary identifier MAC control element (C-RNTI MAC CE) or a common control channel service data unit (CCCH SDU).

9. The method any one of claims 1 to 3 and 7 to 8 or the communication device of any one of claims 4 to 8, **characterized in that** the random access procedure is initiated due to uplink data arrival.

10. The method of any one of claims 1 to 3 and 7 to 9

or the communication device of any one of claims 4 to 9, **characterized in that** the said same time is a same TTI.

### Patentansprüche

1. Verfahren zum Handhaben einer über einen gemeinsam zu nutzenden Aufwärtsstrecke-Kanal, uplink shared channel-UL-SCH, erfolgenden Übertragung, UL-SCH-Übertragung, in einem Endgerät, UE, eines drahtlosen Kommunikationssystems, wobei das Verfahren umfasst:

Durchführen einer UL-SCH-Übertragung (602); und ist

#### gekennzeichnet durch:

Priorisieren einer erneuten Übertragung einer Message 3, Msg3, für einen einen wahlfreien Zugriff betreffenden Vorgang, random access procedure, wenn die erneute Übertragung der Msg3 und eine erneute Übertragung eines Transportblockes, TB, der in einem UL HARQ-Puffer eines HARQ-Prozesses, der gegenüber dem für die Msg3 verwendeten unterschiedlich ist, bereits gespeichert ist, zur gleichen Zeit eingeplant sind (604).

2. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, dass** das Verfahren weiterhin umfasst:

Überspringen der erneuten Übertragung des TBs.

3. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, dass** die erneute Übertragung des TBs eine adaptive erneute Übertragung oder eine nicht-adaptive erneute Übertragung sein kann.

4. Kommunikationsvorrichtung (100) zum Handhaben einer über einen gemeinsam zu nutzenden Aufwärtsstrecke-Kanal, uplink shared channel-UL-SCH, erfolgenden Übertragung, UL-SCH-Übertragung, in einem Endgerät, UE, eines drahtlosen Kommunikationssystems (10), wobei die Kommunikationsvorrichtung (100) umfasst:

einen Prozessor (108) zum Ausführen eines Programms (112); und  
einen mit dem Prozessor (108) gekoppelten Speicher (110) zum Speichern des Programms (112), wobei das Programm (112) umfasst:

Durchführen einer UL-SCH-Übertragung; und

#### gekennzeichnet ist durch:

Priorisieren einer erneuten Übertragung einer Message 3, Msg3, für einen einen wahlfreien Zugriff betreffenden Vorgang, random access procedure, wenn die erneute Übertragung der Msg3 und eine erneute Übertragung eines Transportblockes, TB, der in einem UL HARQ-Puffer eines HARQ-Prozesses, der gegenüber dem für die Msg3 verwendeten unterschiedlich ist, bereits gespeichert ist, zur gleichen Zeit eingeplant sind.

5. Kommunikationsvorrichtung nach Anspruch 4, **dadurch gekennzeichnet, dass** das Programm (112) weiterhin umfasst:

Überspringen der erneuten Übertragung des TBs.

6. Kommunikationsvorrichtung nach Anspruch 4, **dadurch gekennzeichnet, dass** die erneute Übertragung des TBs eine adaptive erneute Übertragung oder eine nicht-adaptive erneute Übertragung sein kann.

7. Verfahren nach einem der Ansprüche 1 bis 3 oder Kommunikationsvorrichtung nach einem der Ansprüche 4 bis 6, **dadurch gekennzeichnet, dass** die erneute Übertragung des TBs zu einem Bündel von Übertragungs-Zeitintervallen (TTI) transmission time interval bundle, gehört.

8. Verfahren nach einem der Ansprüche 1 bis 3 und 7 oder Kommunikationsvorrichtung nach einem der Ansprüche 4 bis 7, **dadurch gekennzeichnet, dass** die Übertragung der Msg3 eine über den UL-SCH erfolgende Aufwärtsstrecke-Übertragung, uplink transmission, ist, die durch einen einen wahlfreien Zugriff betreffenden Vorgang, random access procedure, getriggert wird, und eine Msg3 ein MAC-Steuerelement für einen temporären Zellen-Funknetzwerk-Identifikator, cell radio network temporary identifier MAC control element (C-RNTI MAC CE), oder eine Service-Dateneinheit für einen üblichen Steuerkanal, common control channel service data unit (CCCH SDU), ist.

9. Verfahren nach einem der Ansprüche 1 bis 3 und 7 bis 8 oder Kommunikationsvorrichtung nach einem der Ansprüche 4 bis 8, **dadurch gekennzeichnet, dass** der einen wahlfreien Zugriff betreffenden Vorgang bei Ankunft von Aufwärtsstrecke-Daten, uplink data, initiiert wird.

10. Verfahren nach einem der Ansprüche 1 bis 3 und 7 bis 9 oder Kommunikationsvorrichtung nach einem

der Ansprüche 4 bis 9, **dadurch gekennzeichnet, dass** die genannte gleiche Zeit ein und dasselbe TTI ist.

## Revendications

1. Procédé pour gérer une transmission sur un canal partagé de liaison montante, UL-SCH, dans un équipement utilisateur, UE, d'un système de communication sans fil, le procédé comprenant le fait :

d'effectuer une transmission UL-SCH (602) ; et

### caractérisé par

la priorisation d'une retransmission de Message 3, Msg3, pour une procédure d'accès aléatoire lorsque la retransmission de Msg3 et une retransmission d'un bloc de transport, TB, déjà stocké dans une mémoire tampon UL HARQ d'un processus HARQ différent de celui utilisé par Msg3 sont programmées en même temps (604).

2. Procédé de la revendication 1, **caractérisé en ce que** le procédé comprend en outre le fait d'omettre la retransmission du TB.
3. Procédé de la revendication 1, **caractérisé en ce que** la retransmission du TB peut être une retransmission adaptative ou une retransmission non adaptative.
4. Dispositif de communication (100) pour gérer une transmission sur un canal partagé de liaison montante, UL-SCH, dans un équipement utilisateur, UE, d'un système de communication sans fil (10), le dispositif de communication (100) comprenant :

un processeur (108) pour exécuter un programme (112) ; et  
une mémoire (110), couplée au processeur (108), pour stocker le programme (112),  
où le programme (112) comprend le fait :

d'effectuer une transmission UL-SCH ; et

### caractérisé par

la priorisation d'une retransmission de Message 3, Msg3, pour une procédure d'accès aléatoire lorsque la retransmission de Msg3 et une retransmission d'un bloc de transport, TB, déjà stocké dans une mémoire tampon UL HARQ d'un processus HARQ différent de celui utilisé par Msg3 sont programmées en même temps.

5. Dispositif de communication de la revendication 4, **caractérisé en ce que** le programme (112) comprend en outre le fait d'omettre la retransmission du TB.

6. Dispositif de communication de la revendication 4, **caractérisé en ce que** la retransmission du TB peut être une retransmission adaptative ou une retransmission non adaptative.

7. Procédé de l'une quelconque des revendications 1 à 3, ou le dispositif de communication de l'une quelconque des revendications 4 à 6, **caractérisé en ce que** la retransmission du TB appartient à un groupe d'intervalles de temps de transmission (TTI).

8. Procédé de l'une quelconque des revendications 1 à 3 et 7 ou le dispositif de communication de l'une quelconque des revendications 4 à 7, **caractérisé en ce que** la transmission de Msg3 est une transmission en liaison montante sur UL-SCH déclenchée par une procédure d'accès aléatoire, et un Msg3 comprend un élément de commande MAC d'identifiant temporaire de réseau radio cellulaire (C-RNTI MAC CE) ou une unité de données de service de canal de commande commun (CCCH SDU).

9. Procédé de l'une quelconque des revendications 1 à 3 et 7 à 8 ou le dispositif de communication de l'une quelconque des revendications 4 à 8, **caractérisé en ce que** la procédure d'accès aléatoire est lancée en raison de l'arrivée de données de liaison montante.

10. Procédé de l'une quelconque des revendications 1 à 3 et 7 à 9 ou le dispositif de communication de l'une quelconque des revendications 4 à 9, **caractérisé en ce que** ledit même temps est un même TTI.

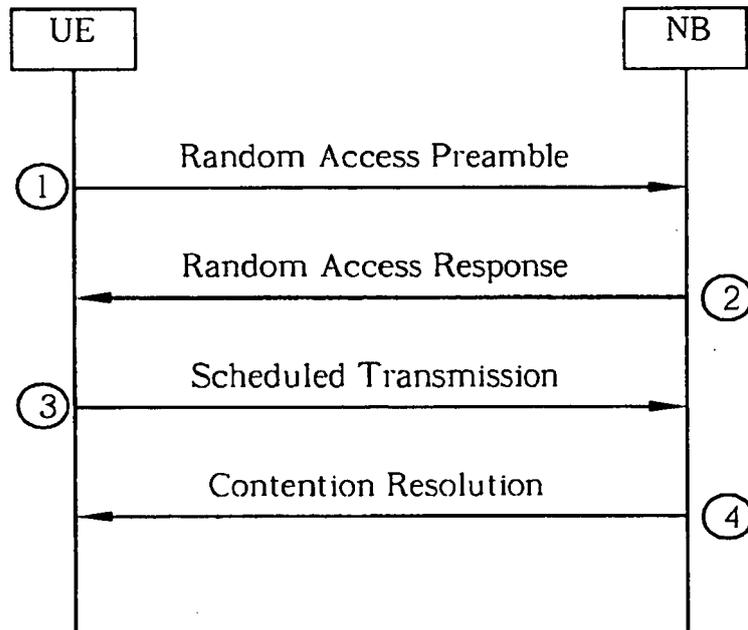


FIG. 1

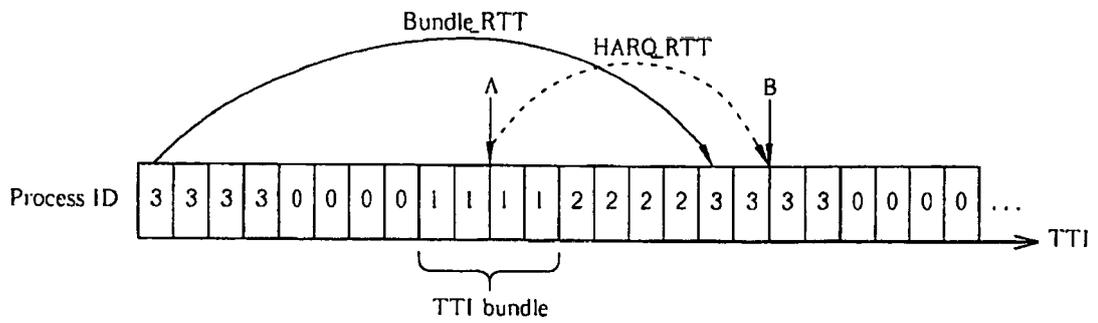


FIG. 2

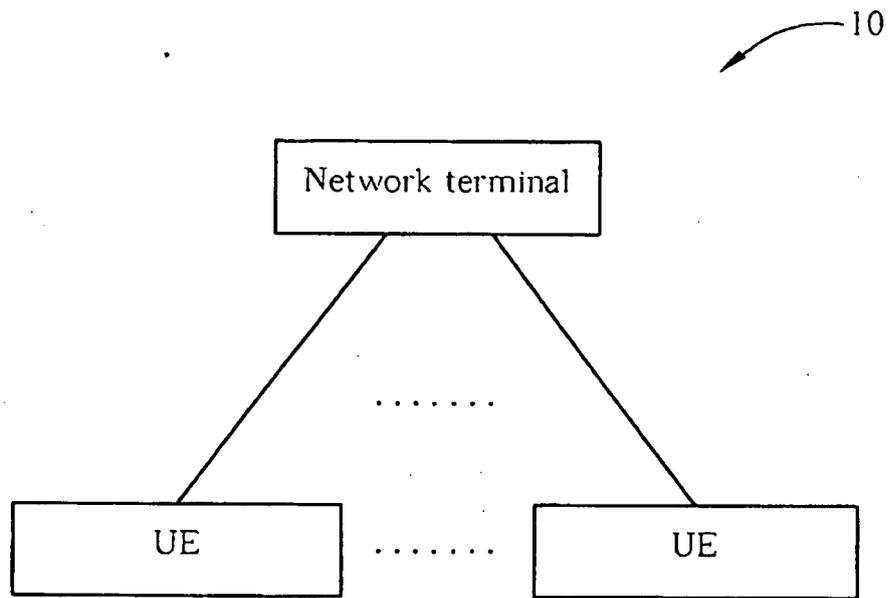


FIG. 3

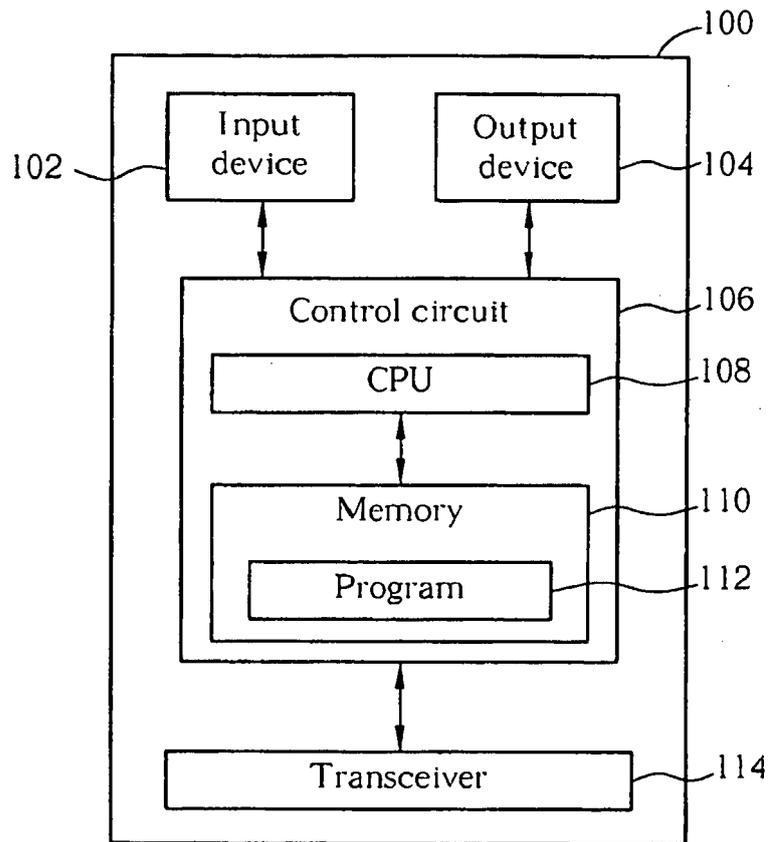


FIG. 4

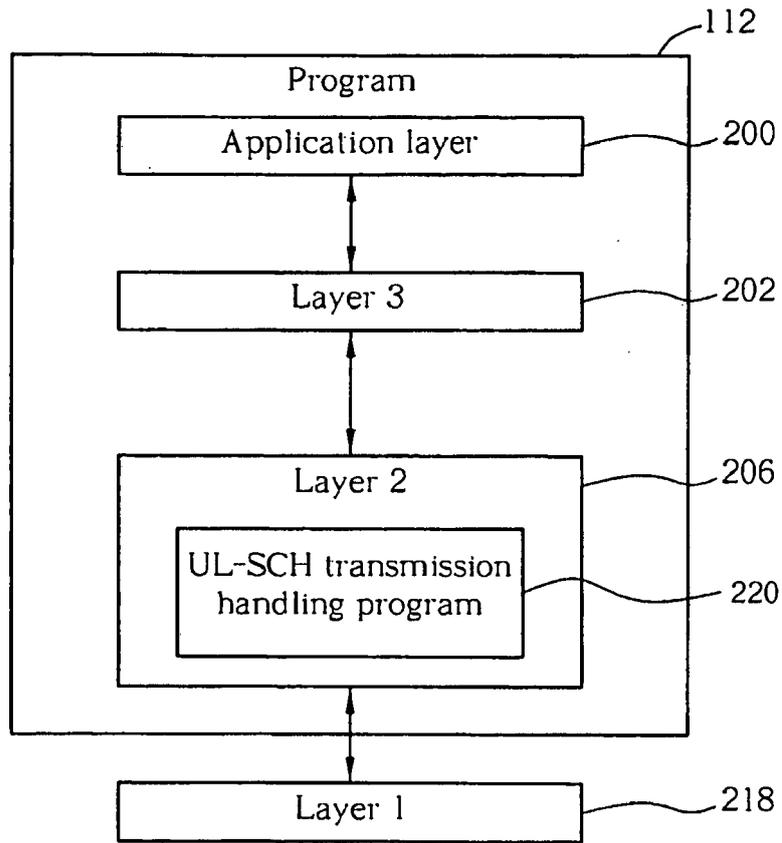


FIG. 5

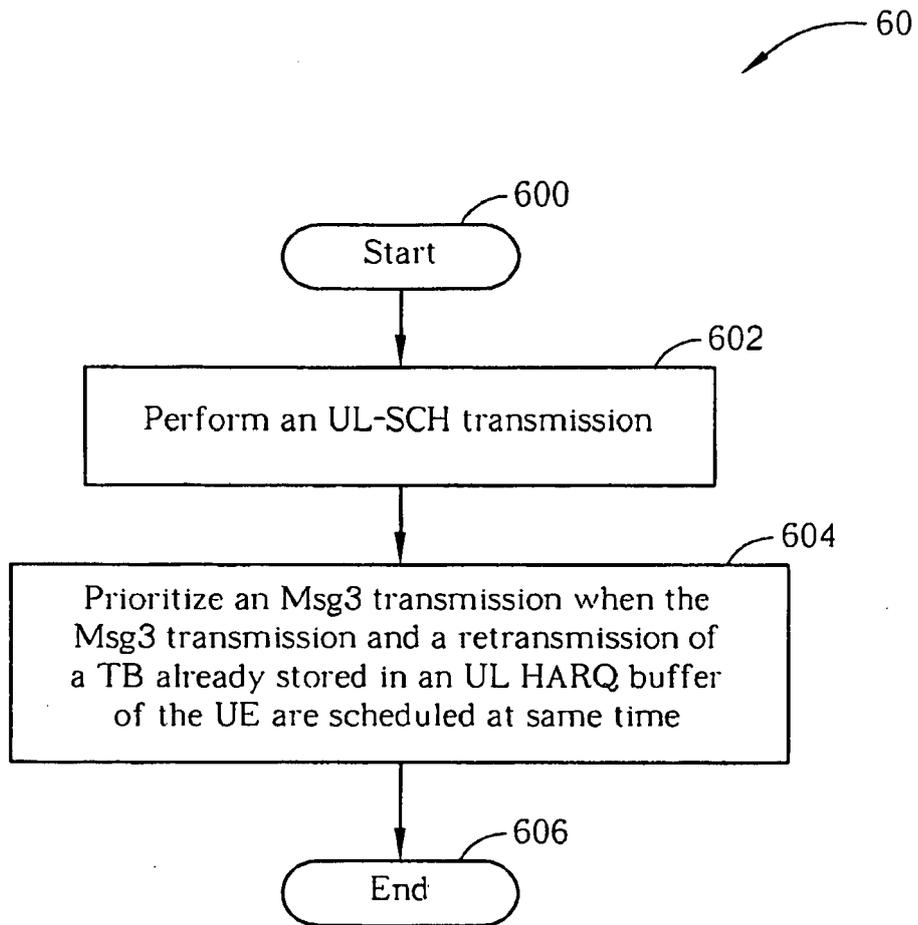


FIG. 6

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- EP 1871121 A2 [0016]