



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
19.05.2010 Bulletin 2010/20

(51) Int Cl.:
B65H 35/00 (2006.01)

(21) Application number: **09151300.2**

(22) Date of filing: **26.01.2009**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK TR
Designated Extension States:
AL BA RS

(72) Inventor: **Chiu, Tzu-Chin**
510, YuanlinTown, Changhua County (TW)

(74) Representative: **Liedtke, Markus**
Liedtke & Partner
Patentanwälte
Elisabethstraße 10
99096 Erfurt (DE)

(30) Priority: **18.11.2008 TW 97220644 U**

(71) Applicant: **Caimon Enterprise Co., Ltd**
Changhua County 510 (TW)

(54) **Tape Cutting Dispenser**

(57) The present invention provides a tape cutting dispenser comprising a body (110), a pair of a holders (170) and a cutting device (200). The body has two opposite walls (120), each of the walls has a hole (130) and an accommodating space is formed between the two walls (120). The holder (170) is disposed in the hole (120). Each of the holders (170) has a protruding portion

(172) protruding toward the wall (120) along an axial direction (A) and further has an elastic element (180). The elastic element (180) has axial flexibility and the elasticity bending away from the axial direction, such that the protruding portion (172) of the holder (170) is recoverably bendable away from the axial direction. The cutting device (200) is disposed on the body (110) opposite to the accommodating space (150).

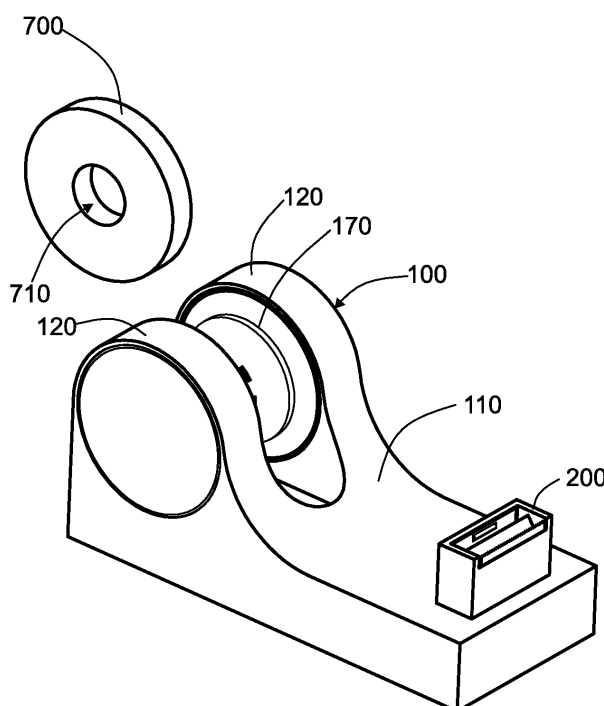


Fig. 2a

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates to a tape dispenser, and more particularly the present invention relates to a tape cutting dispenser which has a holder recoverably bending away from an axial direction.

2. Description of the Prior Art

[0002] Tapes have become an indispensable product in modern life, for use at home, office, medical treatment or factory, etc. However, in order to use the tapes and cut the tape more convenient, therefore, the tape dispenser is invented.

[0003] As Fig. 1 shows, the conventional tape dispenser includes a dispenser body 10, a roller 12 and a cutting blade 14. The dispenser body 10 has a taping trough 16 for accommodating the tape 70. The two side walls of the roller 12 have a protruding shaft 20 while the two sides of the taping trough 16 has a gap 18 for positioning the shaft 20 of the roller 12. When pulling the tape 70 toward the cutting blade 14, the cutting blade 14 will cut the tape in a demanded position.

[0004] To replace the tape 70, the roller 12 is took off from the taping trough 16, a ring core 72 of the tape 70 engages with the outer circumference of the roller 12, and then the shaft 20 is put into the gap 18 of the taping trough 16 to finish the replacement of the new tape 70.

[0005] After the conventional tape dispenser is used for a period of time, the shaft 20 of the roller 12 may be broken, even the whole roller 12 may be missing. As a result, a user must buy a new roller 12 to maintain the tape dispenser as useable. The present invention is provided to improve the aforesaid problems and achieve other objectives as follows.

SUMMARY OF THE INVENTION

[0006] It is an objective of the present invention to provide a tape cutting dispenser with a simplified and easily assembled structure.

[0007] It is another objective of the present invention to provide a tape cutting dispenser that can be used with several different sizes/dimensions of tape.

[0008] It is another objective of the present invention to provide a tape cutting dispenser for quickly replacing and/or positioning a tape.

[0009] The present invention provides a tape cutting dispenser comprising a body, a pair of a holders and a cutting device. The body has two opposite walls, each of the walls has a hole and an accommodating space is formed between the two walls. The holder is disposed in the hole. Each of the holders has a protruding portion protruding toward the wall along an axial direction and

further has an elastic element. The elastic element has axial flexibility and the elasticity bending away from the axial direction, such that the protruding portion of the holder is recoverably bendable away from the axial direction. The cutting device is disposed on the body opposite to the accommodating space.

[0010] In the preferable embodiment further includes at least one cover that provides to cover the outside surface of the hole of the wall. The cover has at least one female connecting portion while the inner circumference of the hole has at least one male connecting portion engages with the female connecting portion. In addition, the inner axial center of the holder has a first positioning pillar for engaging with one end of the elastic element; the inner surface of the cover has a second positioning pillar corresponding to the first positioning pillar for engaging with the other end of the elastic element. The holder has at least one guiding portion extending out of a rim of the holder while the hole of the wall has at least one guiding groove to receive the guiding portion.

[0011] In the other preferred embodiment, the holder may be replaced with a holder module. In other words, the holder module includes a holder and the fastening sleeve, the holder can axially moveable along the fastening sleeve. The side wall of the fastening sleeve further forms at least one aperture while the wall has at least one hook engaging with the aperture. In addition, one side of the fastening sleeve and the cover are preferably integrately formed to cover the outside surface of the hole of the wall.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] Fig. 1 shows an exploded view of a conventional tape dispenser;

[0013] Fig. 2a shows a first embodiment of the present invention of the tape cutting dispenser;

[0014] Fig. 2b shows a front view of the present invention of the tape cutting dispenser;

[0015] Fig. 3 shows an exploded view of the present invention of the tape cutting dispenser;

[0016] Fig. 4 shows a cross-sectional view of the present invention to assemble a tape;

[0017] Fig. 5a shows an operation view of the present invention to assemble the tape;

[0018] Fig. 5b shows a final operation view of the present invention to assemble the tape;

[0019] Fig. 6a shows an operation view of the present invention to disassemble the tape;

[0020] Fig. 6b shows a final operation view of the present invention to disassemble the tape;

[0021] Fig. 7 shows another embodiment of the holder assembling the hole according to the present invention;

[0022] Fig. 8a shows an exploded view of the holder module of the present invention;

[0023] Fig. 8b shows an assembling view of the holder module of the present invention; and

[0024] Fig. 9 shows another embodiment of the tape

cutting dispenser of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0025] The present invention provides a tape cutting dispenser with a simplified and easily assembled structure. In the preferred embodiment, the tape cutting dispenser is provided for using with stationery tapes, and its used field such as school, office or other relative places. The dimension (width of the tape) of the stationery tape includes, but not limit to, 1/2, 3/4 and 1 inch. In other embodiments, however, the tape cutting dispenser may apply not only to stationery tape, but also to the usage at home, medical treatment or commercially factory. In order to illustrate the present invention, various embodiments and structures thereof are described below and are accompanied with drawings.

[0026] As Fig. 2a, 2b and 3 show, the present invention of the tape cutting dispenser 100 includes a body 110, a pair of holders 170 and a cutting device 200. The body 110 has two opposite walls 120, and each of the walls 120 has a hole 130 and an accommodating space 150 is formed between the two walls 130. In the present embodiment, the accommodating space 150 preferably is formed between the two walls 120, such that each of the walls 120 of the body 110 is not connected to each other. In other different embodiments, however, the wall 120 of the body 110 may be connected to each other to enclose the accommodating space 150 (not illustrated). Two holders 170 are disposed within each of the holes 130 and restrictably moveable in the hole 130. The holder 170 has a protruding portion 172 for engaging with the ring core 710 of the tape 700.

[0027] In the embodiment shown in Fig. 3, the protruding portion 172 of the holder 170 preferably includes a cone casing 176, a top surface 178 and a flange 184, wherein the top surface 178 is located on the top end of the cone casing 176, and the flange 184 is disposed on the bottom end of the cone casing 176. In other embodiments, however, the protruding portion 172 may also be constructed of an arc-curved surface or/and other proper shapes. In the embodiment shown in Fig. 2b and 3, the surface of the protruding portion 172 (i.e. the cone casing 176) preferably has a plurality of dents 177, at least one of the surfaces of the dents 177 is disposed parallel to the top surface 178 for fixing the ring core 710 of the tape 700 to prevent the tape 700 from moves along the cone surface of the cone casing 176 (as Fig. 2b shown). The diameter of the top surface 178 is smaller than the diameter of the ring core 710 such that the ring core 710 of the tape 700 can pass through and engage with the cone casing 176.

[0028] In addition, in the embodiment shown in Fig. 3, the present embodiment further includes two covers 230 to cover the outside surface of the hole 130 of the wall 120. In other embodiments, however, the cover 230 and the outside surface of the wall 120 may also be integrately

formed. Thus, when the holder 170 assembles in the hole 130 of the wall 120, the holder 170 has to assemble from inside (i.e., from the space between the two walls 120). The cover 230 preferably has at least one female connecting portion 232 extending out of a rim of the holder 170 while the wall 120 around the hole 130 has a male connecting portion 122 for engaging with the female connecting portion 232. The above-mentioned of the female connecting portion 232 is preferably being a side border which has an opening, and the male connecting portion 122 is preferably being a protrusion, such that the protrusion is capable of engaging with the side border. In another embodiment, however, the arrangement of the female connecting portion 232 and the male connecting portion 122 may be reversed or use other proper elements, such as hook-loop, Velcro tape, fastening tape, etc.

[0029] The cutting device 200 is disposed on the body 110 opposite to the accommodating space 150. The cutting device 200 includes a cutting blade 210 and a bladed seat 220, wherein the cutting blade 220 is disposed on the bladed seat 220. A user may pull out the tape 700 and then take an appropriate length of the tape to cut it off on the cutting device 200. Moreover, the tape cutting dispenser 100 further has a base 190 for assembling beneath the body 110. A plurality of clips 192 are disposed on the top edge of the base 190 for engaging with the fasteners (not illustrated in the drawings) which are disposed corresponding to the clips 192. In another embodiment, however, the base 190 and the body 110 may also be integrately formed.

[0030] Please also refer to Fig. 4, each of the protruding portions 172 of the holders 170 protrudes toward the opposite wall 120 along an axial direction A. The holder 170 further has an elastic element 180. In the preferred embodiment, inner center of the holder 170 has a first positioning pillar 174 of the axial direction A for engaging with one end of the elastic element 180; inner surface of the cover 230 has the second position pillar 234 corresponding to the first positioning pillar 174 so as to engage with the other end of the elastic element 180. In another embodiment, however, the inner surface of the cover 230 may also be disposed without the second positioning pillar 234, the end of the elastic element 180 may simply contact with the inner surface of the cover 230 without further engagement. The first positioning pillar 174 and the second positioning pillar 234 mentioned-above are preferably a cylinder, and their diameter are smaller than the diameter of the elastic element 180. In other embodiments, however, the first positioning pillar 174 and the second positioning pillar 234 may also be a trough (not illustrated) for receiving the two ends of the elastic element 180. In addition, the elastic element 180 is preferably a spiral compression spring. In other embodiments, however, the elastic element 180 may also be an extension spring, a torsion spring or other proper springs.

[0031] Moreover, one side of the wall 120 around the hole 130 is preferably having a limiting portion 126 cor-

responding to the flange 184 for restricting the movement of the holder 170 along the axial direction A. In other words, when no external force is exerted to the elastic element 180, the flange 184 of the holder 170 will contact and restrict by the limiting portion 126 of the wall 120 due to the extensibility of the elastic element 180. At the same time, the two top surfaces 178 of the holder 170 preferably do not contact with each other.

[0032] In order to further illustrate the present invention, relating steps and various embodiments thereof are described below. As Fig. 5a and 5b shows, when the tape 700 is inserted into the tape cutting dispenser 100, the tape 700 contacts with the protruding portion 172 of the holder 170, such that the holder 170 is forced to bend downwardly and away from the axial direction A. In this stage, the elastic element 180 disposed inside the holder 170 will be axially compressed after receiving the external force and bend away from the axial direction A. The limiting portion 126 in association with the flange 184 of the holder 170 to confine the holder 170 within the hole 130 of the wall 120. Therefore, when the tape 700 pushes the holder 170 downwards, the elastic element 180 will be axial compressed and downwardly bend away from the axial direction A simultaneously until the ring core 710 of the tape 700 engages and positions on the protruding portion 710 of the holder 170. Afterwards, a rebound elastic force of the elastic element 180, recovers the holder 170 back to its original length and position.

[0033] Fig. 6a and 6b illustrate the disassembling of the tape and the tape cutting dispenser. When the tape 700 pulls the holder 170 upwards, the elastic element 180 disposed inside the holder 170 will be axially compressed and bent upwards away from the axial direction A. As shown in the present embodiment mentioned-above, the holder 170 is confined within the hole 130 by means of the limiting portion 126 of the hole 130. After the tape 700 entirely disengages from the holder 170, the elastic element 180 recovers the holder 170 back to its original length and position. Therefore, even though the size of the tape 700 changes, when replacing the tape 700, the holder 170 may move inside the hole 130 and then rebound quickly by means of the elasticity of the elastic element 180.

[0034] In order to increase the stability of bending motion away from the axial direction A of the holder 170, the holder 170 further has at least one guiding portion 182 disposed on the rim of the flange 184, as Fig. 7 shown. At least one guiding groove 124 corresponding to the guiding portion 182 is disposed on the wall 120 which enclosing the hole 130 for guiding the guiding portion 182. In the embodiment shown in Fig. 7, the width of the guiding groove 124 is greater than the width of the guiding portion 182, such that the holder 170 can be bent appropriate ranges/angles. When assembling or disassembling the tape with the tape cutting dispenser, the bending ranges/angles away the axial direction A of the holder 170 will be limited to the guiding groove 124, thus, unnecessary interference between the flange 184 and the

side wall of the hole 130 can be avoided, and allow the holder 170 to return to its original position/status.

[0035] Fig. 8a, Fig. 8b and Fig. 9 show another preferable embodiment of the present invention. In the present embodiment, the holder 170 may also be replaced by a holder module 300. The holder module 300, which includes a holder 170 and the fastening sleeve 310, is disposed in the hole 130. The holder 170 is axially moveable along the fastening sleeve 310. In the embodiment shown in Fig. 8a and Fig. 8b, a pair of the guiding portions 182 are disposed on the rim of the flange 184 of the holder 170 while the inner wall of the fastening sleeve 310 has two second guiding groove 340, thereby the guiding portion 182 can be moved axially along the second guiding grooves 340. In particular, the dimension of the second guiding groove 340 is preferably greater than the width of the guiding portion 182, such that the guiding portion 182 can be bent away from the axial direction A with appropriate ranges/angles. The shape of the guiding portion 182 is preferably an arc shape so as to move smoothly at the second guiding portion 340.

[0036] Furthermore, in the present embodiment, the limiting portion 126 is preferably disposed on the fastening sleeve 310 which is corresponding to the rim of the cover 230 for engaging with the flange 184 of the holder 170. One side of the fastening sleeve 310 and the cover 230 are preferably integrately formed to cover the outside surface of the hole 130 of the wall 120. The side wall of the fastening sleeve 310 further forms at least one opening 320 while the wall 120 near the hole 130 has at least one hook 330 engaging with the opening 320. Therefore, the holder module 300 can be engaged with the opening 320 of the fastening sleeve 310 to position in the hole 130 by the hook 330. The relative structure of the holder 170 and the relative assembling steps about the tape 700 assembling with the tape cutting dispenser 100 please refer to the above-mentioned embodiments.

[0037] Although the preferred embodiments of the present invention have been described herein, the above description is merely illustrative. Further modification of the invention herein disclosed will occur to those skilled in the respective arts and all such modifications are deemed to be within the scope of the invention as defined by the appended claims.

Claims

1. A tape cutting dispenser, comprising:

a body has two opposite walls, each of the walls having a hole, wherein an accommodating space is formed between the walls;
a pair of holders disposed in each of the holes, wherein the holder has a protruding portion protruding toward the opposite wall along an axial direction, the holder further has an elastic element having axial flexibility and the elasticity

- bending away from the axial direction, such that the protruding portion of the holder is recoverably bendable away from the axial direction; and a cutting device disposed on the body opposite to the accommodating space.
2. The tape cutting dispenser of claim 1 further includes at least one cover covers an outside surface of the hole of the wall.
 3. The tape cutting dispenser of claim 2, wherein the cover has at least one female connecting portion while the wall has a male connecting portion engages with the female connecting portion.
 4. The tape cutting dispenser of claim 2, wherein a first positioning pillar is disposed inside the holder, one end of the elastic element engages with the first positioning pillar and the other end of the elastic element contacts with an inner surface of the cover.
 5. The tape cutting dispenser of claim 4, wherein the inner surface of the cover further has a second positioning pillar which is corresponding to the first positioning pillar.
 6. The tape cutting dispenser of claim 1, wherein the holder has at least one guiding portion extending out of a rim of the holder while the wall has at least one guiding groove to receive the guiding portion.
 7. The tape cutting dispenser of claim 1, wherein the protruding portion includes a cone casing, a top surface and a flange, the top surface is disposed on the top end of the cone casing, and the flange is disposed on the bottom end of the cone casing.
 8. The tape cutting dispenser of claim 7, wherein the wall includes a limiting portion corresponding to the flange so as to limit the axial movement of the holder.
 9. The tape cutting dispenser of claim 1, wherein the surface of the protruding portion has a plurality of dents, each of the surface of the dents are disposed parallel to the top surface.
 10. A tape cutting dispenser, comprising:
 - a body has two opposite walls, each of the walls having a hole, wherein an accommodating space is formed between the walls;
 - a pair of holder modules disposed in each of the holes, wherein the holder module has a protruding portion protruding toward the wall along an axial direction, the holder further has an elastic element having axial flexibility and the elasticity bending away from the axial direction, such that the protruding portion of the holder is recoverably bendable away from the axial direction; and
 - a cutting device disposed on the body opposite to the accommodating space.
 11. The tape cutting dispenser of claim 10, wherein the holder module further includes a holder and a fastening sleeve, the holder is axially moveable along the fastening sleeve.
 12. The tape cutting dispenser of claim 11, wherein the protruding portion is formed on one side of the holder, the protruding portion includes a cone casing, a top surface and a flange, the top surface is disposed on the top end of the cone casing, and the flange is disposed on the bottom end of the cone casing.
 13. The tape cutting dispenser of claim 10, wherein the side wall of the fastening sleeve further includes a aperture while the wall has at least one hook engages with the aperture.
 14. The tape cutting dispenser of claim 10, wherein the fastening sleeve includes at least one second guiding groove while the holder includes at least one guiding portion axially moves along the second guiding groove.

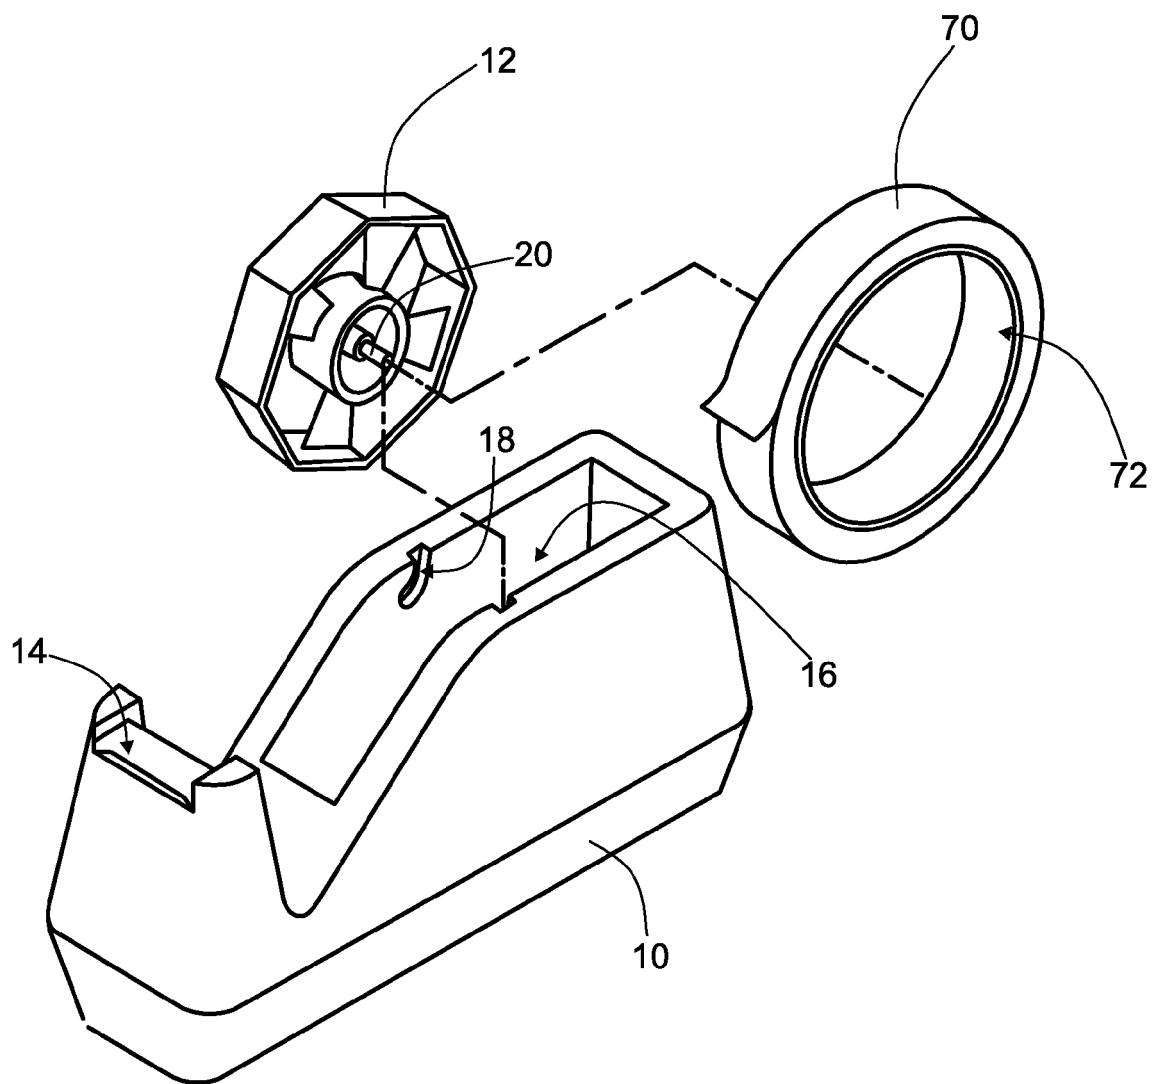


Fig. 1 (PRIOR ART)

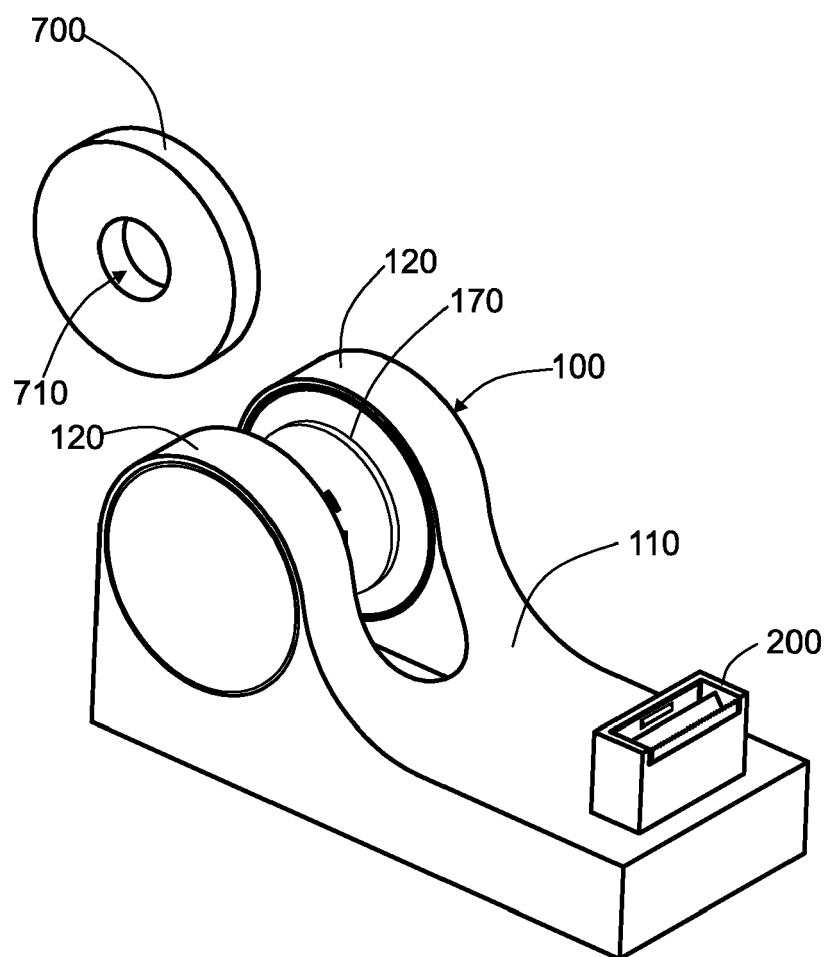


Fig. 2a

100

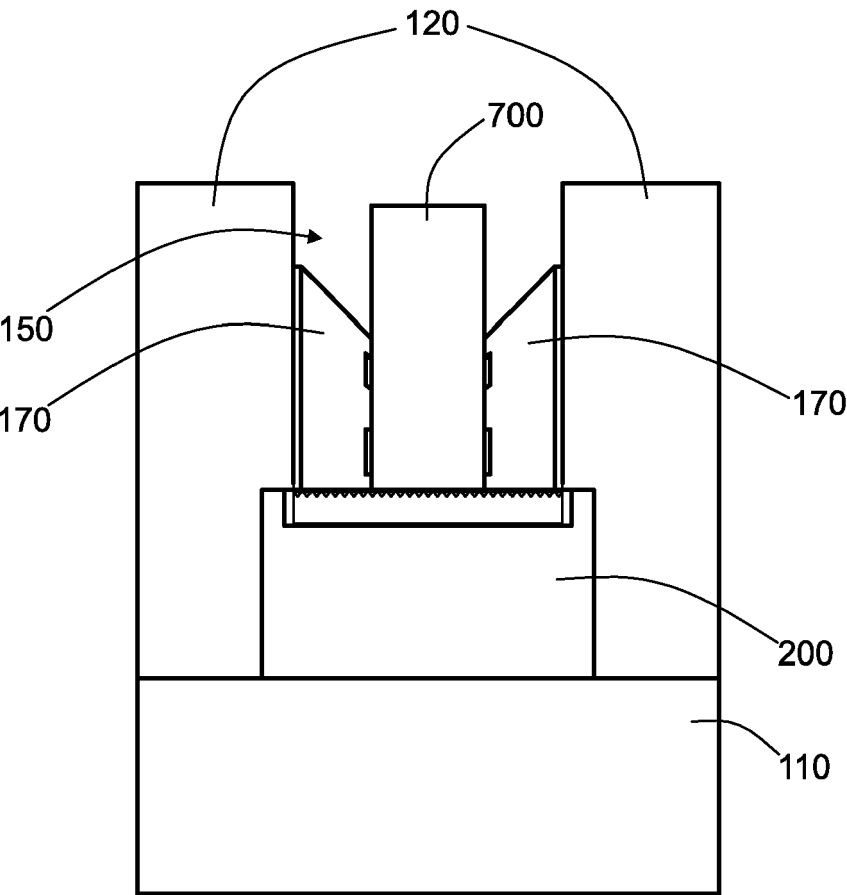


Fig. 2b

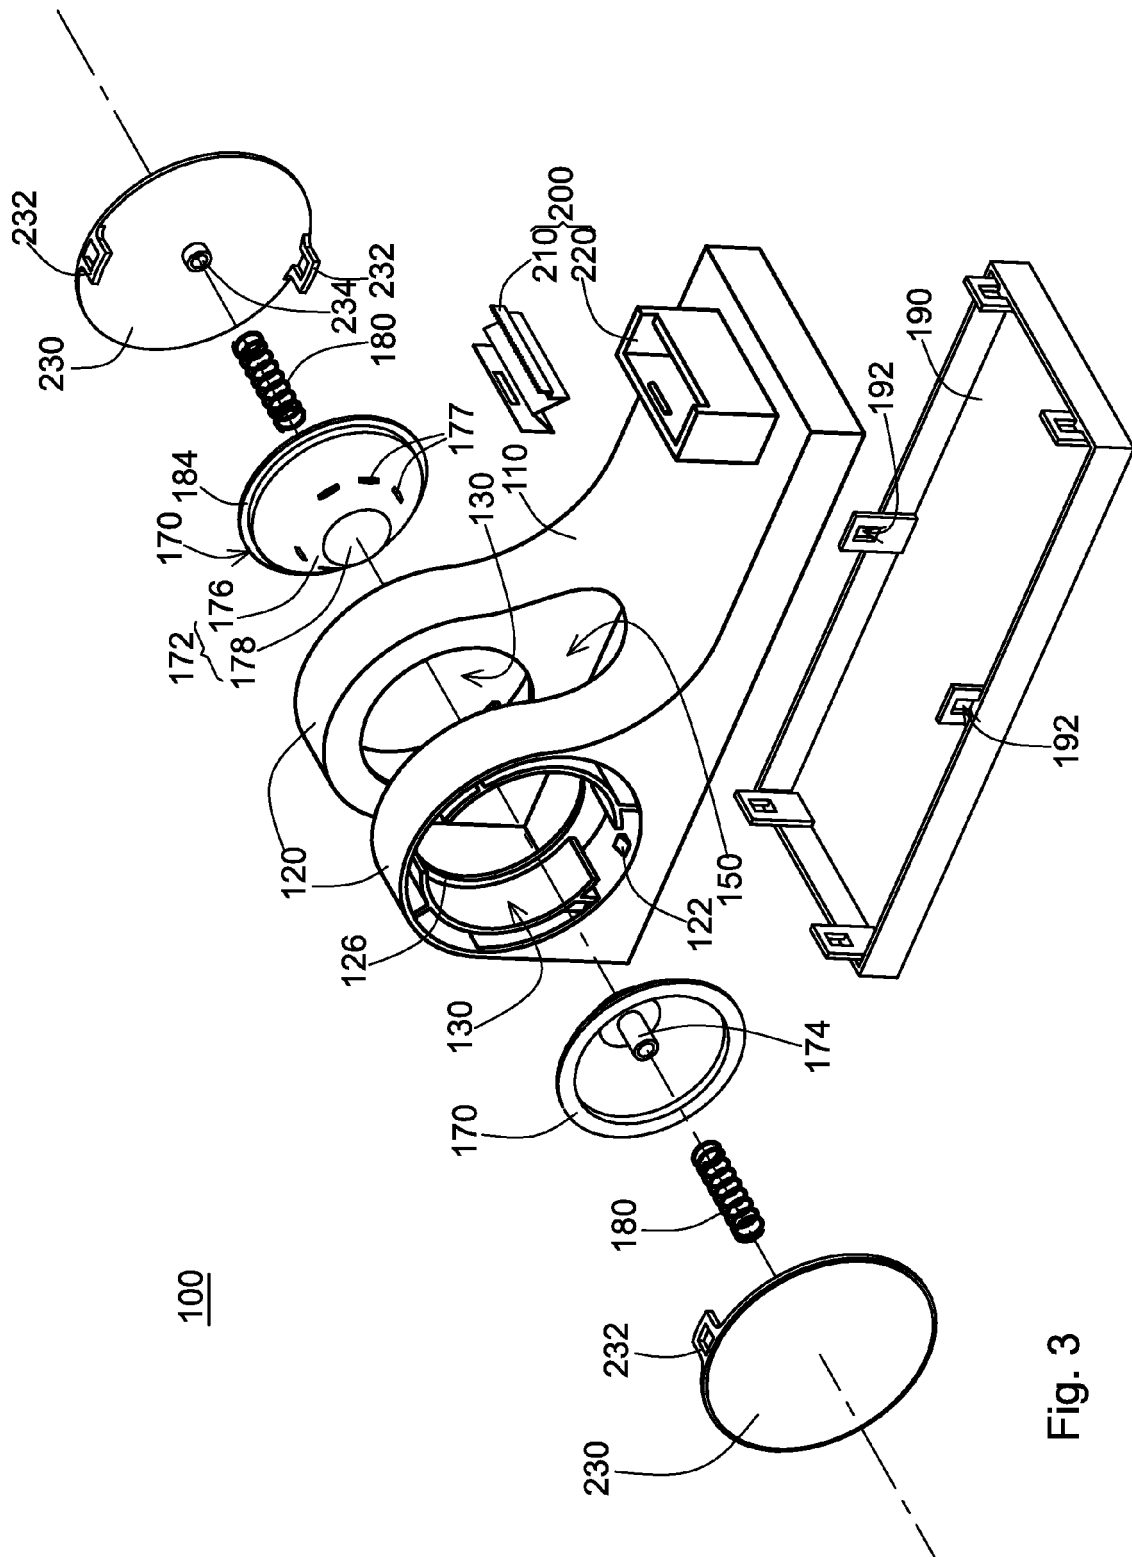


Fig. 3

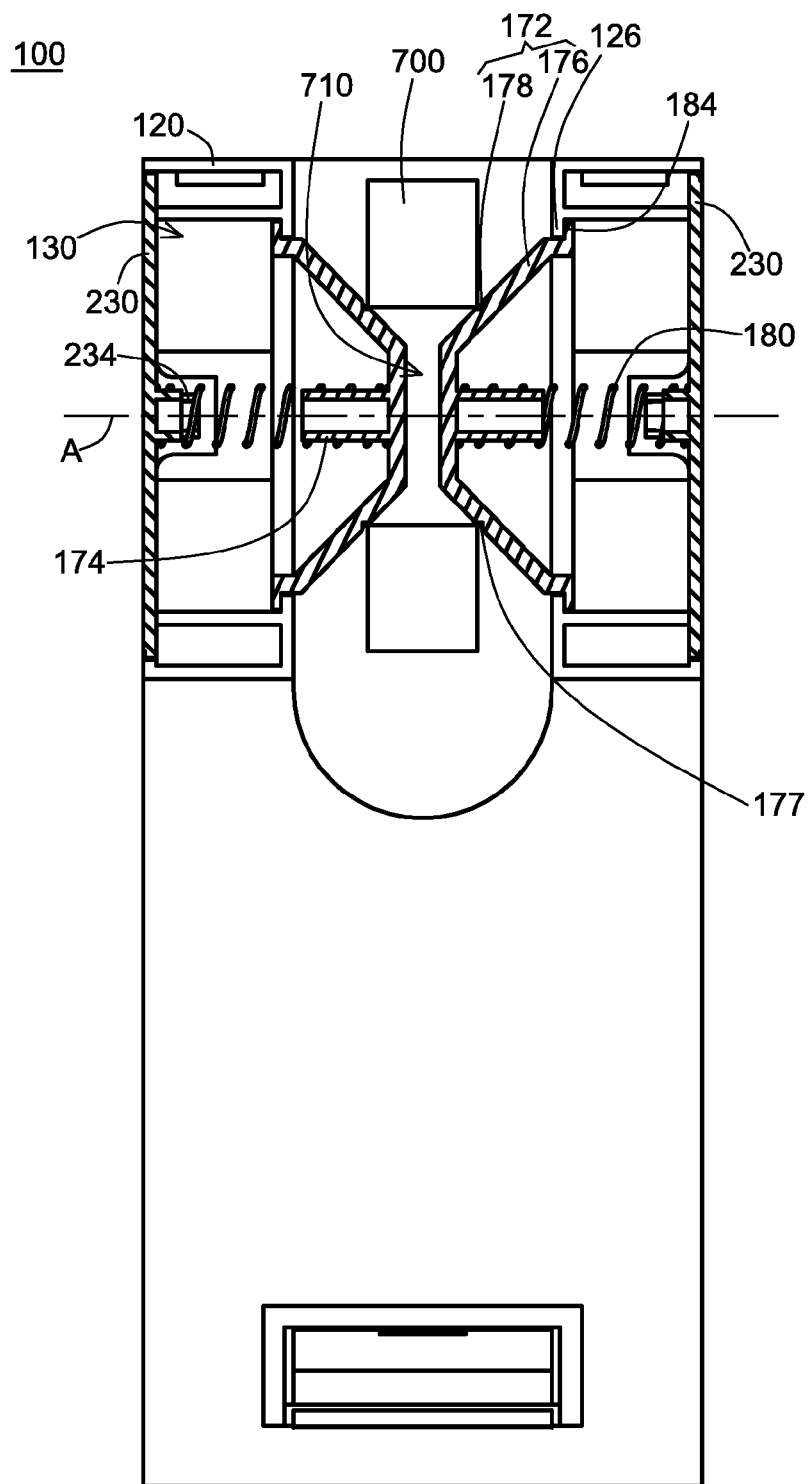


Fig. 4

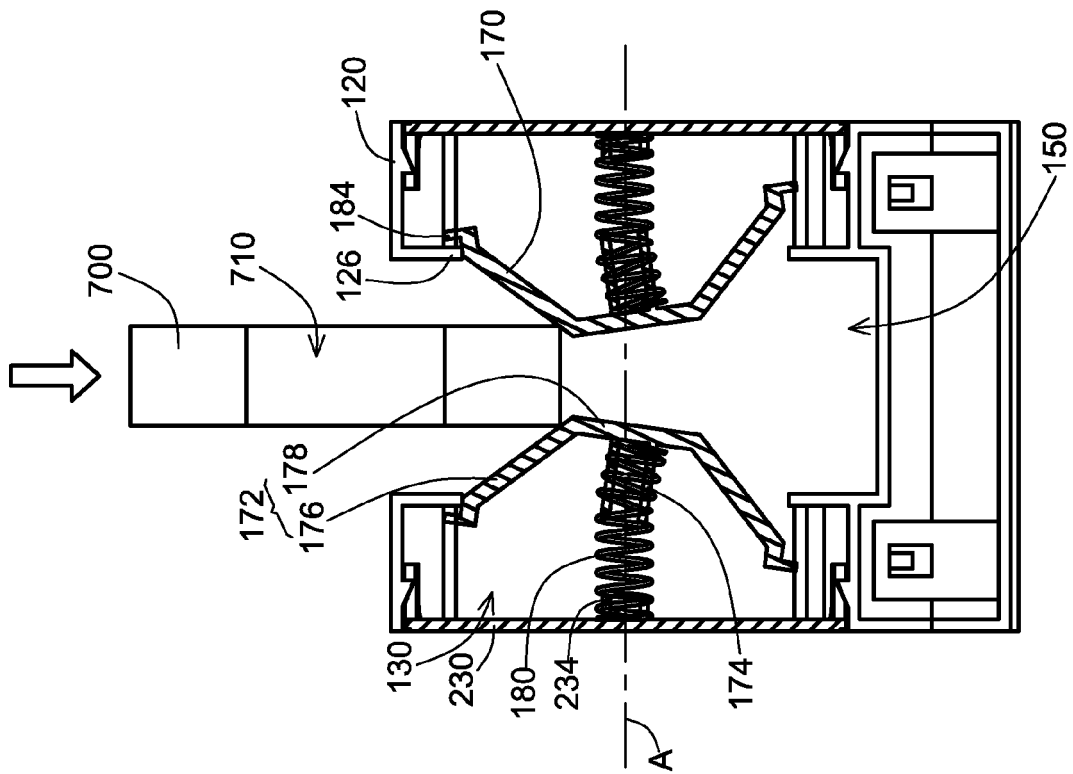


Fig. 5a

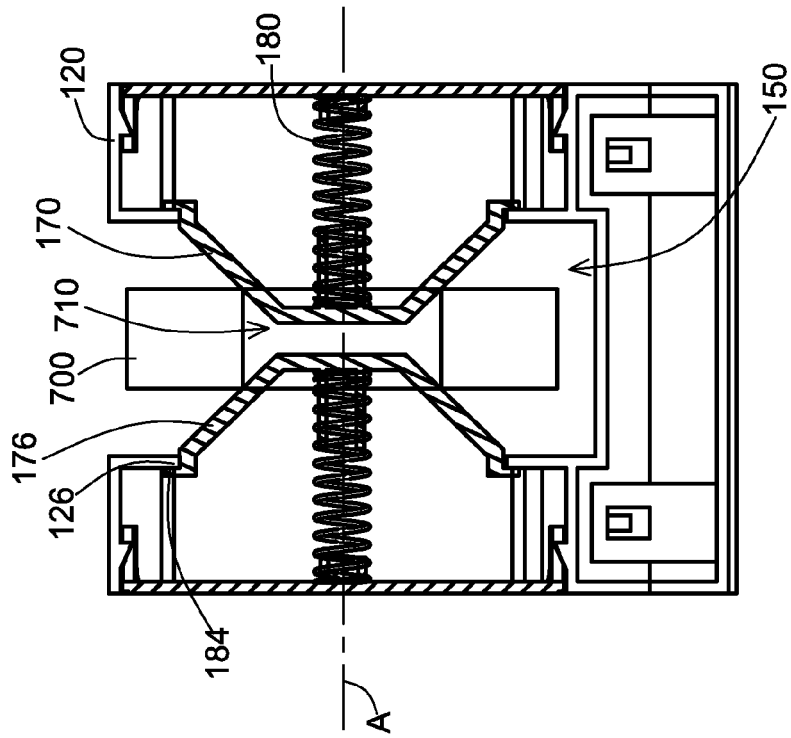


Fig. 5b

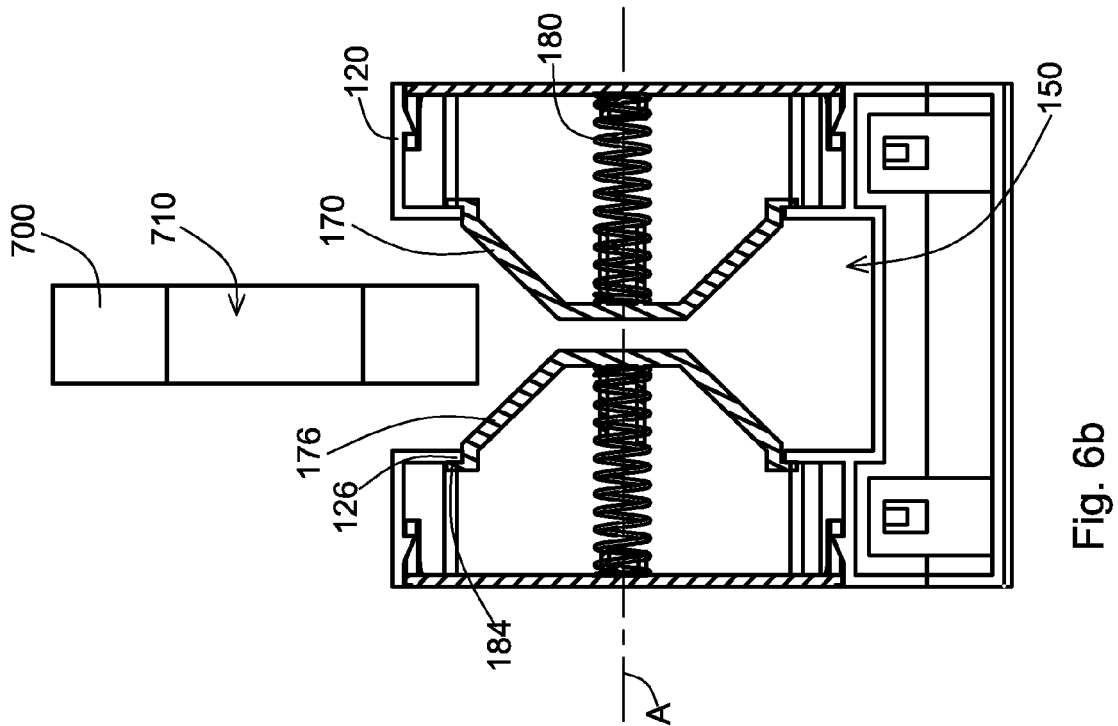


Fig. 6b

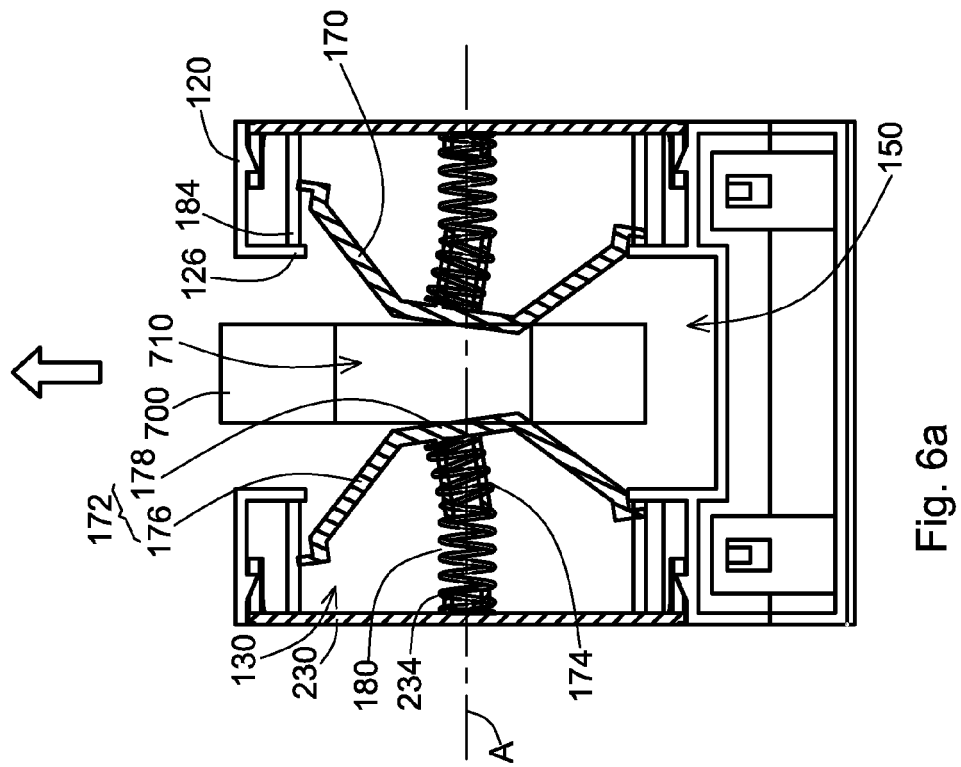


Fig. 6a

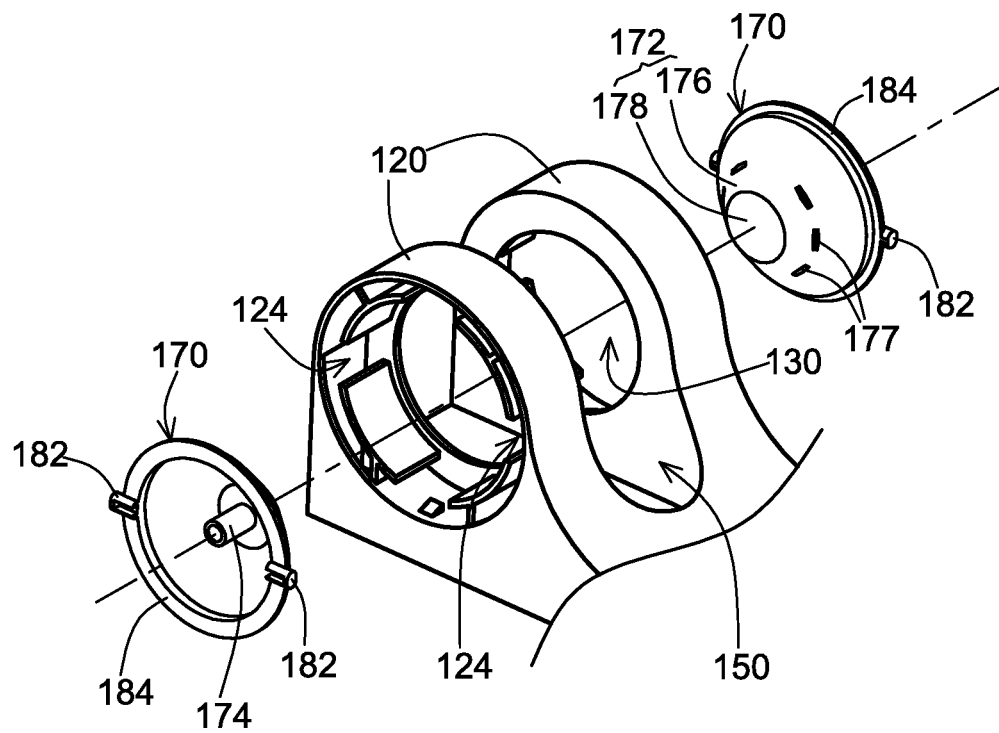


Fig. 7

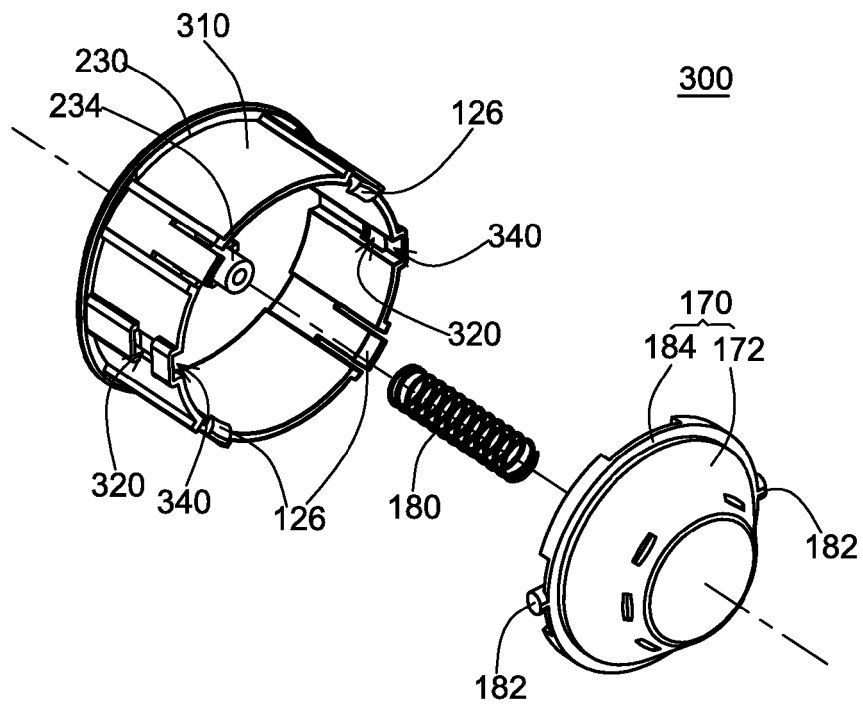


Fig. 8a

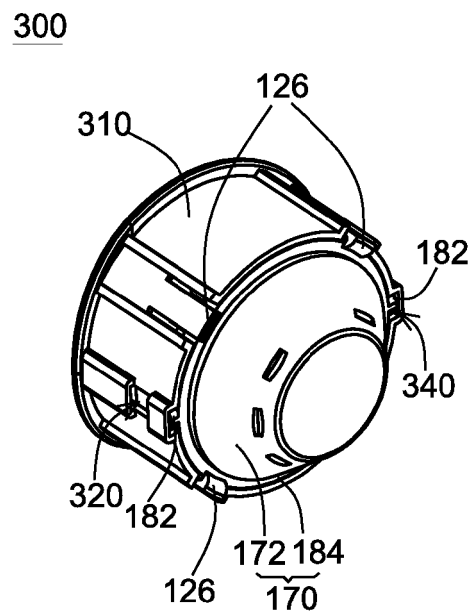


Fig. 8b

100

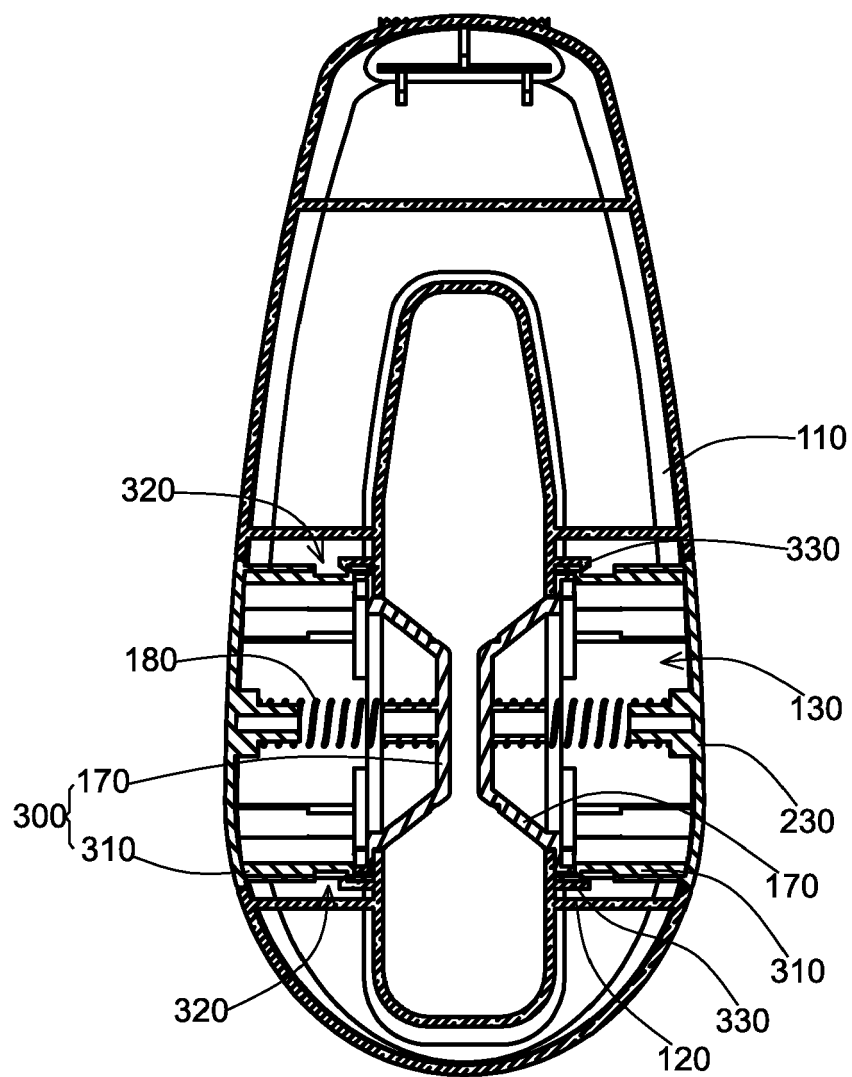


Fig. 9



EUROPEAN SEARCH REPORT

Application Number
EP 09 15 1300

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Y	US 4 957 233 A (SAMUELSON BRUCE E [US]) 18 September 1990 (1990-09-18) * the whole document *	1,7,8,10	INV. B65H35/00
Y	EP 1 132 326 A (SATO KK [JP]) 12 September 2001 (2001-09-12) * paragraph [0077] - paragraph [0080]; figure 4 *	1,7,8,10	
A	US 7 347 396 B1 (YU CHEN HSIU-MAN [TW]) 25 March 2008 (2008-03-25) * the whole document *	1,10	
A	US 2002/185511 A1 (HUANG HARRISON [TW]) 12 December 2002 (2002-12-12) * the whole document *	1,10	
A	US 4 059 210 A (DEERING JR HARTLAND W) 22 November 1977 (1977-11-22) * the whole document *	1,10	
			TECHNICAL FIELDS SEARCHED (IPC)
			B65H
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 9 December 2009	Examiner Jezierski, Krzysztof
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03.92 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 09 15 1300

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-12-2009

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4957233	A	18-09-1990	CA 2014349 A1	12-11-1990
			DE 4013935 A1	15-11-1990
			FR 2646840 A1	16-11-1990
			JP 2769383 B2	25-06-1998
			JP 3018552 A	28-01-1991

EP 1132326	A	12-09-2001	AT 244671 T	15-07-2003
			AT 277857 T	15-10-2004
			AT 280125 T	15-11-2004
			AU 762730 B2	03-07-2003
			AU 3454300 A	16-10-2000
			CA 2333504 A1	05-10-2000
			CN 1310686 A	29-08-2001
			CN 1483638 A	24-03-2004
			CN 1426929 A	02-07-2003
			DE 60003780 D1	14-08-2003
			DE 60003780 T2	05-02-2004
			DE 60014452 D1	04-11-2004
			DE 60014452 T2	03-03-2005
			DE 60015194 D1	25-11-2004
			DE 60015194 T2	17-02-2005
			DK 1132326 T3	27-10-2003
			ES 2202078 T3	01-04-2004
			ES 2230436 T3	01-05-2005
			ES 2231631 T3	16-05-2005
			HK 1039476 A1	06-08-2004
			ID 28093 A	03-05-2001
			IL 139838 A	20-06-2004
			WO 0058194 A1	05-10-2000
			JP 4307620 B2	05-08-2009
			JP 2000281262 A	10-10-2000
			NO 20006031 A	29-01-2001
			NZ 508315 A	30-06-2003
			RU 2175629 C1	10-11-2001
			TW 464630 B	21-11-2001
			US 6447185 B1	10-09-2002
			ZA 200007394 A	21-06-2001

US 7347396	B1	25-03-2008	NONE	

US 2002185511	A1	12-12-2002	NONE	

US 4059210	A	22-11-1977	AU 519431 B2	03-12-1981
			AU 3228278 A	19-07-1979
			CA 1082656 A1	29-07-1980
			DE 2801047 A1	13-07-1978

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 09 15 1300

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-12-2009

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4059210 A		FR 2376810 A1	04-08-1978
		GB 1591085 A	10-06-1981
		IT 1103566 B	14-10-1985
		JP 1322192 C	11-06-1986
		JP 53087896 A	02-08-1978
		JP 60047176 B	19-10-1985
