



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
16.06.2010 Bulletin 2010/24

(51) Int Cl.:
F25B 1/00 (2006.01)

(21) Application number: **08855672.5**

(86) International application number:
PCT/JP2008/071069

(22) Date of filing: **20.11.2008**

(87) International publication number:
WO 2009/069524 (04.06.2009 Gazette 2009/23)

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT RO SE SI SK TR
Designated Extension States:
AL BA MK RS

(72) Inventors:
• **OKAZAKI, Takashi**
Tokyo 100-8310 (JP)
• **UNEZAKI, Fumitake**
Tokyo 100-8310 (JP)
• **OOBAYASHI, Tomoyoshi**
Tokyo 100-8310 (JP)

(30) Priority: **30.11.2007 JP 2007310097**

(71) Applicant: **Mitsubishi Electric Corporation**
Tokyo 100-8310 (JP)


(74) Representative: **Pfenning, Meinig & Partner GbR**
Patent- und Rechtsanwälte
Theresienhöhe 13
80339 München (DE)

(54) **REFRIGERATION CYCLE DEVICE**

(57) A refrigerant cycle apparatus comprising:
a compressor 1, a radiator 2, decompression means 3,
a heat absorber 4, an internal heat exchanger 5 that per-
forms heat exchange between a refrigerant at an outlet
of said radiator and the refrigerant at an outlet of said
heat absorber, wherein first temperature detection
means 30 for detecting a refrigerant temperature be-
tween an outlet of the compressor 1 and an inlet of the

radiator 2 and second temperature detection means 31
for detecting the refrigerant temperature between the out-
let of the radiator 2 and a high-pressure side inlet of the
internal heat exchanger 5 are provided, and an opening
degree of decompression means 3 is controlled so that
a temperature difference (ΔT) between a detection tem-
perature by the first temperature detection means 30 and
the detection temperature by the second temperature de-
tection means 31 becomes a target value.

F I G. 1

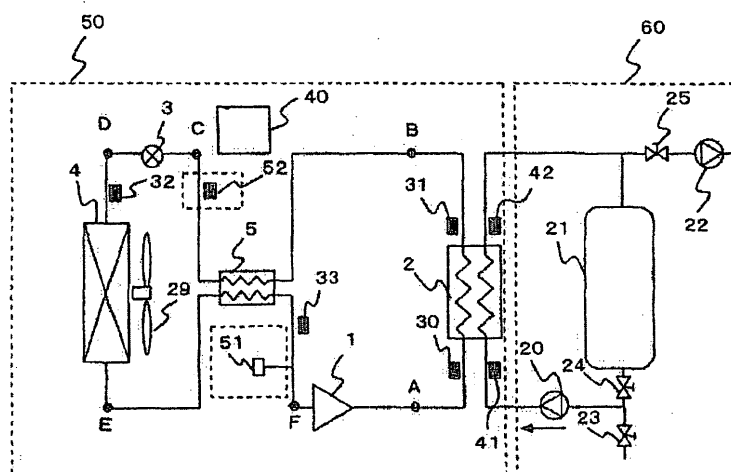

Description

Technical Field

5 **[0001]** The present invention relates to a refrigeration cycle apparatus using an internal heat exchanger, more particularly to a refrigerant control for stably securing performance.

Background Art

10 **[0002]** Descriptions will be given to prior art as follows.
Conventionally, a hot water supply apparatus is proposed as a built-in refrigeration cycle apparatus such as:

15 a hot water supply apparatus comprising a refrigeration cycle including a compressor, a hot water supply heat exchanger, an electronic expansion valve, and a heat source side heat exchanger whose heat source is an external air, and a hot water supply cycle including a hot water supply heat exchanger and a hot water supply tank,

wherein since ability control means that uses an ability-variable type compressor and ability-controls the compressor in response to changes in external environment conditions of the heat source side heat exchanger is attached, expansion valve opening degree control means for controlling an opening degree of an electronic expansion valve so as to make a discharge temperature of a compressor to be a target value in response to changes in external environment conditions (an external temperature, for example) of the heat source side heat exchanger and rotation speed control means for controlling a rotation speed of the compressor to be a target value in response to changes in the external environment conditions of the heat source side heat exchanger are attached, an opening of the electronic expansion valve is controlled so as to make the discharge temperature of the compressor becomes a target value in response to changes in the external environment conditions (an external temperature, for example) of the heat source side heat exchanger, and the rotation speed of the compressor is controlled to be a target value in response to changes in the external environment conditions of the heat source side heat exchanger, an optimal operation condition can be obtained in which a hot water supply ability and a hot water supply load further match, and a coefficient of performance (COP) can be improved and down-sizing of elements such as an heat exchanger becomes possible. (For example, refer to Patent Document 1)

30 **[0003]** A water heater is also proposed such as:

a water heater for heating a hot water supply fluid in a supercritical heat pump cycle where a refrigerant pressure in a high pressure side becomes equal to or more than the critical pressure of the refrigerant comprising:
a compressor,
35 a radiator that performs heat exchange between a refrigerant discharged from the compressor and a hot water supply fluid and is configured so that a refrigerant flow and the hot water supply fluid flow opposes,
a decompressor for decompressing the refrigerant flowing out of the radiator, and
an evaporator that makes the refrigerant that flows out of the compressor evaporate, makes the refrigerant absorb a heat to discharge it into a suction side of the compressor,

40 wherein a refrigerant pressure of a high-pressure side is controlled so that a temperature difference (ΔT) between the refrigerant that flows out of the radiator and the hot water supply fluid that flows therein becomes a predetermined temperature difference (ΔT_o). (For example, refer to Patent Document 2) In this example of the prior art, a heat exchange efficiency of the radiator can be enhanced to improve efficiency of a heat pump.

45 **[0004]**

[Patent Document 1] Japanese Patent Gazette No.3601369 (pp. 6; Fig. 1)

[Patent Document 2] Japanese Patent Gazette No.3227651 (pp.1 - 3; Fig. 2)

50 Summary of Invention

Problems to be Solved by the Invention

55 **[0005]** Both of the above examples of the prior art control refrigerant conditions so that a discharge temperature of the compressor or a temperature difference (ΔT) between the refrigerant that flows out of the radiator and the hot water supply fluid that flows therein becomes a target value to achieve an efficient operation. However, there was a problem that in the vicinity where an efficiency (COP) of the refrigeration cycle becomes maximum, a control based only on an inlet side (the above discharge temperature) of the radiator or an outlet side (the above temperature difference ΔT) is

difficult to achieve stable and efficient operation conditions because changes in the discharge temperature or the temperature difference ΔT are small. In addition, since an operation in which an internal heat exchanger exists in the refrigerant circuit is not considered, there was a problem that to control to achieve stable and efficient operation conditions is difficult.

[0006] The present invention is made to solve the above problems in the prior art. The object is to obtain a refrigeration cycle apparatus capable of stably achieving efficient operation conditions by controlling operation values based on standard conditions of the radiator and outlet conditions of the radiator to be a target value.

Means for Solving the Problems

[0007] In order to solve the above problems, the refrigeration cycle apparatus according to the present invention includes at least a compressor, a radiator, decompression means capable of changing an open degree, a heat absorber, an internal heat exchanger that performs heat exchange between a refrigerant at an outlet of the radiator and the refrigerant at the outlet of the heat absorber. The refrigeration cycle apparatus is **characterized in that** at least first refrigerant conditions detection means for detecting standard conditions of the radiator and second refrigerant conditions detection means for detecting refrigerant conditions between an outlet of the radiator and a high-pressure side inlet of an internal heat exchanger are provided, and an opening degree of decompression means is controlled so that a calculation value calculated based on an output of the first refrigerant conditions detection means and the output of the second refrigerant conditions detection means becomes a target value.

Effect of the Invention

[0008] According to the present invention, the expansion valve opening degree is controlled so that the COP becomes maximum based on standard conditions of the radiator and refrigerant conditions of the radiator outlet part, so that a refrigeration cycle apparatus capable of stably achieving efficient operation can be obtained.

Brief Description of Drawings

[0009]

[Fig. 1] Fig. 1 is a diagram showing a configuration of a refrigeration cycle apparatus according to Embodiment 1 of the present invention.

[Fig. 2] Fig. 2 is a diagram showing an operation behavior on a P-h diagram according to Embodiment 1 of the present invention.

[Fig. 3] Fig. 3 is a diagram showing a temperature distribution of a refrigerant and water in a water heat exchanger according to Embodiment 1 of the present invention.

[Fig. 4] Fig. 4 is a diagram showing cycle conditions against an expansion valve opening degree according to Embodiment 1 of the present invention.

[Fig. 5] Fig. 5 is a diagram showing changes in each calculation value, heating ability, and COP against an expansion valve opening degree according to Embodiment 1 of the present invention.

[Fig. 6] Fig. 6 is a diagram showing changes in other calculation value, heating ability, and COP against an expansion valve opening degree according to Embodiment 1 of the present invention.

[Fig. 7] Fig. 7 is a diagram showing a control flowchart according to Embodiment 1 of the present invention.

[Fig. 8] Fig. 8 is a diagram showing a refrigeration cycle apparatus according to Embodiment 2 of the present invention. [Fig. 9] Fig. 9 is a diagram showing an operation behavior on a P-h diagram according to Embodiment 2 of the present invention.

Descriptions of Codes and Symbols

[0010]

1	compressor
2	radiator (water heat exchanger)
3	expansion valve
4	heat absorber (evaporator)
5	internal heat exchanger
20	hot water supply side pump
21	hot water storage tank

22	use side pump
23,24, 25	on-off valve
29	blower
30,31, 32, 33, 41, 42, 52	temperature detection means
35,51	pressure detection means
40	controller
50	heat source apparatus
60	hot water storage apparatus

Best Mode for carrying Out the Invention

Embodiment 1

[0011] Descriptions will be given to a refrigerant cycle apparatus by Embodiment 1 according to the present invention.

Fig. 1 shows a configuration diagram of the refrigerant cycle apparatus according to the present embodiment. In the figure, the refrigerant cycle apparatus according to the present embodiment is a hot water supply apparatus using carbon dioxide (hereinafter, CO₂) as a refrigerant, composed of a heat source apparatus 50, a hot water storage apparatus 60, and a controller 40 for controlling these. The present embodiment shows an example of the hot water supply apparatus, however, it is not limited thereto. The apparatus may be an air conditioner. In the same way, the refrigerant is not limited to carbon dioxide but an HFC refrigerant may be used.

[0012] The heat source apparatus 50 is composed of a compressor 1 for compressing the refrigerant, a radiator 2 (hereinafter, referred to "water heat exchanger") for taking out heat of a high-temperature high-pressure refrigerant compressed in the compressor 1, an internal heat exchanger 5 for further cooling the refrigerant output from the water heat exchanger 2, a decompressor 3 (hereinafter, referred to "expansion valve") that decompresses the refrigerant and whose opening degree can be changed, an heat-absorber 4 (hereinafter, referred to "evaporator") for evaporating the refrigerant decompressed in the expansion valve 3, and an internal heat exchanger 5 for further heating the refrigerant flowed out of the evaporator 4. That is, the internal heat exchanger 5 is a heat exchanger that heat-exchanges the refrigerant at an outlet of the water heat exchanger 2 with the refrigerant at the outlet of the evaporator 4. A blower 29 is provided for sending air on an outer surface of the evaporator 4. There are also provided first temperature detection means 30 for detecting a discharge temperature of the compressor 1, second temperature detection means 31 for detecting an outlet temperature of the water heat exchanger 2, fifth temperature detection means 32 for detecting an inlet refrigerant temperature of the evaporator 4, and sixth temperature detection means 33 for detecting a suction temperature of the compressor 1. In addition, the first temperature detection means 30 and the second temperature detection means 31 correspond to a first refrigerant conditions detection means and second refrigerant conditions detection means respectively in an example of control in Fig. 7 to be described later.

[0013] A hot water storage apparatus 60 is connected with the water heat exchanger 2, which is a radiator, via piping, being composed of a heat source side pump 20, a hot water storage tank 21, a use side pump 22, and on-off valves 23, 24, 25. Here, on-off valves 23, 24, 25 may be a simple valve only for switching operation or an opening variable valve. When a water level of the hot water storage tank 21 drops, the on-off valves 24, 25 are closed, the on-off valve 23 is opened, and hot water storage operation is performed in which supplied water is heated up to a predetermined temperature. When a heat dissipation loss is large and the temperature in the hot water storage tank 21 decreases such as in winter, the on-off valves 23, 25 are closed, the on-off valve 24 is opened, and circulation heating operation is performed in which low-temperature hot water in the hot water storage tank 21 is re-boiled. At the time of using the hot water supply, the on-off valves 23, 24 are closed, the on-off valve 25 is opened, the use side pump 22 starts operation to transfer stored hot water to the use side. At an inlet side of the water heat exchanger 2, third temperature detection means 41 is attached for detecting an inlet temperature of a medium (water) to be heated. At an outlet side of the water heat exchanger 2, fourth temperature detection means 42 is attached for detecting the outlet temperature of the medium (water) to be heated.

[0014] A controller 40 performs calculation using detected values from first temperature detection means 30, second temperature detection means 31, fifth temperature detection means 32, sixth temperature detection means 33, third temperature detection means 41, and fourth temperature detection means 42 to control an opening degree of the expansion valve 3, a rotation speed of the compressor 1, and the rotation speed of the hot water supply side pump 20, respectively.

[0015] Fig. 2 is a P-h diagram describing cycle conditions during hot water storage operation in the refrigeration cycle apparatus shown in Fig. 1. In Fig. 2, solid lines denote refrigerant conditions at a certain expansion valve opening degree and A, B, C, D, and E denote refrigerant conditions in the hot water storage operation. At the time of the hot water storage operation, a high-temperature high-pressure refrigerant (A) discharged from the compressor 1 flows into the water heat exchanger 2. In the water heat exchanger 2, the refrigerant heats supplied water while dissipating heat to water circulating

the hot water storage circuit to decrease the own temperature. A refrigerant (B) flowed out of the water heat exchanger 2 dissipates heat in the internal heat exchanger 5 to further decrease (C) the temperature, being decompressed (D) by the expansion valve 3 to turn into a low-temperature low-pressure refrigerant. The low-temperature low-pressure refrigerant absorbs heat from the air in the evaporator 4 to evaporate (E). The refrigerant flowed out of the evaporator 4 is

heated in the internal heat exchanger 5 to turn into a gas (F) and sucked by the compressor 1 to form a refrigeration cycle. **[0016]** Here, the expansion valve 3 is controlled so that a suction superheat degree of the compressor 1 becomes a target value (for example, 5 to 10 °C). Specifically, based on a detection value of fifth temperature detection means 32 detecting an inlet refrigerant temperature of the evaporator 4, a temperature decrease amount due to a pressure loss in the evaporator 4 and the internal heat exchanger 5 is corrected, an evaporation temperature (ET) is estimated, a suction superheat degree SH_S is calculated by the following formula using a detection value (T_S) of sixth temperature detection means 33 detecting a suction temperature of the compressor 1.

$$SH_S = T_S - ET$$

Using the above formula, an opening degree of the expansion valve 3 is controlled so that SH_S becomes a target value. An example is given in which an evaporation temperature (ET) is estimated based on the detection value of the fifth temperature detection means 32, however, it is not limited thereto. Pressure detection means (second pressure detection means) 51 (refer to Fig. 1) is installed between a low-pressure side outlet of the internal heat exchanger 5 and the inlet of the compressor 1, and from the detection value, a refrigerant saturation temperature may be obtained. A suction superheat degree control precedes other high efficiency operation control because a function to prevent liquid return of the compressor 1 precedes a function to efficiently operate the water heat exchanger 2 from the viewpoint of securing reliability of the equipment.

[0017] Next, operation on the P-h diagram in the case when the opening degree of the expansion valve 3 is made smaller is denoted by broken lines in Fig. 2. When the opening degree of expansion valve 3 is made smaller, the refrigerant flow amount flowing from the expansion valve 3 to the evaporator 4 decreases and the suction superheat degree of the compressor 1 temporarily increases. In addition, since the refrigerant shifts to a high pressure side, the pressure on the high pressure side increases and a discharge temperature becomes high. At the same time, a water heat exchanger output temperature decreases so that a temperature difference in the becomes constant. When the water heat exchanger output temperature decreases, a heat exchange amount in the internal heat exchanger 5 decreases, and as a result, the suction superheat degree becomes almost the same state as that of before the opening degree of the expansion valve 3 is made smaller to indicate a constant value. That is, a change in opening degree of the expansion valve 3 is absorbed by the heat exchange amount of the internal heat exchanger 5 (the heat exchange amount varies in response to the opening degree of the expansion valve 3) to make a change in the suction superheat degree small. Accordingly, control of the suction superheat degree of the compressor 1 alone cannot secure heating ability in the water heat exchanger 2 and efficiency is lowered. Therefore, new control is required in order to secure heating ability and improve operation efficiency.

[0018] Next, descriptions will be given to why a local maximal value occurs in performance (COP) using a temperature distribution in the water heat exchanger shown in Fig. 3.

Fig. 3 shows a refrigerant and water temperature distribution in the water heat exchanger 2. In the figure, thick solid lines show a change in refrigerant temperature, and a thin solid lines denote a change in water temperature. $\Delta T1$ denotes a temperature difference between the water heat exchanger inlet temperature and water outlet temperature, and $\Delta T2$ denotes a temperature difference between the water heat exchanger outlet temperature and water inlet temperature. ΔT_p is a temperature difference at a pinch point where the temperature difference between a refrigerant and water in the water heat exchanger 2 becomes minimum. ΔT denotes a temperature difference between the water heat exchanger inlet temperature and the water heat exchanger outlet temperature. As shown by a cycle state against the expansion valve opening degree in Fig. 4, when a discharge temperature is increased by decreasing the expansion valve 3 opening degree, under a condition when heating ability in the water heat exchanger 2 is almost constant, the outlet temperature of the water heat exchanger 2 decreases so that an average temperature difference of the refrigerant and water in the water heat exchanger 2 is maintained, and the temperature difference ΔT_p of pinch point also decreases. Further, as the refrigerant amount shifts to a high pressure side, a discharge pressure rises to increase an input and COP is lowered. To the contrary, when the expansion valve 3 opening degree is made large and the discharge temperature is lowered, the outlet temperature of the water heat exchanger 2 increases so that an average temperature difference between the refrigerant and water in the water heat exchanger 2 is maintained. The temperature difference ΔT_p at the pinch point also increases, however, a heating ability ratio becomes small and COP is lowered. Accordingly, as shown by broken

lines in the figure, a suitable expansion opening degree exists that makes COP maximum.

[0019] Next, Fig. 5 shows changes in operation values obtained from the temperature of each part when the opening degree of the expansion valve 3 changes. In Fig. 5, the horizontal axis represents the opening degree (%) of the expansion valve 3, and the vertical axis represents the suction superheat degree, discharge temperature, temperature difference ΔT_2 between the outlet temperature of the water heat exchanger and water inlet temperature, heating ability ratio, COP ratio. The heating ability ratio and COP ratio show a ratio when a maximum value against the expansion valve opening degree is set as 100%, respectively. Against changes in the opening degree of the expansion valve 3, changes in the suction superheat degree can be regarded as almost a constant value, so that it is understood that changes in the heating ability ratio and the COP ratio cannot be judged by the suction superheat degree. When controlling the COP to be maximum based on the temperature difference ΔT_2 between the discharge temperature and the outlet temperature of the water heat exchanger and water inlet temperature, changes in the discharge temperature and temperature difference ΔT_2 are small in the vicinity of the expansion valve opening degree when the COP reaches maximum as shown by a dotted line in the figure, so that it is found that a high accuracy temperature measurement is required for controlling COP to be maximum.

[0020] Next, Fig. 6 shows changes in other operation values obtained from temperatures of each part when the opening degree of the expansion valve 3 is changed. In Fig. 6, the horizontal axis represents the opening degree (%) of the expansion valve 3. The vertical axis represents an outlet/inlet temperature difference ΔT_{hx} of the internal heat exchanger, a temperature difference ΔT between a discharge temperature and an outlet temperature of the water heat exchanger, a total temperature difference $\Sigma \Delta T$ of the above ΔT_1 and ΔT_2 , heating ability, and a COP ratio, respectively. Characteristics of Fig. 6 shows that operation can be performed in the vicinity where the COP becomes maximum by either controlling a heat exchange amount of the internal heat exchanger 5 based on the temperature difference ΔT_{hx} between the outlet and inlet of the internal heat exchanger or controlling the heat exchange amount of the water heat exchanger 2 based on the total temperature difference $\Sigma \Delta T$ of ΔT_1 and ΔT_2 of the water heat exchanger 2. Further, the temperature difference ΔT between the discharge temperature and the outlet temperature of the water heat exchanger significantly changes in the vicinity of the expansion valve opening degree at which the COP becomes maximum, so that it is understood that a deviation from the maximum value of the COP could be controlled to be small based on the temperature difference ΔT . Here, only the case of the temperature difference ΔT is shown, however, the same effect can be expected by controlling based on the difference ($\Delta T_1 - \Delta T_2$) of the temperature differences ΔT_1 and ΔT_2 .

Thus, it is possible to achieve an operation in the vicinity of the maximum efficiency by adopting a high-pressure side outlet temperature of the internal heat exchanger 5 for ΔT_{hx} , the discharge temperature for ΔT , and the discharge temperature and a water side outlet/inlet temperatures for $\Sigma \Delta T$.

[0021] As is understood from Fig. 6, a total temperature difference $\Sigma \Delta T$ of the temperature difference ΔT_1 between the water heat exchanger inlet temperature and water outlet temperature and the temperature difference ΔT_2 between the water heat exchanger outlet temperature and water inlet temperature becomes a minimum. The control based on such an index has a physical meaning and being reasonable. However, high-precision temperature detection is required because change in temperature is small in the vicinity where the COP becomes a maximum compared with the temperature difference ΔT . Further, from Fig. 3, it is considered that when the COP becomes a maximum value, a temperature difference ΔT_p at a pinch point is almost the same as that of ΔT_2 between the water heat exchanger outlet temperature and water inlet temperature. This is because a maximum performance is shown when two temperature differences that become minimum in the water heat exchanger 2 become equal without being biased to either of them when considering characteristics of the heat exchanger. Accordingly, it is allowable to control the expansion valve 3 so as to make ΔT_p and ΔT_2 to be equal.

[0022] Next, descriptions will be given to an example of a control operation of the refrigeration cycle apparatus of Fig. 1 in which an expansion valve opening degree is controlled so as to make a suction superheat degree and the above temperature difference ΔT to converge at target values.

Fig. 7 is a flowchart showing a control operation of the refrigeration cycle apparatus. With the present invention, for the purpose of giving a priority to reliability of products, the suction superheat degree (SHs) control of the compressor 1 precedes the temperature difference ΔT control for securing the heating ability.

Firstly, when the suction superheat degree (SHs) is smaller than a target value (SHm) by a preset convergence range ΔSH or less (S101), the expansion valve opening degree is lowered until the suction superheat degree (SHs) converges. Thus, when the suction superheat degree (SHs) is secured, the temperature difference ΔT is made to converge at the target value. Specifically, when the temperature difference ΔT is smaller than a target value (ΔT_m) by a preset convergence range δT or less (S102), the expansion opening degree is lowered and ΔT is made to converge. Thus, lower limit values of the suction superheat degree (SHs) and the temperature difference ΔT can be suppressed.

Next, when the suction superheat degree (SHs) is larger than the target value (SHm) by a preset convergence range ΔSH or more (S103), the expansion valve opening degree is increased until the suction superheat degree (SHs) converges. Thus, when the suction superheat degree (SHs) is converged, the temperature difference ΔT is made to converge at the target value. Thus, when the suction superheat degree (SHs) is converged, the temperature difference ΔT is made

to converge at the target value. Specifically, when the temperature difference ΔT is larger than the target value (ΔT_m) by a preset convergence range δT or more (S104), the expansion opening degree is increased and ΔT is made to converge. Thus, upper limit values of the suction superheat degree (SHs) and the temperature difference ΔT can be suppressed. An example is shown in which a priority is given to control the suction superheat degree, however, it is not limited thereto when using a compressor which is resistant to liquid return. The same effect can be expected even when the priority order is exchanged. Through the above control, the suction superheat degree (SHs) and the temperature difference ΔT are converged at target values.

[0023] In the above, descriptions are given to an example in which the suction superheat degree (SHs) and the temperature difference ΔT are controlled to converge at target values (SH_m , ΔT_m), however, it is allowable that, in place of the temperature difference ΔT , a total temperature difference $\Sigma \Delta T$ of ΔT_1 and ΔT_2 , a difference between ΔT_1 and ΔT_2 ($\Delta T_1 - \Delta T_2$), or ΔT_{hx} can be used to control them to converge at a target value, respectively. When using $\Sigma \Delta T$ and ($\Delta T_1 - \Delta T_2$), they are obtained by calculating detection temperatures by the first temperature detection means 30, the second temperature detection means 31, the third temperature detection means 41, and the fourth temperature detection means 42. When using ΔT_{hx} , internal heat exchanger outlet temperature detection means 52 is attached (refer to Fig. 1) between a high-pressure side outlet of the internal heat exchanger 5 and an inlet of the expansion valve 3, the temperature difference ΔT_{hx} is obtained from a detection temperatures by the second temperature detection means 31 and the internal heat exchanger outlet temperature detection means 52.

[0024] Since, in the present embodiment, in addition to suction superheat degree control of the compressor, the expansion valve opening degree is made to be controlled so that the COP becomes maximum based on a temperature difference ΔT (or $\Sigma \Delta T$, $\Delta T_1 - \Delta T_2$, ΔT_{hx}) between the discharge temperature and the water heat exchanger outlet temperature, a high efficiency refrigeration cycle apparatus can be obtained.

A refrigerant saturation temperature (ET) is obtained based on an output of the fifth temperature detection means 32 or pressure detection means, the suction superheat degree (SHs) is obtained by the detection temperature (T_s) of the sixth temperature detection means and the refrigerant saturation temperature (ET), and the expansion valve opening degree is controlled so that the suction superheat degree (SHs) becomes a target value, so that the superheat degree of the suction part of the compressor 1 is secured, liquid return to the compressor 1 can be prevented, and reliability can be secured. In the example of Fig. 1, descriptions are given to an example in which the fifth temperature detection means 32 is provided between the expansion valve 3 and the evaporator 4, it can be disposed at any position between the inlet of the evaporator 4 and a low-pressure side inlet of the internal heat exchanger 5.

In the present embodiment, when controlling the superheat degree and the above temperature differences (ΔT , $\Sigma \Delta T$, $\Delta T_1 - \Delta T_2$, ΔT_{hx}), the control of the superheat degree precedes the control of the above temperature differences. From this point, the reliability of the compressor 1 is secured.

In the present embodiment, the radiator is composed of the water heat exchanger, so that a high efficiency hot water supply apparatus can be obtained.

Embodiment 2

[0025] Descriptions will be given to a refrigeration cycle apparatus according to Embodiment 2 of the present invention as follows.

Fig. 8 is a drawing showing a configuration of the refrigeration cycle apparatus according to the present invention. What is different from Embodiment 1 is that a first pressure detection means 35 is provided in place of the first temperature detection means 30 for detecting the discharge temperature of the compressor 1. Based on the first pressure detection means 35, a virtual saturation temperature is obtained, which is a standard condition of the water heat exchanger 2. The pressure detection means 35 can be shared with a pressure sensor provided, for example, to prevent an abnormal rise in high pressure. Descriptions on an operation behavior will be omitted because they are the same as Embodiment 1.

[0026] In the present embodiment, like a conventional HFC refrigerant, a virtual superheat degree of the water heat exchanger 2 outlet is calculated to control the refrigerant conditions thereof. Specifically, from first pressure detection means 35 provided in place of the first temperature detection means 30, a virtual saturation temperature is calculated as a standard condition of the water heat exchanger 2 and from the difference between a virtual saturation temperature T_{sat} and outlet temperature T_{count} of the water heat exchanger 2 detected by the second temperature detection means 31, a virtual superheat degree SC is obtained from the following formula.

$$SC = T_{sat} - T_{count}$$

In the present embodiment, the opening degree of the expansion valve 3 is controlled in the same way as the flowchart of Fig. 7 so that the SC obtained by the above formula becomes a target value (SC_m) whose efficiency is maximum.

[0027] Here, how to obtain the virtual saturation temperature will be explained.

Fig. 9 is a diagram showing an operation behavior of the refrigeration cycle apparatus according to the present invention on a P-h diagram. The virtual saturation temperature can be freely defined by demonstrating a definition such as a pseudo critical temperature trajectory connecting flexion points of isothermal lines like a dashed line α and a vertical line like a dotted line β extended with an enthalpy at a critical point being a constant. However, in order to operate the refrigeration cycle apparatus stably and at the maximum efficiency, a virtual saturation temperature should be selected under which the temperature difference becomes large in the vicinity of the maximum efficiency as mentioned above. Then, the virtual saturation temperature can be obtained as an intersection of a constant pressure line with a pressure at a point B, which is a detection value by first pressure detection means 35 and the dashed line α , or as an intersection of a constant pressure line with a pressure at a point B, which is a detection value by first pressure detection means 35 and the dotted line β .

[0028] In the present embodiment, since the virtual saturation temperature is used in place of the discharge temperature of the compressor 1, first temperature detection means 30 in Fig. 1 can be omitted and low cost can be achieved. Like the conventional HFC refrigerant, superheat degree of the outlet of the water heat exchanger 2 is controlled, therefore, control of the expansion valve can be applied as it is, which has been conventionally used.

Claims

1. A refrigerant cycle apparatus comprising:

at least a compressor, a radiator, decompression means capable of changing an open degree, a heat absorber, an internal heat exchanger that performs heat exchange between a refrigerant at an outlet of said radiator and the refrigerant at an outlet of said heat absorber, wherein

first refrigerant conditions detection means for detecting standard conditions of at least said radiator and second refrigerant conditions detection means for detecting refrigerant conditions between an outlet of said radiator and a high-pressure side inlet of said internal heat exchanger are provided, and

an opening of said decompression means is controlled so that a calculation value calculated based on at least an output of said first refrigerant conditions detection means and the output of said second refrigerant conditions detection means becomes a target value.

2. The refrigerant cycle apparatus of claim 1 comprising:

third temperature detection means for detecting an inlet temperature of a medium to be heated and fourth temperature detection means for detecting an outlet temperature of the medium to be heated, wherein

the opening degree of said decompression means is controlled such that a calculation value calculated based on outputs of said first refrigerant condition detection means, said second refrigerant condition detection means, said third temperature detection means, and said fourth temperature detection means become a target value.

3. A refrigerant cycle apparatus comprising:

at least a compressor, a radiator, decompression means capable of changing an open degree, a heat absorber, an internal heat exchanger that performs heat exchange between a refrigerant at an outlet of said radiator and the refrigerant at an outlet of said heat absorber, wherein

first temperature detection means for detecting a refrigerant temperature between an outlet of said compressor and an inlet of said radiator and second temperature detection means for detecting the refrigerant temperature between an outlet of said radiator and a high-pressure side inlet of said internal heat exchanger are provided, and

an opening degree of said decompression means is controlled such that a temperature difference (ΔT) between a detection temperature by said first temperature detection means and the detection temperature by said second temperature detection means becomes a target value.

4. The refrigerant cycle apparatus of claim 3 further comprising:

third temperature detection means for detecting an inlet temperature of a medium to be heated and fourth temperature detection means for detecting an outlet temperature of the medium to be heated, wherein

the opening degree of said decompression means is controlled such that a calculation value calculated based on outputs of said first temperature detection means, said second temperature detection means, said third temperature detection means, and said fourth temperature detection means, instead of said temperature dif-

ference (ΔT), become a target value.

5. A refrigerant cycle apparatus comprising:

at least a compressor, a radiator, decompression means capable of changing an open degree, a heat absorber, an internal heat exchanger that performs heat exchange between a refrigerant at an outlet of said radiator and the refrigerant at an outlet of said heat absorber, wherein first temperature detection means for detecting a refrigerant temperature between an outlet of said compressor and an inlet of said radiator and second temperature detection means for detecting the refrigerant temperature between the outlet of said radiator and a high-pressure side inlet of said internal heat exchanger, third temperature detection means for detecting an inlet temperature of a medium to be heated and fourth temperature detection means for detecting the outlet temperature of the medium to be heated are provided, and an opening degree of said decompression means is controlled such that a sum ($\Sigma \Delta T$) of a temperature difference (ΔT_1) between a detection temperature by said first temperature detection means and the detection temperature by said fourth temperature detection means and the temperature difference (ΔT_2) between the detection temperature by said second temperature detection means and the detection temperature by said third temperature detection means becomes a target value.

6. A refrigerant cycle apparatus comprising:

at least a compressor, a radiator, decompression means capable of changing an open degree, a heat absorber, an internal heat exchanger that performs heat exchange between a refrigerant at an outlet of said radiator and the refrigerant at an outlet of said heat absorber, wherein first temperature detection means for detecting a refrigerant temperature between an outlet of said compressor and an inlet of said radiator and second temperature detection means for detecting the refrigerant temperature between the outlet of said radiator and a high-pressure side inlet of said internal heat exchanger, third temperature detection means for detecting an inlet temperature of a medium to be heated and fourth temperature detection means for detecting an outlet temperature of the medium to be heated are provided, and an opening degree of said decompression means is controlled such that a difference ($\Delta T_1 - \Delta T_2$) between a second temperature difference (ΔT_1) between a detection temperature by said first temperature detection means and the detection temperature by said fourth temperature detection means and a third temperature difference (ΔT_2) between the detection temperature by said second temperature detection means and the detection temperature by said third temperature detection means becomes a target value.

7. A refrigerant cycle apparatus comprising:

at least a compressor, a radiator, decompression means capable of changing an open degree, a heat absorber, an internal heat exchanger that performs heat exchange between a refrigerant at an outlet of said radiator and the refrigerant at an outlet of said heat absorber, wherein first pressure detection means for detecting a refrigeration pressure between at least an outlet of said compressor and an inlet of said decompression means and second temperature detection means for detecting a refrigeration temperature between the outlet of said radiator and a high-pressure side inlet of said internal heat exchanger are provided, and an opening degree of said decompression means is controlled such that a calculation value calculated based on a detection pressure by said first pressure detection means and a detection temperature by said second temperature detection means becomes a target value.

8. A refrigerant cycle apparatus comprising:

at least a compressor, a radiator, decompression means capable of changing an open degree, a heat absorber, an internal heat exchanger that performs heat exchange between a refrigerant at an outlet of said radiator and the refrigerant at an outlet of said heat absorber, wherein second temperature detection means for detecting a refrigerant temperature between an outlet of said radiator and a high-pressure side inlet of said internal heat exchanger and internal heat exchanger outlet temperature detection means for detecting the refrigerant temperature between a high-pressure side outlet of said internal heat exchanger and an inlet of said compression means are provided, and an opening degree of said decompression means is controlled such that a temperature difference (ΔT_{hx}) between a detection temperature by said second temperature detection means and the detection temperature by said

internal heat exchanger outlet temperature detection means becomes a target value.

- 5 9. The refrigerant cycle apparatus of any one of claims 1 to 8, wherein
sixth temperature detection means for detecting the refrigerant temperature between a low-pressure side outlet of
said internal heat exchanger and an inlet of said compressor is provided,
superheat degree of a compressor suction part is calculated from a refrigerant saturation temperature at a detection
point of said sixth temperature detection means and a detection temperature by said sixth temperature detection
means, and
10 the opening degree of said decompression means is controlled such that said superheat degree becomes the target
value.
- 15 10. The refrigerant cycle apparatus of claim 9, wherein
second pressure detection means is provided between the low-pressure side outlet of said internal heat exchanger
and the inlet of said compressor and
said refrigerant saturation temperature is calculated based on a detection value of said second pressure detection
means.
- 20 11. The refrigerant cycle apparatus of claim 9, wherein
fifth temperature detection means is provided between the inlet of said heat absorber and the low-pressure side
inlet of said internal heat exchanger and
said refrigerant saturation temperature is calculated based on the detection temperature of said fifth temperature
detection means.
- 25 12. The refrigerant cycle apparatus of any one of claims 9 to 11, wherein
a priority is given to control said superheat degree over said temperature difference.
- 30 13. The refrigerant cycle apparatus of any one of claims 1 to 12, wherein
said radiator is a heat exchanger that exchanges heat with water.
- 35 14. The refrigerant cycle apparatus of any one of claims 1 to 13, wherein
carbon dioxide is used as a refrigerant.
- 40
- 45
- 50
- 55

FIG. 1

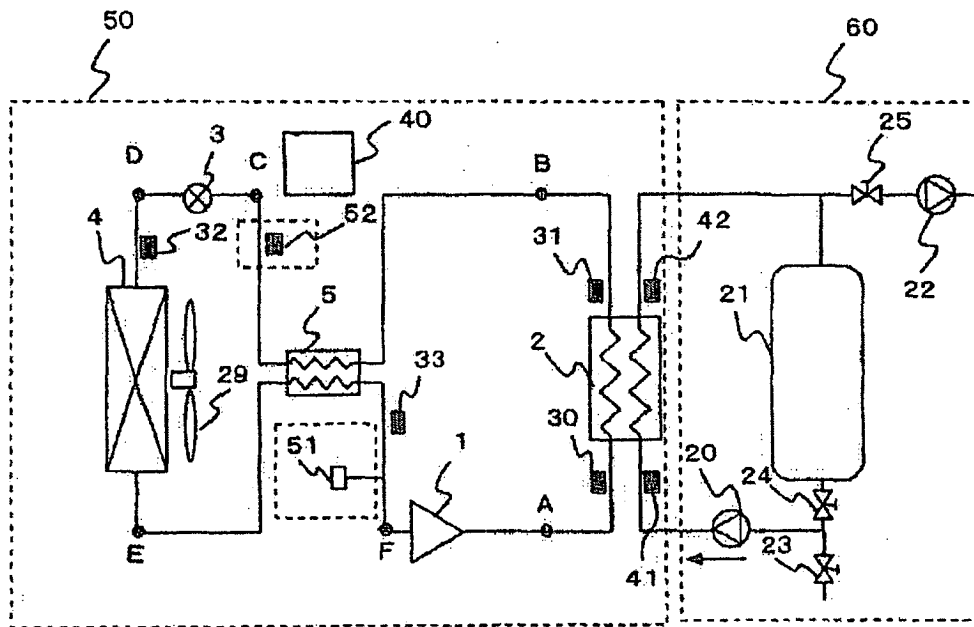


FIG. 2

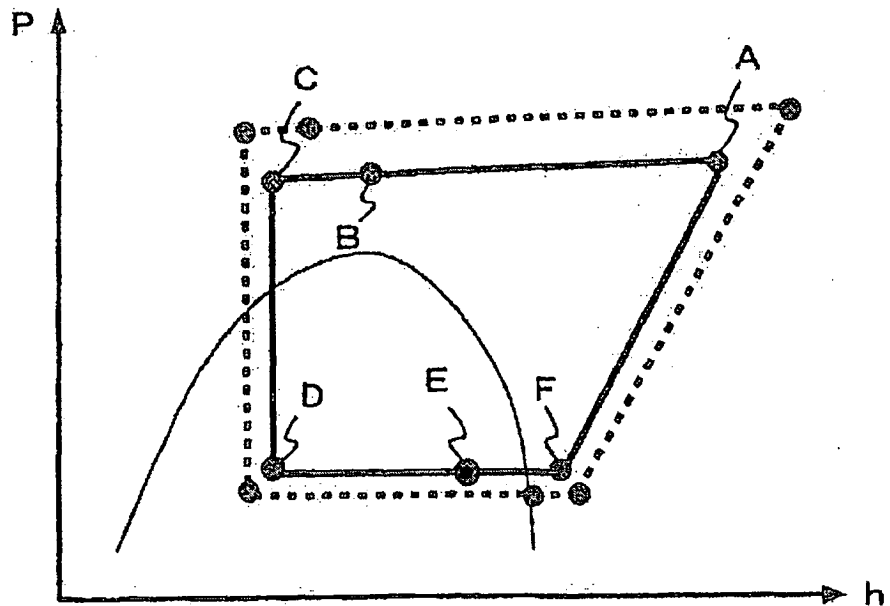


FIG. 3

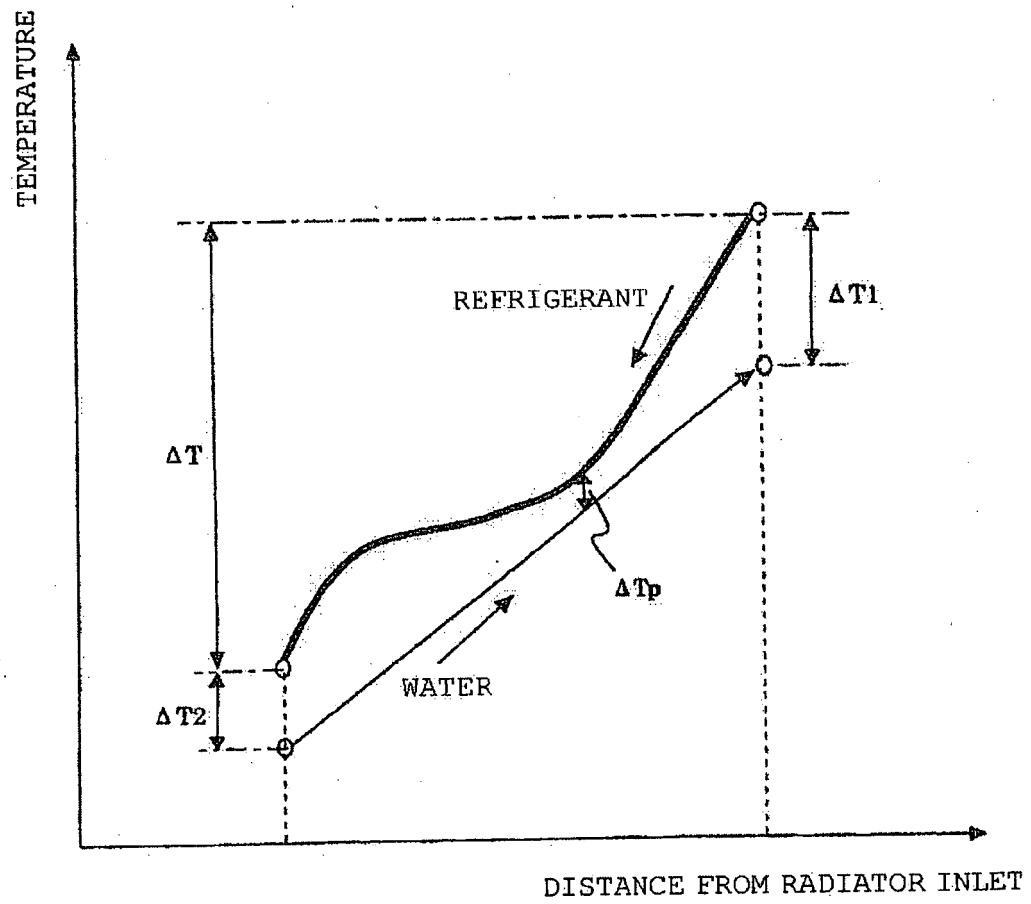


FIG. 4

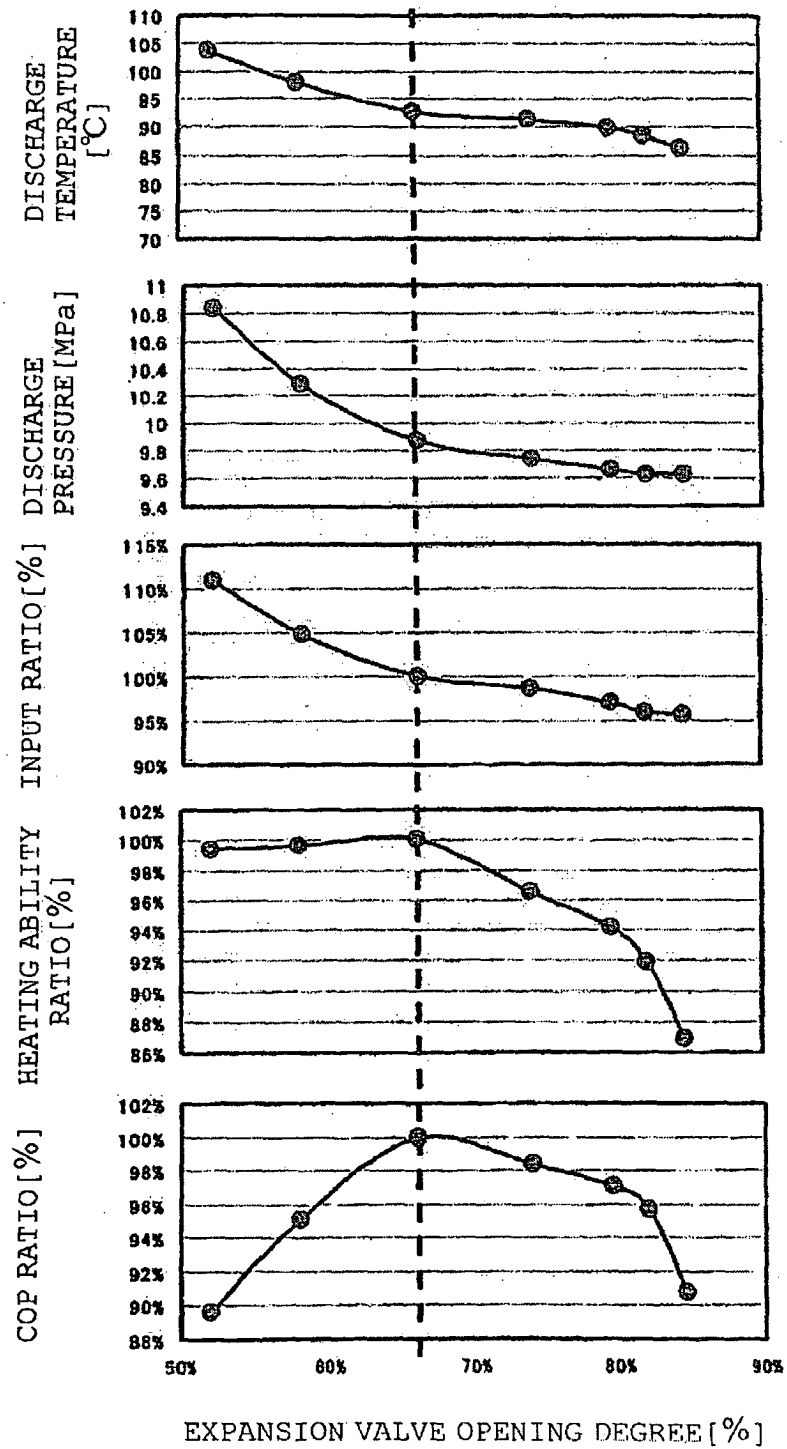


FIG. 5

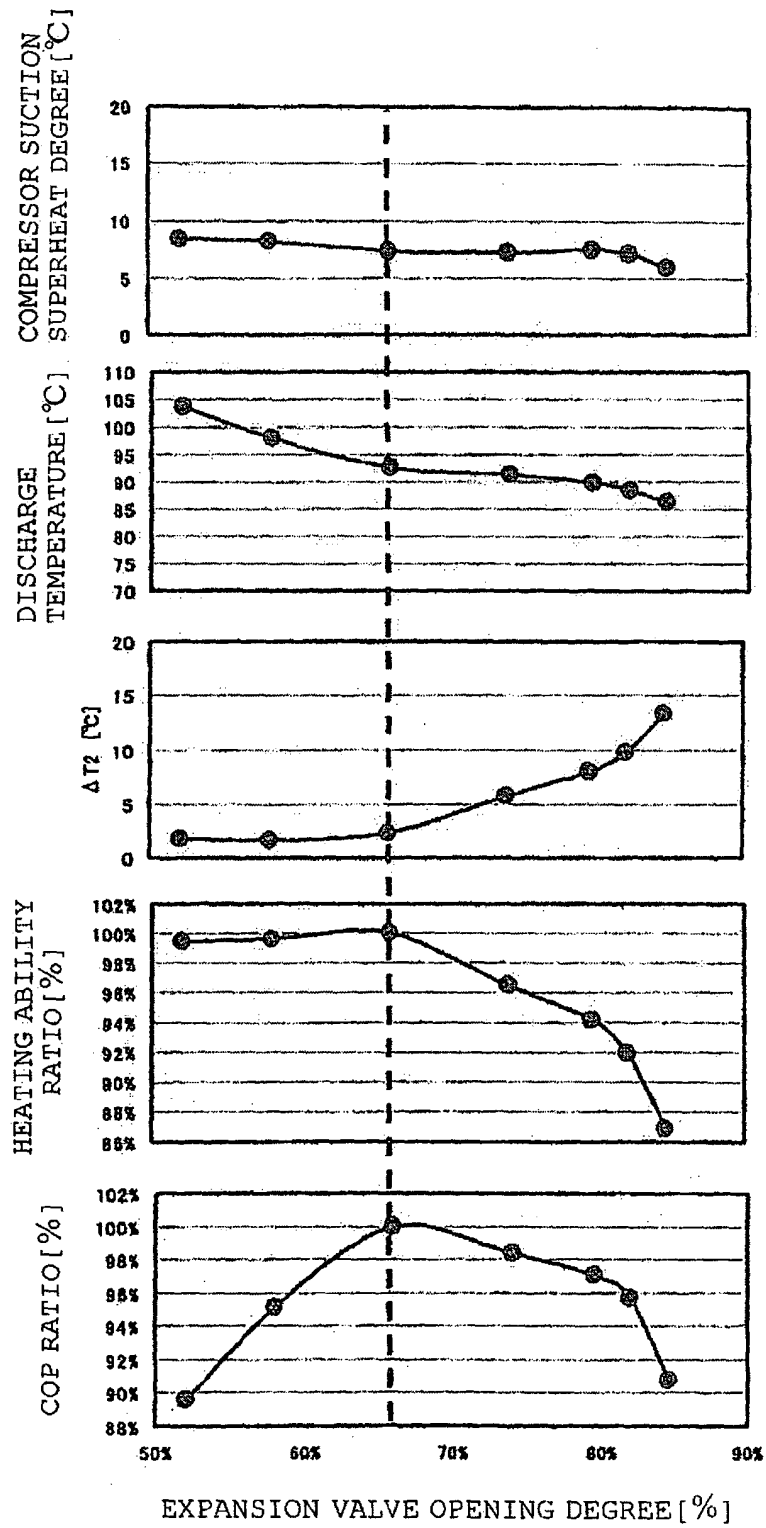


FIG. 6

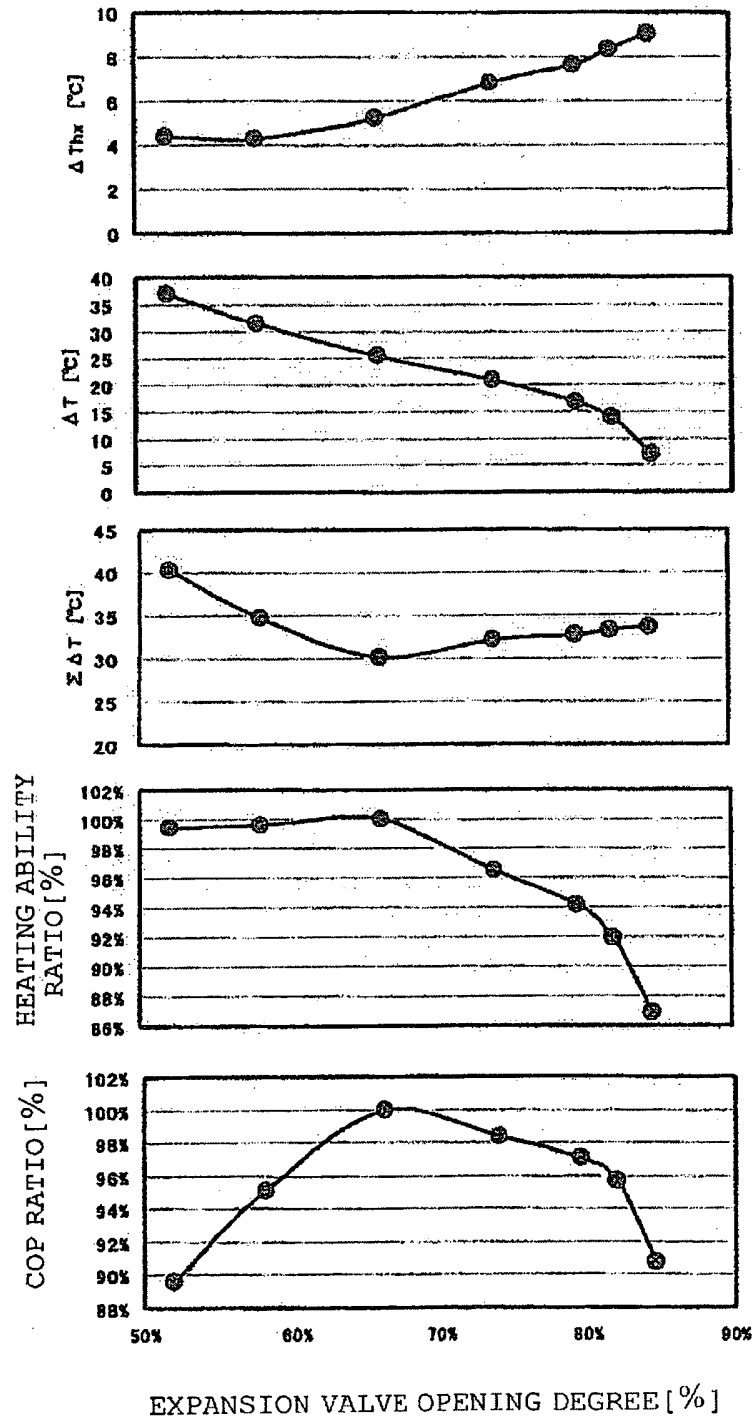


FIG. 7

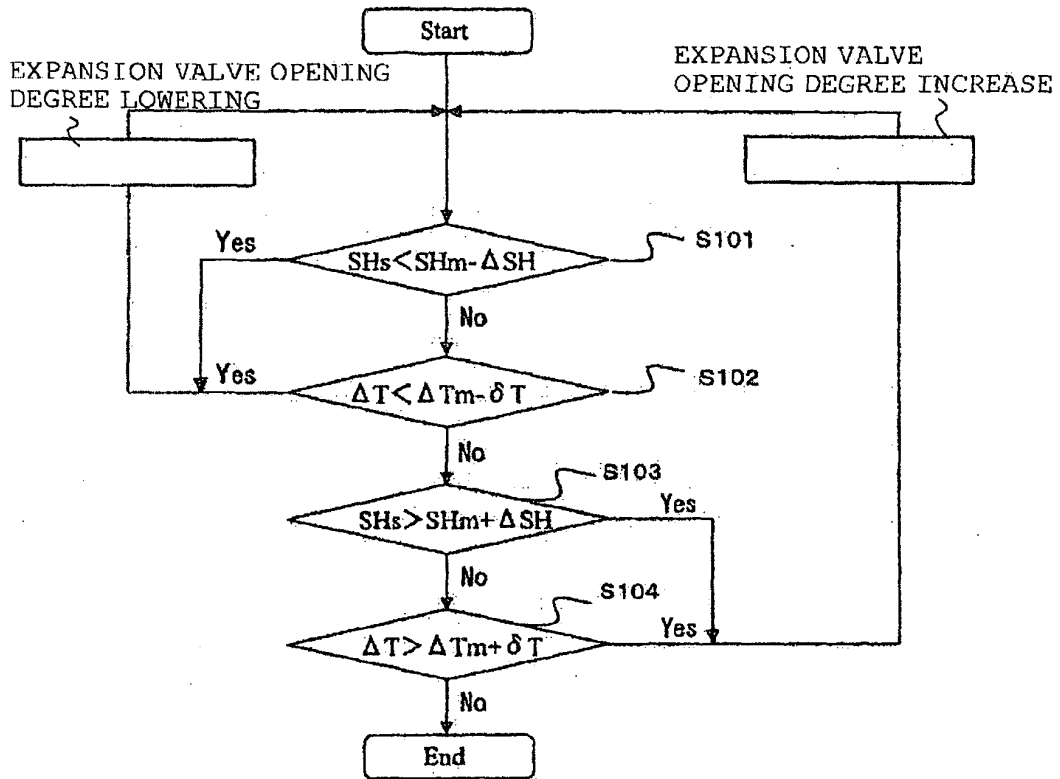


FIG. 8


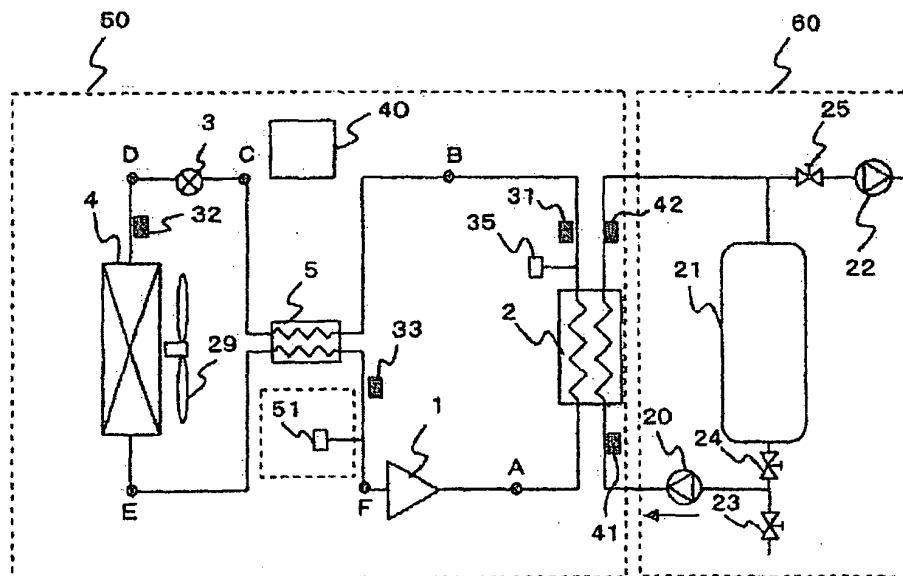


FIG. 9

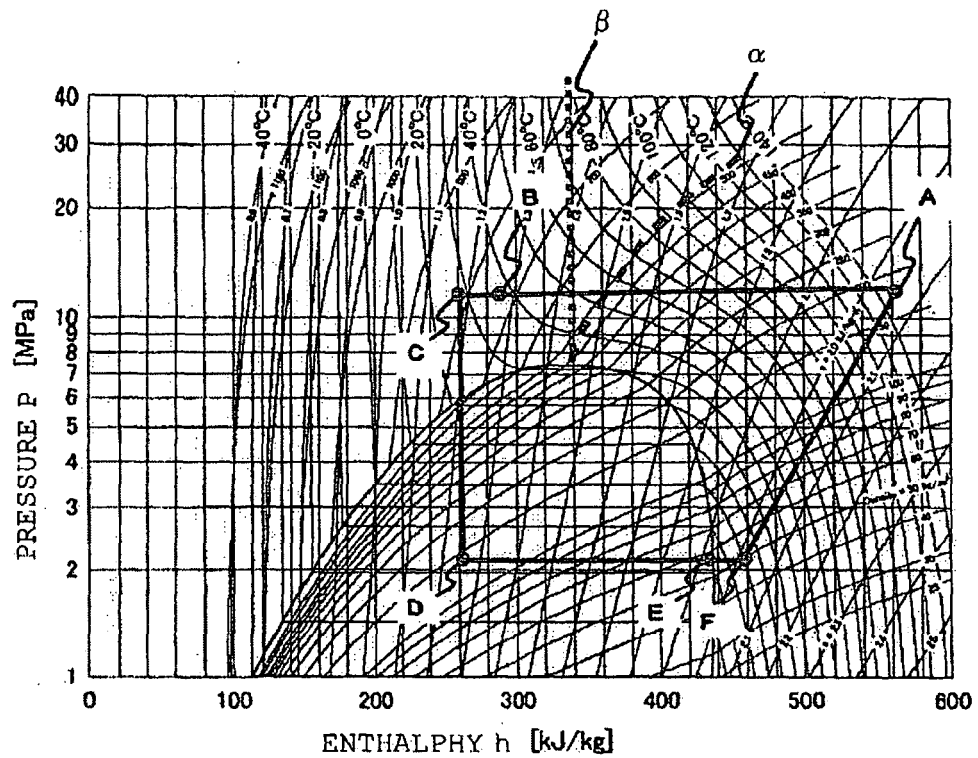

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2008/071069

A. CLASSIFICATION OF SUBJECT MATTER F25B1/00 (2006.01) i		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) F25B1/00		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2009 Kokai Jitsuyo Shinan Koho 1971-2009 Toroku Jitsuyo Shinan Koho 1994-2009		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	JP 2006-77998 A (Matsushita Electric Industrial Co., Ltd.), 23 March, 2006 (23.03.06), Claims; Par. Nos. [0001] to [0053]; Figs. 1 to 6	1-4, 7-14 5, 6
Y A	JP 2005-315558 A (Mitsubishi Electric Corp.), 10 November, 2005 (10.11.05), Claims; Par. Nos. [0001] to [0039]; Figs. 1 to 13	1-4, 7-14 5, 6
Y A	WO 2006/006578 A1 (Denso Corp.), 19 January, 2006 (19.01.06), Par. Nos. [0001] to [0071]; Claims; Figs. 1 to 12	1-4, 9-14 5, 6
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 06 February, 2009 (06.02.09)		Date of mailing of the international search report 24 February, 2009 (24.02.09)
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer
Facsimile No.		Telephone No.

Form PCT/ISA/210 (second sheet) (April 2007)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2008/071069

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 2003-176957 A (Denso Corp.), 27 June, 2003 (27.06.03), Claims; Par. Nos. [0001] to [0061]; Figs. 1 to 8	3-4, 8
Y	JP 2005-134070 A (Matsushita Electric Industrial Co., Ltd.), 26 May, 2005 (26.05.05), Claims; Par. Nos. [0001] to [0053]; Figs. 1 to 10	4
Y	JP 2005-156030 A (Hitachi Home & Life Solution, Inc.), 16 June, 2005 (16.06.05), Claims; Par. Nos. [0001] to [0030]; Figs. 1 to 5	9-14
A	JP 2007-278686 A (Mitsubishi Electric Corp.), 25 October, 2007 (25.10.07), Par. Nos. [0019] to [0020]; Fig. 2	1-14
A	JP 2006-153349 A (Mitsubishi Electric Corp.), 15 June, 2006 (15.06.06), Par. Nos. [0020] to [0021]; Figs. 4 to 5	1-14
A	JP 2004-61061 A (Matsushita Electric Industrial Co., Ltd.), 26 February, 2004 (26.02.04), Claims; Par. Nos. [0001] to [0050]; Figs. 1 to 10	1-14
A	JP 2007-93100 A (Mitsubishi Electric Corp.), 12 April, 2007 (12.04.07), Par. No. [0027]; Fig. 1	1-14
A	JP 3601369 B2 (Daikin Industries, Ltd.), 15 December, 2004 (15.12.04), Full text; all drawings	1-14
A	JP 3227651 B2 (Denso Corp.), 12 November, 2001 (12.11.01), Full text; all drawings	1-14

Form PCT/ISA/210 (continuation of second sheet) (April 2007)

EP 2 196 745 A1

INTERNATIONAL SEARCH REPORT Information on patent family members

International application No.

PCT/JP2008/071069

JP 2006-77998 A	2006.03.23	EP 1632733 A2	2006.03.08
		CN 1746593 A	2006.03.15
JP 2005-315558 A	2005.11.10	(Family: none)	
WO 2006/006578 A1	2006 01.19	EP 1777471 A1	2007 04.25
JP 2003-176957 A	2003.06.27	US 2003/0061827 A1	2003.04.03
		DE 10246004 A1	2003.04.17
JP 2005-134070 A	2005.05.26	(Family: none)	
JP 2005-156030 A	2005.06.16	(Family: none)	
JP 2007-278686 A	2007.10.25	(Family: none)	
JP 2006-153349 A	2006.06.15	(Family: none)	
JP 2004-61061 A	2004.02.26	(Family: none)	
JP 2007-93100 A	2007.04.12	EP 1818627 A1	2007.08.15
		WO 2006/057111 A1	2006.06.01
		KR 10-2007-0065417 A	2007.06.22
		CN 1065622 A	2007.10.31
JP 3601369 B2	2004.12.15	(Family: none)	
JP 3227651 B2	2001.11.12	US 2002/0014085 A1	2002.02.07
		DE 19955339 A1	2000.05.25

Form PCT/ISA/210 (patent family annex) (April 2007)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2008/071069

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

See extra sheet.

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- the
- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

Form PCT/ISA/210 (continuation of first sheet (2)) (April 2007)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2008/071069

Continuation of Box No.III of continuation of first sheet(2)

Document 1: JP 2006-77998 A (Matsushita Electric Industrial Co., Ltd.), 23 March 2006 (23.03.06), claims, paragraphs 0001-0053, Figs. 1-6

The matter common to the inventions of claims 1-14 is "a refrigeration cycle device having a compressor, heat radiator, pressure reduction means whose degree of opening can be changed, a heat absorber, and an internal heat exchanger for exchanging heat between refrigerant at the exit of the heat radiator and refrigerant at the exit of the heat absorber" which is the invention-defining matter of claims 1, 3, and 5-8 which do not refer back to other claims.

However, the search revealed that the common matter is the technique described in document 1, and since the common matter makes no contribution over the prior art, it is not a special technical feature within the meaning of PCT Rule 13.2, second sentence.

Accordingly, claims 1-14 have no special technical features which are the same or corresponding to each other, and further, since the claims 1-14 have no other matter that can be considered as a special technical feature within the meaning of PCT Rule 13.2, second sentence, there is no technical relationship, within the meaning of PCT Rule 13, between the inventions. Further, although the inventions of claims 2, and 9-14 examined in the process of finding a special technical feature are exceptionally classified together with the specified invention into the first invention group as the subject of the examination, the first invention group and the second to six invention groups listed below are not so linked as to form a single general inventive concept. Therefore, the inventions of claims 1-14 do not satisfy the requirement of unity of invention.

Classification:

First invention group: claims 1, 2, and 9-14

(for claims 9-14, only portions citing claim 1)

Second invention group: claim 3 and all the claims citing claim 3

Third invention group: claim 5 and all the claims citing claim 5

Fourth invention group: claim 6 and all the inventions citing claim 6

Fifth invention: claim 7 and all the claims citing claim 7

Sixth invention: claim 8 and all the claims citing claim 8

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 3601369 B [0004]
- JP 3227651 B [0004]