



(11) **EP 2 224 062 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

(15) Correction information:

Corrected version no 1 (W1 B1)
Corrections, see
Claims EN 1

(51) Int Cl.:

E02D 27/42 ^(2006.01) **F03D 1/00** ^(2006.01)
F03D 11/04 ^(2006.01)

(48) Corrigendum issued on:

28.10.2015 Bulletin 2015/44

(45) Date of publication and mention
of the grant of the patent:

22.07.2015 Bulletin 2015/30

(21) Application number: **10154542.4**

(22) Date of filing: **24.02.2010**

(54) **A foundation for a wind turbine and a method of making a foundation for a wind turbine**

Fundament für eine Windturbine und Verfahren zur Herstellung eines Fundaments für eine Windturbine

Fondation d'une éolienne et procédé de fabrication d'une fondation pour éolienne

(84) Designated Contracting States:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR

(30) Priority: **26.02.2009 DK 200900269**

(43) Date of publication of application:

01.09.2010 Bulletin 2010/35

(73) Proprietor: **Vestas Wind Systems A/S**
8200 Aarhus N (DK)

(72) Inventors:

• **Øllgaard, Børge**
DK-6700, Esbjerg (DK)

• **Jensen, Søren Poul**
DK-6800, Varde (DK)

(74) Representative: **Inspicos A/S**

Kogle Allé 2
P.O. Box 45
2970 Hørsholm (DK)

(56) References cited:

WO-A1-00/43599 WO-A1-84/03531
DE-A1- 2 438 722 DE-U1- 8 813 746
US-A- 5 586 417 US-A1- 2005 252 129
US-A1- 2009 044 482

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 224 062 B9

Description

FIELD OF THE INVENTION

[0001] The present invention relates to a foundation for a wind turbine and a method for laying a foundation of a wind turbine or similar tower construction. Furthermore, the invention relates to a wind turbine with such a foundation and to a cover for covering an intersection between two elements of a wind turbine foundation.

BACKGROUND OF THE INVENTION

[0002] When laying a foundation of a tower construction such as a wind turbine tower, a reinforced concrete element is often cast and subsequently, the turbine tower is positioned on the concrete element and fixed hereto. Often, the foundation includes an embedment section which is typically made of steel and has a circular shape corresponding to the shape of the tower. The embedment section includes a flange or similar interface for fixing the tower to the foundation.

[0003] When laying the foundation, the embedment section is firstly arranged such that the interface, and thus the tower, becomes accurately positioned. Subsequently, the reinforced concrete element is cast inside and about the embedment section whereby the embedment section becomes solidly fixed in a large block of concrete. Finally, the tower is anchored to the embedment section, typically by use of substantially vertical anchor rods or bolts through matching holes in adjacent flanges of the embedment section and the lowest tower section.

[0004] US 5,586,417 discloses an example of a tower construction.

[0005] Due to the heavy weight of the tower construction, the connection between the embedment section and the concrete section is exposed to very large forces and cracks in the interface between these two sections are typically unavoidable. It is, however, of utmost importance that the embedment section continuously transfers the forces from the tower to the concrete section throughout the lifetime of the wind turbine.

[0006] A foundation according to the preamble of claim 1 is further known from WO 00/43599; while DE 2438722 discloses another known foundation.

DESCRIPTION OF THE INVENTION

[0007] It is an object of the present invention to improve protection of a foundation for a wind turbine and thus potentially to increase the life time and reduce the maintenance costs for a wind turbine.

[0008] According to a first aspect, the invention provides a foundation for a wind turbine, the foundation comprising a concrete section and an embedment section, the embedment section comprising an embedded portion being embedded in the concrete section and an upright

portion projecting upwardly from an upper surface of the concrete section and forming an interface for attaching a tower to the foundation, the foundation further comprising a cover arranged across an intersection between the upper surface and an outer surface of the upright portion. The cover comprises a blank of a sheet material formed with a hole having a shape matching a cross-sectional shape of the embedment section.

[0009] Due to the cover, intrusion of water between the embedment section and concrete section can be prevented and the expected lifetime of the foundation can be increased. In addition, the provision of a separate element to cover the intersection allows movement of the embedment section relative to the concrete section. Since the cover is formed as a sheet material with a hole, it becomes easy to arrange the cover about the upright portion which thereby holds the cover in place.

[0010] The concrete section would typically be much larger than the embedment section. As an example, the upper surface may have an area which is 5-10 times the area of the cross-section of the embedment section in the plane defined by the upper surface. Normally, the upper surface would be circular or quadrangular, and the cover would be made so that it essentially covers the entire upper surface, or at least 75-95 percent of the upper surface.

[0011] The hole with a shape which matches the shape of the embedment section may generally be smaller than the embedment section so that the cover can be heeled over the embedment section by elastic deformation of the cover material. For this purpose, the cover may preferably be made from a flexible and elastically deformable material such as a rubber material such as EPDM. Due to the elastic deformation, the cover may cover a portion of the upper surface, the transition between the concrete section and embedment section as well as a portion of the outer surface of the embedment section.

[0012] In one embodiment, the embedment section has a circular shape - i.e. in a cross section in plane with the upper surface or at least in a cross section perpendicular to the axial, oblong, direction of the tower, the shape is circular or faceted so that the shape becomes essentially circular. In this embodiment, the cover may have a hole which is circular and which has a diameter e.g. between 1 and 20 percent smaller than the outer diameter of the embedment section.

[0013] The blank may have a shape like a closed ring with an outer peripheral rim and an inner peripheral rim, where the inner peripheral rim extends about and thus defines the hole. To facilitate attachment of the blank to a foundation of an existing wind turbine tower, e.g. during repair of the foundation, the blank may form an opening, e.g. formed by a slit extending between the outer and inner peripheral rims. This will allow opening of the closed ring shape for attaching the blank around the embedment section.

[0014] The closed ring shape could be re-established by joining the opposite edges of the opening e.g. by pro-

viding these edges with Velcro™ or an adhesive etc.

[0015] The cover may be adhesively bonded to the upper surface of the concrete section by use of an adhesive which is suitable for sealing between a rubber cover and a concrete element, e.g. a silicone based sealing compound or other adhesives known in the art.

[0016] The cover may also be adhesively bonded to the outer surface of the embedment section. In this case e.g. with an adhesive suitable for sealing between steel and rubber - again, this could be a silicone based adhesive or other adhesives known in the art.

[0017] The cover could be made in one single piece so that intrusion of water between separate pieces is prevented. The cover may also be made from several sheets of a material which can be solidly vulcanised, remoulded or in other ways bonded or welded in a water tight manner.

[0018] To protect the cover from mechanical impact, e.g. from vehicles driving to and from the wind turbine tower, or to protect the cover from the sunlight, it may advantageously be covered by a layer of soil. In that event, however, it may be an advantage to arrange a layer of sand, or a layer of cloth or similar protective material between the cover and the soil.

[0019] Since the space between the cover and the concrete or embedment elements is difficult to access, one or more sensors which are capable of sensing moisture or humidity and which are capable of dispatching a corresponding surveillance signal out of the space, could be arranged in the space. In a similar manner, one or more sensors could be arranged on the outer surface of the embedment element prior to the casting of the concrete element. In this way, humidity entering the interface between the concrete element and the embedment element can be registered.

[0020] In one embodiment, the cover is provided in a size so that it covers not only a large part of the upper surface but also covers the entire outer surface of the embedment section and optionally also covers the interface between the embedment section and the first section of the tower. In this way, the risk of intrusion of water or humidity in the space between the cover and the embedment section may further be reduced. In general, however, the cover may advantageously cover the upper surface in a distance of at least one meter from the embedment section, and it may cover at least 10-30 centimetres of the outer surface of the embedment section from the upper surface and up.

[0021] In a second aspect, the invention provides a wind turbine comprising a foundation according to the above description.

[0022] In a third aspect, the invention provides a method of preventing intrusion of water in a wind turbine foundation, according to claim 1, the method comprising the step of providing a cover of a water impermeable material and arranging the cover across an intersection between the upper surface and an outer surface of the embedment section. In particular, the cover may be adhesively bond-

ed to the upper surface and to the outer surface.

DESCRIPTION OF THE DRAWING

[0023] Examples of the invention will now be described with reference to the drawings in which:

Fig. 1 illustrates in a cross section, a foundation according to the invention;

Fig. 2 illustrates the cover seen from above; and

Fig. 3 illustrates an alternative embodiment with an opening allowing attachment of the cover to an already existing tower.

[0024] However, it should be understood that the detailed description and specific examples, while indicating embodiments of the invention, are given by way of illustration only, since various changes and modifications within the scope of the claims will become apparent to those skilled in the art from this detailed description.

[0025] Herein, the foundation 1 comprises a concrete section 2 and an embedment section 3. The embedment section is partly embedded in the concrete section such that the lower, embedded, portion 4 being is encapsulated in concrete and such that an upright portion 5 projects upwardly from an upper surface 6 of the concrete section. At the top end 7 of the upright portion, the embedment section 3 forms an interface 8 for attaching a tower to the foundation.

[0026] The foundation 1 further comprises a cover 9 arranged across an intersection 10 between the upper surface 6 and an outer surface 11 of the upright portion 5.

[0027] The cover is made from EPDM rubber and has a thickness of 2 mm. The size of the upper surface 6 of the concrete section 2 is 15*15 meter and the embedment section 3 has a diameter of 330 centimetres. The cover 9 is e.g. circular with a diameter of 4,9 meters or quadrangular with a size of 4,9*4,9 meters.

[0028] The cover 9 has a hole with a diameter of 2,9 meters. Since the diameter of the hole is smaller than the outer diameter of the embedment section 3, the cover 9 may be elastically deformed by pressing the upright portion 5 through the hole in the cover.

[0029] Due to the elastic deformation of the cover, the cover may thereby extend, in one piece, along the upper surface 6, across the intersection 10 and continue upwardly along the outer surface 11 of the embedment section 3 without having to assemble separate sheets of the EPDM rubber. In this way, a good durability and water tight characteristics may be obtained and the foundation may therefore be protected against intrusion of water for a very long period of time.

[0030] Due to the elastic properties of the EPDM rubber, the cover 9 will tightly squeeze around the outer surface 11 of the embedment section 3 at the end 12 of the cover 9, and intrusion of water may already for that rea-

son be prevented effectively. To further protect the foundation, a sealing compound, e.g. a silicone or tar based compound may be provided between the outer surface 11 and the cover 9.

[0031] Optionally, a sealing compound, e.g. silicone or tar based, may also be provided between the upper surface 6 and the cover 9 to prevent water from intruding the space there between. To further prevent intrusion of water, the upper surface 6 of the concrete section 2 may have a downward angle from the embedment section 3 towards the edge 13 of the concrete section 2, relative to horizontal.

[0032] The cover 9 is covered with a layer 14 of sand, and the layer of sand is again covered with a layer of soil 15. The sand protects the EPDM rubber from being injured by stones or similar potentially sharp particles in the soil. The soil protects against erosion of the sand, and the sand and soil effectively protects the EPDM rubber e.g. from being slowly decomposed by the daylight.

[0033] As it appears, the use of a cover, not least a cover of an elastically deformable material provided with a hole of a size being smaller than the embedment section may effectively be used in a method for protecting a foundation against intrusion of water into the intersection between the concrete and an element being embedded in the concrete.

[0034] Fig. 1 illustrates the foundation in a cross section, and for simplifying the illustration, only one half of the foundation is illustrated. The dotted line 16 indicates the centre of the foundation. The embedment section extends circularly around this centre, and the concrete section is square with the centre at line 16.

[0035] In Fig. 2, it is clearly shown that the blank has a shape like a closed ring 17 with an outer peripheral rim 18 and an inner peripheral rim 19. The inner peripheral rim extends about the hole 20 which is thereby defined by that inner rim.

[0036] Fig. 3 illustrates an embodiment of the cover in which the blank 21 forms an opening 22 extending between the outer and inner peripheral rims 18, 19 to allow opening of the closed ring shape for attaching the blank around the embedment section. For re-establishing the closed shape, the blank is made with an overlap 23 of 200-500 mm in the peripheral direction such that one of the radial edges 24 of the opening overlaps the other radial edge 25 of the opening. In the overlap, the blank could be made with Velcro 26 or an adhesive etc. for holding the edges 24, 25 assembled.

Claims

1. A foundation (1) for a wind turbine, the foundation comprising a concrete section (2) and an embedment section (3), the embedment section comprising an embedded portion (4) being embedded in the concrete section (2) and an upright portion (5) projecting upwardly from an upper surface (6) of the concrete

section and forming an interface (8) for attaching a tower to the

foundation (1), **characterised in that** the foundation (1) further comprises a cover (9) arranged across an intersection (10) between the upper surface (6) of the concrete section and an outer surface (11) of the upright portion (5), wherein the cover comprises a blank of a sheet material formed with a hole having a shape matching a cross-sectional shape of the embedment section.

2. A foundation according to claim 1, wherein the cover is adhesively bonded to at least one of the upper surface and the outer surface.

3. A foundation according to claim 1, wherein the cover is made from a rubber material.

4. A foundation according to any of the preceding claims, where the blank has a shape like a closed ring with an outer peripheral rim and an inner peripheral rim, where the inner peripheral rim extends about and thus defines the hole, and where the blank forms an opening extending between the outer and inner peripheral rims to allow opening of the closed ring shape for attaching the blank around the embedment section.

5. A foundation according to claim 4, wherein the hole has an area being smaller than the area of the matching cross-sectional shape.

6. A foundation according to any of the claims 4-5, wherein the embedment section has a circular cross-sectional shape and the cover forms a hole with a diameter being smaller than the diameter of the embedment section.

7. A foundation according to any of the preceding claims, wherein the cover is made from EPDM.

8. A foundation according to any of the preceding claims, wherein the cover is covered with a layer (14) of sand.

9. A foundation according to claim 8, wherein the sand is covered with a layer (15) of soil.

10. A foundation according to any of the preceding claims, wherein the cover covers the upper surface in a distance of at least one meter from the embedment section.

11. A foundation according to any of the preceding claim, wherein the cover covers in one piece, a major portion of the upper surface and an outer surface of the embedment section from the intersection to the interface for attaching the tower.

12. A wind turbine comprising a foundation according to any of claims 1-11.
13. A method of preventing intrusion of water in a wind turbine foundation according to any of the claims 1-11, the method comprising the step of providing a cover of a water impermeable material and arranging the cover across an intersection between the upper surface and an outer surface of the embedment section.
14. A method according to claim 13, wherein the cover is adhesively bonded to the upper surface and to the outer surface.

Patentansprüche

1. Ein Fundament (1) für eine Windturbine, das Fundament umfassend einen Betonabschnitt (2) und einen Einbettungsabschnitt (3), der Einbettungsabschnitt umfassend einen eingebetteten Teil (4), der in den Betonabschnitt (2) eingebettet ist, und einen aufrechten Teil (5), der aufwärts aus einer Oberseite (6) des Betonabschnitts herausragt und ein Zwischenstück (8) für die Befestigung eines Turmes an dem Fundament (1) bildet, **dadurch gekennzeichnet, dass** das Fundament (1) weiterhin eine Abdeckung (9) umfasst, die an einem Schnittpunkt (10) zwischen der Oberseite (6) des Betonabschnitts und einer Außenfläche (11) des aufrechten Teils (5) angeordnet ist, wobei die Abdeckung einen Zuschnitt eines Folienmaterials umfasst, der eine Loch aufweist, das eine der Querschnittsform des Einbettungsabschnitts entsprechende Form hat.
2. Ein Fundament nach Anspruch 1, wobei die Abdeckung klebend mit zumindest einer der Oberseite und der Außenfläche verbunden ist.
3. Ein Fundament nach Anspruch 1, wobei die Abdeckung aus einem Gummimaterial gefertigt ist.
4. Ein Fundament nach einem der vorangehenden Ansprüche, wobei der Zuschnitt die Form eines geschlossenen Rings aufweist, mit einem äußeren peripheren Rand und einem inneren peripheren Rand, wobei der innere periphere Rand sich um das Loch erstreckt und somit das Loch definiert, und wobei der Zuschnitt eine Öffnung bildet, die sich zwischen dem äußeren und dem inneren peripheren Rand erstreckt, um das Öffnen der geschlossenen Ringform zum Befestigen des Zuschnitts um den Einbettungsabschnitt zu ermöglichen.
5. Ein Fundament nach Anspruch 4, wobei das Loch eine Fläche aufweist, die kleiner ist als die Fläche der entsprechenden Querschnittsform.

6. Ein Fundament nach einem der Ansprüche 4-5, wobei der Einbettungsabschnitt eine kreisförmige Querschnittsform hat und die Abdeckung ein Loch bildet, dessen Durchmesser kleiner ist als der Durchmesser des Einbettungsabschnitts.
7. Ein Fundament nach einem der vorangehenden Ansprüche, wobei die Abdeckung aus EPDM gefertigt ist.
8. Ein Fundament nach einem der vorangehenden Ansprüche, wobei die Abdeckung mit einer Schicht (14) Sand bedeckt ist.
9. Ein Fundament nach Anspruch 8, wobei der Sand mit einer Schicht (15) Erde bedeckt ist.
10. Ein Fundament nach einem der vorangehenden Ansprüche, wobei die Abdeckung die Oberseite für eine Entfernung von zumindest einem Meter von dem Einbettungsabschnitt aus bedeckt.
11. Ein Fundament nach einem der vorangehenden Ansprüche, wobei die Abdeckung in einem Stück einen Großteil der Oberseite und einer Außenfläche des Einbettungsabschnitts von dem Schnittpunkt zu dem Zwischenstück zum Befestigen des Turmes abdeckt.
12. Eine Windturbine umfassend ein Fundament nach einem der Ansprüche 1-11.
13. Ein Verfahren zum Verhindern des Eindringens von Wasser in das Fundament einer Windturbine nach einem der Ansprüche 1-11, das Verfahren aufweisend den Schritt
Bereitstellen einer Abdeckung aus wasserdichtem Material
und
Anordnen der Abdeckung über einen Schnittpunkt zwischen der Oberseite und einer Außenfläche des Einbettungsabschnitts.
14. Ein Verfahren nach Anspruch 13, wobei die Abdeckung klebend mit der Oberseite und der Außenfläche verbunden ist.

Revendications

1. Fondation (1) pour une turbine d'éolienne, la fondation comprenant une section de béton (2) et une section d'encastrement (3), la section d'encastrement comprenant une partie noyée (4) qui est noyée dans la section de béton (2) et une partie verticale (5) faisant saillie vers le haut de la surface supérieure (6) de la section de béton et formant une interface (8) pour fixer une tour à la fondation (1), **caractérisée**

- en ce que** la fondation (1) comprend en outre un couvercle (9) aménagé en travers d'une intersection (10) entre la surface supérieure (6) de la section de béton et une surface externe (11) de la section verticale (5), dans laquelle le couvercle comprend une ébauche d'un matériau en feuille présentant un trou qui a une forme correspondant à la forme en coupe transversale de la section d'encastrement.
2. Fondation selon la revendication 1, dans laquelle le couvercle est lié par adhésif à au moins l'une ou l'autre de la surface supérieure et de la surface externe.
 3. Fondation selon la revendication 1, dans laquelle le couvercle est constitué d'un matériau de type caoutchouc.
 4. Fondation selon l'une quelconque des revendications précédentes, dans laquelle l'ébauche a la forme d'un anneau fermé avec un rebord périphérique externe et un rebord périphérique interne, où le rebord périphérique interne s'étend autour du trou qu'il définit ainsi et l'ébauche forme une ouverture s'étendant entre les rebords périphériques externe et interne pour permettre l'ouverture de la forme de l'anneau fermé afin de fixer l'ébauche autour de la section d'encastrement.
 5. Fondation selon la revendication 4, dans laquelle le trou a une surface inférieure à la surface de la forme en coupe transversale correspondante.
 6. Fondation selon l'une quelconque des revendications 4 à 5, dans laquelle la section d'encastrement a une forme en coupe transversale circulaire et le couvercle forme un trou d'un diamètre plus petit que le diamètre de la section d'encastrement.
 7. Fondation selon l'une quelconque des revendications précédentes, dans laquelle le couvercle est constitué d'EPDM.
 8. Fondation selon l'une quelconque des revendications précédentes, dans laquelle le couvercle est revêtu d'une couche (14) de sable.
 9. Fondation selon la revendication 8, dans laquelle le sable est recouvert d'une couche (15) de terre.
 10. Fondation selon l'une quelconque des revendications précédentes, dans laquelle le couvercle recouvre la surface supérieure sur une distance d'au moins un mètre de la section d'encastrement.
 11. Fondation selon l'une quelconque des revendications précédentes, dans laquelle le couvercle recouvre d'un seul tenant une partie majeure de la surface supérieure et d'une surface externe de la section d'encastrement de l'intersection à l'interface pour fixer la tour.
 12. Turbine d'éolienne comprenant une fondation selon l'une quelconque des revendications 1 à 11.
 13. Procédé permettant d'empêcher l'intrusion d'eau dans une fondation de turbine d'éolienne selon l'une quelconque des revendications 1 à 11, le procédé comprenant l'étape de mise en oeuvre d'un couvercle d'un matériau imperméable à l'eau et d'aménagement du couvercle en travers d'une intersection entre la surface supérieure et une surface externe de la section d'encastrement.
 14. Procédé selon la revendication 13, dans lequel le couvercle est lié par un adhésif à la surface supérieure et à la surface externe.

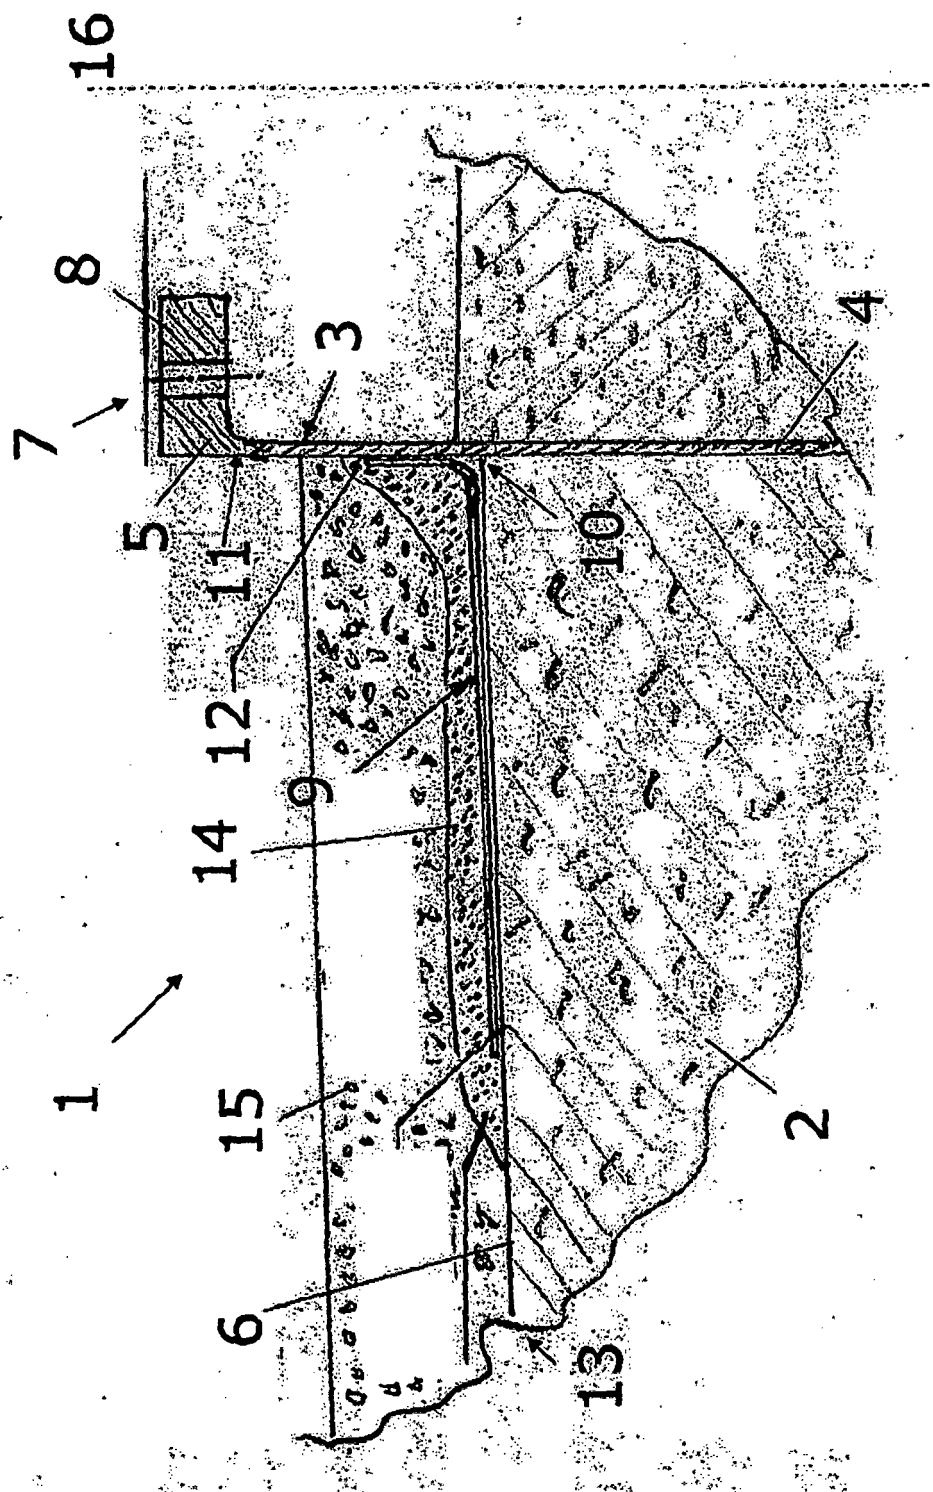


Fig. 1

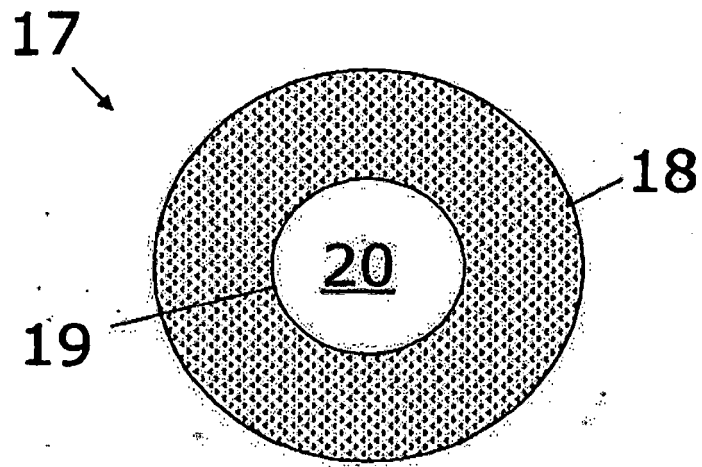


Fig. 2

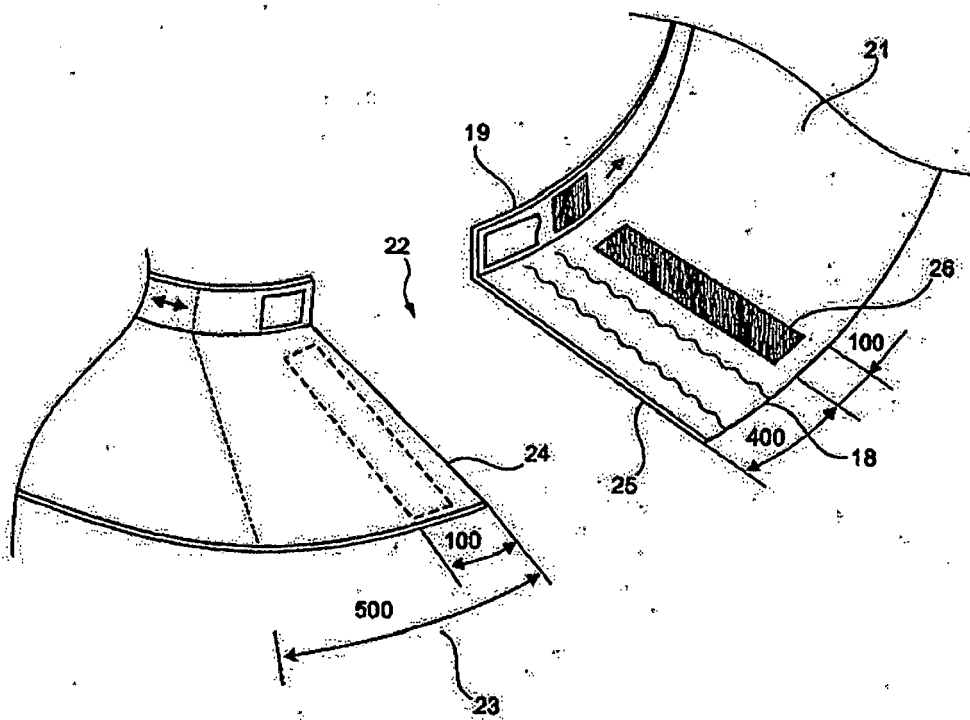


Fig. 3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5586417 A [0004]
- WO 0043599 A [0006]
- DE 2438722 [0006]