



(11) **EP 2 224 496 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 72

(51) Int Cl.:
H01L 31/042 (2006.01) **H01L 31/04** (2006.01)

(86) International application number:
PCT/JP2008/070475

(48) Corrigendum issued on:
03.11.2010 Bulletin 2010/44

(87) International publication number:
WO 2009/066583 (28.05.2009 Gazette 2009/22)

(43) Date of publication:
01.09.2010 Bulletin 2010/35

(21) Application number: **08851106.8**

(22) Date of filing: **11.11.2008**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT
RO SE SI SK TR

(30) Priority: **22.11.2007 JP 2007303274**

(71) Applicant: **Sharp Kabushiki Kaisha**
Osaka-shi
Osaka 545-8522 (JP)


(72) Inventors:
• **Sainoo, Yasushi**
Osaka-shi
Osaka 545-8522 (JP)
• **Okamoto, Satoshi**
Osaka-shi
Osaka 545-8522 (JP)

(74) Representative: **Müller - Hoffmann & Partner**
Patentanwälte
Innere Wiener Strasse 17
81667 München (DE)

(54) **WIRING MEMBER BETWEEN ELEMENTS, PHOTOELECTRIC CONVERSION ELEMENT, AND PHOTOELECTRIC CONVERSION ELEMENT CONNECTING BODY AND PHOTOELECTRIC CONVERSION MODULE USING THE WIRING MEMBER BETWEEN ELEMENTS AND THE PHOTOELECTRIC CONVERSION ELEMENT**

(57) An interconnector (20) includes an extending portion (21) extending in one direction and a connection portion (22) fixed to an n electrode (8) or a p electrode (9) formed on a cell substrate (11) of a photoelectric conversion element (1) for connection to this electrode (8, 9). The connection portion (22) is formed in a comb shape so as to protrude from the extending portion (21) in a direction substantially orthogonal to the one direction. Though the extending portion (21) is in contact with the cell substrate (11), it is not fixed to the cell substrate. By not fixing the extending portion (21) to the cell substrate (11), stress involved with heat shrinkage can be released and a degree of freedom in arrangement of the n electrode (8) and the p electrode (9) formed on the photoelectric conversion element (1) can be enhanced.

FIG.1

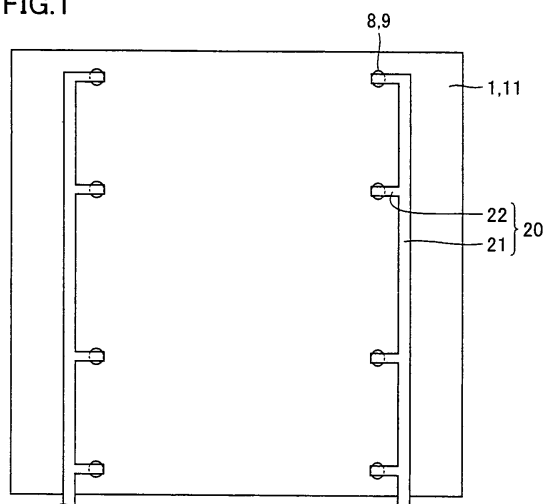

EP 2 224 496 A8