



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
15.09.2010 Bulletin 2010/37

(51) Int Cl.:
H04M 1/02 (2006.01) G06F 1/16 (2006.01)

(21) Application number: **09154815.6**

(22) Date of filing: **10.03.2009**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK TR
Designated Extension States:
AL BA RS

• **Ladouceur, Norman M**
Waterloo Ontario N2L 3W8 (CA)
• **Griffin, Jason T.**
Waterloo Ontario N2L 3W8 (CA)

(71) Applicant: **RESEARCH IN MOTION LIMITED**
Waterloo, Ontario N2L 3W8 (CA)

(74) Representative: **MERH-IP**
Matias Erny Reichl Hoffmann
Paul-Heyse-Strasse 29
80336 München (DE)

(72) Inventors:
• **Walker, David Ryan**
Waterloo Ontario N2L 3W8 (CA)

Remarks:
Amended claims in accordance with Rule 137(2) EPC.

(54) **Mobile foldable electronic terminal**

(57) A portable folding electronic device has a base with a longer length dimension and a shorter width dimension and a user interface on one surface. The user interface may be oriented for use when the base has a portrait orientation. The device also has a screen unit with a longer length dimension and a shorter width dimension and a screen on one surface. A linkage connects

the base to the screen unit. The linkage provides at least two degrees of freedom between the base and the screen unit such that the screen unit may be moved to a first position folded onto the base, with the length dimension of said screen unit aligned with the length dimension of the base, and to a second position tilted with respect to the base, with the length dimension of the screen unit aligned with the width dimension of the base.

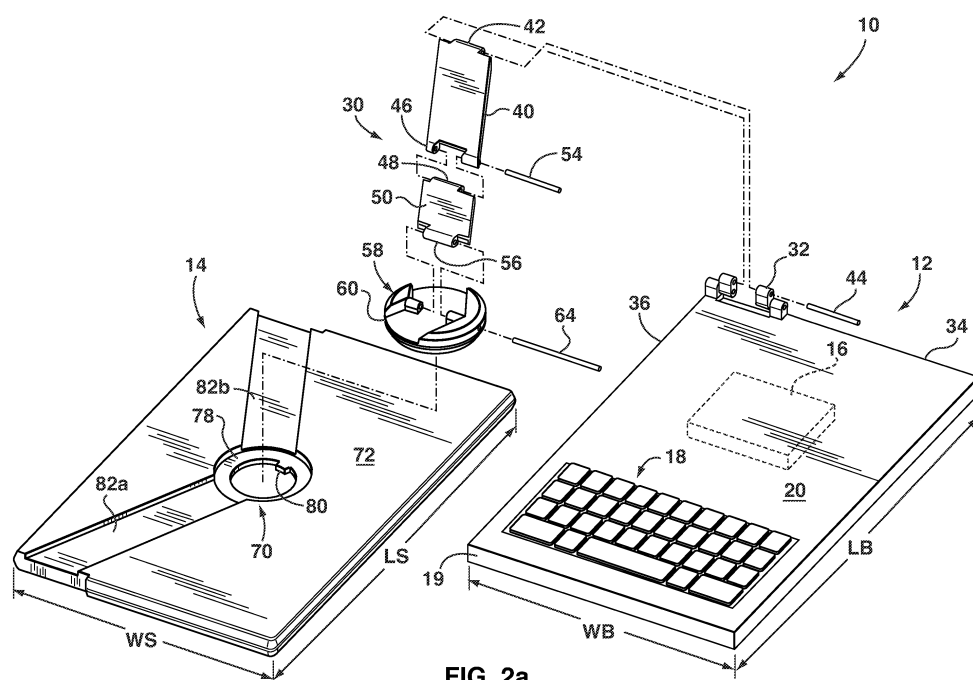


FIG. 2a

Description

[0001] This specification relates to a portable folding electronic device.

[0002] Many portable electronic devices have a screen unit hinged to a base, with the base supporting a user interface. With such devices, the screen unit may fold down so that the screen faces the keys on the base. In this closed configuration, the screen and keys are shielded. Such folding portable devices (as, for example, a flip phone) typically have a rectangular configuration with the hinge at the short side of the base and screen unit. In consequence, the screen is long and narrow which, at least for some users, may make reading the screen difficult.

BRIEF DESCRIPTION OF THE DRAWINGS

[0003] In the figures which illustrate example embodiments,

[0004] **FIG. 1** is a front perspective view of a portable folding electronic device made in accordance with a first embodiment,

[0005] **FIG. 2a** is an exploded view of the device of **FIG. 1**,

[0006] **FIGS. 2b, 2c, and 2d** are perspective, top and front views, respectively, of a portion of the device of **FIG. 1**,

[0007] **FIGS. 3a to 3f** are perspective views illustrating operation of the device of **FIG. 1**,

[0008] **FIG. 4** is an exploded view of a portable folding electronic device made in accordance with a second embodiment, and

[0009] **FIGS. 5a to 5d** are perspective views illustrating operation of the device of **FIG. 4**.

DESCRIPTION OF PREFERRED EMBODIMENTS

[0010] In overview, a portable folding electronic device has a base with a longer length dimension and a shorter width dimension and a user interface on one surface. The user interface may be oriented for use when the base has a portrait orientation. The device also has a screen unit with a longer length dimension and a shorter width dimension and a screen on one surface. A linkage connects the base to the screen unit. The linkage provides at least two degrees of freedom between the base and the screen unit such that the screen unit may be moved to a first position folded onto the base, with the length dimension of said screen unit aligned with the length dimension of the base, and to a second position tilted with respect to the base, with the length dimension of the screen unit aligned with the width dimension of the base.

[0011] In an aspect the invention provides a portable folding electronic device having a user interface and a screen, comprising: a base having a longer length dimension and a shorter width dimension and having a user interface on one surface; a screen unit having a longer

length dimension and a shorter width dimension and having a screen on one surface; and a linkage connecting said base to said screen unit through joints providing at least two degrees of freedom between said base and said screen unit such that said screen unit may be moved to a first position folded onto said base with said length dimension of said screen unit aligned with said length dimension of said base and to a second position tilted with respect to said base with said length dimension of said screen unit aligned with said width dimension of said base.

[0012] Preferably, said user interface is oriented for use when said base has a portrait orientation.

[0013] In another aspect the invention provides a portable folding electronic device having a user interface and a screen, comprising: a base having a longer length dimension and a shorter width dimension and having a user interface on one surface, said user interface oriented for use when said base has a portrait orientation; a screen unit having a longer length dimension and a shorter width dimension and having a screen on one surface; a linkage connecting said base to said screen unit, said linkage providing at least one hinge joint and at least one pivot joint between said base and said screen unit such that said screen unit may be moved to a first position folded onto said base with said length dimension of said screen unit aligned with said length dimension of said base and to a second position tilted with respect to said base with said length dimension of said screen unit aligned with said width dimension of said base.

[0014] In another aspect the invention provides a portable device having a user interface and a screen, comprising: a base having a longer length dimension and a shorter width dimension and having a user interface on one surface; a screen unit having a longer length dimension and a shorter width dimension and having a screen on one surface; at least one link arm connecting said base to said screen through a hinge connection to one of said base and said screen unit and a pivoting connection to another of said base and said screen unit such that said screen unit may be moved to a first position folded onto said base with said length dimension of said screen unit aligned with said length dimension of said base and to a second position tilted with respect to said base with said length dimension of said screen unit aligned with said width dimension of said base.

[0015] In another aspect the invention provides a portable device having a user interface and a screen, comprising: a base having a longer length dimension and a shorter width dimension and having a user interface on one surface; a screen unit having a longer length dimension and a shorter width dimension and having a screen on one surface; at least one link arm connecting said base to said screen through joints providing at least two degrees of freedom between said base and said screen unit such that said screen unit may be moved to a first position folded onto said base with said length dimension of said screen unit aligned with said length dimension of

said base and to a second position tilted with respect to said base with said length dimension of said screen unit aligned with said width dimension of said base.

[0016] Turning to FIGS. 1, 2a, 3a, and 3b, a portable folding electronic device 10 has a rectangular base 12 and a rectangular screen unit 14. The base has a length dimension LB which is substantially equal to the length dimension LS of the screen unit and a width dimension WB which is substantially equal to the width dimension WS of the screen unit. The base houses a processor 16 and has keys on its front surface 20 arranged as a keyboard 18 disposed proximate a bottom edge 19 of the base. As will be apparent, the keyboard 18 is aligned with the width dimension WB of the base. Thus, the keyboard is oriented for use when the base has a portrait orientation. The screen unit has a screen 22 (FIG. 3c) on its front surface 24 (FIG. 3c).

[0017] A linkage 30 connects the base 12 to the screen unit 14 as follows. A hinge wing 32 is mounted to the top edge 34 of the base proximate one side 36 of the base. A first link arm 40 with an end 42 formed as a hinge wing is hinged to hinge wing 32 by pivot pin 44 to form a hinge joint 45. The opposite end 46 of the first link arm 40 is also formed as a hinge wing and hinged to a hinge winged end 48 of a second link arm 50 by a pivot pin 54 to form a hinge joint 55. The opposite end 56 of the second link arm 50 is also formed as a hinge wing and is hinged to a hinge part top section 58 of a pivot disk 60 by a pivot pin 64 to form a hinge joint 65.

[0018] The pivot disk 60 is received for limited rotational movement by a receptor 70 in the back wall 72 of the screen unit as follows. Turning to FIGS. 2a to 2d, pivot disk 60 has a top section 62 threaded to a bottom section 66. The assembled pivot disk has a neck 68 with a first section 74 with a radius R1 and a second section 76 with a smaller radius R2. Neck section 74 transitions to neck section 76 at walls 77 which, as will become apparent, act as limit stops. The receptor 70 is formed by a circular inward step in the back wall 72 of the screen unit to an annular ring 78 with a radially inwardly projecting tang 80. During manufacture, the bottom section 66 of the pivot disk is registered with the annular ring at the interior side of back wall 72 and the top section 62 of the pivot disk is then threaded to the bottom section. With this assembly, the top and bottom sections 62, 66 of the pivot disk sandwich the annular ring 78 which projects inwardly toward the neck 68 of the pivot disk. During assembly, the pivot disk is oriented such that the tang 80 projecting from the annular ring is located at the smaller radius section 76 of the neck 68. The pivot disk 60 and receptor 70 thereby form a pivot joint 75 with rotational freedom limited by the limit stops 77 stopping against tang 80.

[0019] The back wall 72 of the screen unit 14 also has a V-shaped notch with the notches 82a, 82b of the V-shape meeting at the receptor 70.

[0020] With this arrangement, the screen unit may be moved to a first position whereat device 10 assumes the closed configuration illustrated in FIG. 1. In this configuration,

the screen unit is folded onto the base with the screen unit lying against the keypad of the base with the length dimension LS of the screen unit aligned with the length dimension LB of the base. In this closed configuration, link arms 40 and 50 are aligned and lie in notch 82b.

[0021] Referring to FIGS. 3a to 3f, device 10 may be unfolded from its stored configuration as follows. The screen unit 14 may first be pivoted about hinge 45 as seen in FIG. 3a. Once the screen unit has been pivoted to a sufficient extent about hinge 45, the screen unit may be pivoted about hinge 65, as seen in FIG. 3b. Next, the screen unit may be rotated about pivot joint 75 so that the length dimension LS of the screen unit becomes aligned with the width dimension WB of the base. The screen unit may then be again pivoted about hinge 45 to a second position tilted with respect to the base with the bottom wall 86 of the screen unit abutting the front surface 20 of the base, as shown in FIGS. 3c and 3d. The screen unit may be pivoted about hinge joint 55 to adjust the tilt of the screen unit. It will be apparent that with the screen unit at its second position illustrated in FIGS. 3c and 3d, the screen 22 of the screen unit is at the same side of the device 10 as the keyboard 18. It will also be apparent that the bottom edge 86 of the screen unit overlies the front surface 20 of the base between the keyboard 18 and the top edge 34 of the base. With the screen unit 14 in this second position, screen 22 has a landscape orientation while the keyboard 18 has a portrait orientation on the base. The landscape orientation of the screen may make the screen easier to read.

[0022] From this second position of the screen unit illustrated in FIGS. 3c and 3d, the screen unit may be moved to a third position. More specifically, as shown in FIG. 3e, the screen unit may again be rotated about pivot joint 65 so that its length dimension LS is again aligned with the length dimension LB of the base. The screen unit may then be pivoted about hinge joints 45, 55, and 65 so that the screen unit lies atop base 12, but this time with the screen 22 facing outwardly, as illustrated in FIG. 3f. The configuration of FIG. 3f is a tablet-type configuration which would have advantages where screen 22 is a touch screen. In the tablet-type configuration, link arms 40 and 50 are aligned and lie in notch 82a.

[0023] While not illustrated in FIGS. 1 to 3f, the pivot disk may have a central opening through which wires from the base may pass to facilitate electrical connections between the base and screen unit.

[0024] While not preferred, in an alternate embodiment, screen unit 14 could move from the first position illustrated in FIG. 1 to a position whereat the length dimension LS of the screen unit is aligned with the width dimension WB of the base absent hinge joints 55 and 65. Specifically, absent these hinge joints, the screen unit could still be pivoted about hinge joint 45 as illustrated in FIG. 3a, however, in this embodiment, the screen unit would be pivoted about the hinge joint 45 until it made a right angle with the base. The screen unit would then be

rotated about pivot joint **75** to align its length dimension with the width dimension of the base. In this position, the screen unit would be spaced from the base by the upright link arms **40**, **50**. With this modification, the screen unit could not be moved to the described tablet-type configuration.

[0025] In both embodiments, the hinge joint **45** provides a first degree of freedom for the screen unit and the pivot joint **75** provides a second degree of freedom for the screen unit to allow the screen unit to move from its first position when the device is in a closed configuration to its second position whereat its length dimension **LS** is aligned with the width dimension **WB** of the base.

[0026] Turning to **FIG. 4**, in another embodiment wherein like parts have been given like reference numerals, a portable folding electronic device **100** has a rectangular base **112** and a rectangular screen unit **114**. The base has a length dimension **LB** which is substantially equal to the length dimension **LS** of the screen unit and a width dimension **WB** which is substantially equal to the width dimension **WS** of the screen unit. The base houses a processor and has a keyboard **18** on its front surface **20** disposed proximate a bottom edge **19** of the base and aligned with the width dimension **WB** of the base. The screen unit has a screen **22** (**FIG. 5b**) on its front surface **24** (**FIG. 5b**).

[0027] The front surface **120** of base **112** has a pie-shaped depression **190** terminating at its periphery in a deeper curved notch **192**. Front surface **120** has a hole **191** at the radial centre of the pie-shaped depression **190**. The pie-shaped depression and curved notch extend under the middle portion of the keyboard **18**.

[0028] A linkage **130** connects the base **112** to the screen unit **114** as follows. A hinge wing **132** is mounted to the bottom edge **86** of the screen unit **112** midway along the bottom edge. A link arm **160** in the nature of a pivot plate with an end **142** formed as a hinge wing is hinged to hinge wing **132** by a pivot pin (not shown) to form a hinge joint **145** (**FIG. 5a**).

[0029] The link arm **160** has a peripheral thickened curved band **194** and a thinner pie-shaped inner section **196** with a hole **198**. The curved band of the link arm is received within the curved notch **192** in the front surface of the base **112** and the pie-shaped inner section **196** of the link arm is received within the pie-shaped depression of the base **112**. A pin **115** extends through the holes **191** and **198** and abuts the back side of the keyboard **18** to lock the link arm to the base **112** and provide a pivot joint **175** (**FIG. 5c**).

[0030] In manufacture, the link arm is first secured to the base **112** by pin **115** and then the keyboard is installed. Thereafter, the screen unit may be attached to the base **112** by completing hinge joint **145**.

[0031] The pin joining the link arm to the base may be annular and receive wires from the base to allow for an electrical connection between the base and screen unit.

[0032] Turning to **FIGS. 5a** to **5d**, in use, device **100** may be unfolded from its stored configuration seen in

FIG. 5a as follows. The screen unit **114** may first be pivoted about hinge **145** as seen in **FIG. 5a**. Next the screen unit may be twisted from its position shown in **FIG. 5b** to the position shown in **FIG. 5c** by rotating the link arm **160**. The length of the curved band **194** of the link arm and the curved notch **192** in the base provide limit stops to the rotation of the link arm. In the position shown in **FIG. 5c**, the length dimension **LS** of the screen unit **114** is aligned with the width dimension **WB** of the base **112**. In this position, the tilt of the screen unit can be adjusted by pivoting the screen unit about hinge **145**. Optionally, from the position of the screen unit in **FIG. 5c**, the screen unit could be quickly folded down to the position shown in **FIG. 5d** should a user wish to temporarily shield the keyboard and screen.

[0033] Alternatively, the device **100** could be unfolded from its stored configuration shown in **FIG. 5a** by first rotating the screen unit to the position shown in **FIG. 5d** and then pivoting the screen unit about hinge **145** to the position shown in **FIG. 5c**. As a further option, the screen unit may be moved from its stored configuration of **FIG. 5a** to the open position of **FIG. 5c** in one fluid motion wherein the screen unit is simultaneously rotated and pivoted.

[0034] While the base of the devices has been described as having a keyboard, any suitable user interface may be provided. For example, the user interface of the base could comprise one or more of the following: keyboard, keypad, touch screen, game pad interface, track ball, and gesture pad. Where the user interface included a touch screen, this could function as both an input and an output device.

[0035] While the exemplary devices shown have a rectangular base and a rectangular screen unit, other shapes would be possible provided they have a longer length dimension and a shorter width dimension.

[0036] Other modifications will be apparent to those skilled in the art.

Claims

1. A portable folding electronic device (10, 100) having a user interface (18) and a screen (22), comprising:

a base (12, 112) having a longer length dimension and a shorter width dimension and having a user interface (18) on one surface;

a screen unit (14, 114) having a longer length dimension and a shorter width dimension and having a screen on one surface; and

a linkage (30, 130) connecting said base to said screen unit through joints (45, 75, 145, 175) providing at least two degrees of freedom between said base and said screen unit such that said screen unit may be moved to a first position folded onto said base with said length dimension of said screen unit aligned with said length dimension

sion of said base and to a second position tilted with respect to said base with said length dimension of said screen unit aligned with said width dimension of said base.

2. The device of claim 1 wherein, when said screen unit (14, 114) is in said first position, said screen (22) faces said user interface (18) and, when said screen unit is in said second position, said screen is at a same side of said device as said user interface.
3. The device of claim 1 or claim 2 wherein a bottom edge (19) of said base is aligned with said width dimension of said base and said user interface (18) is disposed proximate said bottom edge of said base and wherein, when said screen unit is in said second position, a bottom edge (86) of said screen unit overlies said one surface of said base between said user interface and a top edge (34) of said base.
4. The device of any one of claim 1 to claim 3 wherein said length dimension of said base (12, 112) is substantially the same as said length dimension of said screen unit (14, 114) and wherein said width dimension of said base is substantially the same as said width dimension of said screen unit.
5. The device of any one of claim 1 to claim 4 wherein said linkage (30, 130) provides at least three degrees of freedom between said base and said screen unit such that said screen unit (14, 114) may be moved to a third position folded onto said base with said length dimension of said screen unit aligned with said length dimension of said base and with said screen facing directly away from said user interface.
6. The device of any one of claim 1 to claim 5 wherein said linkage comprises a link arm (40, 160) and wherein said joints comprise a hinge joint (45, 145) extending between said link arm and one of said base and said screen unit.
7. The device of claim 6 wherein said joints comprise a pivot joint (75, 175) extending between said link arm and another of said base and said screen unit.
8. The device of claim 7 wherein said link arm is a first link arm (40) and wherein said linkage further comprises a second link arm (50) and wherein said pivot joint (75) extends between said second link arm and another of said base and said screen unit.
9. The device of any one of claim 6 to claim 8 wherein said hinge joint is a first hinge joint (45) and wherein said linkage further provides a second hinge joint (65) between said base and said screen unit so that said screen unit may be moved to a third position folded onto said base with said length dimension of

said screen unit aligned with said length dimension of said base and with said screen facing directly away from said user interface.

- 5 10. The device of claim 9 wherein said second hinge joint (65) is at said pivot joint (75).
11. The device of claim 8 wherein said first link arm is joined to said second link arm by a hinge joint (55).
- 10 12. The device of claim 6 wherein said hinge joint (145) extends between said screen unit and said link arm (160) at a bottom edge (86) of said screen unit, said bottom edge extending along said long dimension of said screen unit.
- 15 13. The device of claim 9 wherein said first hinge joint (45) extends between said base and said link arm (40) at a top edge (34) of said base, said top edge extending along said width dimension of said base.
- 20 14. The device of any one of claim 1 to claim 13 wherein said screen is a touch screen.
- 25 15. The device of any one of claim 1 to claim 14 wherein said user interface comprises a plurality of keys (18).

Amended claims in accordance with Rule 137(2) EPC.

1. A portable folding electronic device (10) having a user interface (18) and a screen (22), comprising:
 - a base (12) having a longer length dimension and a shorter width dimension and having a user interface (18) on one surface;
 - a screen unit (14) having a longer length dimension and a shorter width dimension and having a screen on one surface and a first notch (82b) and a second notch (82a) forming a V-shaped notch on an opposite surface; and
 - a linkage (30) connecting said base to said screen unit through joints (45, 75) providing at least three degrees of freedom between said base and said screen unit such that said screen unit may be moved to a first position folded onto said base with said length dimension of said screen unit aligned with said length dimension of said base and said linkage aligned with, and lying in, said first notch (82b), to a second position tilted with respect to said base with said length dimension of said screen unit aligned with said width dimension of said base, and to a third position folded onto said base with said length dimension of said screen unit aligned with said length dimension of said base and with said screen facing directly away from said user inter-

face and said linkage aligned with, and lying in, said second notch (82a).

2. The device of claim 1 wherein, when said screen unit (14, 114) is in said first position, said screen (22) faces said user interface (18) and, when said screen unit is in said second position, said screen is at a same side of said device as said user interface.
3. The device of claim 1 or claim 2 wherein a bottom edge (19) of said base is aligned with said width dimension of said base and said user interface (18) is disposed proximate said bottom edge of said base and wherein, when said screen unit is in said second position, a bottom edge (86) of said screen unit overlies said one surface of said base between said user interface and a top edge (34) of said base.
4. The device of any one of claim 1 to claim 3 wherein said length dimension of said base (12, 112) is substantially the same as said length dimension of said screen unit (14, 114) and wherein said width dimension of said base is substantially the same as said width dimension of said screen unit.
5. The device of any one of claim 1 to claim 4 wherein said linkage comprises a link arm (40) and wherein said joints comprise a hinge joint (45) extending between said link arm and one of said base and said screen unit.
6. The device of claim 5 wherein said joints comprise a pivot joint (75) extending between said link arm and another of said base and said screen unit.
7. The device of claim 6 wherein said link arm is a first link arm (40) and wherein said linkage further comprises a second link arm (50) and wherein said pivot joint (75) extends between said second link arm and another of said base and said screen unit.
8. The device of any one of claim 5 to claim 7 wherein said hinge joint is a first hinge joint (45) and wherein said linkage further provides a second hinge joint (65) between said base and said screen unit so that said screen unit may be moved to said third position folded onto said base with said length dimension of said screen unit aligned with said length dimension of said base and with said screen facing directly away from said user interface.
9. The device of claim 8 wherein said second hinge joint (65) is at said pivot joint (75).
10. The device of claim 7 wherein said first link arm is joined to said second link arm by a hinge joint (55).
11. The device of claim 8 wherein said first hinge joint

(45) extends between said base and said link arm (40) at a top edge (34) of said base, said top edge extending along said width dimension of said base.

12. The device of any one of claim 1 to claim 11 wherein said screen is a touch screen.
13. The device of any one of claim 1 to claim 12 wherein said user interface comprises a plurality of keys (18).

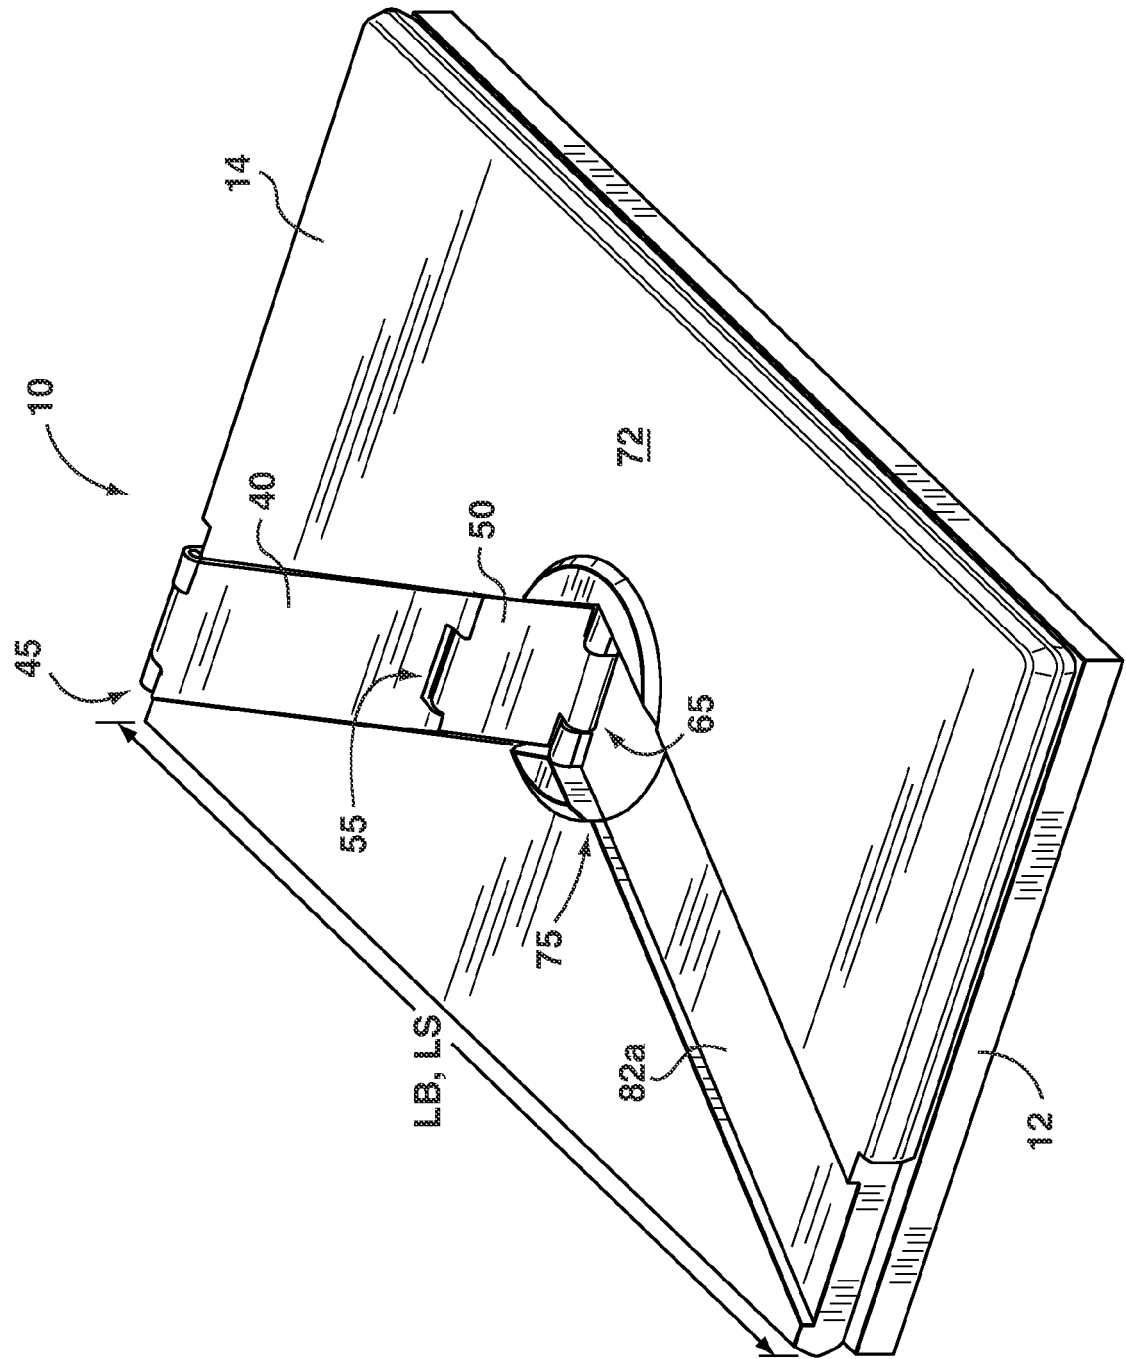


FIG. 1

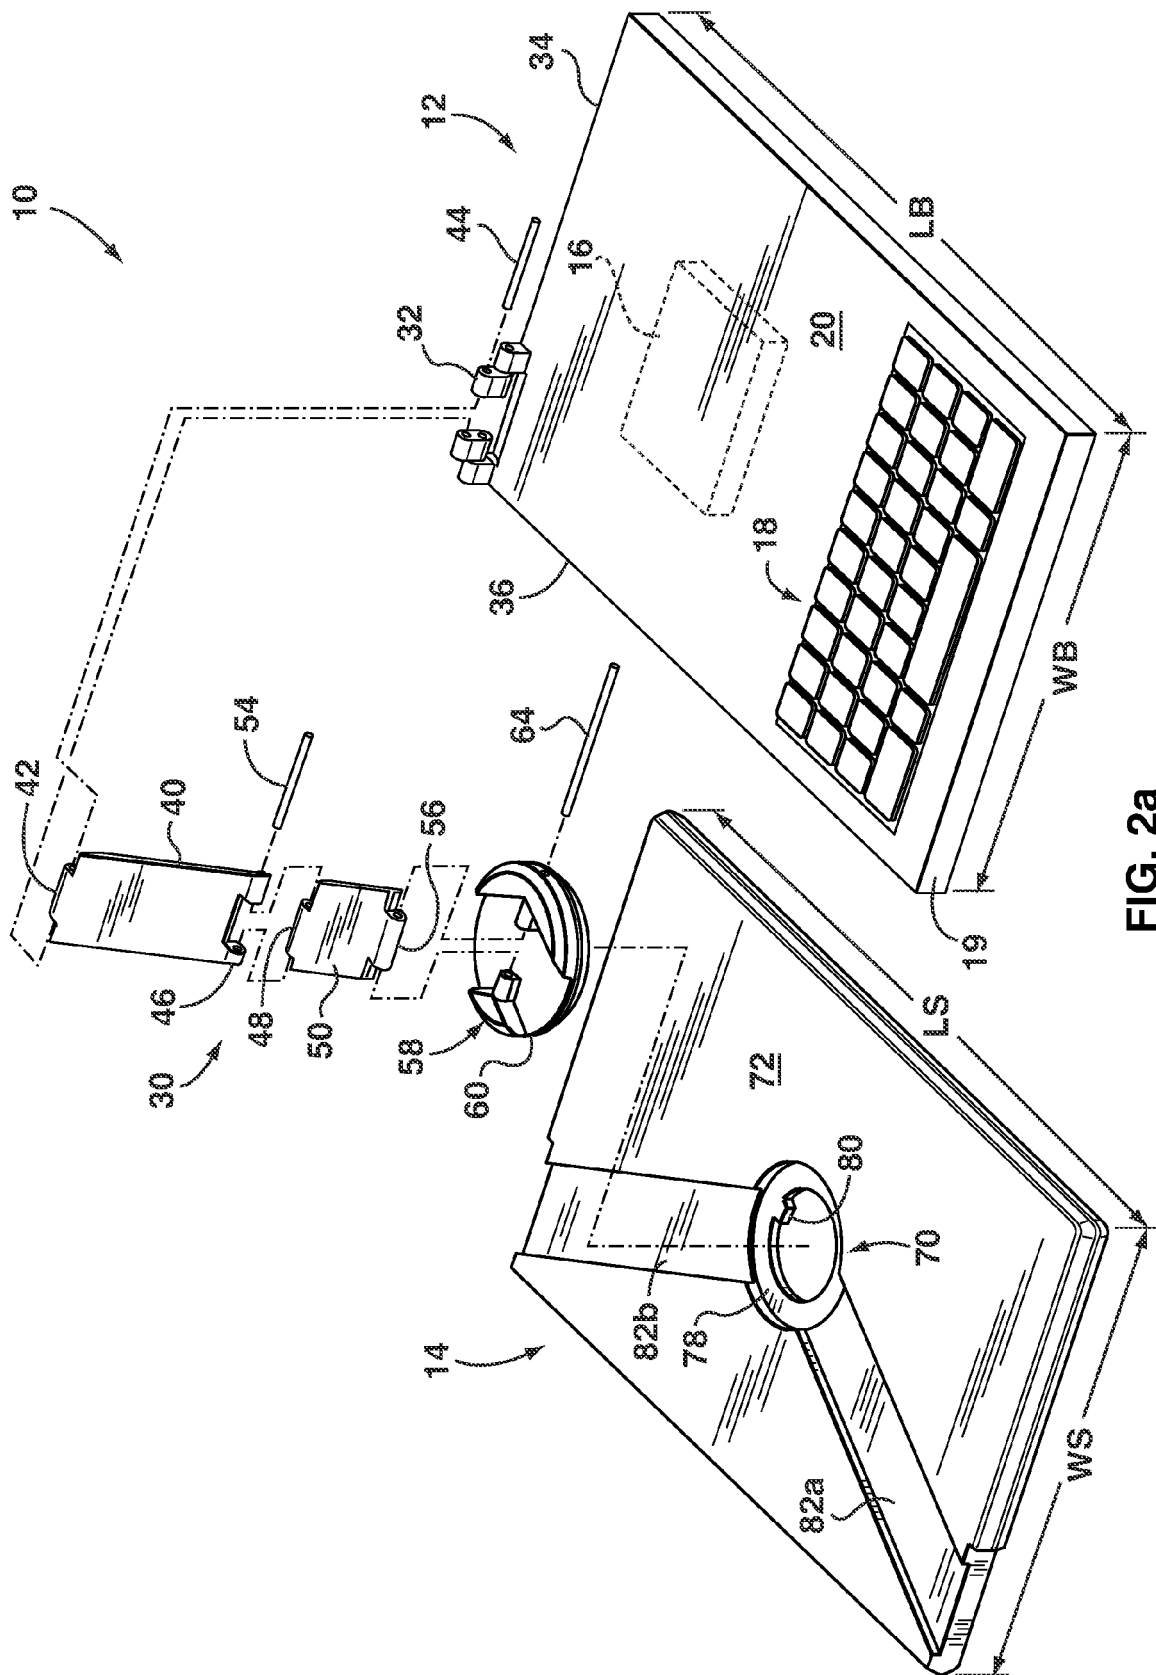


FIG. 2a

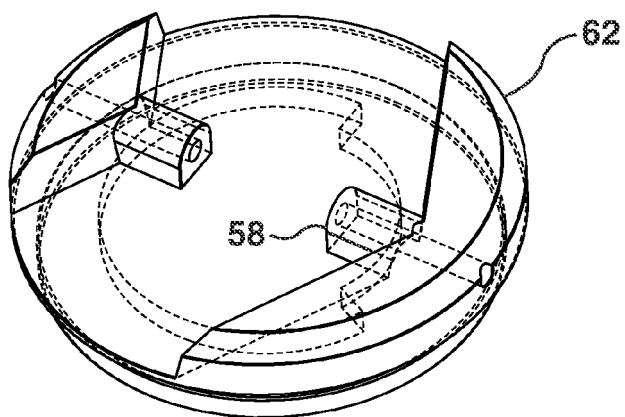


FIG. 2b

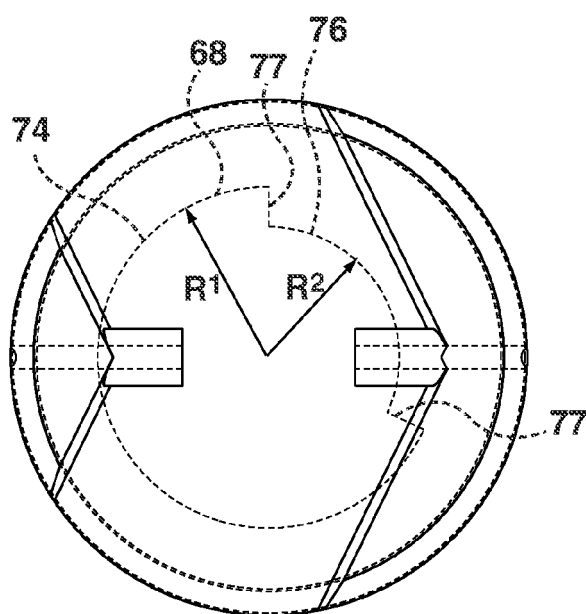


FIG. 2c

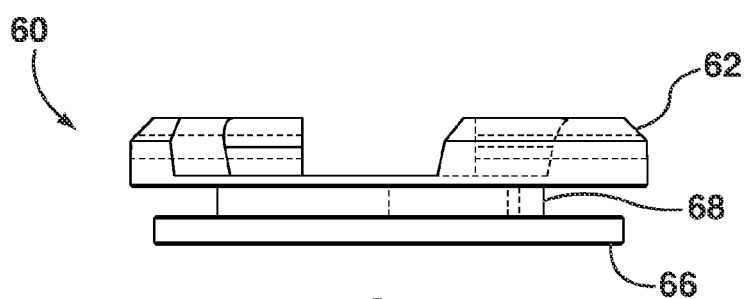
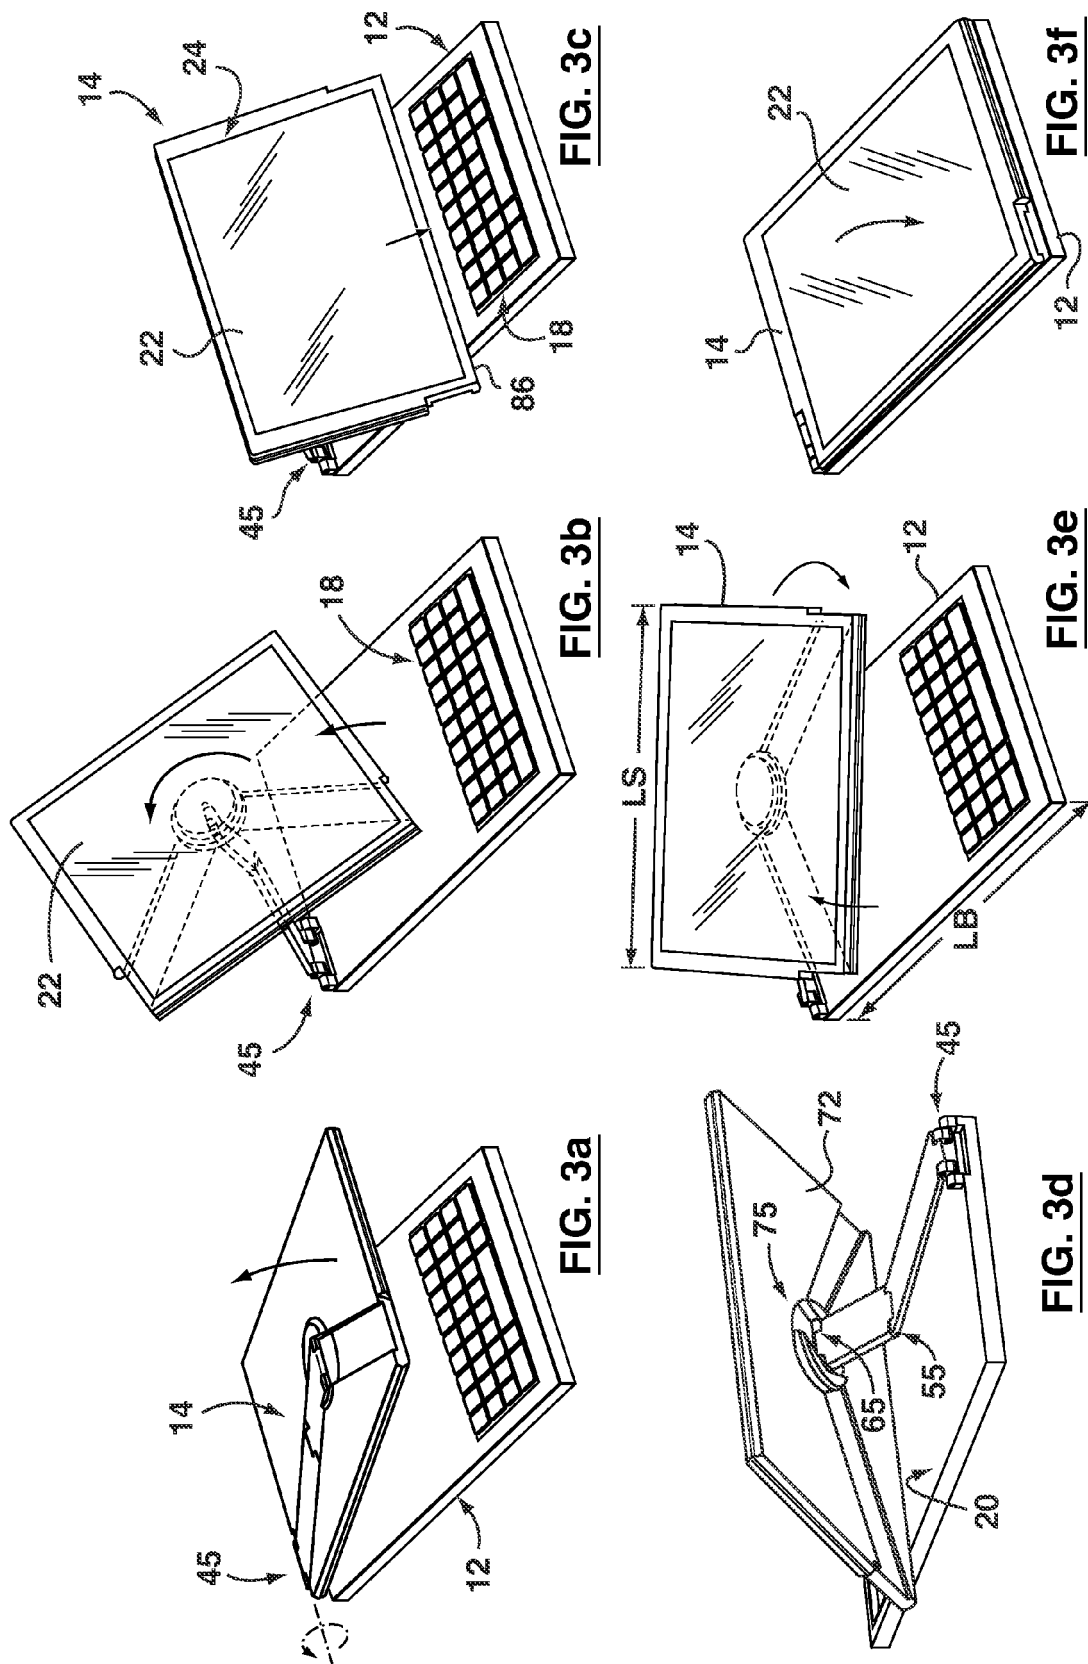
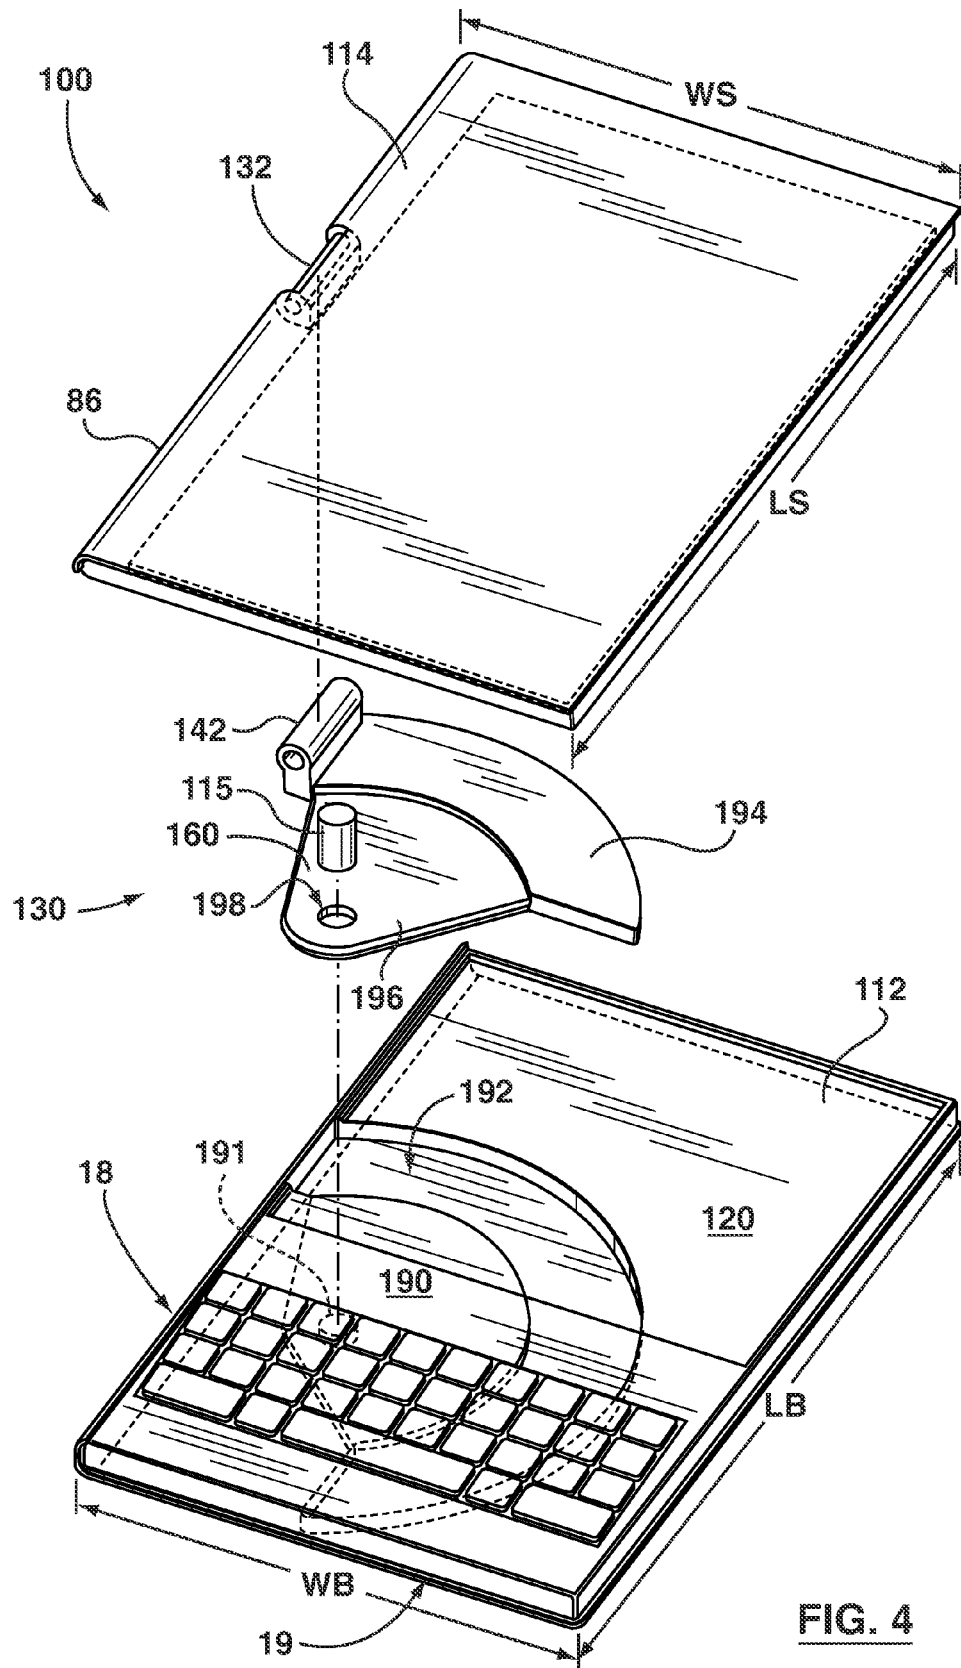


FIG. 2d





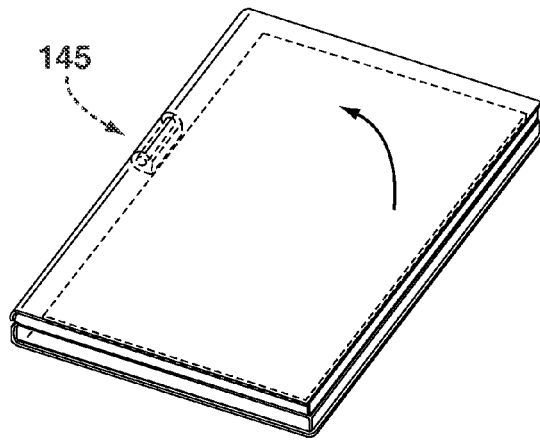


FIG. 5a

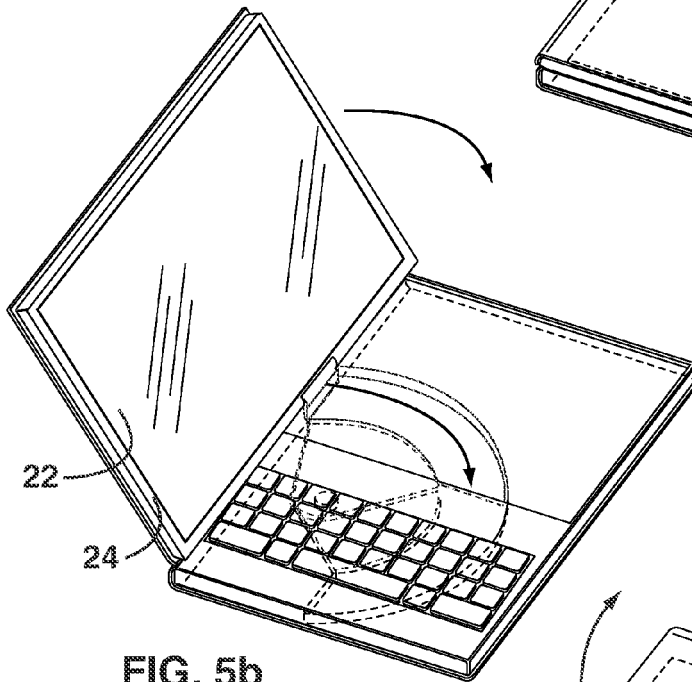


FIG. 5b

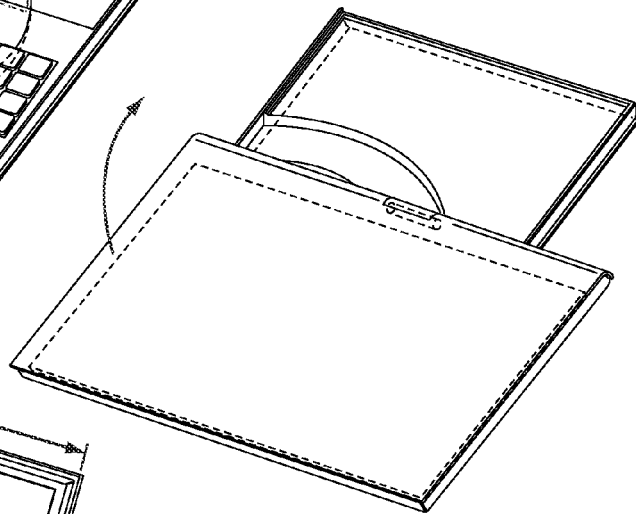


FIG. 5d

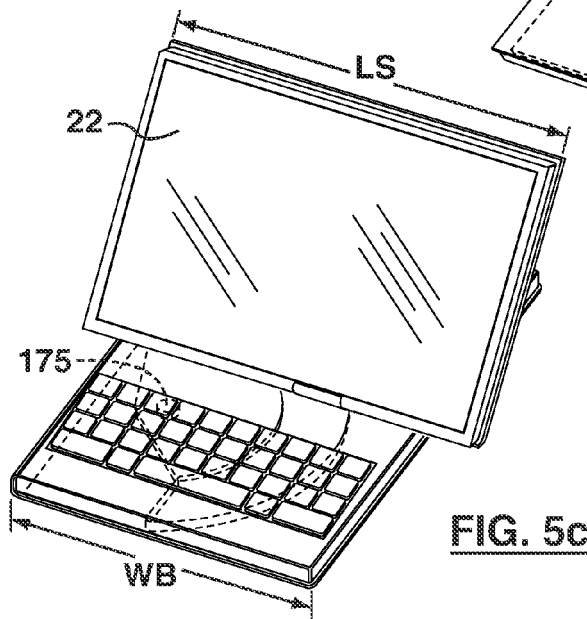


FIG. 5c



EUROPEAN SEARCH REPORT

Application Number
EP 09 15 4815

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2008/094792 A1 (CHEN SHAOFEN [US]; WEN ZHAOFANG [US]) 24 April 2008 (2008-04-24) * abstract; figures 4A, 4B, 6F, 6G, 7 * * paragraph [0122] - paragraph [0129] * -----	1-15	INV. H04M1/02 G06F1/16
X	US 2008/151481 A1 (MISAWA ATSUSHI [JP]) 26 June 2008 (2008-06-26) * abstract; figures 22A-22E, 25A-26E * * paragraph [0172] - paragraph [0200] * -----	1-15	
X	EP 0 626 632 A1 (SHARP KK [JP]) 30 November 1994 (1994-11-30) * abstract; figures 37, 38(a), 38(b), 39, 41(a), 41 (b), 41 (c), 42, 45 * * column 41, line 9 - column 50, line 48 * -----	1-15	
A	US 2004/145564 A1 (DUARTE MATIAS [US]; LEWIS TODD [US]; PALMER JOSEPH [US]) 29 July 2004 (2004-07-29) * abstract; figure 6 * -----	1-15	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
			H04M G06F
Place of search Munich		Date of completion of the search 27 August 2009	Examiner Marinov, Ivan
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

1
EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 09 15 4815

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-08-2009

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2008094792 A1	24-04-2008	NONE	

US 2008151481 A1	26-06-2008	CN 101155201 A	02-04-2008
		JP 2008085865 A	10-04-2008
		KR 20080029932 A	03-04-2008

EP 0626632 A1	30-11-1994	CN 1098797 A	15-02-1995
		DE 69425608 D1	28-09-2000
		DE 69425608 T2	19-04-2001
		US 5844543 A	01-12-1998

US 2004145564 A1	29-07-2004	NONE	
