



(11) **EP 2 232 797 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
06.12.2017 Bulletin 2017/49

(51) Int Cl.:
H04M 3/42 ^(2006.01) **H04L 12/58** ^(2006.01)

(21) Application number: **07857046.2**

(86) International application number:
PCT/EP2007/011326

(22) Date of filing: **21.12.2007**

(87) International publication number:
WO 2009/080078 (02.07.2009 Gazette 2009/27)

(54) **METHOD AND SYSTEM FOR MANAGING COMMUNICATION SESSIONS SET-UP BETWEEN USERS**

VERFAHREN UND SYSTEM ZUR VERWALTUNG VON ZWISCHEN BENUTZERN AUFGEBAUTEN
KOMMUNIKATIONSSITZUNGEN

PROCÉDÉ ET SYSTÈME POUR GÉRER DES SESSIONS DE COMMUNICATION ÉTABLIES ENTRE
DES UTILISATEURS

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE
SI SK TR**

• **DOLFINI, Danilo**
I-10148 Torino (IT)

(43) Date of publication of application:
29.09.2010 Bulletin 2010/39

(74) Representative: **Colombo, Stefano Paolo et al**
Marchi & Partners S.r.l.
Via Vittor Pisani, 13
20124 Milano (IT)

(73) Proprietor: **Telecom Italia S.p.A.**
20123 Milano (IT)

(56) References cited:
US-A1- 2004 203 664 US-B1- 6 853 634

(72) Inventors:
• **SALIS, Nicoletta**
I-10148 Torino (IT)

EP 2 232 797 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a method and system for managing communication sessions set-up between users.

[0002] As devices that enable mobile communication are becoming more and more popular, there is an increasing need for users to control and customize their communication, based on the context in which this takes place.

[0003] As stated by R. Dinoff et al., ("Learning and Managing User Context in Personalized Communications Services", Bell Laboratories, Lucent Technologies - Int'l Workshop on Context in Advanced Interfaces, 23 May 2006) there is an increasing need for users to have the possibility to get called by the right people in the right way, and to be not bothered by the ones users don't want to deal with for the moment. To this purpose, R. Dinoff et al. propose an availability service which is (i) context-aware, (ii) requester-targeted, and (iii) preferences driven. By context-aware, the Authors mean that the service can take into account the end-user's current context, including dynamic information (e.g., presence on various devices, location, and current usage of devices, and more static information, such as buddy lists and relationships, calendar entries, corporate directory). By requester-targeted, the Authors mean that the answer provided may depend on the person or service that is making the availability request. By preferences driven the Authors mean that the answer provided should reflect the preferences of the end-user in connection with his current context, the request, and the requester.

[0004] For setting the user's context, the Authors propose having the system observe the user's behaviour and learn about the user's preferences by detecting usage patterns.

[0005] R. Plesa and L. Logrippo ("Enhanced communication service through context integration", publication in MATA 2005, 2005-10) propose a combination of presence information and context information (called "consolidated presence information") to build an intelligent picture of a user's current situation, status and accessibility. For the Authors presence information include the physical location of the user (e.g., at home), call state (e.g., ready, currently on a call), the role of the user or his willingness to communicate (e.g., available, in a meeting), indicators that show if a user is logged into a network and whether he is active and the preferred medium of communication (e.g., voice, IM, e-mail). Moreover, for the Authors human related context includes information about users (e.g., their habits) or the user's social environment (e.g. co-location with others). Context related to physical environment includes location, but also infrastructure and information about surrounding resources for computation and communication.

[0006] The Authors state that said consolidated presence information allows users to dynamically set policies that govern the particulars of how they interact with each

other. Introducing presence and context information provides ground for new services: context-based services (e.g., "all calls from my students will have announcement X played out"), availability (e.g., "secretaries are not available to answer enquires during lunch time"), notification (e.g., "remind me of the 3 pm group meeting if I am not already in the meeting room") or personal addressing services (e.g., "if the call is from a person involved in project X, redirect it to the team leader").

[0007] The Applicant notes that the above two mentioned documents focuses their attention on the called party needs.

[0008] US 2006/0205400 discloses a communication system in which a calling party mobile station is capable of automatically obtaining information on a plurality of currently available communication modes of a called party mobile station and charge rate information to enable a user of the calling party mobile station to determine which mode is to be used for communication with the called party mobile station based on the information thus obtained. As stated by US 2006/0205400, with this system the user of the calling party mobile station is given the possibility to select a communication mode by referring to information on both the communication modes supported by the called party mobile station and the unit prices, and is allowed, for example, to select a less expensive communication mode, or to select the TV telephone call mode if he/she wants to see the face of the called party.

[0009] US 2004/0203664 discloses a system and method for context-aware unified communication for enabling communications between users over a common communications platform or heterogeneous communications platforms. The system comprises: agents associated with a respective caller and callee communications device for generating commands providing call control between the caller and callee devices; a routing engine for routing call commands between caller and callee via respective device agents to establish a communication session, and enabling exchange of conversation messages between the caller and callee communications devices over said single or heterogeneous communications platforms; a device for monitoring dynamic context of a callee and obtaining callee's preferences for receiving communications so that the routing engine enables a call setup between a caller and callee communications devices based on the callee's preferences or dynamic context information; and, further enabling either caller or callee to migrate a call to another communications device without disrupting a flow of a conversation.

[0010] US 6,853,634 discloses a presence management system that allows connections between watching parties and watched parties in a multiple access communications network to be managed. When the presence management system receives a contact request from a watching party it determines whether the required watched party is available for contact. The presence management system chooses the best mode of commu-

nication (e.g. email or fax) taking into account the watched parties preferences and details about the facilities available to the watching party.

[0011] As more and more different devices (PCs, PDAs, mobile phones, ...), services (voice call, video call, Instant Messaging, email, SMS/MMS, Push-to-Talk, ...) and network interfaces (Bluetooth, Wi-Fi, ...) that enable user communications are becoming available, the Applicant perceived the need of making user communications simpler and more effective.

[0012] In particular, the Applicant perceived the need for a calling user, desiring to contact a called user at a given time, to reach the desired called user in the best available way at that given time, without worrying about the means (e.g., the device and/or the service and/or the network interface) the calling user has to use and, in particular, without wasting time to try to reach the desired called user through different communication services and/or devices and/or network interfaces till the called user is reached.

[0013] The Applicant found that this problem can be solved through a method according to claim 1 comprising steps a) to d). In the present description and claims, the expressions:

- "user" is used to indicate any physical (such as a human) or virtual (such as a software) entity adapted to use a device;
- "context information" indicates any information that can be used to characterize the situation of an entity. For example, context information can include information on user's habits, on business commitments, on working hours, on buddy lists and relationships, on calendar entries, on user location (absolute position, relative position, co-location, ...), on user's devices (device resources, presence on various devices, current usage of devices, applications/services installed on the user device, ...), on network resources, on network connection quality, indication showing if a user is logged into a network, and similar;
- "session" with reference to two entities is used to indicate a data transmission from one of the two entities to the other one and/or vice versa, wherein the two entities can communicate with each other directly or through other entities;
- "communication session" is used to indicate any voice, video, text session and similar based conversation or conference between two or more entities. Examples of communication sessions include telephone calls, telephone conferences, video conferences, chat sessions, virtual meetings, SMS/MMS and similar;
- "network equipment" indicates at least one network apparatus;

- "voice call" indicates a voice call that can be established through a circuit-switched telephone network or a packet-switched network;

- 5 - "multimedia call" indicates a multimedia call that can be established through a circuit-switched telephone network or a packet-switched network.

[0014] Preferably, in b), current context information on the called user comprises current context information on network resources and/or capabilities at the called user side.

[0015] Preferably, the determination in b) is performed also based on current context information on the calling user.

[0016] Preferably, current context information on the calling user also comprises current context information on network resources and/or capabilities at the calling user side.

[0017] Preferably, the determination in b) is performed also based on predefined called user preferences.

[0018] Preferably, the determination in b) is performed also based on predefined calling user preferences.

[0019] For example, the communication services can be selected from the group comprising: voice call, multimedia call, Push to talk, instant messaging, SMS (short message service), MMS (multimedia messaging service), virtual communications, e-mail and fax messaging.

[0020] The suitable information sent in d) advantageously comprises called user identifying data that enable establishment of a communication session with the called user through the communication service selected in c).

[0021] Advantageously, the method further comprises accessing a storage area to retrieve said called user identifying data, said storage area comprising a list of communication services associated with the called user and, for each associated communication service, a list of identifying data that allow establishment of a communication session with the called user through such associated communication service.

[0022] The suitable information sent in d) advantageously also comprises data identifying the calling user.

[0023] The suitable information sent in d) advantageously also comprises data identifying the calling user device.

[0024] According to an embodiment, the request received in a) specifies a preselected communication service, among said plurality of possible communication services, to contact the called user.

[0025] In this embodiment, the method advantageously comprises b') determining if said preselected communication service is currently available to establish a communication session with the called user at said at least one called user device, based on current context information on the called user.

[0026] Preferably, the determination in b') is performed also based on current context information on the calling

user.

[0027] Preferably, the determination in b') is performed also based on predefined called user preferences.

[0028] Preferably, the determination in b') is performed also based on predefined calling user preferences.

[0029] In the affirmative case of b'), the method comprises d') sending to the communication service actuator, that enables the provision of the preselected communication service specified in the request received in a), suitable information for starting establishment of the communication session between the calling user and the called user through said preselected communication service.

[0030] In this embodiment, step b) is advantageously executed in the negative case of b').

[0031] Said plurality of possible communication services can comprise communication services of at least two communication service typologies.

[0032] Said at least two communication service typologies can comprise, for example, a direct communication service typology and a messaging communication service typology.

[0033] The services of the direct communication service typology can be selected from the group comprising: voice call, multimedia call, Push to talk and communications established in a virtual reality. The services of the messaging communication service typology can be selected from the group comprising: instant messaging, SMS (short message service), MMS (multimedia messaging service), e-mail, virtual messaging (e.g., through AVATARS in a virtual reality) and fax messaging.

[0034] When the communication service selected in c) (or the preselected communication service specified in the request received in a)) is of the messaging communication service typology, the method advantageously further comprises receiving from the calling user device a message for the called user, said message complying with a predetermined user device communication protocol. The method advantageously further comprises converting said message into a corresponding message complying with a communication protocol supported by the communication service actuator that enables the provision of the communication service selected in c) (or that enables the provision of the preselected communication service specified in the request received in a)). In this case, the information sent in d) (or d')) advantageously comprises said converted message.

[0035] This is a particularly advantageous aspect of the invention in that it allows the calling user device to send the message for the called user according to a same predetermined user device communication protocol, independently on the specific messaging communication service actually used to establish the communication session with the called user. Therefore, the calling user is, for example, enabled to send a SMS, a MMS and/or an e-mail message to the called user, without having the calling user device suitably configured to send SMS, MMS and/or e-mail messages.

[0036] This make the user device more user friendly in that it gives the user the possibility to exploit the large variety of communication services nowadays at his/her disposal without being required to carry out a plurality of annoying, time consuming and quite complicated configuration operations to enable his/her user device to access SMS, MMS and/or e-mail services.

[0037] Moreover, the calling user can be enabled to reach the called user through a specific messaging communication service, even if the calling user or the calling user device does not support it. For example, the calling user can be enabled to reach the called user through an e-mail message even if the calling user has not an associated e-mail address or even if the calling user device does not support e-mail services.

[0038] Furthermore, the calling user is enabled to reach the called user without worrying about the called user device configuration and about the services supported by the called user devices.

[0039] The above is advantageous also for the network operator because a reduction of the difficulties met by the users in exploiting the large variety of offered communication services can contribute to spread the use of such services among the subscribers.

[0040] According to an embodiment, the request received in a) specifies a preselected communication service typology, among said at least two communication service typologies, to establish a communication session with the called user.

[0041] In this embodiment, the determination in b) is advantageously carried out within said preselected communication service typology.

[0042] In the negative case of b), the determination in b) is advantageously carried out again within the other(s) of the at least two communication service typologies.

[0043] If there is at least one communication service currently available within the other(s) of the at least two communication service typologies, c) and d) are executed.

[0044] When there is no service currently available to establish a communication session with the called user within any of the at least two communication service typologies, the calling user device is notified accordingly.

[0045] Preferably, the method further comprises notifying the communication service selected in c) to the calling user device.

[0046] According to an embodiment, step d) can be advantageously executed if an approval to establish a communication session with the called user through the communication service selected in c) is received from the calling user device.

[0047] When an approval to establish a communication session with the called user through the communication service selected in c) is not received from the calling user device, the method advantageously comprises e) offering to the calling user device the possibility to book a communication session with the called user through a service within the preselected communication service typology.

pology specified in the request received in a) (or through the preselected communication service specified in the request received in a)). If acceptance of said offer is received from the calling user device, the method advantageously comprises f) checking for a predetermined period of time if at least one communication service, within the preselected communication service typology specified in the request received in a) (or the preselected communication service), becomes available to establish a communication session with the called user at said at least one called user device, based on current context information on the called user and on the calling user. In the positive case of f), the method advantageously comprises g) sending to the communication service actuator, that enables the provision of the communication service that has become available, suitable information for starting establishment of the communication session between the calling user and the called user through such communication service. Preferably, in the positive case of f), the method advantageously comprises notifying the calling user device about the communication service that has become available. Moreover, g) is advantageously performed under receipt of an approval by the calling user device.

[0048] Steps e), f) and g) can be performed also when there is no service currently available to establish a communication session with the called user.

[0049] Advantageously, according to said policies, the communication service providing the highest level of interactivity is selected in c).

[0050] Advantageously, according to said policies, the communication service providing the shortest expected response time is selected in c).

[0051] Advantageously, according to said policies, the communication service meeting predetermined (calling and/or called) user preferences is selected in c).

[0052] In an embodiment, according to said policies the cheapest communication service can be selected in c).

[0053] In an embodiment, according to said policies the communication service guaranteeing the simplest and/or preferred human-machine-interface can be selected in c).

[0054] In an embodiment, according to said policies the communication service that allows reaching the called user in the most rapid way can be selected in c).

[0055] Typical examples of user devices are telephone sets, IP (Internet Protocol) phones, cellular or mobile phones, TV sets, set-top boxes, Hi-Fi systems, fax machines, IP-TV gateways, personal computers, personal digital assistant (PDA) and similar.

[0056] In another aspect, the invention relates to a network equipment according to claim 14. As far as further features of this aspect of the invention are concerned, reference is made to what disclosed above with reference to the first aspect of the invention.

[0057] In another aspect, the invention relates to a communication system according to claim 15.

[0058] As far as further features of this aspect of the invention are concerned, reference is made to what disclosed above with reference to the first aspect of the invention.

5 **[0059]** The invention in the various aspects thereof allows achieving the following advantages.

[0060] From the point of view of the calling user, it enables the calling user to communicate with the desired called user, without facing common difficulties in the use of different devices, services and/or network interfaces. Moreover, it spares the calling user the waste of time for trying to reach the desired called user through different communication services and/or devices and/or network interfaces till the called user is reached (e.g., by first trying with a telephone call from the calling user phone; if there is no answer, trying to check, at the calling user's PC, if the called user is available through Instant messaging communication; if he/she is not available, trying to send an e-mail by the calling user's PC; then, if an out-of-office reply message is received, trying to send a SMS from the calling user phone).

[0061] From the point of view of the network operator, the invention spares the network operator useless cost and waste of network resources for trying to satisfy different attempts by a same calling user to contact a same called user. Moreover, for the network operator it improves the capability to meet the need of a calling user and reduces the possibility of missing opportunities to establish communication sessions among users.

30 **[0062]** Considering that even null communication session requests are a cost for the device Hardware/Software elements (battery, CPU, RAM, ...) and that this could impact on the general lifetime and performances of a device and on the usage possibility thereof, the invention -by reducing the possibility of performing null communication session requests- is advantageous also from the point of view of the calling user device.

35 **[0063]** Moreover, the invention advantageously guarantees the calling user to reach the called user in the best available way at a given time as far as concern the situation of the called user and the network capabilities.

[0064] Additionally, the invention enables to better exploit all the electronic devices nowadays at users' disposal.

45 **[0065]** The invention is also particularly advantageous when the called user is associated with a plurality of called user devices and communication services in that it allows managing at best the plethora of services and devices that can be used to reach the called user.

50 **[0066]** The features and advantages of the present invention will be made apparent by the following detailed description of some exemplary embodiments thereof, provided merely by way of non-limiting examples, description that will be conducted by making reference to the attached drawings, wherein:

- figure 1 schematically shows an embodiment of a communication system according to the invention;

- figure 2 schematically shows an example of a user device interface allowing a calling user to make a request for establishing a communication session with a called user according to the invention;
- figure 3 schematically shows a flowchart outlining the main actions carried out to establish a communication sessions between a calling user and a called user, according to an embodiment of the invention;
- figure 4 schematically shows a flowchart outlining the main actions carried out to book a communication session between the calling user and the called user, according to an embodiment of the invention;
- figure 5 schematically shows an exemplary mapping of communication services in an interactivity versus expected-response-time domain.

[0067] Figure 1 shows a communication system 1000 according to an embodiment of the invention. According to this embodiment, the communication system 1000 comprises a network equipment 100, a user device 10, an application server 150, a context platform 140, and a plurality of actuators 1, 2, 3, 4, 5 for the provision of a plurality of communication services.

[0068] In the embodiment shown, actuator 1 is a multimedia gateway enabling provision of multimedia call services, actuator 2 is a voice gateway enabling provision of voice call services, actuator 3 is a Instant Messaging center enabling provision of Instant messaging services, actuator 4 is a SMS/MMS center enabling provision of SMS/MMS services, and actuator 5 is an e-mail server enabling provision of e-mail services.

[0069] It is noted that for the sake of simplicity only five actuators are depicted in figure 1. However, the communication system 1000 can comprise more (or less) actuators providing additional (different) communication services as, for example, VoiP, Push to Talk and fax services.

[0070] Moreover, it is noted that, even if the communication system 1000 usually comprises a plurality of user devices, for the sake of simplicity only one user device is depicted in figure 1.

[0071] In the embodiment shown, the network equipment 100 comprises an application layer 110, an actuator layer 120, a logic layer 130 and a context layer 115.

[0072] The user device 10 comprises an application client 11 and, in a preferred embodiment, also a context client 12.

[0073] The application server 150, the context platform 140, the application layer 110, the actuator layer 120, the logic layer 130, the context layer 115, the application client 11, the context client 12, and the actuators 1, 2, 3, 4, 5 are adapted to implement the invention, in the various aspect thereof, as described in more detail hereinafter, with reference to figures 2 to 6.

[0074] According to the invention, a calling user wish-

ing to establish a communication session with a called user sends a corresponding request from the user device 10 towards the application server 150.

[0075] To send such request the calling user can use a user interface 13 on user device 10 of the type exemplarily shown in figure 2.

[0076] According to the example shown in figure 2, the calling user can select the desired called user (e.g. user 1) from a suitable list of users (e.g. user 1, user 2, ... user n) and can select to establish a communication session with such desired called user through one of two typologies of communication services by clicking on one of two icons A and B representing the two typologies. For example, said two typologies of communication services are direct communication services typology and messaging communication services typology.

[0077] When said request (for establishing a communication session with a desired called user through one of the two typologies of communication services) is received at the application server 150, the latter sends the request to the application layer 110, which, in its turn, passes the request to the logic layer 130.

[0078] As schematically shown in the flowchart of figure 3, at block 200 the logic layer 130 receives said request.

[0079] When the calling user desires to establish a communication session with the called user through the messaging communication service typology, the network equipment 100 will further receive from the user device 10 a message content, according to a predetermined user device communication protocol, for the called user. Said message content can be received at block 200 together with the request for establishing a communication session with the called user or, after, under explicit request by the network equipment 100.

[0080] At the receipt of said request, logic layer 130 interrogates, through intermediation of context layer 115, the context platform 140 about the current context of the called user and, preferably, also of the calling user (block 201). When the context client 12 is present, the context platform 140 will determine the current context also based on information retrieved by the context client 12.

[0081] The current context of the called user and calling user is determined by the context platform 140 according to techniques known in the art adapted to determine the real-time situation of an entity as far as concern, for example, user location, presence on various devices, current usage of device, user's habits, business commitments, working hours, calendar entries, network resources, network connection quality and/or similar. This allows, for example, determining if the called user is currently in a business meeting, if he/she is currently engaged in a telephone call at a user device, if he/she is currently using the PC, if he/she is currently available for Instant messaging communication, if/she is currently driving the car, if his/her mobile phone is currently switched off, if his/her mobile phone support multimedia communication session (e.g., a video call), if the network

resources and the network connection quality currently support a communication service and so on.

[0082] The determination of also the current context of the calling user is preferable in that it can be useful to determine if the current resources of the calling user device and the current network connection quality at the calling user device side are adapted to support a predetermined communication service (e.g., a video call).

[0083] The current context of the calling user and of the called user is advantageously determined according to automatic techniques. Moreover, it can also be advantageously determined based on direct suggestions/information from the user.

[0084] Techniques to determine the context of an entity are known for example from the above mentioned documents by R. Dinoff et al., ("Learning and Managing User Context in Personalized Communications Services", Bell Laboratories, Lucent Technologies - Int'l Workshop on Context in Advanced Interfaces, 23 May 2006) and by R. Plesa and L. Logrippo ("Enhanced communication service through context integration", publication in MATA 2005, 2005-10), and from N. Salis and C.A. Licciardi ("Context Awareness: Telco Perspectives", publication in the proceedings of the Second Workshop on "Context Awareness for Proactive Systems CAPS 2006", Kassel, Germany, June 12-13, 2006).

[0085] Based on current context information on the called user and on the calling user, received from the context platform 140, the logic layer 130 determines if, within the communication service typology preselected by the calling user, there is at least one communication service currently available to establish a communication session with the called user (block 202).

[0086] For example, if the communication service typology preselected by the calling user is the messaging communication service typology and the called user (e.g., user 1) is at work, his/her office mobile phone is switched on, his/her private mobile phone is switched off, he/she is working at the office PC, he is available for Instant messaging communication with the calling user, and he is engaged in a telephone call by the office fixed phone, the communication services available to establish a communication session with the called user within the messaging communication service typology can exemplarily be: Instant-messaging communication, SMS or MMS to the office mobile phone and e-mail to the e-mail account registered at the office PC.

[0087] Moreover, the determination at block 202 is advantageously determined also based on predetermined user preferences.

[0088] To this purpose, the logic layer 130 will access a storage area (not shown) comprising, for each registered user, a list of predetermined user preferences.

[0089] According to another embodiment, such storage area will be accessed to from the context platform 140, which will then send said predetermined user preferences to the logic layer 130.

[0090] For example, in said user preference list a user

can set not to be disturbed at his/her mobile phone(s) during business meetings, not to be disturbed by predetermined people at his/her private mobile phone(s) during working hours, not to be disturbed at his/her mobile phone(s) when already engaged in a telephone conversation by his/her fixed phone, and similar.

[0091] If the check at block 202 gives a positive result, the logic layer 130 selects, among the at least one currently available communication service, the best communication service to establish a communication session with the called user, based on predetermined policies (block 203). Of course, if there is only one currently available communication service, logic layer 130 will select such communication service.

[0092] Moreover, at block 203 a notification of the best communication service selected by the network equipment 100 is advantageously sent to the user device 10.

[0093] Then, the actuator layer 120 sends suitable information/instructions to the communication service actuator enabling the provision of the best communication service thus selected, so as to start establishment of the communication session between the calling user and the called user through the selected best communication service (block 205).

[0094] According to the embodiment shown, action at block 205 is executed if an approval to establish a communication session with the called user through the best communication service selected at block 203 is received from the calling user device 10 (check at block 204).

[0095] If the check at block 202 gives a negative result (i.e., within the communication service typology preselected by the calling user there is not at least one communication service currently available to establish a communication session with the called user), the logic layer 130 determines if, within the other one of the two communication service typologies, there is at least one communication service currently available to establish a communication session with the called user (block 206).

[0096] If the check at block 206 gives a negative result, a notifying message is advantageously sent to the user device 10 (not shown).

[0097] If the check at block 206 gives a positive result, the procedure returns to block 203.

[0098] Even if not shown, if the best communication service selected at block 203 is within the messaging communication service typology, the network equipment 100 will request the user device 10 to send a message content for the called user, if not already at its disposal.

[0099] Moreover, when a communication session is established through a communication service within a typology different from the one preselected by the calling user, the invention can also contemplate an embodiment (not shown) wherein the logic layer 130 is adapted to verify if, during the time the established communication session is on, at least one communication service within the typology originally chosen by the user becomes available and, in the affirmative, to enable the calling user to switch the communication session towards such com-

munication service.

[0100] For example, if the calling user originally chooses a direct communication service typology but the communication session is established through instant messaging due to the called user's phone being busy, when the called user's phone gets free the calling user can be enabled to switch to the original choice (e.g., a voice/video call). For example, this may be useful for saving time when the instant messaging communication risks becoming too long.

[0101] Moreover, if, for example, the calling user originally chooses a video call but the communication session is established through voice call due to poor network connection quality, when the network connection quality improves the calling user can be enabled to switch to the original choice for a video call.

[0102] If the check at block 204 or 206 gives a negative result (that is when an approval to establish a communication session through the best communication service selected at block 203 is not received from the calling user device 10 or when there is no service currently available to establish a communication session with the called user), the calling user is offered the possibility to book a communication session with the called user through the preselected communication service typology originally specified in the request received at block 200 (block 207). Advantageously, the calling user is also given the possibility to set a validity period for the communication session booking.

[0103] As schematically shown in the flowchart of figure 4 (which is a continuation of the flowchart of figure 3), the logic layer 130 checks if acceptance of said offer is received from the user device 10 (block 208).

[0104] If acceptance of said offer is not received from the user device 10, the procedure ends (block 209).

[0105] If acceptance of said offer (for example, specifying the validity period) is received from the user device 10, the logic layer 130 cooperates with the network equipment context platform 140 to determine the current context of the called user and, preferably, also of the calling user (block 210).

[0106] Based on the determined current context information on the called user and on the calling user and based on user preferences, the logic layer 130 determines if at least one communication service, within the communication service typology originally selected by the calling user, becomes available to establish a communication session with the called user (block 211).

[0107] In the positive case, the actuator layer 120 sends suitable information to the communication service actuator enabling the provision of the communication service that has become available so as to start establishment of the communication session between the calling user and the called user through such communication service (block 212). Moreover, at block 212 the user device 10 is notified about the communication session that is going to be established with the called user through the communication service that has become available.

According to an embodiment (not shown), the communication session is established under receipt of an approval by the user device 10.

[0108] If the check at block 211 gives a negative result, it is checked if the validity period set by the user device 10 expired (block 213).

[0109] If the validity period has not expired, the procedure returns at block 210.

[0110] If the validity period has expired, the procedure ends (block 214).

[0111] When at block 205 or 212 the actuator layer 120 sends said suitable information to the appropriate communication service actuator, the latter will provide for the corresponding communication service to be implemented, through conventional techniques.

[0112] For example, in the case of the SMS/MMS actuator 4, it will provide for a SMS/MMS to be sent to the called user according to techniques well known in the art.

[0113] To this purpose, the suitable information sent by the actuator layer 120 to the actuators will comprise all the information required, according to techniques known in the art, to establish a communication session through to the specific communication service.

[0114] For example, in the case of SMS/MMS actuator 4 and SMS communication service, the suitable information will comprise a text content for the called user, an identifier of the called user (e.g., SIM number) to which the SMS has to be sent, and an identifier of the calling user (e.g., SIM number).

[0115] When the communication session with the called user has to be established through a given communication service of the messaging communication service typology, the logic layer 130 is advantageously adapted to convert the message received from the calling user device 10, according to a predetermined user device communication protocol, into a corresponding message for the called user which complies with the communication protocol supported by the communication service actuator enabling the provision of said given communication service.

[0116] In this case, the information sent at block 205 or 212 advantageously comprises such converted message.

[0117] The message received from the calling user device 10 and the converted message can comprise, in accordance with the respective protocol, a body with the text/multimedia content for the called user and suitable headers (e.g., a TO header and a FROM header).

[0118] For example, the predetermined user device communication protocol can be Hypertext Transfer Protocol (or HTTP) or Session Initiation Protocol (SIP).

[0119] Examples of communication protocol supported by the actuators 1, 2, 3, 4, 5 are the Mobile Application Part (MAP) protocol for the SMS/MMS actuator, and the Simple Mail Transfer Protocol (SMTP) for the e-mail actuator.

[0120] This last aspect of the invention is particularly advantageous in that it allows the user device 10 to send

the message for the called user according to a same predetermined user device communication protocol, independently on the specific messaging communication service actually used to establish the communication session with the called user. Therefore, the calling user is, for example, enabled to send a SMS, a MMS and/or an e-mail message to the called user, without having the calling user device 10 suitably configured to send SMS, MMS and/or e-mail messages.

[0121] This makes the user device 10 more user friendly in that it gives the user the possibility to exploit the large variety of communication services nowadays at his/her disposal without being required to carry out a plurality of annoying, time consuming and quite difficult configuration operations to enable his/her user device to access SMS, MMS and/or e-mail services.

[0122] Moreover, it can enable the calling user to reach the called user through a specific messaging communication service, even if the calling user or the calling user device does not support it. For example, it enables the calling user to reach the called user through an e-mail message even if the calling user has not an associated e-mail address or even if the calling user device does not support the e-mail service.

[0123] This is also advantageous for the network operator because a reduction of the difficulties met by the users in exploiting the large variety of communication services offered by it can contribute to the spread of the use of such services among the subscribers.

[0124] As mentioned before, at block 203 the best communication service to establish a communication session with the called user is selected based on predetermined policies.

[0125] According to a preferred embodiment of the invention, said policies get the communication service providing the highest level of interactivity and the shortest expected response time to be selected. Advantageously, said policies also take into account predefined calling and called user preferences.

[0126] Figure 5 schematically shows a mapping of multimedia call and voice call services (in the direct communication typology), and Instant Messaging, SMS/MMS and e-mail services (in the messaging communication typology) in interactivity versus expected-response-time domain.

[0127] In said domain, the multimedia call is the service providing the highest interactivity, followed by voice call, instant messaging, SMS/MMS and e-mail. Moreover, multimedia call and voice call are the services providing the shortest expected response time, followed by instant messaging, SMS/MMS and e-mail.

[0128] If, for example, the communication service typology preselected by the calling user is the direct communication service typology and the called user is at work, his/her office mobile phone is switched off, his/her private mobile phone is switched on and supports both multimedia and voice call, he/she is working at the office PC, he is available for Instant messaging communication

with the calling user, and he is engaged in a telephone call at the office fixed phone, the communication services available to establish a communication session with the called user within the direct communication service typology would exemplarily be: multimedia or voice call to his private mobile phone.

[0129] According to the map shown in figure 5, the best communication service selected at block 203 among the available communication services would be a multimedia call to the called user private mobile phone. However, if the calling user set a default preference for voice call, the best communication service selected at block 203, meeting both the policies represented in figure 5 and the calling user preferences would be a voice call to the called user private mobile phone.

[0130] Moreover, if, for example, the called user set a preference of not being disturbed by a telephone call on his private mobile phone, when already engaged in another telephone call with his/her office mobile/fixed phone, the communication services available to establish a communication session with the called user within the other (messaging communication service) typology would exemplarily be: Instant-messaging communication, SMS or MMS to his private mobile phone and e-mail to the e-mail account registered at his/her office PC.

[0131] In this case, according to the map shown in figure 5, the best communication service selected at block 203 would be the Instant messaging.

[0132] It is noted that, even if not shown, the invention contemplates also the case wherein the calling user is given the possibility to specify the intention to establish a communication session with the desired called user through a preselected communication service among the plurality of possible communication services (e.g., by clicking on one of a plurality of icons representing the plurality of communication services in a suitable user interface on user device 10) and/or the case wherein the user is simply given the possibility to request to establish a communication session with the desired called user in general, without specifying any communication service.

[0133] In the first case, between block 201 and block 202 the logic layer 130 can be adapted to determine if the communication service preselected by the calling user is currently available to establish a communication session with the called user, based on current context information on the called user and, preferably, also on the calling user (as determined at block 201) and, advantageously, also based on the calling user and called user preferences.

[0134] In the affirmative case, action at block 205 is carried out by sending suitable information to the communication service actuator enabling the provision of said preselected communication service, so as to start establishment of the communication session between the calling user and the called user through the preselected communication service.

[0135] In the negative case, the user device 10 may be notified that the communication service preselected

by the calling user is not currently available. Moreover, check at block 202 will be advantageously carried out within the whole plurality of possible communication services and check at block 206 will be omitted.

[0136] In the first case, the calling user can also be given the possibility of directly trying to establish a communication session with the desired called user with the preselected communication service, by directly passing from block 200 to block 205.

[0137] In the second case, the check at block 202 is advantageously performed within the whole plurality of possible communication services.

[0138] In view of the above, it will be clear that the invention, in the various aspects thereof,

- enables a communication network operator and a user to manage at best the plethora of services, network interfaces and devices nowadays available to communicate;
- enables users to avoid wasting time in the use of different devices and/or services and/or network interfaces and to interface just once to the communication network in order to establish a communication session with a desired called user: through a simple gesture (e.g., a "click" on a suitable icon in the user interface on user device 10 or a sentence by a Text-To-Speech client) the users are given the possibility to contact the desired called user in the best available way at that time;
- enables the network to avoid wasting resources to satisfy different attempts by a same calling user trying to reach a desired called user;
- when a user with more than one device at his/her disposal has to be contacted, it avoids the network making all devices ring, with a consequent network resources waste;
- increases the level of politeness (according to the user perception) in user communications (e.g., by reducing the possibility of receiving undesired telephone call at the wrong moment or of hearing a forced busy tone when calling a busy person in the wrong moment);
- enables users to exploit at best all the electronic devices at their disposal;
- enables users to automatically select the best communication service currently available to reach a desired person;
- guarantees the calling user to reach the called user in the best way as far as concern the current user situation and the current network possibilities and capabilities;

- enables the network to guarantee a communication link to its users by changing/alternating different communication services (e.g. voice call, video call, e-mail, Instant Messaging, SMS, MMS, etc...) when the desired one is not available.

[0139] As a matter of fact, the invention enables people to communicate, without worrying about "how".

[0140] The scope of the invention is defined by the appended claims.

Claims

1. Method for enabling a calling user to establish a communication session with a called user, the calling user being associated with at least one calling user device (10) and the called user being associated with at least one called user device (10), wherein the communication session can be established through a plurality of possible communication services and provisioning of said plurality of possible communication services is enabled through a corresponding plurality of communication service actuators (1, 2, 3, 4, 5), the method comprising
 - a) receiving from the at least one calling user device (10) a request to establish a communication session with the called user,
 - b) determining if, among said plurality of possible communication services, there is at least one communication service currently available to establish a communication session with the called user at said at least one called user device (10), based on current context information on the calling user and current context information on the called user,
 - c) in the affirmative case of b), if there are at least two currently available communication services, selecting one of the at least two currently available communication services based on predetermined policies, wherein said predetermined policies comprise selecting the communication service providing the highest level of interactivity, and
 - d) sending to the communication service actuator that enables the provision of the communication service selected in c) suitable information for starting establishment of the communication session between the calling user and the called user through the selected communication service.
2. Method according to claim 1, wherein the current context information on the calling user comprises current context information on network resources and/or capabilities at calling user side.

3. Method according to claim 1 or 2, wherein the determination in b) is performed also based on predefined called user preferences and/or predefined calling user preferences.
4. Method according to any of claims 1 to 3, wherein the request received in a) specifies a preselected communication service, among said plurality of possible communication services, to contact the called user.
5. Method according to claim 4, further comprising b') determining if said preselected communication service is currently available to establish a communication session with the called user at said at least one called user device (10), based on current context information on the called user, wherein b) is executed in the negative case of b').
6. Method according to any of claims 1 to 5, wherein said plurality of possible communication services comprises communication services of at least two communication service typologies.
7. Method according to claim 6, wherein said at least two communication service typologies comprise a direct communication service typology and a messaging communication service typology.
8. Method according to claim 7, that, when the communication service selected in c) is of the messaging communication service typology, further comprises receiving from the calling user device a message for the called user, said message complying with a predetermined user device communication protocol.
9. Method according to claim 8, further comprising converting said message into a corresponding converted message complying with a communication protocol supported by the communication service actuator that enables the provision of the communication service selected in c).
10. Method according to claim 9, wherein the suitable information sent in d) comprises said converted message.
11. Method according to any of claims 6 to 10, wherein the request received in a) specifies a preselected communication service typology, among said at least two communication service typologies, to establish a communication session with the called user.
12. Method according to claim 11, wherein the determination in b) is first carried out within said preselected communication service typology and, when there is no communication service currently available within said preselected communication service typology, the determination in b) is carried out again within the other of the at least two communication service typologies.
13. Method according to any of claims 1 to 12, wherein, according to said policies, the communication service is selected in c) according to at least a further one of the following conditions: the communication service providing the shortest expected response time; the communication service meeting predetermined calling user preferences; the communication service meeting predetermined called user preferences; the cheapest communication service; the communication service guaranteeing a simplest human-machine-interface; the communication service guaranteeing a preferred human-machine-interface; and the communication service that allows reaching the called user in the most rapid way.
14. Network equipment (100) for enabling a calling user, associated with at least one calling user device (10), to establish a communication session with a called user, associated with at least one called user device (10), the network equipment (100) comprising modules adapted
 - a) to receive from the at least one calling user device (10) a request to establish a communication session with a called user,
 - b) to determine if, among a plurality of possible communication services, there is at least one communication service currently available to establish a communication session with the called user at the at least one called user device (10), based on current context information on the calling user and current context information on the called user,
 - c) in the affirmative case of b), if there are at least two currently available communication services, to select one of the at least two currently available communication services based on predetermined policies, wherein said predetermined policies comprise selecting the communication service providing the highest level of interactivity, and
 - d) to send to a communication service actuator (1, 2, 3, 4, 5) that enables the provision of the communication service selected in c) suitable information for starting establishment of the communication session between the calling user and the called user through the selected communication service.
15. Communication system (1000) comprising a plurality of user devices (10), a network equipment (100) and a plurality of communication service actuators (1, 2, 3, 4, 5) enabling provision of a corresponding plurality of communication services, wherein

- each of the plurality of user devices (10) comprises modules adapted to send to the network equipment (100) a request to establish a communication session between a calling user and a called user, the called user being associated with at least one called user device (10);
 - the network equipment (100) comprises modules that, for each of the requests sent from the plurality of user devices (10), are adapted to:

- a) to receive said request;
- b) to determine if, among said plurality of communication services, there is at least one communication service currently available to establish a communication session with the called user at the at least one called user device (10), based on current context information on the calling user and current context information on the called user,
- c) in the affirmative case of b), if there are at least two currently available communication services, to select one of the at least two currently available communication services based on predetermined policies, wherein said predetermined policies comprise selecting the communication service providing the highest level of interactivity, and
- d) to send to the communication service actuator that, among said plurality of communication service actuators (1, 2, 3, 4, 5) enables the provision of the communication service selected in c), suitable information for starting establishment of the communication session between the calling user and the called user through the corresponding communication service; and wherein

- each communication service actuator (1, 2, 3, 4, 5) comprises modules adapted to receive said suitable information from the network equipment (100) and to use said suitable information to start establishment of the communication session between the calling user and the called user through the corresponding communication service.

Patentansprüche

1. Verfahren, um einem anrufenden Benutzer zu ermöglichen, eine Kommunikationssitzung mit einem angerufenen Benutzer herzustellen, wobei der anrufende Benutzer mindestens einer Vorrichtung (10) eines anrufenden Benutzers zugeordnet ist, und wobei der angerufene Benutzer mindestens einer Vorrichtung (10) eines angerufenen Benutzers zugeordnet ist, wobei die Kommunikationssitzung durch eine

Vielzahl von möglichen Kommunikationsdiensten hergestellt werden kann, und das Bereitstellen der Vielzahl von möglichen Kommunikationsdiensten durch eine entsprechende Vielzahl von Kommunikationsdienstaktuatoren (1, 2, 3, 4, 5) ermöglicht wird, wobei das Verfahren Folgendes umfasst

- a) Empfangen, von der mindestens einen Vorrichtung (10) eines anrufenden Benutzers, einer Anforderung, eine Kommunikationssitzung mit dem angerufenen Benutzer herzustellen,
- b) Bestimmen, auf der Grundlage von aktuellen Kontextinformationen über den anrufenden Benutzer und aktuellen Kontextinformationen über den angerufenen Benutzer, ob unter der Vielzahl von möglichen Kommunikationsdiensten mindestens ein Kommunikationsdienst aktuell verfügbar ist, um eine Kommunikationssitzung mit dem angerufenen Benutzer an der mindestens einen Vorrichtung (10) eines angerufenen Benutzers herzustellen,
- c) im positiven Fall von b), falls mindestens zwei aktuell verfügbare Kommunikationsdienste vorhanden sind, Auswählen eines der mindestens zwei aktuell verfügbaren Kommunikationsdienste auf der Grundlage von zuvor festgelegten Vorgehensweisen, wobei die zuvor festgelegten Vorgehensweisen das Auswählen des Kommunikationsdienstes umfassen, welcher die höchste Stufe an Interaktivität zur Verfügung stellt, und
- d) Senden an den Kommunikationsdienstaktor, der die Bereitstellung des Kommunikationsdienstes, der in c) ausgewählt wurde, ermöglicht, geeigneter Informationen zum Beginnen der Herstellung der Kommunikationssitzung zwischen dem anrufenden Benutzer und dem angerufenen Benutzer durch den ausgewählten Kommunikationsdienst.

2. Verfahren nach Anspruch 1, wobei die aktuellen Kontextinformationen über den anrufenden Benutzer aktuelle Kontextinformationen über Netzwerkre Ressourcen und/oder Fähigkeiten auf der Seite des anrufenden Benutzers umfassen.
3. Verfahren nach Anspruch 1 oder 2, wobei die Bestimmung in b) auch auf der Grundlage von zuvor definierten Präferenzen des angerufenen Benutzers und/oder zuvor definierten Präferenzen des anrufenden Benutzers durchgeführt wird.
4. Verfahren nach einem der Ansprüche 1 bis 3, wobei die Anforderung, die in a) empfangen wird, einen zuvor ausgewählten Kommunikationsdienst unter der Vielzahl von möglichen Kommunikationsdiensten spezifiziert, um den angerufenen Benutzer zu kontaktieren.

5. Verfahren nach Anspruch 4, das des Weiteren b') umfasst, Bestimmen auf der Grundlage von aktuellen Kontextinformationen über den angerufenen Benutzer, ob der zuvor ausgewählte Kommunikationsdienst aktuell verfügbar ist, um eine Kommunikationssitzung mit dem angerufenen Benutzer auf der mindestens einen Vorrichtung (10) des angerufenen Benutzers herzustellen, wobei b) in dem negativen Fall von b') ausgeführt wird. 5
6. Verfahren nach einem der Ansprüche 1 bis 5, wobei die Vielzahl von möglichen Kommunikationsdiensten Kommunikationsdiensttopologien umfasst. 10
7. Verfahren nach Ansprüche 6, wobei die mindestens zwei Kommunikationsdiensttopologien eine Direktkommunikationsdiensttopologie und eine Mitteilungskommunikationsdiensttopologie umfasst. 15
8. Verfahren nach Anspruch 7, dass, wenn der Kommunikationsdienst, der in c) ausgewählt wird, zu der Mitteilungskommunikationsdiensttopologie gehört, des Weiteren das Empfangen von der Vorrichtung des anrufenden Benutzers einer Mitteilung für den angerufenen Benutzer umfasst, wobei die Mitteilung mit einem zuvor festgelegten Kommunikationsprotokoll der Benutzervorrichtung kompatibel ist. 20
9. Verfahren nach Anspruch 8, das des Weiteren das Konvertieren der Mitteilung in eine entsprechende konvertierte Mitteilung umfasst, die mit einem Kommunikationsprotokoll kompatibel ist, das durch den Kommunikationsdienstaktuator unterstützt wird, der die Bereitstellung des Kommunikationsdienstes ermöglicht, die in c) ausgewählt wird. 25
10. Verfahren nach Anspruch 9, wobei die geeigneten Informationen, die in d) gesendet werden, die konvertierte Mitteilung umfassen. 30
11. Verfahren nach einem der Ansprüche 6 bis 10, wobei die Anforderung, die in a) empfangen wird, eine zuvor ausgewählte Kommunikationsdiensttopologie unter den mindestens zwei Kommunikationsdiensttopologien spezifiziert, um eine Kommunikationssitzung mit dem angerufenen Benutzer herzustellen. 35
12. Verfahren nach Anspruch 11, wobei die Bestimmung in b) zuerst ohne die zuvor ausgewählte Kommunikationsdiensttopologie ausgeführt wird, und wenn aktuell kein Kommunikationsdienst innerhalb der zuvor ausgewählten Kommunikationsdiensttopologie verfügbar ist, wird die Bestimmung in b) wieder innerhalb der anderen der mindestens zwei Kommunikationsdiensttopologien ausgeführt. 40
13. Verfahren nach einem der Ansprüche 1 bis 12, wobei gemäß den Vorgehensweisen, der Kommunikationsdienst in c) gemäß mindestens einer weiteren der nachfolgenden Bedingungen ausgewählt wird: dem Kommunikationsdienst, der die kürzeste erwartete Antwortzeit zur Verfügung stellt; dem Kommunikationsdienst, der die zuvor festgelegten Präferenzen des anrufenden Benutzers erfüllt; dem Kommunikationsdienst, der die zuvor festgelegten Präferenzen des angerufenen Benutzers erfüllt; dem günstigsten Kommunikationsdienst; dem Kommunikationsdienst, der die einfachste Mensch-Maschine-Schnittstelle garantiert; dem Kommunikationsdienst, der eine bevorzugte Mensch-Maschine-Schnittstelle garantiert; und dem Kommunikationsdienst, der das Erreichen des angerufenen Benutzers auf dem schnellsten Weg ermöglicht. 45
14. Netzwerkequipment (100), um einem anrufenden Benutzer zu ermöglichen, der mindestens einer Vorrichtung eines anrufenden Benutzers (10) zugeordnet ist, eine Kommunikationssitzung mit einem angerufenen Benutzer herzustellen, der mindestens einer Vorrichtung eines angerufenen Benutzers (10) zugeordnet ist, wobei das Netzwerkequipment (100) Module umfasst, die dazu eingerichtet sind,
 - a) von der mindestens einer Vorrichtung eines anrufenden Benutzers (10) eine Anforderung zu empfangen, um eine Kommunikationssitzung mit einem angerufenen Benutzer herzustellen,
 - b) auf der Grundlage von aktuellen Kontextinformationen über den anrufenden Benutzer und aktueller Kontextinformationen über den angerufenen Benutzer zu bestimmen, ob unter einer Vielzahl von möglichen Kommunikationsdiensten mindestens ein Kommunikationsdienst aktuell verfügbar ist, um eine Kommunikationssitzung mit dem angerufenen Benutzer an der mindestens einer Vorrichtung des angerufenen Benutzers (10) herzustellen,
 - c) im positiven Fall von b), falls mindestens zwei aktuell verfügbare Kommunikationsdienste vorhanden sind, einen der mindestens zwei aktuell verfügbaren Kommunikationsdienste auf der Grundlage von zuvor festgelegten Vorgehensweisen auszuwählen, wobei die zuvor festgelegten Vorgehensweisen das Auswählen des Kommunikationsdienstes umfassen, welcher die höchste Stufe an Interaktivität zur Verfügung stellt, und
 - d) an den Kommunikationsdienstaktuator (1, 2, 3, 4, 5), der die Bereitstellung des Kommunikationsdienstes ermöglicht, der in c) ausgewählt wurde, geeignete Informationen zum Beginnen der Herstellung der Kommunikationssitzung zwischen dem anrufenden Benutzer und dem angerufenen Benutzer durch den ausgewählten

Kommunikationsdienst zu senden.

15. Kommunikationssystem (1000), das eine Vielzahl von Benutzervorrichtungen (10), ein Netzwerkequipment (100) und eine Vielzahl von Kommunikationsdienstaktuatoren (1, 2, 3, 4, 5) zum Ermöglichen der Bereitstellung einer entsprechenden Vielzahl von Kommunikationsdiensten umfasst, wobei

- jede der Vielzahl von Benutzervorrichtungen (10) Module umfasst, die dazu eingerichtet sind, dem Netzwerkequipment (100) eine Anforderung zu senden, eine Kommunikationssitzung zwischen einem anrufenden Benutzer und einem angerufenen Benutzer herzustellen, wobei der angerufene Benutzer mindestens einer Vorrichtung eines angerufenen Benutzers (10) zugeordnet ist;
- das Netzwerkequipment (100) Module umfasst, die für jede der Anforderungen, die von der Vielzahl von Benutzervorrichtungen (10) gesendet werden, dazu eingerichtet sind:

- a) die Anforderung zu empfangen;
- b) auf der Grundlage von aktuellen Kontextinformationen über den anrufenden Benutzer und aktuellen Kontextinformationen über den angerufenen Benutzer zu bestimmen, ob unter der Vielzahl von Kommunikationsdiensten mindestens ein Kommunikationsdienst aktuell verfügbar ist, um eine Kommunikationssitzung mit dem angerufenen Benutzer an der mindestens einen Vorrichtung eines angerufenen Benutzers (10) herzustellen,
- c) im positiven Fall von b), falls mindestens zwei aktuell verfügbare Kommunikationsdienste vorhanden sind, einen der mindestens zwei aktuell verfügbaren Kommunikationsdienste auf der Grundlage von zuvor festgelegten Vorgehensweisen auszuwählen, wobei die zuvor festgelegten Vorgehensweisen das Auswählen des Kommunikationsdienstes umfassen, welcher die höchste Stufe an Interaktivität zur Verfügung stellt, und
- d) an den Kommunikationsdienstaktor, der unter der Vielzahl von Kommunikationsdienstaktuatoren (1, 2, 3, 4, 5) die Bereitstellung des Kommunikationsdienstes ermöglicht, der in c) ausgewählt wurde, geeignete Informationen zum Beginnen der Herstellung der Kommunikationssitzung zwischen dem anrufenden Benutzer und dem angerufenen Benutzer durch den entsprechenden Kommunikationsdienst zu senden; und wobei

- jeder Kommunikationsdienstaktor (1, 2, 3, 4, 5) Module umfasst, die dazu eingerichtet sind, die geeigneten Informationen von dem Netzwerkequipment (100) zu empfangen und die geeigneten Informationen zu verwenden, um die Herstellung der Kommunikationssitzung zwischen dem anrufenden Benutzer und dem angerufenen Benutzer durch den entsprechenden Kommunikationsdienst zu beginnen.

Revendications

1. Procédé permettant à un utilisateur appelant d'établir une session de communication avec un utilisateur appelé, l'utilisateur appelant étant associé à au moins un dispositif d'utilisateur appelant (10) et l'utilisateur appelé étant associé à au moins un dispositif d'utilisateur appelé (10), dans lequel la session de communication peut être établie par l'intermédiaire d'une pluralité de services de communication possibles et la fourniture de ladite pluralité de services de communication possibles est permise par l'intermédiaire d'une pluralité correspondante d'actionneurs de services de communication (1, 2, 3, 4, 5), ledit procédé consistant à :

- a) recevoir, du ou des dispositif(s) d'utilisateur appelant (10), une demande d'établissement d'une session de communication avec l'utilisateur appelé,
- b) déterminer si, parmi ladite pluralité de services de communication possibles, au moins un service de communication est actuellement disponible pour établir une session de communication avec l'utilisateur appelé au niveau dudit ou desdits dispositif(s) d'utilisateur appelé (10), sur la base d'informations de contexte actuel concernant l'utilisateur appelant, et d'informations de contexte actuel concernant l'utilisateur appelé,
- c) dans l'affirmative pour le cas évoqué en b), si au moins deux services de communication sont actuellement disponibles, sélectionner l'un desdits au moins deux services de communication actuellement disponibles sur la base de politiques prédéterminées, dans lequel lesdites politiques prédéterminées comprennent la sélection du service de communication fournissant le plus haut niveau d'interactivité, et
- d) envoyer à l'actionneur de services de communication qui permet la fourniture du service de communication sélectionné en c) des informations appropriées pour débiter l'établissement de la session de communication entre l'utilisateur appelant et l'utilisateur appelé par l'intermédiaire du service de communication sélectionné.

2. Procédé selon la revendication 1, dans lequel les informations de contexte actuel concernant l'utilisateur appelant comprennent des informations de contexte actuel concernant les ressources réseau et/ou les capacités du côté de l'utilisateur appelant. 5
3. Procédé selon la revendication 1 ou 2, dans lequel la détermination en b) est réalisée également sur la base de préférences prédéfinies de l'utilisateur appelé et/ou de préférences prédéfinies de l'utilisateur appelant. 10
4. Procédé selon l'une quelconque des revendications 1 à 3, dans lequel la demande reçue en a) spécifie un service de communication présélectionné, parmi ladite pluralité de services de communication possibles, pour contacter l'utilisateur appelé. 15
5. Procédé selon la revendication 4, comprenant en outre b') déterminer si ledit service de communication présélectionné est actuellement disponible pour établir une session de communication avec l'utilisateur appelé au niveau dudit ou desdits dispositif(s) d'utilisateur appelé (10), sur la base d'informations de contexte actuel concernant l'utilisateur appelé, dans lequel b) est exécuté dans la négative de b'). 20 25
6. Procédé selon l'une quelconque des revendications 1 à 5, dans lequel ladite pluralité de services de communication possibles comprend des services de communication d'au moins deux typologies de service de communication. 30
7. Procédé selon la revendication 6, dans lequel lesdites au moins deux typologies de service de communication comprennent une typologie de service de communication directe et une typologie de service de communication par messagerie. 35
8. Procédé selon la revendication 7, qui, lorsque le service de communication sélectionné en c) est de la typologie de service de communication par messagerie, comprend en outre la réception, en provenance du dispositif d'utilisateur appelant, d'un message destiné à l'utilisateur appelé, ledit message étant conforme à un protocole de communication de dispositif d'utilisateur prédéterminé. 40 45
9. Procédé selon la revendication 8, comprenant en outre la conversion dudit message en un message converti correspondant qui est conforme à un protocole de communication mis en œuvre par l'actionneur de service de communication qui permet la fourniture du service de communication sélectionné en c). 50 55
10. Procédé selon la revendication 9, dans lequel les informations appropriées envoyées en d) comprennent ledit message converti.
11. Procédé selon l'une quelconque des revendications 6 à 10, dans lequel la demande reçue en a) spécifie une typologie de service de communication présélectionné, parmi lesdites au moins deux typologies de service de communication, pour établir une session de communication avec l'utilisateur appelé.
12. Procédé selon la revendication 11, dans lequel la détermination en b) est tout d'abord exécutée au sein de ladite typologie de service de communication présélectionné et, lorsqu'aucun service de communication n'est actuellement disponible au sein de ladite typologie de service de communication présélectionné, la détermination en b) est exécutée à nouveau au sein de l'autre des au moins deux typologies de service de communication.
13. Procédé selon l'une quelconque des revendications 1 à 12, dans lequel, selon lesdites politiques, le service de communication est sélectionné en c) en fonction d'au moins une autre des conditions suivantes : le service de communication fournissant le temps de réponse attendu le plus court, le service de communication répondant aux préférences prédéterminées de l'utilisateur appelant, le service de communication répondant aux préférences prédéterminées de l'utilisateur appelé, le service de communication le moins cher, le service de communication garantissant une interface homme-machine la plus simple, le service de communication garantissant une interface homme-machine préférée, et le service de communication qui permet d'atteindre l'utilisateur appelé de la manière la plus rapide.
14. Equipement de réseau (100) permettant à un utilisateur, associé à un ou des dispositif(s) d'utilisateur appelant (10), d'établir une session de communication avec un utilisateur appelé, associé à un ou des dispositif(s) d'utilisateur appelé (10), l'équipement de réseau (100) comprenant des modules conçus pour
 - a) recevoir, en provenance du ou des dispositif(s) d'utilisateur appelant (10), une demande d'établissement d'une session de communication avec un utilisateur appelé,
 - b) déterminer si, parmi une pluralité de services de communication possibles, au moins un service de communication est actuellement disponible pour établir une session de communication avec l'utilisateur appelé au niveau dudit ou desdits dispositif(s) d'utilisateur appelé (10), sur la base d'informations de contexte actuel concernant l'utilisateur appelant, et d'informations de contexte actuel concernant l'utilisateur appelé, c) dans l'affirmative pour le cas évoqué en b),

si au moins deux services de communication sont actuellement disponibles, sélectionner l'un desdits au moins deux services de communication actuellement disponibles sur la base de politiques prédéterminées, dans lequel lesdites politiques prédéterminées comprennent la sélection du service de communication fournissant le plus haut niveau d'interactivité et

d) envoyer à un actionneur de services de communication (1, 2, 3, 4, 5) qui permet la fourniture du service de communication sélectionné en c) d'informations appropriées pour débiter l'établissement de la session de communication entre l'utilisateur appelant et l'utilisateur appelé par l'intermédiaire du service de communication sélectionné.

15. Système de communication (1000) comprenant une pluralité de dispositifs d'utilisateur (10), un équipement de réseau (100) et une pluralité d'actionneurs de services de communication (1, 2, 3, 4, 5) permettant la fourniture d'une pluralité correspondante de services de communication, dans lequel

- chacun de la pluralité de dispositifs d'utilisateur (10) comprend des modules adaptés pour envoyer à l'équipement de réseau (100) une demande d'établissement d'une session de communication entre un utilisateur appelant et un utilisateur appelé, l'utilisateur appelé étant associé à au moins un dispositif d'utilisateur appelé (10),

- l'équipement de réseau (100) comprend des modules qui, pour chacune des demandes envoyées en provenance de la pluralité de dispositifs d'utilisateur (10), sont conçus:

- a) pour recevoir ladite demande,
- b) pour déterminer si, parmi ladite pluralité de services de communication, au moins un service de communication est actuellement disponible pour établir une session de communication avec l'utilisateur appelé au niveau du ou des dispositif(s) d'utilisateur appelé (10), sur la base d'informations de contexte actuel concernant l'utilisateur appelant, et d'informations de contexte actuel concernant l'utilisateur appelé,
- c) dans l'affirmative pour le cas évoqué en b), si au moins deux services de communication sont actuellement disponibles, sélectionner l'un desdits au moins deux services de communication actuellement disponibles sur la base de politiques prédéterminées, dans lequel lesdites politiques prédéterminées comprennent la sélection du service de communication fournissant le plus haut niveau d'interactivité et

d) envoyer à l'actionneur de services de communication qui, parmi ladite pluralité d'actionneurs de services de communication (1, 2, 3, 4, 5), permet la fourniture du service de communication sélectionné en c) d'informations appropriées pour débiter l'établissement de la session de communication entre l'utilisateur appelant et l'utilisateur appelé par l'intermédiaire du service de communication correspondant et dans lequel

- chaque actionneur de services de communication (1, 2, 3, 4, 5) comprend des modules conçus pour recevoir lesdites informations appropriées en provenance de l'équipement de réseau (100) et pour utiliser lesdites informations appropriées pour débiter l'établissement de la session de communication entre l'utilisateur appelant et l'utilisateur appelé par l'intermédiaire du service de communication correspondant.

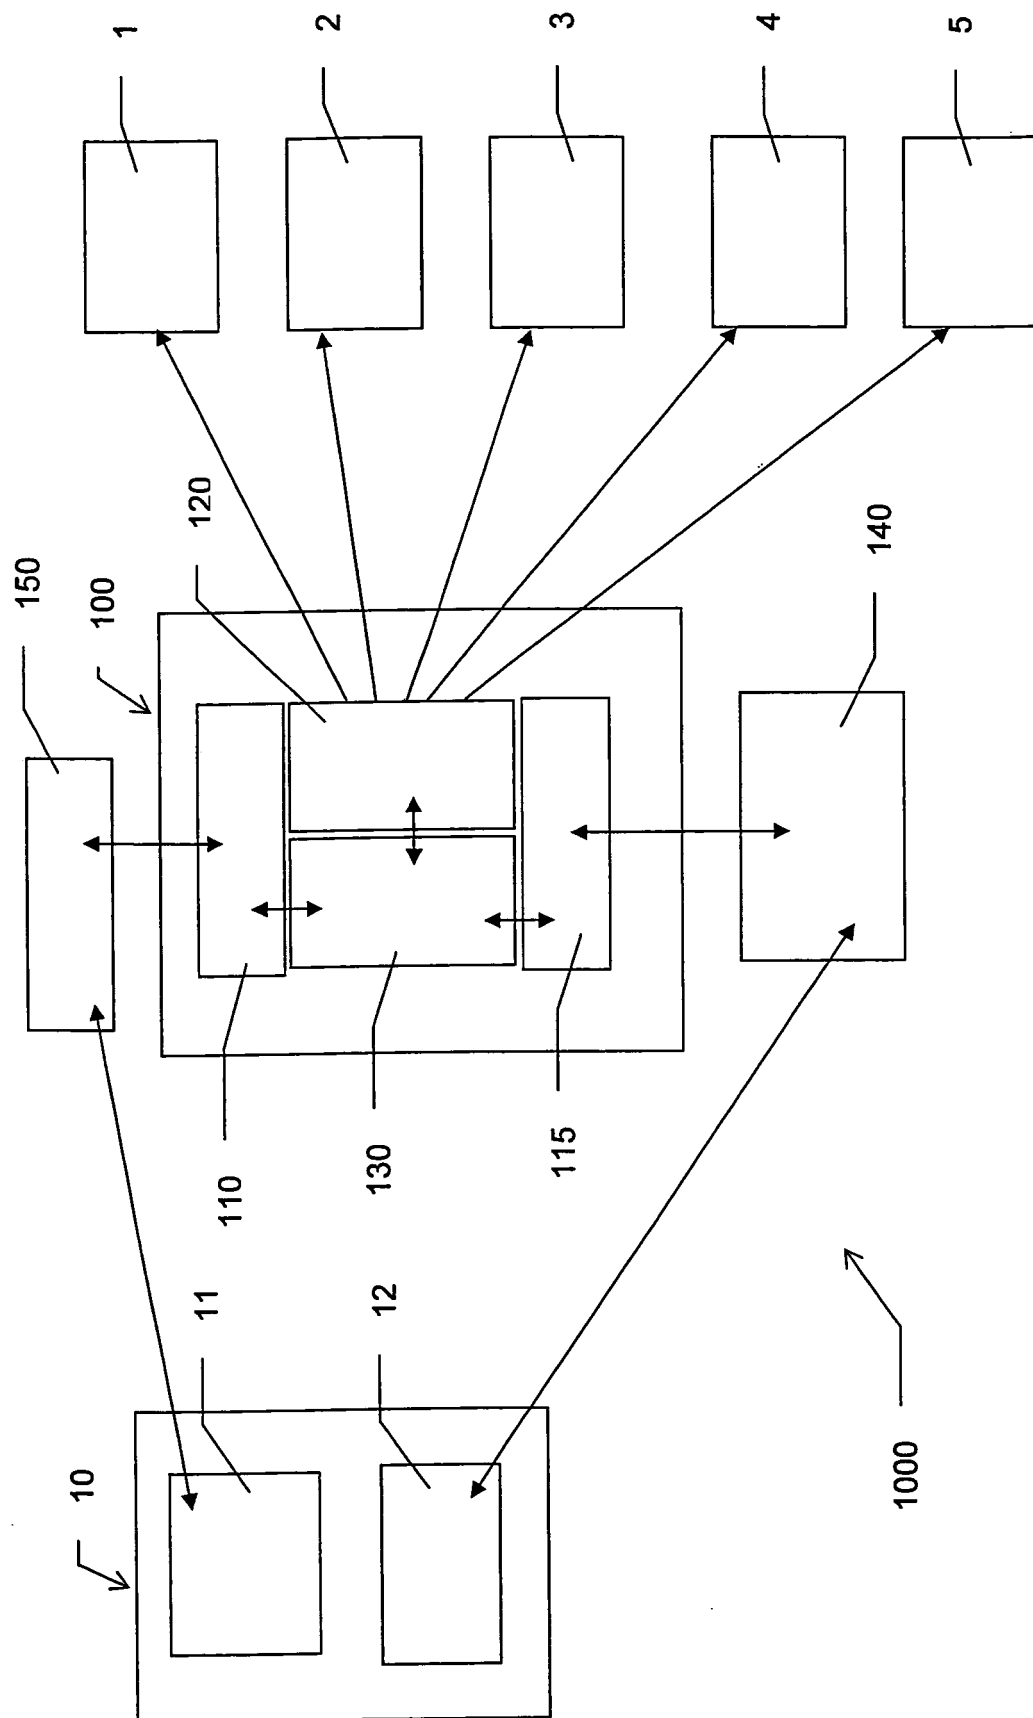


Fig. 1

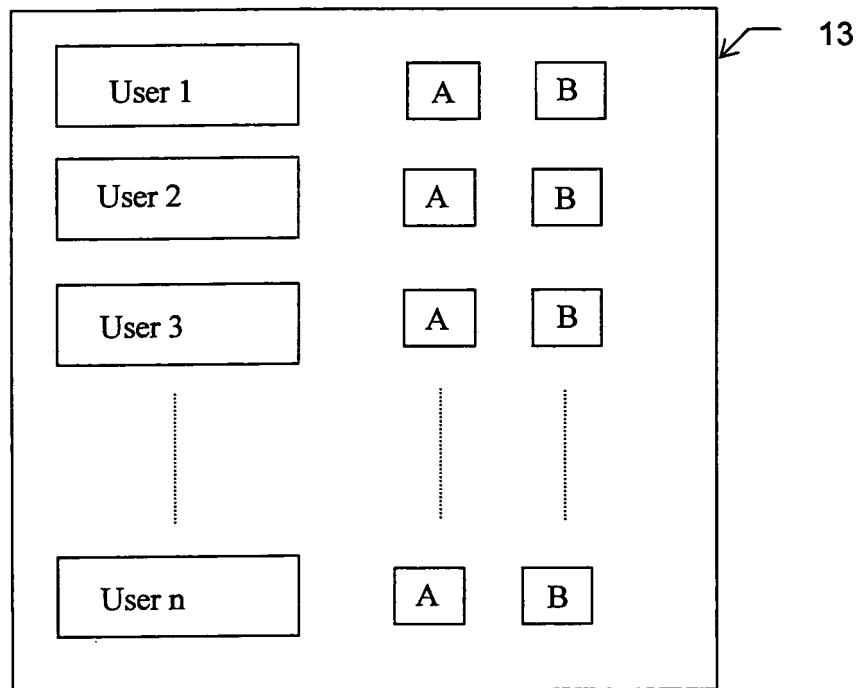


Fig. 2

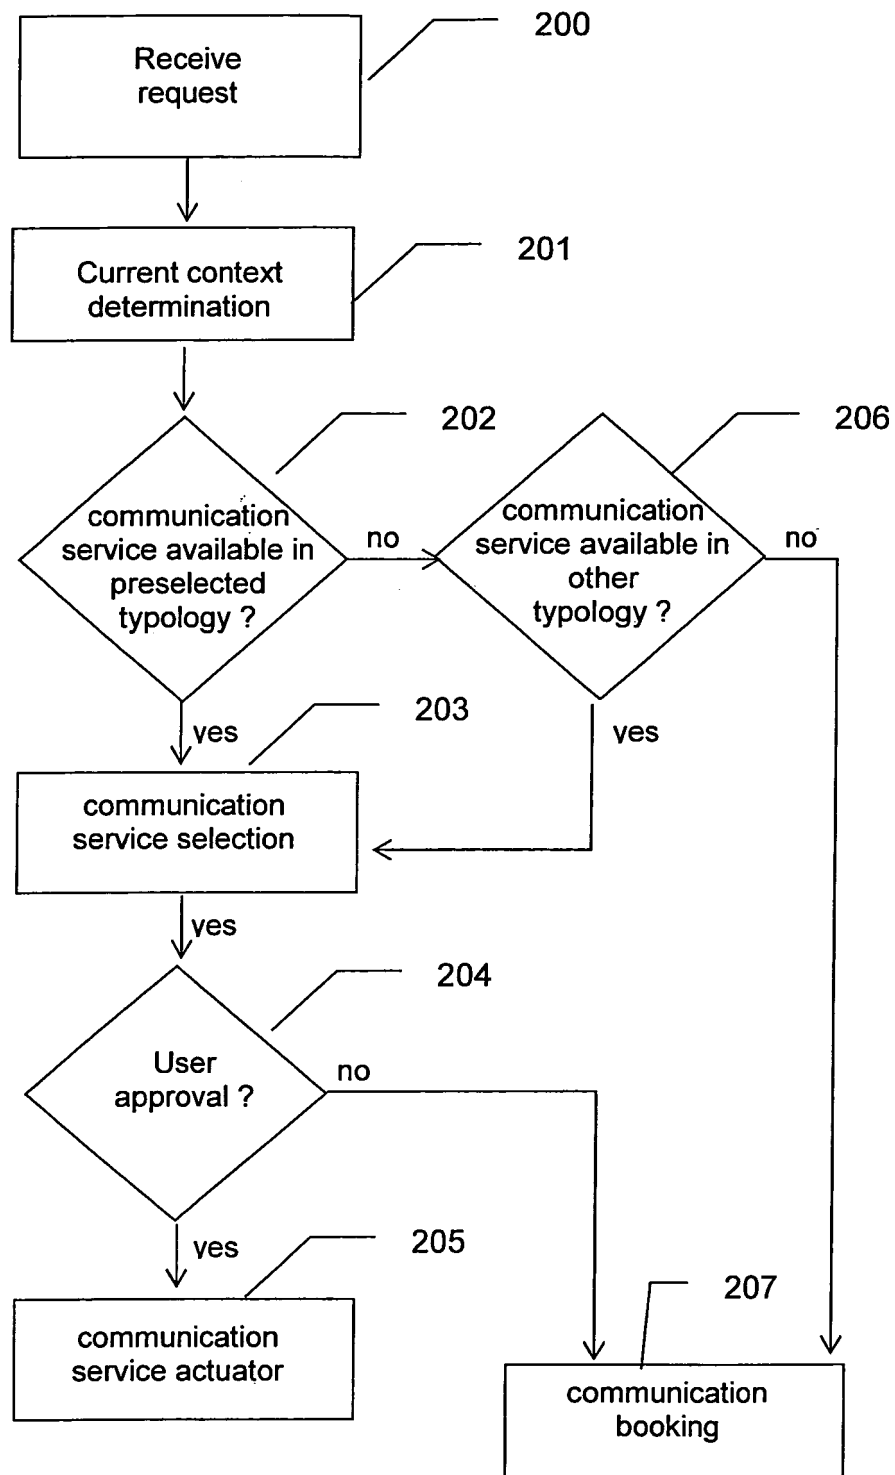


Fig. 3

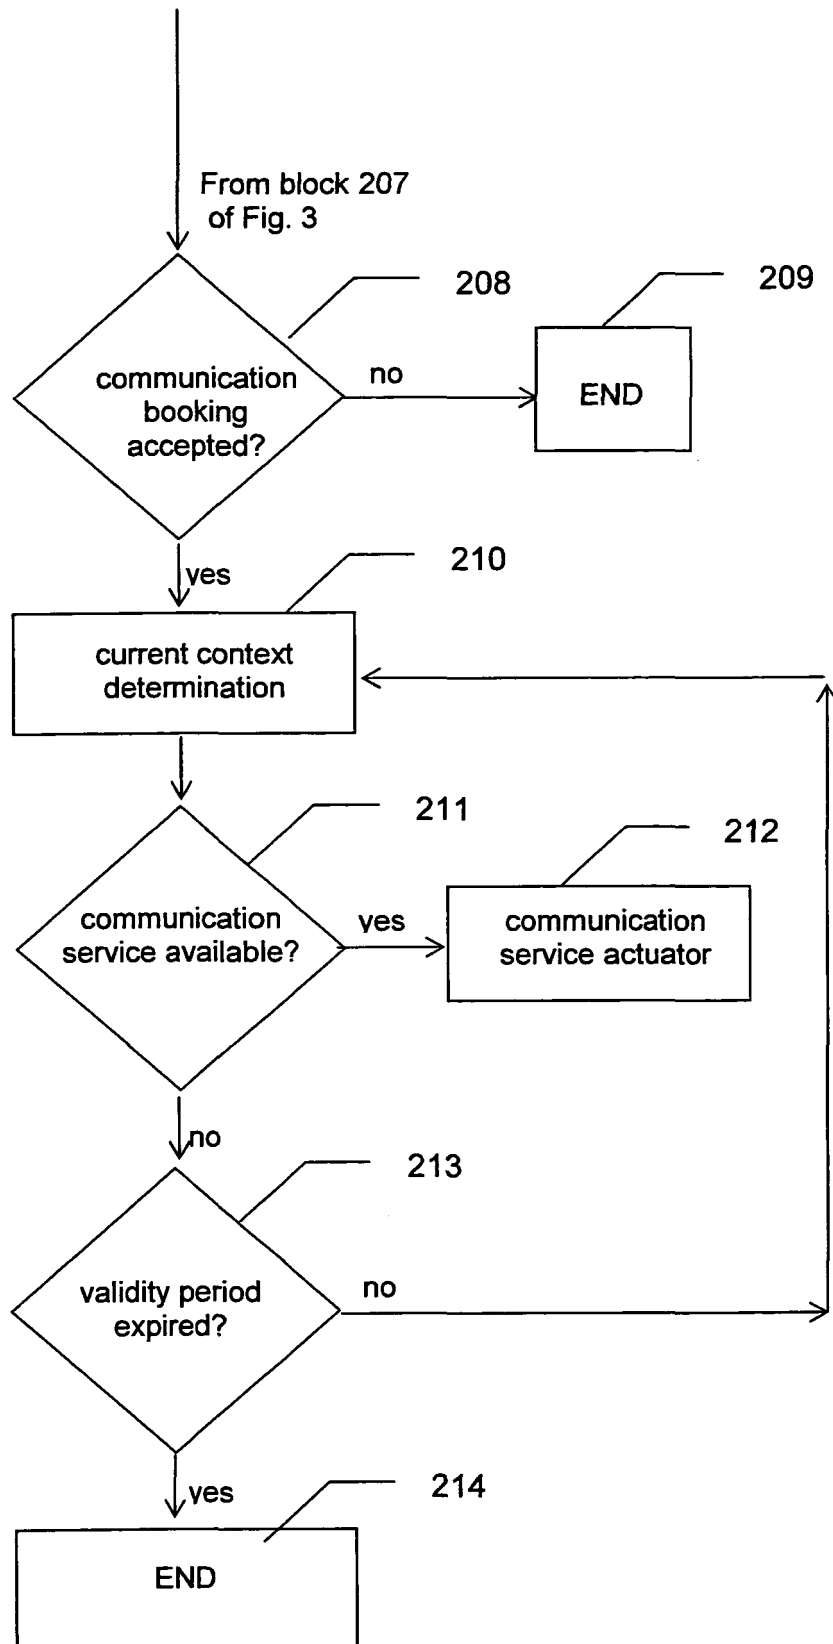


Fig. 4

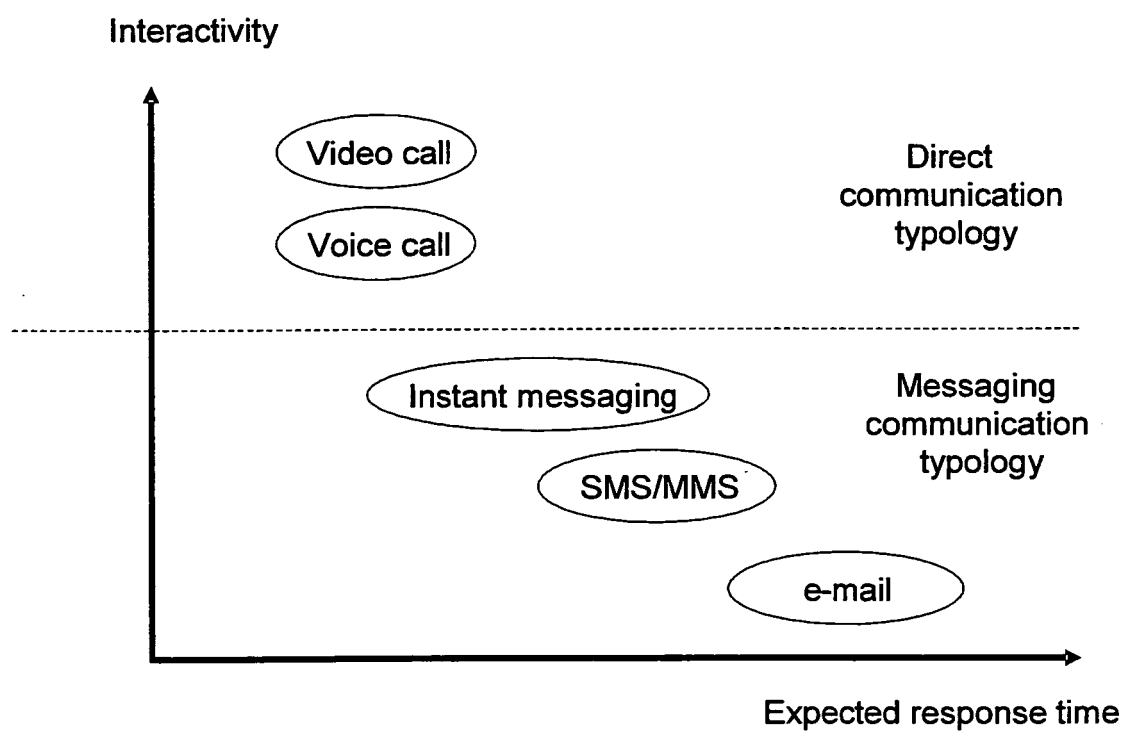


Fig. 5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20060205400 A [0008]
- US 20040203664 A [0009]
- US 6853634 B [0010]

Non-patent literature cited in the description

- **R. DINOFF et al.** Learning and Managing User Context in Personalized Communications Services. *Bell Laboratories, Lucent Technologies - Int'l Workshop on Context in Advanced Interfaces*, 23 May 2006 [0003] [0084]
- **R. PLESA ; L. LOGRIPPO.** Enhanced communication service through context integration. *MATA 2005*, 2005 [0084]
- **N. SALIS ; C.A. LICCIARDI.** Context Awareness: Telco Perspectives. *the proceedings of the Second Workshop on "Context Awareness for Proactive Systems CAPS 2006*, June 2006 [0084]