



(11) **EP 2 236 841 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 72

(51) Int Cl.:
F16B 5/08 (2006.01) **B23K 20/04** (2006.01)
B23K 20/12 (2006.01) **B63B 25/16** (2006.01)
F16B 5/07 (2006.01) **B23K 103/20** (2006.01)

(48) Corrigendum issued on:
17.11.2010 Bulletin 2010/46

(86) International application number:
PCT/JP2008/002556

(43) Date of publication:
06.10.2010 Bulletin 2010/40

(87) International publication number:
WO 2009/084136 (09.07.2009 Gazette 2009/28)

(21) Application number: **08867990.7**

(22) Date of filing: **17.09.2008**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT
RO SE SI SK TR**

- **OMICHI, Noriko**
Hyogo 650-8670 (JP)
- **FUJIMOTO, Mitsuo**
Hyogo 650-8670 (JP)
- **NISHIDA, Hidehito**
Hyogo 650-8670 (JP)

(30) Priority: **27.12.2007 JP 2007336311**

(71) Applicant: **Kabushiki Kaisha Kawasaki Zosen**
Kobe-shi, Hyogo 650-8670 (JP)

(74) Representative: **Leinweber & Zimmermann**
European Patent Attorneys
Patentanwälte
Rosental 7
80331 München (DE)

(72) Inventors:
• **TAKAOKA, Yukichi**
Hyogo 650-8670 (JP)

(54) **DISSIMILAR METAL JOINT STRUCTURE, TANK SKIRT HAVING THE DISSIMILAR METAL JOINT STRUCTURE, TRANSPORT SHIP HAVING THE TANK SKIRT, AND DISSIMILAR METAL MEMBER JOINTING METHOD**

(57) A dissimilar joint structure 10 according to the present invention is provided at a first metal member 6 and a second metal member 7 which are made of dissimilar metals to each other. The dissimilar joint structure 10 couples the first metal member 6 and the second metal member 7. An inserting groove 8a is formed at the first metal member 6. The second metal member 11 includes an inserting portion 9 which is able to be inserted into the inserting groove 8a. The first metal member 6 is joined to the inserting portion 9 with the inserting portion 9 inserted into the inserting groove 8a.

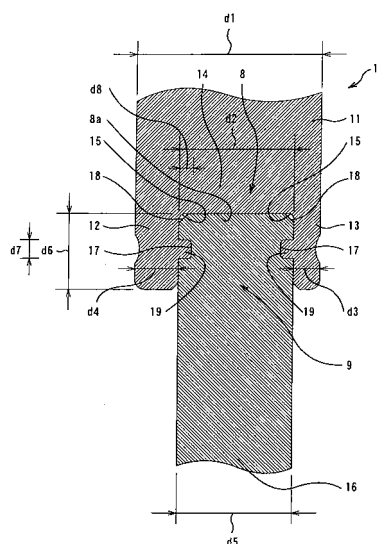


Fig. 6

EP 2 236 841 A8